



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1238	C	REDRAWN & UPDATED	HO	5/29/02	JWM	5/29/02	JWM	5/29/02
1808	D	Updated	JWM	10/31/05	HO	11/1/05	HO	11/1/05

UL
#E94521

LR
#LR62645-73

15A CIRCUIT BREAKER


15A Lighted Switch

Surge Suppression Indicator Light

2.57

NOTES:

- UL1449 Clamping Level: 330 volts
- Actual Clamping Level: 280
- Maximum Surge Current: 33,000 Amps
- Noise Reduction: 60 dB
- Response Time: Less than 1 nanosecond

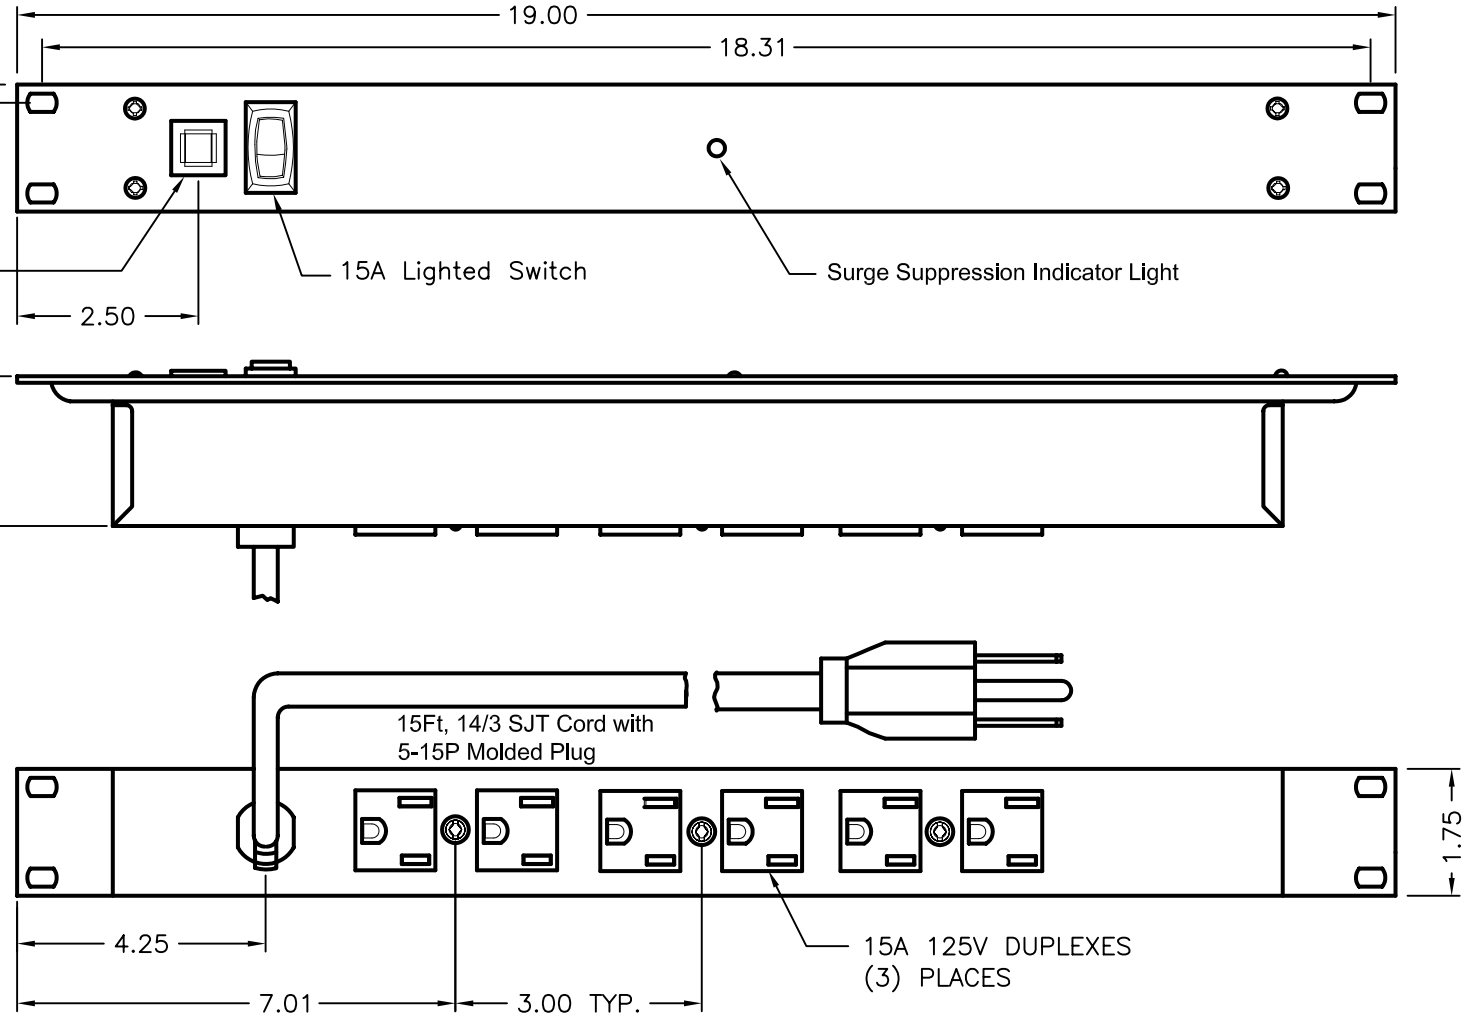

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

Tolerances: Unless
Otherwise Specified:
0.0 = ± 0.100
0.00 = ± 0.020
0.000 = ± 0.005
Angles = $\pm 1^\circ$

DRAWN BY:

RD

DATE:

5/3/96

CHECKED BY:

JOHN COLE

DATE:

APPROVED BY:

Daniel Carey

DRAWING TITLE:

Rack Mount Surge Protector

SIZE

A

DWG. NO.

SSD615

ELECTRONIC FILE

66N7717.dwg

REV

D

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1