



A range of sockets and accessories for 55 series relays and 85 series timers
Features include:

- PCB, screw terminal, panel or DIN rail 46277 mount versions
- Can be used with supply status indication, coil protection and timer modules
- Protection category IP 20
- Flammability in conformity with UL 94
- Sockets and accessories: see 95 series, 99.01, 99.02, 86.10 and 86.20
- Approvals (according to type): BBJ, CSA, DEMKO, CS-IMQ, SEV, cULus



94.14



94.22



P.C.B. SOCKETS

TYPE 94.12 for types 55.31 - 55.32 and 85.32 - 85.52

TYPE 94.13 for types 55.33 and 85.33 - 85.53

TYPE 94.14 for types 55.34 and 85.34 - 85.54

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Sn 6 tin plated

PANEL MOUNT SOLDER SOCKETS (1 mm thick panel mount)





TYPE 94.22 for types 55.31 - 55.32 and 85.32 - 85.52

TYPE 94.23 for types 55.33 and 85.33 - 85.53

TYPE 94.24 for types 55.34 and 85.34 - 85.54

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: polycarbonate (PC)
- CONNECTIONS: Cu Sn 6 silver plated

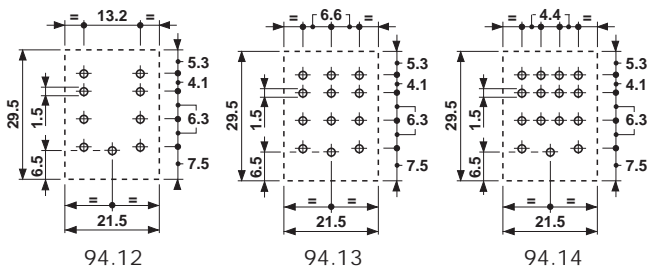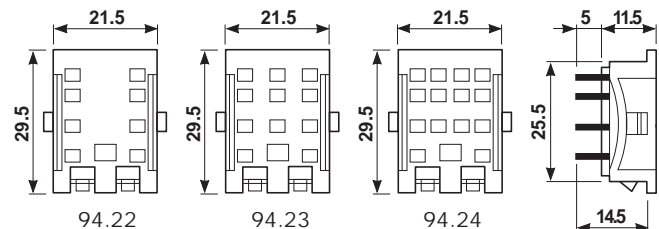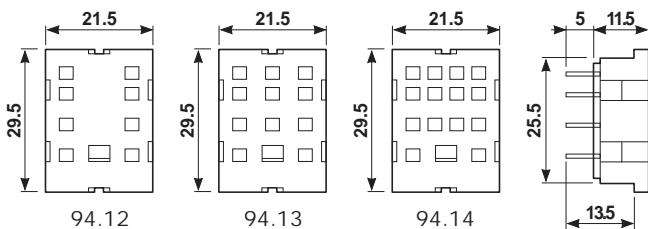



94.34



94.64



PANEL MOUNT SOLDER SOCKETS (M3 screw mount)

TYPE 94.32 for types 55.31 - 55.32 and 85.32 - 85.52

TYPE 94.33 for types 55.33 and 85.33 - 85.53

TYPE 94.34 for types 55.34 and 85.34 - 85.54

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Sn 6 tin plated

CLAMP TERMINAL SOCKETS (panel or 46277 rail DIN mount)




TYPE 94.62 for types 55.31 - 55.32 and 85.32 - 85.52

TYPE 94.64 for types 55.34 and 85.34 - 85.54

Accessories: **TYPE 094.81** retaining clip

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label

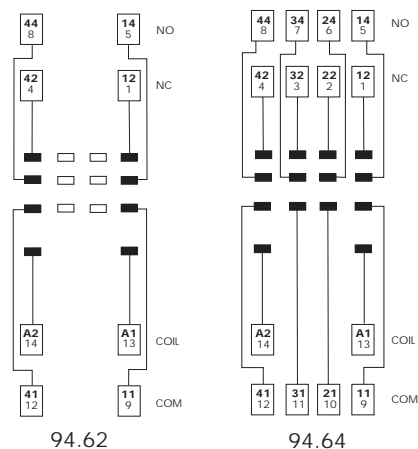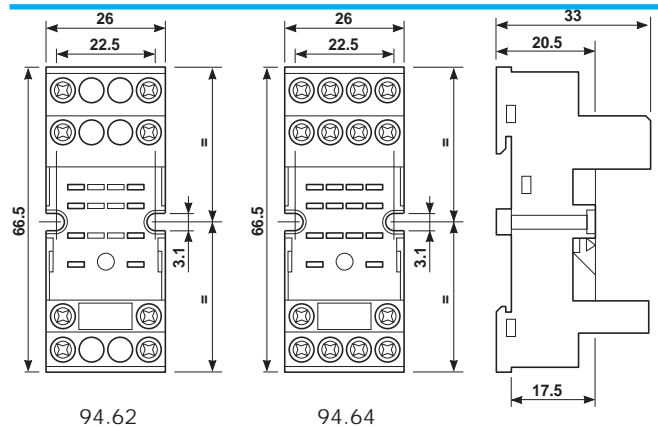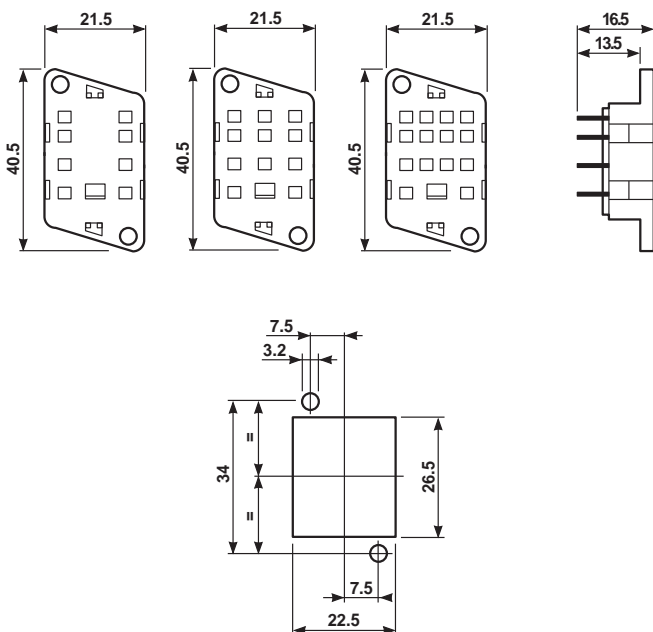



94.74



94.82



CLAMP TERMINAL SOCKETS (panel or 46277 rail DIN mount)

TYPE 94.73 for types 55.33 and 85.32 - 85.52

TYPE 94.74 for types 55.34 and 85.34 - 85.54

Accessories: **TYPE 094.81** retaining clip

TYPE 99.01 coil status indication and coil protection modules

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.

SCREW TERMINAL SOCKETS (panel or 46277 rail DIN mount)


TYPE 94.82 for types 55.31 - 55.32 and 85.32 - 85.52

Accessories: **TYPE 094.81** retaining clip

TYPE 99.01 coil status indication and coil protection modules



CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

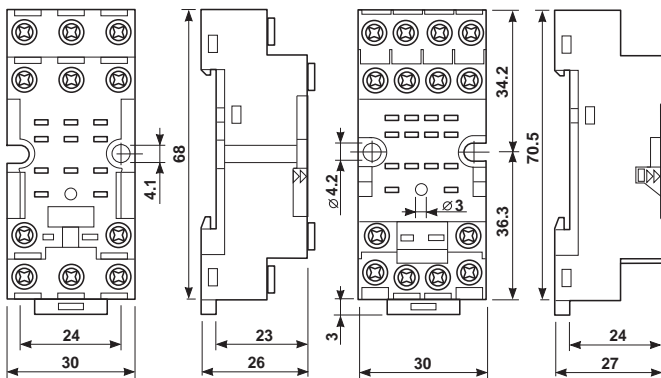


94.73


94.74

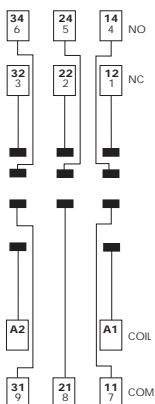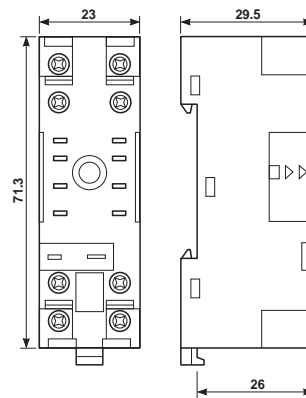

94.73

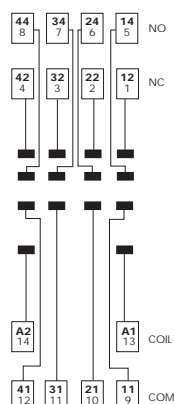

94.74





94.04



094.06



CLAP TERMINAL SOCKETS (panel or 46277 rail DIN mount)

TYPE 94.02 for types 55.31 - 55.32 and 85.32 - 85.52

TYPE 94.04 for types 55.34 and 85.34 - 85.54

Accessories: **TYPE 094.71** retaining clip

TYPE 99.02 coil status indication and coil protection modules

TYPE 094.06 6-way jumper link

TYPES 86.10 - 20 timer modules

6-WAY JUMPER LINK

TYPE 094.06 for socket 94.02 and 94.04

CHARACTERISTICS

- LOAD: 10 A 250 V

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

