
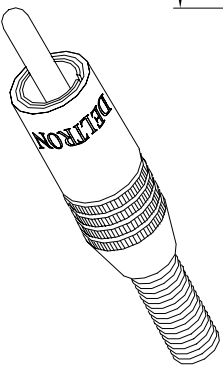


- Designed and manufactured in the UK to the highest quality standards for use with Professional Audio Equipment.
- Solid centre conductor of gold plated machined brass with large solder bucket for easy soldering.
 - Ground contact machined from solid brass with gold plated, unique 'T' shaped slot for effective spring contact pressure.
 - Large crimpable cable clamp for strong and secure cable connection.
 - Solid brass body effectively shrouds connector providing 100% shielding.
 - PTFE insulation for high dielectric constant
 - Spring strain relief.
 - Maximum cable size 5.5mm
 - Attractive styling finished in flash gold with printed colour coding.

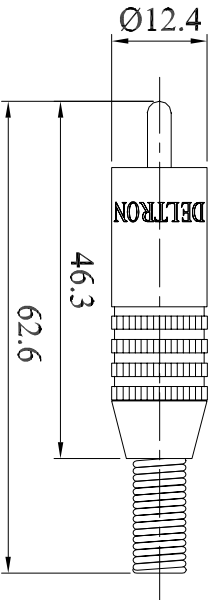

- Material
- Centre contact :Brass, 0.5 micron gold plated
 - Ground contact :Brass, 0.5 micron gold plated
 - Insulation :PTFE
 - Cable clamp :Brass, 0.5 micron gold plated
 - Spring :Spring steel, flash gold plated
 - Cap :Brass, flash gold plated
- Ratings –
- 5A at 200 Vdc/150 Vac max.
 - Insulation Resistance –
 - 100M Ω at 500 Vdc

Deltron Part No.	Description
320-0000	FLASH GOLD CAP & SPRING
320-0500	FLASH GOLD CAP & SPRING (RED COLOUR CODING)
320-0600	FLASH GOLD CAP & SPRING (WHITE COLOUR CODING)

CONVERTED FROM PS0363 ISS3 (08.12.93) IN JAN 2003

Drgn No 320 SERIES

TITLE HIGH END PROFESSIONAL PHONO LINE PLUG

ALL DIMENSIONS IN MM
ANGLES IN DECIMAL DEGREES



DELTRON Components

ES 3

GENERAL SPECIFICATION
FOR 320 SERIES

CUSTOMER

FILTER REF

Aprvd Date 03/02/03

Aprvd By MC

Drwn by BS

Scale: NTS

Sheet 1 / 1