
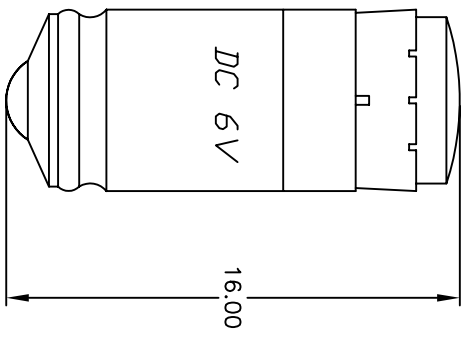


▲ GREEN L.E.D

| PARAMETERS | SYMBOL | TYP. | UNITS |
|---------------------|-------------|------|-------|
| AVE CURRENT | I_A | 10 | mA |
| EMISSION WAVELENGTH | λ_p | 640 | nm |
| LUMINOUS INTENSITY | I_f | 55 | mcd |

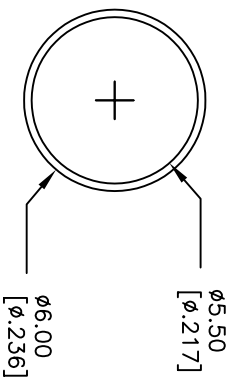

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- ▲3. LED VOLTAGE: 6VDC
4. OPERATING TEMPERATURE: -20°C-60°C
5. ▲ DENOTES CRITICAL PARAMETER.
6. 2002/95/EC (ROHS) COMPLIANT

| | | | | |
|------|---------|-------------------------|----------|------|
| B | 17323 | 15.1mm to 16mm | 5/24/07 | TN |
| A | 13609 | RELEASED FOR PRODUCTION | 11/18/03 | AR |
| REV. | ECN No. | DESCRIPTION | DATE | CHKD |

| | | | | |
|-------|---------|---------------------|---------|-----|
| TITLE | | 50-004-16 GREEN LED | | |
| SCALE | DATE | DR | DWG | REV |
| 4:1 | 5/24/07 | TN | F050416 | B |



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED