



P.C. MOUNTING

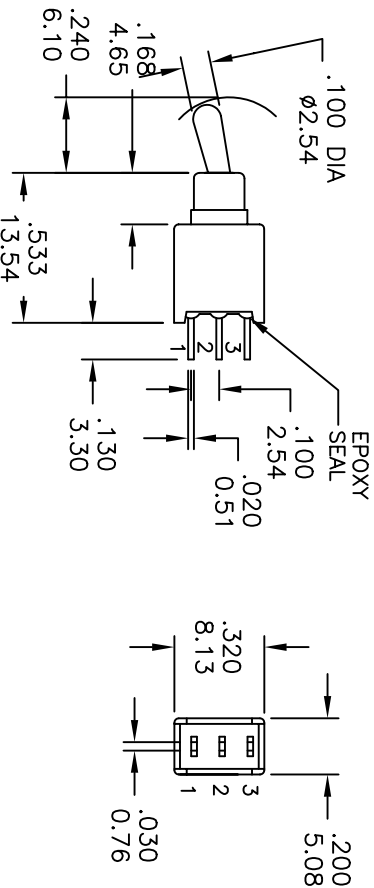

Model No.	POS.1	POS.2	POS.3
2AS1	ON	NONE	ON
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

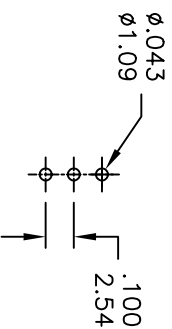

SPECIFICATIONS

ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 20m Ω max. Initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS

CASE & BUSHING - Glass filled nylon 6/6, retardant, heat stabilizer(UL94V-0)
ACTUATOR - Brass, chrome plated, Internal O-ring seal, standard for all actuators.
SWITCH SUPPORT - Brass, tin plated.
TERMINALS/CONTACT - Silver or gold plated copper.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 1Amp @250VAC
 3Amps @120 VAC or 28 VDC

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2	TITLE 圖名	Sealed Sub - Miniature Toggle Switches	SIZE 圖紙	A4		
1	(A)			TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 2.54 mm FILE NAME : 2ASPP0011	DWG NO.	2AS1T2A1M2RE	UNIT 單位	inch		
2	(B)				REV. 版本	A	DATA 日期	FEB - 20 - 2002	SHEET 張數	1 of 1
3	(C)				CHECKED BY 審核	Jack	DRAWN BY 製圖	BOBO		
4	(D)									
5	(E)									