


C&K PCM Series Ultraminiature Surface Mount Slide Switches *New!*

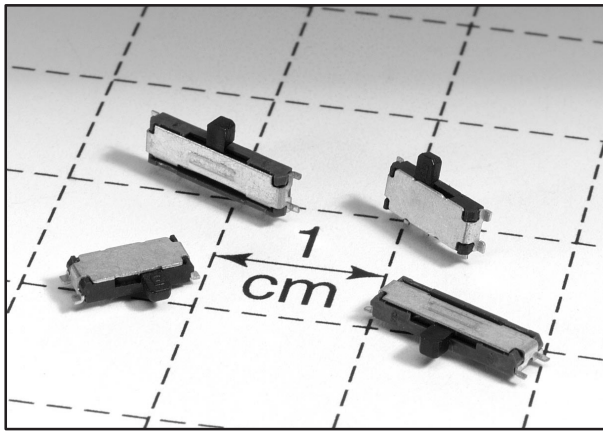

Features/Benefits

- Ultraminiature surface mount
- Low profile
- SPDT & DPDT models

Typical Applications

- Computer peripherals & network products
- Telecommunication products
- Test & measurement equipment

How To Order

Complete part numbers for PCM Series Ultraminiature Surface Mount Slide Switches are shown on pages below.

Specifications

CONTACT RATING: 0.3A @ 6 VDC.
 MECHANICAL LIFE: 10,000 cycles.
 CONTACT RESISTANCE: 70 milliohms max.
 INSULATION RESISTANCE: 100 milliohms min. @ 500V.
 DIELECTRIC STRENGTH: 500 VAC min.
 OPERATING TEMPERATURE: -10°C to +85°C.
 SOLDERABILITY: 255°C max. solder temperature.
 PACKAGING: Tape & reel.

Materials


CASE: P.P.S.
 COVER: SUS 301
 SLIDER: Nylon 4/6
 BRUSH: Copper alloy silver clad.
 TERMINALS: Copper alloy tin, silver plated.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Slide




PCM12SMTR
SPDT

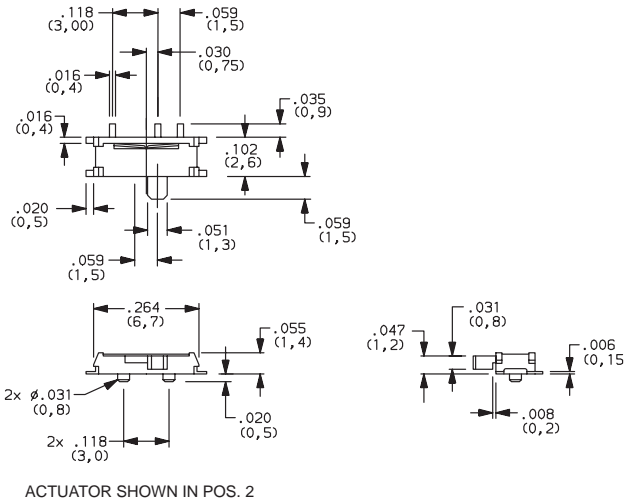

ACTUATOR SHOWN IN POS. 2

PC MOUNTING

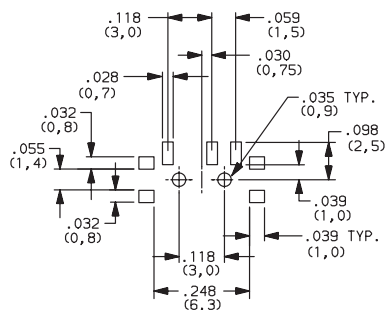


PART NUMBER	SWITCH FUNCTION	
	POS. 1	POS. 2
PCM12SMTR	ON	ON
CONN. TERMINALS	1-2	2-3
SCHMATIC		
SPDT		

New!

C&K PCM Series Ultraminiature Surface Mount Slide Switches

PART NUMBER	SWITCH FUNCTION		
	POS. 1	POS. 2	POS. 3
PCM13SMTR	ON	ON	ON
CONN. TERMINALS	1-3	2-3	3-4
SCHMATIC			
DPDT			

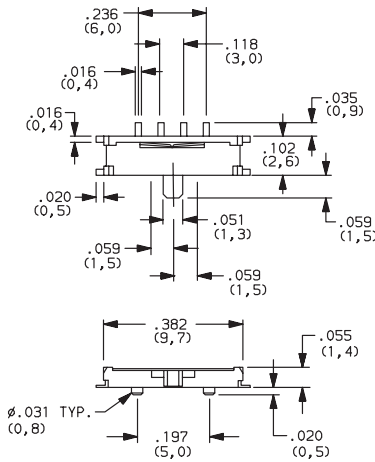

PCM13SMTR
DPDT

ACTUATOR SHOWN IN POS. 2

PC MOUNTING

