

# 342A012 to 058


45° side-breakout transition




## Applications

Provides strain relief and mechanical protection on cable harness assemblies.

### As supplied (a)

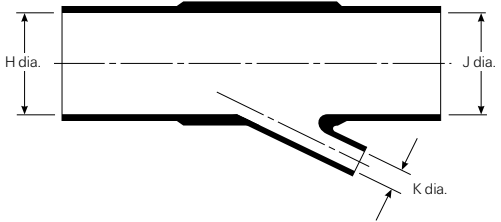

### After unrestricted recovery (b)

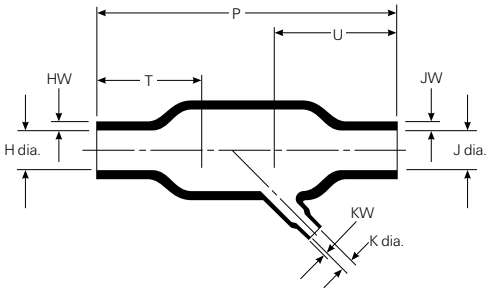

Available in:

Americas

Europe

Asia Pacific



**Fax-on-demand**

US only (800) 260-9099

Outside US (650) 257-2301

**Fax ID**

3413

**Description**

SCD

Visit our website at [www.tycoelectronics.com](http://www.tycoelectronics.com)**Materials available**

Material*	Material description	Precoating no.	Adhesive part no.**
-3	Semirigid polyolefin	/42 or /86	S-1017 or S-1048
-4	Flexible polyolefin	/42 or /86	S-1017 or S-1048
-12	Viton	N/A	S-1255-04
-25	Fluid-resistant elastomer	/42 or /86 or /225	S-1017 or S-1048 or S-1125
-100	Polyolefin, Zerohal	-100-CS1972	S-1030

(S1030 tape supplied in bag)

\*For more information, please see the appropriate material page in this section.

\*\*For more information, please see Section 5 of this catalog.

**Product dimensions (mm/in)**

Part number	H & J		K		P
	Min. a	Max. b	Min. a	Max. b	±10% b
342A012	13.2 (.52)	6.9 (.27)	6.6 (.26)	3.6 (.14)	49.3 (1.94)
342A024	26.9 (1.06)	12.7 (.50)	6.6 (.26)	3.6 (.14)	92.5 (3.64)
342A034	26.9 (1.06)	13.7 (.54)	13.2 (.52)	6.1 (.24)	144.8 (5.70)
342A048	55.6 (2.19)	26.9 (1.06)	13.2 (.52)	6.9 (.27)	184.9 (7.28)
342A058	55.6 (2.19)	26.9 (1.06)	26.9 (1.06)	13.7 (.54)	203.5 (8.01)
	T	U	HW & JW	KW	
	±10%	±10%	±20%	±20%	
	b	b	b	b	
342A012	19.6 (.77)	19.6 (.77)	1.52 (.06)	1.02 (.04)	
342A024	31.8 (1.25)	39.6 (1.56)	2.54 (.10)	1.02 (.04)	
342A034	50.8 (2.00)	50.8 (2.00)	2.54 (.10)	1.52 (.06)	
342A048	63.5 (2.50)	63.5 (2.50)	4.57 (.18)	1.52 (.06)	
342A058	66.0 (2.60)	66.0 (2.60)	4.57 (.18)	2.54 (.10)	

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 mm (.06") max.