
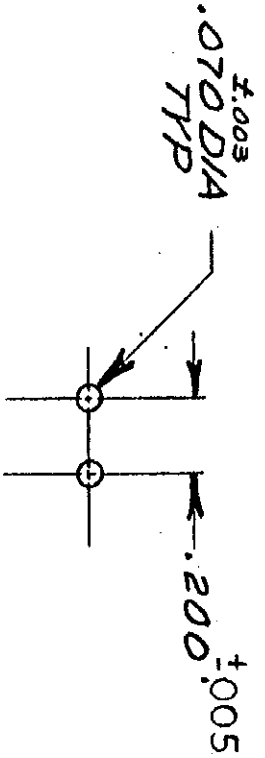


S

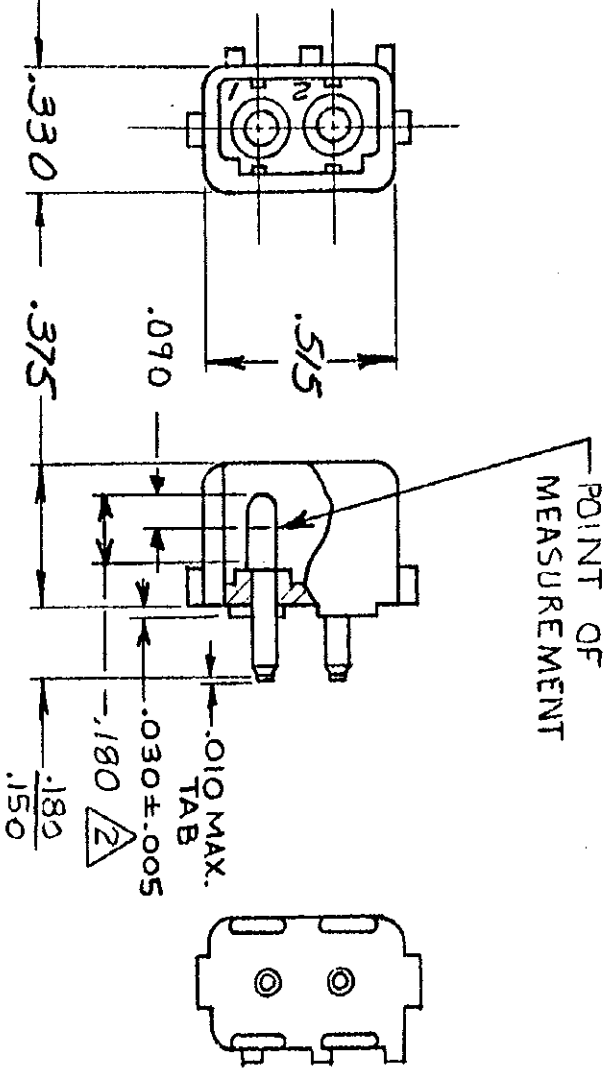

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

REVISION RECORD	DR	CHK	DATE
N	KU	RS	4-16-86
P	RB	RS	3/29/89
R	NG	RS	8-4-82
OBSOLETE 2-1-6-1			
PER FCN CM-2706			
OBS I-1, 5-1, 9-1			
PER CM 2213			
OBSOLETE 3-1,			
4-1, 7-1, 8-1, 12, 22,			
3-2, 4, 5, 26, 27, 28, 29			

NUMBER	350209
REQUIRED PER ASSEMBLY	
DESCRIPTION	

ASSEMBLY NO.	350209-1	NYLON - NAT.	COPPER ALLOY - PRE-TIN
ASSEMBLY NO.	350209-2	NYLON - NAT	COPPER ALLOY - GOLD
© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING. G. ECKMAN 3-12-73 DR G. ECKMAN 3/16/73 CHK G. ECKMAN 3/16/73 DE G. ECKMAN 3-16-73 APF G. ECKMAN 3-16-73			
MATERIAL AND FINISH	SEE TABLE	CLASS	H
WIRE - RANGE - INSULATION	H	TYPE	H
TOLERANCE EXCEPT AS NOTED	± .010	LOC	CM
SCALE	H	NO	350209
NAME	2 CIRCUIT P.C. BOARD MATE-N-10K	REF	R
AMP INCORPORATED HARRISBURG, PENNA.			

PRINT/DIST
5/5

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.