


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005	Effective: 12/21/98	DCP No. 880				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		NDT Released	JWM	7/10/00				

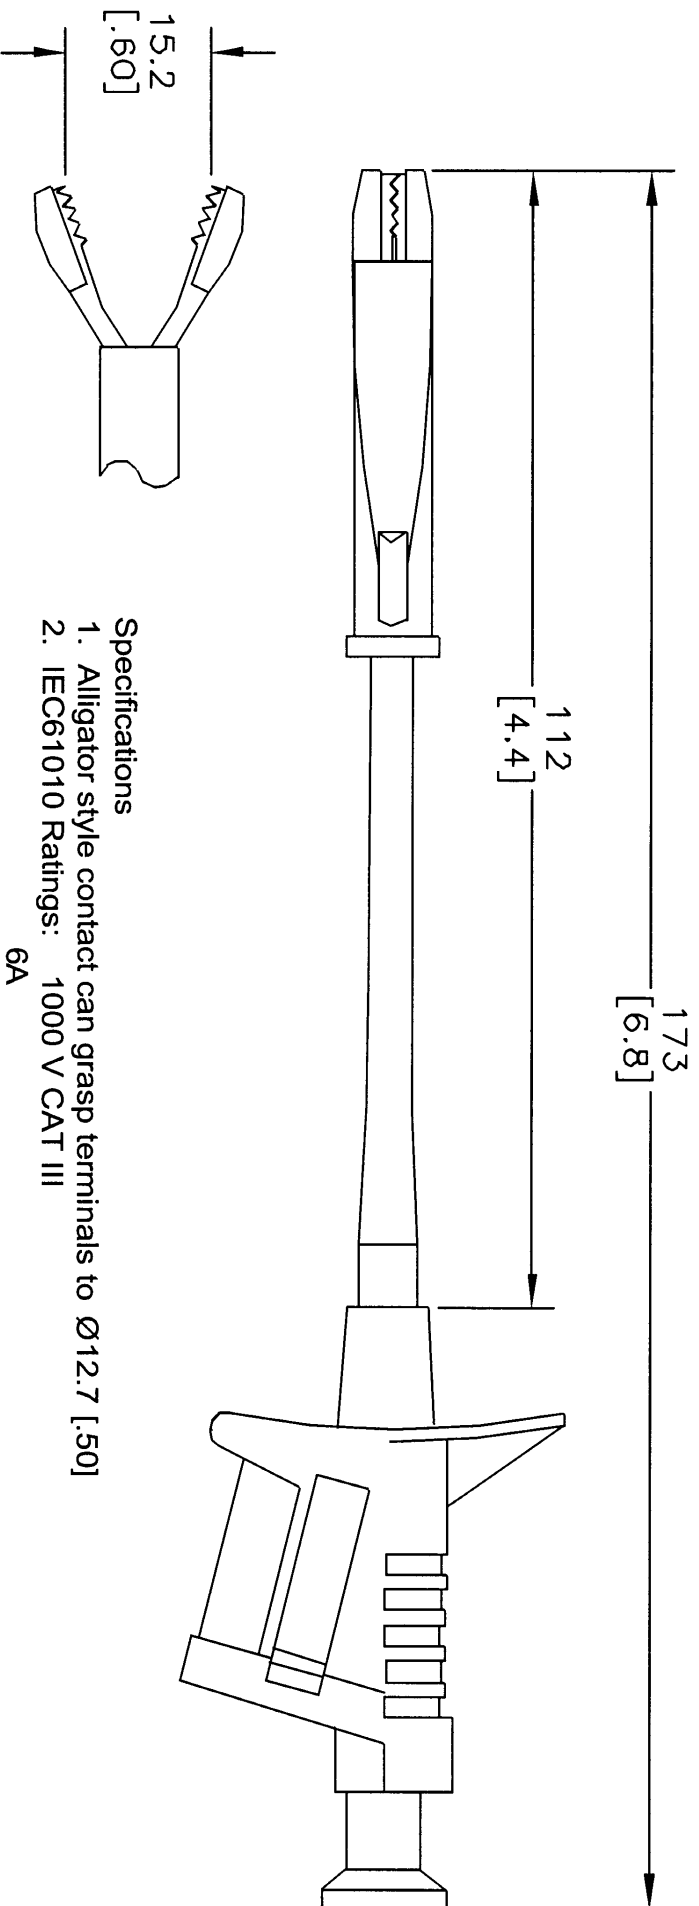

Specifications

1. Alligator style contact can grasp terminals to Ø12.7 [.50]
 2. IEC61010 Ratings: 1000 V CAT III
6A
- Reinforced or double insulation
3. Materials: Body - Polyamide (Nylon) & Santoprene
Tip - Brass, Nickel Plated
 4. Internal Resistance: <50 milliohms
 5. Temperature: -20°C to +80°C



DISCLAIMER
ALL DRAWING AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE NOT KNOWN, THE USER ASSUMES ALL LIABILITY FOR THE PROPER USE OF THE PRODUCT FOR THE INTENDED USE AND ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff Mevicker	7/10/00
CHECKED BY:	DATE:
APPROVED BY:	DATE:



DRAWING TITLE: Alligator Style Flexible Clip - Red

SIZE	DWG. NO.	ELECTRONIC FILE
A	76-062	16F7729.dwg

SCALE:	U.O.M.: Millimeters [Inches]	SHEET:
NTS		1 OF 1

SPC-F005.DWG

3421739