


E56KRVP

The E56KRVP is E-Tech's top-of-the-line solution for external applications. Supporting V.90 protocol for 56K Internet connections, high speed FAXing and full duplex speakerphone, this mode has it all. The E56KRVP comes complete with power supply, phone cord, software suite AND FREE SERIAL CABLE!

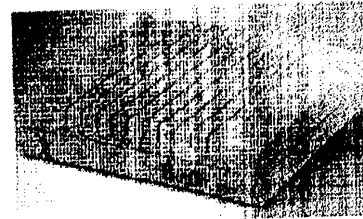

Specifications

Throughput		115,200
Data Throughput (bps)		14,400
Fax Throughput		
Modulation Techniques & Speed		
K56flex		*
ITU-T V.90		*
ITU-T V.34 bis 33.6, 31.2, 28.8, 26.4, 24.0, 21.6, 19.2, 16.8, 14.4, 12.0, 9.6, 7.2, 4.8, 2.4K bps		*
ITU-T V.34 28.8, 26.4, 24.0, 21.6, 19.2, 16.8, 14.4, 12.0, 9.6, 7.2, 4.8, 2.4K bps		*
ITU-T V.32 bis 14.4, 12.0, 9.6, 7.2 & 4.8 K bps		*
ITU-T V.32 9.6 & 4.8K bps		*
ITU-T V.23 1200/75 bps		*
ITU-T V.22 bis 2.4K bps		*
ITU-T V.22/ Bell 212A, 1200 bps		*
ITU-T V.21/ Bell 103, 300 bps		*
Data Compression / Error Correction Protocol		
MNP 2-4, V.42		*
MNP 5, V.42bis		*
FAX Feature		
Class 1 FAX		*
Class 2 FAX		*
ITU-T V.17 Fax, 14.4-7.2K bps		*
ITU-T V.29, V.27ter Fax, 9.6-2.4K bps		*
Operation Mode		
Asynchronous		*
Special Features		
Extended AT command set		*
Diagnostic Testing		*
Memory for four Phone numbers		*
Call Progress Display		*
FDSP (Full Duplex Speaker Phone)		*
ASVD ITU-T V.61		N/A
OSVD		N/A
Plug & Play standard for ISA (Select IRQ 3,4,5,7,9,10,11,12)		N/A
Jumper selection for COM Port for ISA		N/A
Select IRQ (3,4,5,7)		N/A
Wake up ring jumper		N/A
Audio signal jumper for sound card		N/A
Accessories		
Application Software		*
Phone cord, User manual		*