

RF Coaxial Connectors

SMB Plugs, Jacks and Adaptors



Features:

- Reliable electrical performance to 4.0GHz.
- Quick connect and disconnect snap on coupling.

Electrical

Impedance	50Ω
Frequency Range	0 to 4.0GHz
VSWR	178U → 1.3 +0.04f maximum GHz (Straight) 1.45 +0.06f maximum GHz (Right Angle) 316U → 1.25 +0.04f maximum GHz (Straight) 1.35 +0.04f maximum GHz (Right Angle)
Working Voltage	250 volts rms maximum, at sea level
Dielectric withstanding Voltage	750 volts rms maximum, at sea level
Contact Resistance	Centre contact = 6.0mΩ maximum Outer contact = 1.0mΩ maximum
Insertion Loss	0.3dB maximum at 1.5GHz (Straight) 0.6dB maximum at 1.5GHz (Right Angle)
Insulation Resistance	1000MΩ minimum

Mechanical and Environmental

Mating	Snap-on coupling
Durability	500 matings
Cable Retention	RG-174 → 20lbs minimum
Temperature Range	-65°C to +165°C
Vibration	MIL-STD-202 Method 204 Test Condition D
Salt Spray	MIL-STD-202 Method 101 Test Condition B
Thermal Shock	MIL-STD-202 Method 107 Test Condition B



RF Coaxial Connectors


SMB Plugs, Jacks and Adaptors




Material

	Material	Plating
Connector Body	Brass	Nickel or gold
Centre Contact	Male : Brass Female : Beryllium Copper	30µ" gold over 100µ" nickel 30µ"gold over 100µ" nickel
Insulation	Teflon	None
Crimp Ferrule	Annealed Copper	Same as Body


24-01L-1-TGG

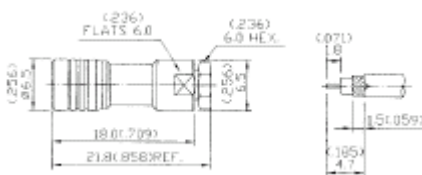


24-02L-1-TGG

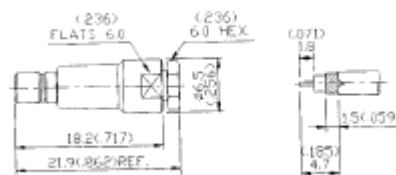


24-05L-1-TGG

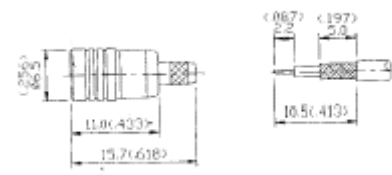


24-06L-1-TGG

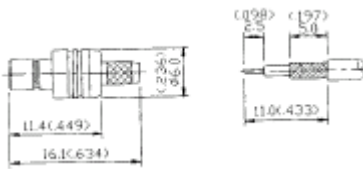


24-07L-1-TGG

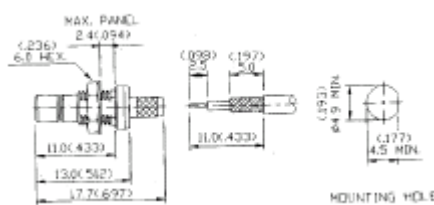


24-12-2-TGG




24-12-2-TGG



24-09-1-TGG



24-10-1-TGG



RF Coaxial Connectors

SMB Plugs, Jacks and Adaptors



Specifications

Type	Applicable Cable	Part Number
Jacks-RG174 Straight Clamp	RG 174	24-02L-1-TGG
PCB Mount Jacks Straight	-	24-14-2-TGG
PCB Mount Jacks RA	-	24-12-2-TGG
Bulkhead Jacks-Solder Front Mount	-	24-10-1-TGG
Bulkhead Jacks-Solder Rear Mount	-	24-09-1-TGG
Plugs-RG174 Straight Clamp	RG 174	24-01L-1-TGG
		24-05L-1-TGG
		24-06L-1-TGG
Jacks-RG174 Straight Crimp	-	24-07L-1-TGG
Bulkhead Jacks Crimp Straight	-	24-07L-1-TGG
Adaptors SMB Plug-SMB Plug	-	24-15-1-TGG
Adaptors SMB Bulkhead Jack-SMB Jack	-	24-16-1-TGG

RF Coaxial Connectors

SMB Plugs, Jacks and Adaptors



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300




SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

