5500 Lit Rocker Switches - Single Pole 16A 250Vac



16(4)A 250Vac T85

10(3)A 250Vac T100, (12A 250Vac T125 for P rocker only)

FL

UL CSA 15A 250Vac, CSA 16A Non Ind 250Vac UL CSA 250Vac 1hp, 125Vac 1/2hp UL 85°C, file E45221, CSA file LR10990

In house test


Inrush 24A to EN61058-1 & 20A 28Vdc

μ contact gap

Technical data on pages 4 & 5 (switches), 66 (indicators)

For Twin units repeat the order details for both the right and left sides

C 5503 A L --TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

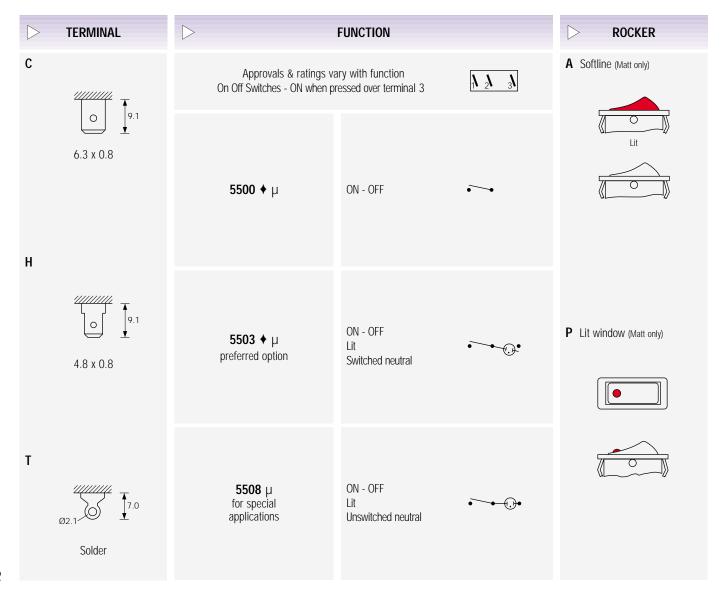







C5503AL ---


C5500AL ---







5 C5503P/C5503PL

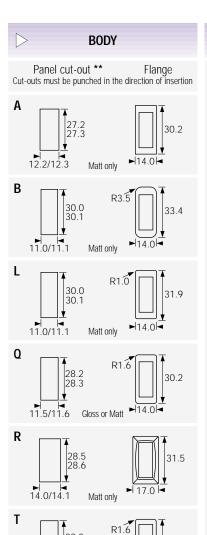

28.2 28.3

Matt only

11.5/11.6

OPTIONS

Finish Matt is standard


Colour Call factory for custom colours. A full range is available for large orders

Legend printing Select from the examples or call factory for custom legends

Lamp voltage Call factory for details

Blanking plate A0434 -- (SP) A0494 -- (DP) Dummy units to fill unused panel holes


Protective cover (designed to IP65) Snaps on to A, L, Q or T bodies (add G after body in cat no). This reduces panel thickness by 1mm.



Panel sealing washers W46 (Single Pole) and W42 (Double Pole) are available for these body types but reduce panel thickness by a further 0.8mm

For all options call the factory

DIMENSIONS (mm)



Panel thickness A,Q 0.75 to 3.3mm 0.75 to 2.5mm L,B,T 0.75 to 3.0mm

** For cut-out details on momentary switches call the factory

Terminal spacing - Poles 10.8 between centres (twin units)

Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double pole body. For 1500 range panel cut-out details see page 29. For 5500 range panel cut-out details (L, B and T) call factory.







For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly (This has terminal numbers 1, 2 & 3)

Examples of printing







23