

TBD243C, TBD244C



High Power Bipolar Transistor


TO-220, General Purpose



Features:


- NPN and PNP plastic power transistors.
- General purpose amplifier and switching applications.

TO-220 Plastic Package

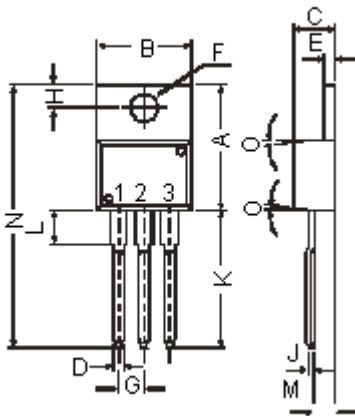

Dimensions	Minimum	Maximum
A	14.42	16.51
B	9.63	10.67
C	3.56	4.83
D	-	0.90
E	1.15	1.40
F	3.75	3.88
G	2.29	2.79
H	2.54	3.43
J	-	0.56
K	12.70	14.73
L	2.80	4.07
M	2.03	2.92
N	-	31.24
O	7°	

Dimensions : Millimetres



Pin Configuration

1. Base
2. Collector
3. Emitter
4. Collector



TBD243C, TBD244C

High Power Bipolar Transistor



Absolute Maximum Ratings

Characteristic	Symbol		TBD243C TBD244C	Unit		
Collector-Base Voltage (Open Emitter)	V_{CBO}	Maximum	100	V		
Collector Emitter Voltage (Open Base)	V_{CEO}					
Collector Current	I_C				6.0	A
Total Power Dissipation upto $T_C = 25^\circ\text{C}$	P_{tot}				65	W
Junction Temperature	T_j				150	$^\circ\text{C}$
Collector Current Saturation Voltage $I_C = 6\text{A}$; $I_B = 1\text{A}$	$V_{CE(Sat)}$	Minimum	1.5	V		
D.C. Current Gain $I_C = 0.3\text{A}$; $V_{CE} = 4\text{V}$	h_{FE}				30	
Ratings (at $T_A = 25^\circ\text{C}$ unless otherwise specified)						
Limiting Values						
Collector-Base Voltage (Open Emitter)	V_{CBO}	Maximum	100	V		
Collector Emitter Voltage (Open Base)	V_{CEO}					
Emitter-Base Voltage (Open Collector)	V_{EBO}				5.0	
Collector Current	I_C				6.0	
Collector Current (Peak)					10	
Base Current	I_B				2.0	
Total Power Dissipation upto $T_C = 25^\circ\text{C}$	P_{tot}				65	W
Junction Temperature	T_j				150	$^\circ\text{C}$
Storage Temperature	T_{stg}				-65 to +150	
Thermal Resistance						
From Junction to Case	$R_{th(j-c)}$	-	1.92	$^\circ\text{C/W}$		
Characteristics $T_{amb} = 25^\circ\text{C}$ unless otherwise specified						
Collector Cut off Current $I_B = 0$; $V_{CE} = 60\text{V}$ $V_{BE} = 0$; $V_{CE} = V_{CEO}$	I_{CEO} I_{CES}	Maximum	0.7 0.4	mA		
Emitter Cut off Current $I_C = 0$; $V_{EB} = 5\text{V}$	I_{EBO}	Maximum	1.0	mA		
Breakdown Voltages $I_C = 30\text{mA}$; $I_B = 0$ $I_C = 1\text{mA}$; $I_E = 0$ $I_E = 1\text{mA}$; $I_C = 0$	$V_{CEO(Sus)}^*$ V_{CBO} V_{EBO}	Minumum	100 100 5.0	V		
Saturation Voltage $I_C = 6\text{A}$; $I_B = 1\text{A}$	$V_{CE(sat)}^*$	Maximum	1.5			
Base Emitter On Voltage $I_C = 6\text{A}$; $V_{CE} = 4\text{V}$	$V_{BE(on)}^*$	Maximum	2.0			
D.C. Current Gain $I_C = 0.3\text{A}$; $V_{CE} = 4\text{V}$ $I_C = 3\text{A}$; $V_{CE} = 4\text{V}$	h_{FE}^*	Minimum	30 15	-		

TBD243C, TBD244C

High Power Bipolar Transistor



Characteristics

$T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified

Small Signal Current Gain $I_C = 0.5\text{A}; V_{CE} = 10\text{V}; f = 1\text{KHz}$	h_{fe}	Minimum	20	-
Transition Frequency $I_C = 0.5\text{A}; V_{CE} = 10\text{V}; f = 1\text{MHz}$	$f_T^{(1)}$	Mimumum	3	MHz

* Pulse Test: Pulse Width $\leq 300\mu\text{s}$; Duty Cycle $\leq 2\%$.

(1) $f_T = |h_{fe}| \cdot f_{test}$

Specifications

I_C (av) maximum (A)	V_{CEO} maximum (V)	h_{FE} minimum at $I_C = 0.3\text{A}$	P_{tot} at 25°C (W)	TYPE	Part Number
6	100	30	65	NPN	TBD243C
				PNP	TBD244C

TBD243C, TBD244C

High Power Bipolar Transistor



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

