HITACHI

KAOHSIUNG HITACHI **ELECTRONICS CO.,LTD** P.O. BOX 26-27 2,13TH EAST ST. K.E.P.Z. KAOHSIUNG TAIWAN R.O.C. TEL:(07) 821-5811(7 LINE) FAX:(07) 821-5815

FOR	MESSRS:	

DATE: Jun.04,2004

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

SP14Q006-T CONTENTS

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701- SP14Q006-T-5	1-1/1
2	RECORD OF REVISION	7B64PS 2702- SP14Q006-T-5	2-1/1
3	GENERAL SPECIFICATION	7B64PS 2703- SP14Q006-T-5	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704- SP14Q006-T-5	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705- SP14Q006-T-5	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706- SP14Q006-T-5	6-1/3~3/3
7	BLOCK DIAGRAM	7B64PS 2707- SP14Q006-T-5	7-1/1
8	INTERFACE TIMING CHART	7B64PS 2708- SP14Q006-T-5	8-1/3~3/3
9	OUTLINE DIMENSIONS	7B63PS 2709- SP14Q006-T-5	9-1/2
		7B64PS 2709- SP14Q006-T-5	9-2/2
10	APPEARANCE STANDARD	7B64PS 2710- SP14Q006-T-5	10-1/3~3/3
11	PRECAUTION IN DESIGN	7B64PS 2711- SP14Q006-T-5	11-1/2~2/2
12	DESIGNATION OF LOT MARK	7B64PS 2712- SP14Q006-T-5	12-1/1
13	PRECAUTION FOR USE	7B64PS 2713- SP14Q006-T-5	13-1/1

* When products will be discontinued, customers will be informed by HITACHI with twelve months prior announcement.

ACCEPTED BY;

PROPOSED BY; Jimmy, HO

KAOHSIUNG HITACHI	Sh.	7B64PS 2701- SP14Q006-T-5	PAGE	1 1/1
ELECTRONICS CO.,LTD.	No.		FAGE	1-1/1

RECORD OF REVISION

DATE	SHEET No.	SUMMARY
	7B64PS 2705 - SP14Q006-T-2	5.2 ELECTRICAL CHARACTERISTICS OF LED BACKLIGHT
	PAGE 5 - 2/2	SYMBOL TYP. MAX
		VLED (TBD) -
	•	ILED 60 -
		Revised ↓
		SYMBOL TYP. MAX
		VLED 5 5.2
		ILED 160 -
Oct.22,'03	7B64PS2709- SP14Q006-T-3 Page 9-2/2	Changed LED I/F JAE/1L-G-4S-S3C2 → JAE/IL-G-4S-S3C2
Mar.24,'04	7B64PS2708- SP14Q006-T-4	8.3 POWER ON/OFF TIMING SEQUENCE Revised tDLD min. 200 → 50
	Page 8-3/3	Revised tCH max. 200 → 30
Jun.04,'04	7B64PS 2705- SP14Q006-T-5	5.1 ELECTRICAL CHARACTERISTICS Added
	Page 5-1/2	ITEM SYMBOL MIN. TYP. MAX
	agc 0-1/2	Power Supply Voltage Logic VDD-VSS 3.2 3.3 3.4
		21.0 22.0 23.0
		Recommend LC Driving Voltage VDD-V0 20.0 21.0 22.0
		19.0 20.0 21.0
	7B64PS 2706- SP14Q006-T-5 Page 6-3/3	6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT Added The LCD driving voltage should be adjusted at the voltage where the peak contrast is obtained.
	7B64PS 2710- SP14Q006-T-5 Page 10-1/3	10.1 APPEARANCE INSPECTION CONDITION Revised 45°→25°

KAOHSIUNG HITACHI			Sh.			
10.011010110 11117.0111	DATE	Jun.04,'04	•	7B64PS 2702- SP14Q006-T-5	DAGE	2_1/1
ELECTRONICS CO LTD	DAIL	Juli.04, 04	NIa	10041 0 2102- 01 14Q000-1-0	I AGE	4-1/1
ELECTRONICS CO.,LTD.			No.			

3. GENERAL SPECIFICATIONS

(1) Part Name SP14Q006-T

(2) Outer Dimensions 167.0(W)mm×109.0(H)mm×10.0(D) mm max.

(3) Effective Area 120(W)mm min. × 89(H)mm min.

(4) Dot Size 0.345(W)min. × 0.345(H)min.

(5) Dot Pitch 0.360(W)mm × 0.360(H)mm

(6) Dot Number (Resolution) 320 (W) × 240 (H) dots

(7) Duty Ratio 1/240

(8) LCD Type Transflective type F-B / W STN

With anti-glare type upper polarizer

(9) Viewing Direction 6 O'clock

(10) Viewing Angle in Rear - Front

(12:00) (6:00)

R-F=90 °(typ.)

(11) Backlight Type LED(Color: white)

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	0	6.0	٧	
Power Supply for LC Driving	VDD-VEE	0	27.5	V	
Input Signal Voltage	Vi	-0.3	VDD+0.3	V	(Note 1)
Static Electricity	VESD0	_	±100	V	(Note 2,3,4)
	VESD1	-	±10	kV	(Note 2,3,5)

VSS=0V: STANDARD

Note 1: DOFF, FLM, CL1, CL2, D0~D3.

Note 2: Make certain you are grounded when handling LCM.

Note 3 : Energy storage capacitance 200pF , discharge resistance 250Ω Ta=25℃ , 60%RH.

Note 4: Contact discharge to I/F connector pins.

Note 5: Contact discharge to front metal bezel.

4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

4.2 LIVITORIVILIVIAL ADSOLUTE IVIAMINIONI TATTIVOS											
ITEM	OPERATING		STO	RAGE	COMMENT						
	MIN.	MAX.	MIN.	MAX.							
Ambient Temperature	-20 ℃	70 ℃	-30 ℃	80 ℃	(Note 2,3,6)						
Humidity	(Not			te 1)	Without Condensation						
		2.45m/s ²		11.76m/s ²							
Vibration	-	(0.25G)	-	(1.2G)	(Note 4)						
·				Note 5	1h max.						
		29.4m/s ²		490.0m/s ²							
Shock	-	(3 G)	-	(50 G)	X、Y、Z Directions						
				(Note 5)							
Corrosive Gas	Note Acc	eptable	Note Acc	eptable							

Note 1 : Ta≤40°C : 85%RH max.

Ta>40°C: Absolute humidity must be lower than the humidity of 85%RH at 40°C

Note 2 : Ta at -30° C ---< 48h, at 80° C ---< 168h.

Note 3: Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note 4:5Hz~100Hz (Except resonance frequency)

Note 5: This module should be operated normally after finish the test.

Note 6: The response time will be slower under low temperature.

KAOHSIUNG HITACHI	DATE	lum 04 '04	Sh.	7B64PS 2704- SP14Q006-T-5	DAGE	1 1/1
ELECTRONICS CO.,LTD.	DAIE	Jun.04,'04	No.	7B04F3 2704- 3F 14Q000-1-3	FAGE	4-1/1

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	COMMENT	
Power Supply Voltage	VDD-VSS		4.75	5.0	5.25	V		
for Logic	VDD-V33	-	3.2	3.3	3.4	V		
Power Supply Voltage for LC Driving	VEE-VSS	1	-23.1	-22.0	-20.9	٧		
Innut Signal Voltage	Vi	H LEVEL	0.8VDD	-	VDD	V	(Note1)	
Input Signal Voltage	VI VI	L LEVEL	0	-	0.2VDD	V	(Note I)	
Power Supply Current	IDD	VDD-VSS=5.0V		6.0	_	mA	(Note2)	
for Logic	עטו	VEE-VSS= -22.0V		0.0		111/5		
Power Supply Current	IEE	VDD-VSS=5.0V	_	5.0	-	mA	(Note2)	
for LC Driving	166	VEE-VSS= -22.0V		0.0			(NOICE)	
Decemended I.C.		Ta= 0° C , ϕ = 0°	21.0	22.0	23.0	V		
Recommended LC	VDD-V0	Ta=25°C , <i>∮</i> = 0°	20.0	21.0	22.0	V	(Note3)	
Driving Voltage		Ta=50°C , <i>φ</i> = 0°	19.0	20.0	21.0	٧		
Frame Frequency	fFLM	-	70	75	80	Hz	(Note4)	

Note 1: DOFF, FLM, CL1, CL2, D0~D3.

Note 3 : Recommended LC driving voltage may fluctuate about ±1.0V by each module. Test pattern is all "Q"


Note 4: Please set the frame frequency so as to avoid flicker and rippling on the display.

KAOHSIUNG HITACHI	DATE	lun 04 '04	Sh.	7B64PS 2705- SP14006-T-5	DAGE	5_1/2
ELECTRONICS CO.,LTD.	DATE	Jun.04,'04	No.	7804F3 2703- 3F 14000-1-3	I AGL	J-1/2

5.2 ELECTRICAL CHARACTERISTICS OF LED BACKLIGHT

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	COMMENT
Power Supply Voltage for LED	VLED	-		5.0	5.2	V	
Power Supply Current for LED	ILED	VLED=5.0V	1	160	-	mA	(Note 1)

Note 1: The ILED changes depending on ambient temperature.



6. OPTICAL CHARACTERISTICS 6.1 OPTICAL CHARACTERISTICS T

Ta=25\U+2103 (Backlight off)


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Viewing Area	-	K≧2.0 <i>θ</i> =0°	_	90	_	deg.	1
viewing Area	-	K≧2.0 <i>θ</i> =90°	-	- 80 - deg.	1		
Contrast Ratio	K	φ=0°, θ=0°		5	-	ı	2,3
Response Time (Rise)	tr	φ=0°, θ=0°	_	(336)	-	ms	4
Response Time (Fall)	tf	φ=0°, θ=0°	-	(148)	-	ms	4


Note 1 : Definition of θ and ϕ

(Measure condition by HITACHI)


(Normal)

Viewing direction






Note 2: Definition of viewing angle \$\phi1\$ and \$\phi2\$




Contrast ratio K vs viewing angle \$\phi\$

Note 3: Definition of contrast"K"


Brightness on non-selected dot (B1) Brightness on selected dot (B2)





KAOHSIUNG HITACHI	DATE	Jun.04,'04	Sh.	7B64PS 2706-SP14Q006-T-5	PAGE	6-1/3	
ELECTRONICS CO.,LTD.	DAIL	Juli.04, 04	No.	75041 3 2700-31 140000-1-3	IAGE	0-1/3	ĺ

Note 4: Definition of optical response

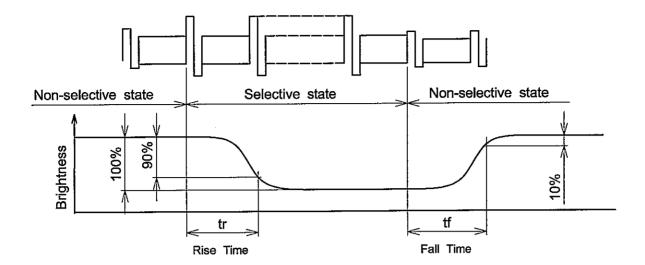

6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT


(Backlight ON)

ITEM	MIN.	TYP.	MAX.	UNIT	NOTE
Brightness	-	60	-	cd/m²	ILED=160mA
Brightness Uniformity	-	_	±30	%	(Note 1)

Ta=25℃, Display data should be all "ON".


The LCD driving voltage should be adjusted at the voltage where the peak contrast is obtained.

Note 1: Measure of the following 9 places on the display.

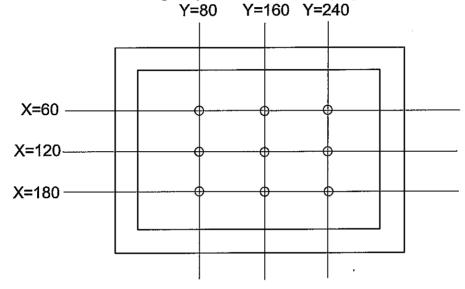

Definition of the brightness tolerance.


KAOHSIUNG HITACHI	DATE Jun.04,'04	Sh.	7B64PS 2706- SP14Q006-T-5	PAGE	6-3/3
ELECTRONICS CO.,LTD.	DATE Juli.04, 04	No.	75041 3 2700-31 14 0000-1-3	0	0°-575

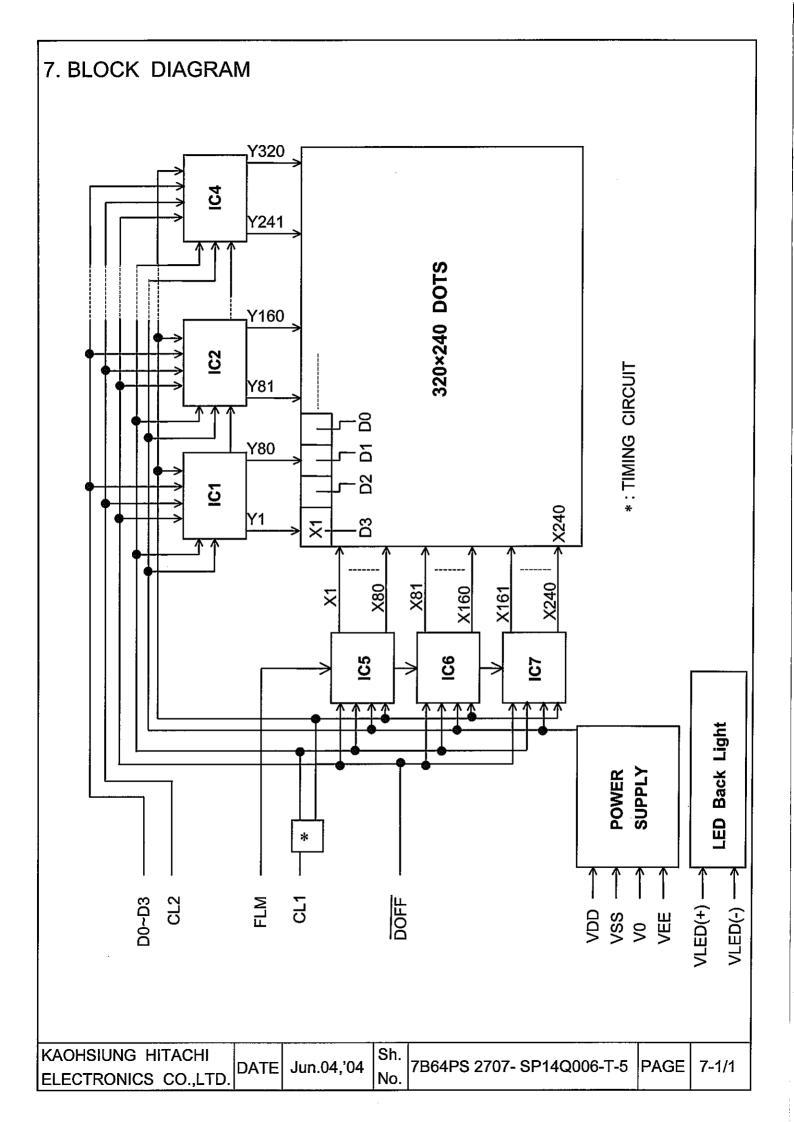


8. INTERFACE TIMING CHART 8.1 INTERFACE TIMING CHART 52.1μs≦T≦59.5μs CL1 CL2 X1 X240-(Y1)(Y5)D3 $\langle Y2 \rangle \langle Y6 \rangle$ Y318 D2 (Y3)(Y7) Y319 **D1** [']Υ4 \ Υ8 \ Y320 D₀ FLM CL1 240×T **FLM** X239 X240 D0~D3 KAOHSIUNG HITACHI Sh. |7B64PS 2708- SP14Q006-T-5 |PAGE | 8-1/3 DATE Jun.04,'04 ELECTRONICS CO.,LTD. No.

8.2 TIMING CHARACTERISTICS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
CL2 frequency	fCP	-		6.5	MHz
CL2 pulse width	tw	45	-	-	ns
CL2 rise, fall time	tr,tf	-	_	15	ns
Data set up time	tDSU	30	-	-	ns
Data hold time	tDHD	30	-	_	ns
CL1 set up time	tLSU	80	-	-	ns
CL1 clock time	tLC	120	-	-	ns
"FLM" set up time	tSETUP	100	-	_	ns
"FLM" hold time	tHOLD	100	-	-	ns
"CL1" pulse width	twc	125	_	-	ns

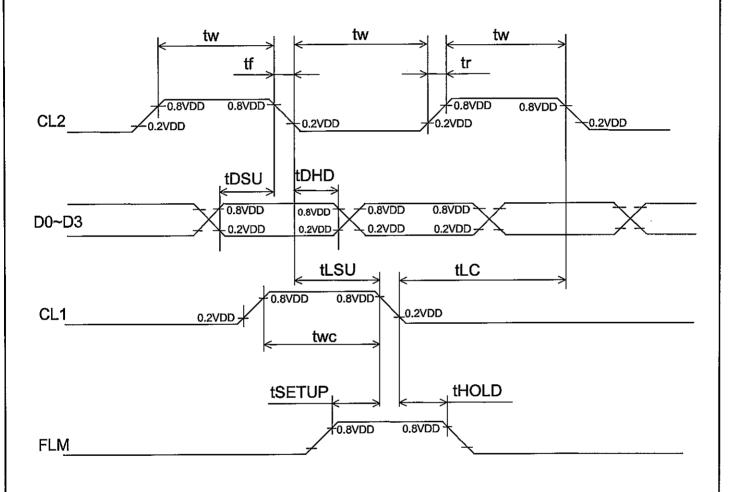

KAOHSIUNG HITACHI			Sh			-
	DATE	Jun 04 '04	011.	7B64PS 2708- SP14Q006-T-5	PAGE	8-2/3
ELECTRONICS CO.,LTD.		0011101,01	No.			

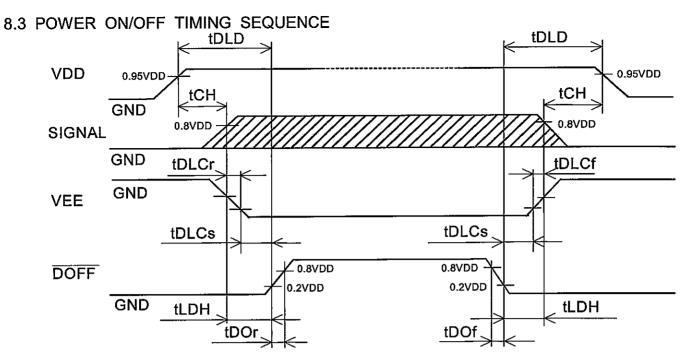


SYMBOL	MIN.	MAX.	UNIT	COMMENT
tDLD	50	-	ms	
tCH	0	30	ms	(Note 1)
tLDH	0	-	ms	
tDOr	-	100	ns	
tDOf	_	100	ns	
tDLCr	0	_	ms	(Note 2)
tDLCf	0	-	ms	
tDLCs	20	-	ms	

Note 1 : Please keep the specified sequence because wrong sequence may cause permanent damage to the LCD panel.

Note 2 : HITACHI recommends you to use DOFF function.


Display quality may deteriorate if you don't use DOFF function.


8.4 POWER SUPPLY FOR LCM (EXAMPLE)

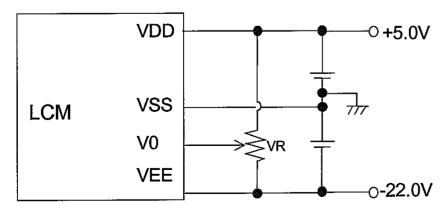

Note 1 : $VR : 10k\Omega$

KAOHSIUNG HITACHI		Jun.04,'04	Sh.	7B64PS 2708- SP14Q006-T-5	PAGE	8-3/3
ELECTRONICS CO.,LTD.	DATE	Juli.04, 04	No.	75041 6 2700- 61 14 8000 1 6	1,702	0 0,0

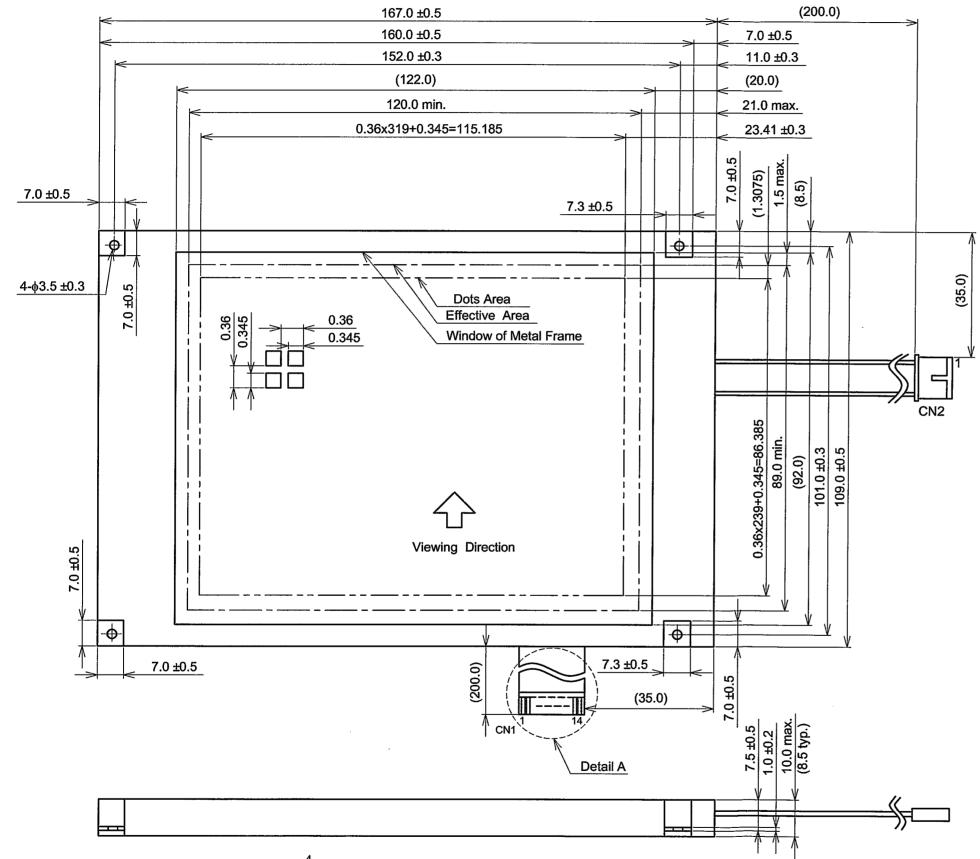


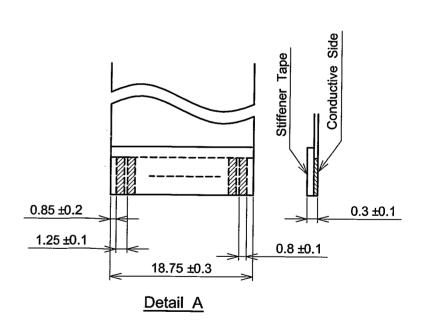

Note 1 : Measurement when adding 9.8×10^4 Pa at the measuring point.

Scale : NTS Unit : mm

KAOHSIUNG HITACHI ELECTRONICS CO.,LTD.	DATE	Jun.04,'04	Sh. No.	7B63PS 2709-SI	P14Q006-T-5	PAGE	9-1/2
LLLCTRONICS CO.,LTD.							

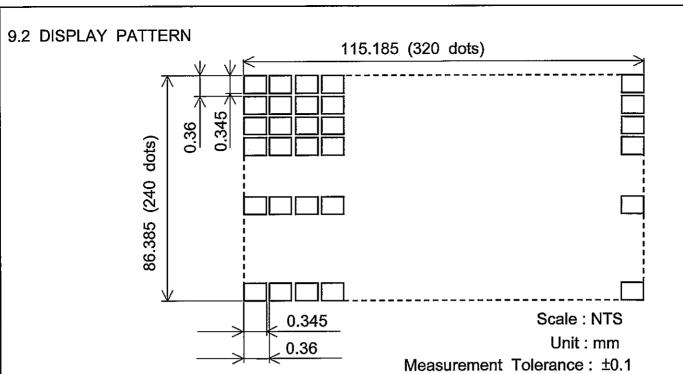

9.3 INTERFACE PIN CONNECTION

FPC: pitch 1.25mm 14 pins

INTER	RFACE	PIN No.	SIGNAL	LEVEL	FUNCTION
LCM	CN1	1	D0	H/L	Display Data
		2	D1		
		3	D2		
		4	D3		
		5	DOFF	H/L	H:ON / L:OFF
		6	FLM	Н	First Line Marker
		7	N.C	-	
		8	CL1	H→L	Data Latch
		9	CL2	H→L	Data Shift
		10	VDD	-	Power Supply for Logic
		11	VSS	-	GND
		12	VEE	-	Power Supply for LC
		13	VO	-	Operating Voltage LC Driving
		14	VSS	_	GND

INTER	FACE	PIN No.	SIGNAL	LEVEL	FUNCTION
LCM	CN2	1	VLED(+)		Power Supply for LED
		2	N.C	_	-
		3	N.C	-	-
		4	VLED(-)	_	LED GND

LED I/F: J.A.E / IL - G - 4S - S3C2


KAOHSIUNG HITACHI	DATE	lun 04 '04	Sh.	7B64PS 2709- SP14Q006-T-5	DVCE	0.2/2
ELECTRONICS CO.,LTD.	DATE	Jun.04,'04	No.	7B04F3 2705- 3F 14Q000-1-3	FAGL	3-212

10. APPEARANCE STANDARD

10.1 APPEARANCE INSPECTION CONDITION


Visual inspection should be done under the following condition.

- (1) The inspection should be done under in the dark room.
- (2) The CFL should be lighted with the prescribed inverter.
- (3) The distance between eyes of an inspector and the LCD module is 25cm.
- (4) The viewing zone is shown the figure . Viewing angle ≤25°



10.2 DEFINITION OF EACH ZONE

A zone: Within the effective area specified at page 9-1/2 of this document. B zone: Area between the window of metal frame and the effective area line specified at page 9-1/2 of this document.

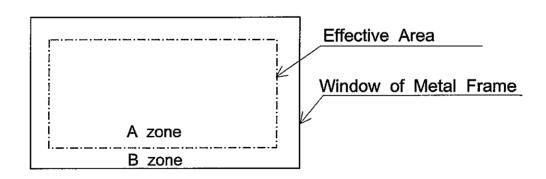

KAOHSIUNG HITACHI	E Jun.04,'04	7B64PS 2710- SP14Q006-T-5	PAGE	10-1/3
ELECTRONICS CO.,LTD.	No.	75041 3 27 10- 31 14 2000-1-3	T KOL	10-1/0

10.3 APPEARANCE SPECIFICATION


*) If a problem occurs in respect to any of these items, both parties(Customer and HITACHI) will discuss in more detail.

No.	both parties(Custome	i and mitacini	CRITE		uetan	•	Α	В
INO.	Scratches	Distinguished on					*	_
	Scratches	(To be judged b			ple)			
	Dent	Same as Above					*	-
	Wrinkles in Polarizer	Same as Above						
	Bubbles	Average D	iameter	Ma	ximum	Number		
		Ď(mn			Accep	otable		i
		D≦	0.2		lgn	ore	1	
		0.2 <d≦< td=""><td>≦0.3</td><td></td><td>1</td><td>2</td><td>\circ</td><td>-</td></d≦<>	≦0.3		1	2	\circ	-
		0.3 <d≦< td=""><td>≦0.5</td><td></td><td>3</td><td>}</td><td></td><td></td></d≦<>	≦0.5		3	}		
		0.5 <d< td=""><td></td><td></td><td>No</td><td>ne</td><td></td><td></td></d<>			No	ne		
	Stains,		Filame	ntous				
	Foreign Materials,	Length	Widtl	ì	Maxir	num Number	0	-
	Dark Spot	L(mm)	W(mn		Α	cceptable		
		L≦2.0	W≦C			Ignore		
		L≦3.0	0.03 <w≦< td=""><td></td><td></td><td>6</td><td></td><td></td></w≦<>			6		
L		L≦2.5	<u> 0.05<w≦< u=""></w≦<></u>			1		
		Round						
		Average	Maximum	· ·	1	Minimum		
		Diameter	Accepta	able		Space		
C		D(mm)						
		D<0.2	ignor	е		-	0	-
		0.2 ≦D<0.33	8			10mm		
		0.33≦D	None			-		
D		Total	Filamentous + Round = 10				0	
		Those wiped out easily are acceptable						0
	Color Tone	To be judged by HITACHI limit sample						-
	Color Uniformity	Same as above		I 5 5			0	-
	Pinhole	Average D		Ма		Number		
		D(mn		Acceptable				
		D≦0.			<u>Ign</u>			
		0.15 <d≦0.3< td=""><td></td><td></td><td>1</td><td></td><td></td><td></td></d≦0.3<>			1			
		C≦0.0		Ignore				
	Contrast	Average	Contrast	Maxim		Minimum	$ \circ $	-
	Irregularity	Diameter		Numl		Space		
	(Spot)	D(mm) D≦0.25	To be	Accept Igno				
		D≦0.25 0.25 <d≦0.35< td=""><td></td><td>19110 10</td><td></td><td>20mm</td><td></td><td></td></d≦0.35<>		19110 10		20mm		
			judged by HITACHI	4		20mm		
		0.35 <d≦0.5 0.5 <d< td=""><td>ППАСПІ</td><td>Non</td><td></td><td></td><td></td><td></td></d<></d≦0.5 	ППАСПІ	Non				
L		U.3 \U		INOI		<u>-</u>		

KAOHSIUNG HITACHI	DATE	Jun.04,'04	Sh.	7B64PS 2710- SP14Q006-T-5	PAGE	10_2/3
ELECTRONICS CO.,LTD.	DATE	Juli.04, 04	No.	75041 3 27 10- 31 14 0000-1-3	I AUL	10-270


No.	ITEM					Α	В
	Contrast Irregularity (Line)	Width D(mm)	Length L(mm)	Maximum Number Acceptable	Minimum Space		
	(Filamentous)	W≦0.25	L≦1.2	2	20mm		
C		W≦0.2	L≦1.5	3	20mm		_
D		W≦0.15	L≦2.0	3	20mm		
		W≦0.1	L≦3.0	4	20mm]	
	_	То	tal	(3		
	Rubbing Scratch	To be judge	ed by HITAC	HI standard			_

Note 1: Definition of average diameter (D)




$$\frac{a+b}{2}$$
 = D......Average Diameter

Note 2: Definition of length (L) and width (W)

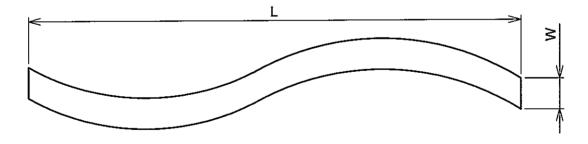

Note 3: Definition of pinhole



c : Salience

KAOHSIUNG HITACHI		Iup 04 '04	Sh.	7D64DC 2710 SD140006 5	DAGE	10-3/3
ELECTRONICS CO., LTD.	DATE	Juli.04, 04	No.	7B64PS 2710-SP14Q006-5	FAGE	10-3/3

11. PRECAUTION IN DESIGN

11.1 LC DRIVING VOLTAGE (VEE) AND VIEWING ANGLE RANGE
Setting VEE out of the recommended condition will be a cause for a change of viewing angle range.

11.2 PRECAUTIONS AGAINST STATIC CHARGE

As this module contains C-MOS LSIs, it is not strong against electrostatic discharge. Make certain that the operator's body is connected to the ground through a list band etc. And don't touch I/F pins directly.

11.3 POWER ON SEQUENCE

Input signals should not be applied to LCD module before power supply voltage is applied and reaches to specified voltage (VDD). If above sequence is not kept, C-MOS LSIs of LCD modules may be damaged due to latch up problem.

11.4 PACKAGING

- (1) No leaving product is preferable in the place of high humidity for a long period of time. For their storage in the place where temperature is 35 ℃ or higher special care to prevent them from high humidity is required. A combination of high temperature and high humidity may cause them polarization degradation as well as bubble generation and polarizer peel-off. Please keep the temperature and humidity within the specified range for use and storage.
- (2) Since polarizers tend to be easily damaged, They should be handled full with care so as not to get them touched, pushed or rubbed.
- (3) As the adhesives used for adhering polarizers are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropyl alcohol. The following solvents are recommended for use:

 normal hexane

Please contact us when it is necessary for you to use chemicals.

- (4) Lightly wipe to clean the dirty surface with absorbent cotton waste or other soft material like chamois, soaked in the chemicals recommended without scrubbing it hardly. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.
- (5) Immediately wipe off saliva or water drop attached on the display area because its long period adherence may cause deformation or faded color on the spot.
- (6) Foggy dew deposited on the surface due to coldness will be caused for polarizer damage, stain and dirt on product. When necessary to take out the products from some place at low temperature for test, etc. It is required for them to be warmed up in a container once at the temperature higher than that of room.
- (7) Touching the display area and contact terminals with bare hands and contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched by bare hands. (Some cosmetics are detrimental to polarizers.)

KAOHSIUNG HITACHI	DATE	Jun.04,'04	Sh.	7B64PS 2711- SP14Q006-T-5	PAGE	11-1/2	١
ELECTRONICS CO.,LTD.	DAIL	Jun.04, 04	No.	TBOTT OF TIGOGOT O		' ' ' ' ' ' '	l

(8) In general the quality of glass is fragile so that it tends to be cracked or chipped in handling, specially on its periphery. Be careful not to give it sharp shock caused by dropping down, etc.

11.5 CAUTION FOR OPAERATION

- (1) It is an indispensable condition to drive LCDs within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life. An electrochemical reaction due to direct current causes LCDs undesirable deterioration, so that the use of direct current driver should be avoided.
- (2) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCDs show dark blue color in them. However those phenomena do not mean malfunction or out of order with LCDs which will come back in the specified operating temperature range.
- (3) If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- (4) A slight dew depositing on terminals is a cause for electrochemical reaction resulting in terminal open circuit. Please operate the LCD module under the relative condition of 40°C 85%RH.

11.6 STORAGE

- In case of storing for a long period of time (for instance, for years) for the purpose of replacement use, the following ways area recommended.
- (1) Storage in a polyethylene bag with the opening sealed, so the fresh air will not be entered from outside.
- (2) Placing in a dark place where neither exposure to direct sunlight nor light is , keeping temperature in the range from 0 $^{\circ}$ C to 35 $^{\circ}$ C.
- (3) Storing with no touch on polarizer surface by anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery from us.)

11.7 SAFETY


- (1) It is recommendable to crash damaged or unnecessary LCDs into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- (2) When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

KAOHSIUNG HITACHI ELECTRONICS CO.,LTD	IDATE Jun.04.'04	Sh. No. 7B64PS 2711- SP14Q006-T-5	PAGE 11-2/2
--	-------------------	-----------------------------------	-------------

12. DESIGNATION OF LOT MARK

LOT MARK

Lot mark is consisted of 4 digital number.



YEAR	FIGURE IN
	LOT MARK
2004	4
2005	5
2006	6
2007	7
2008	8

Note 1: Some products have alphabet at the end or the first.

	FIGURE IN		FIGURE IN
MONTH	LOT MARK	MONTH	LOT MARK
Jan.	01	Jul.	07
Feb.	02	Aug.	08
Mar.	03	Sep.	09
Apr.	04	Oct.	10
May	05	Nov.	11
Jun.	06	Dec.	12

WEEK	FIGURE IN
(DAY IN	LOT MARK
CALENDAR)	
01~07	11
08~14	2
15~21	3
22~28	4
29~31	5

Location of lot mark: on the back side of LCM

4034T

13. PRECAUTION FOR USE

- 13.1 A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.
- 13.2 On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.
 - (1) When a question is arisen in the specifications.
 - (2) When a new problem is arisen which is not specified in this specifications.
 - (3) When an inspection specifications change or operating condition change in customer is reported to HITACHI, and some problem is arisen in this specification due to the change.
 - (4) When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

The precaution that should be observed when handling LCM have been explained above. If any points are unclear or if you have any request, please contact HITACHI.

KAOHSIUNG HITACHI		Sh Jun.04,'04	7B64PS 2713- SP14Q006-T-5	DAGE	12 1/1
ELECTRONICS CO.,LTD.	DATE	No	1780473 2713-3714Q000-1-3	FAGE	13-1/1