

Data sheet acquired from Harris Semiconductor SCHS071B – Revised July 2003

# **CMOS Presettable Up/Down Counters**

High-Voltage Types (20-Volt Rating)
CD4510B — — BCD Type
CD4516B — — Binary Type


CD4510B Presettable BCD Up/Down Counter and the CD4516 Presettable Binary Up/Down Counter consist of four synchronously clocked D-type flip-flops (with a gating structure to provide T-type flip-flop capability) connected as counters. These counters can be cleared by a high level on the RESET line, and can be preset to any binary number present on the jam inputs by a high level on the PRESET ENABLE line. The CD4510B will count out of non-BCD counter states in a maximum of two clock pulses in the up mode, and a maximum of four clock pulses in the down mode.

If the CARRY-IN input is held low, the counter advances up or down on each positive-going clock transition. Synchronous cascading is accomplished by connecting all clock inputs in parallel and connecting the CARRY-OUT of a less significant stage to the CARRY-IN of a more significant stage.

The CD4510B and CD4516B can be cascaded in the ripple mode by connecting the CARRY-OUT to the clock of the next stage. If the UP/DOWN input changes during a terminal count, the CARRY-OUT must be gated with the clock, and the UP/DOWN input must change while the clock is high. This method provides a clean clock signal to the subsequent counting stage. (See Fig. 15).

These devices are similar to types MC14510 and MC14516.

The CD4510B and CD4516B types are supplied in 16-lead dual-in-line plastic packages (E suffix), 16-lead small-outline packages (NSR suffix), and 16-lead thin shrink small-outline packages (PW and PWR suffixes). The CD4516B types also are supplied in 16-lead hermetic dual-in-line ceramic packages (F3A suffix).




CD4510B, CD4516B
TERMINAL ASSIGNMENT

# CD4510B, CD4516B Types

#### Features:

- Medium-speed operation -f<sub>CL</sub> = 8 MHz typ. at 10 V
- Synchronous internal carry propagation
- Reset and Preset capability
- 100% tested for quiescent current at 20 V
- 5-V, 10-V, and 15-V parametric ratings
- Standardized symmetrical output characteristics
- Maximum input current of 1 μA at 18 V over full package temperature range;
   100 nA at 18 V and 25°C
- Noise margin (full package-temperature range): 1 V at V<sub>DD</sub> = 5 V
  2 V at V<sub>DD</sub> = 10 V
  2.5 V at V<sub>DD</sub> = 15 V
- Meets all requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices"



### Applications:

- Up/Down difference counting
- Multistage synchronous counting
- Multistage ripple counting
- Synchronous frequency dividers

# OPERATING CONDITIONS AT TA = 25°C, Unless Otherwise Specified

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges.

Characteristic	V <sub>DD</sub>	Min.	Max.	Units	
Supply Voltage Range (At TA = Full Package-Temperature Range)		3	18	V	
	5	150			
Clock Pulse Width, t <sub>W</sub>	10	75	-	ns	
	15	60	-		
	5	_	2		
Clock Input Frequency, f <sub>CL</sub>	10	-	4	MHz	
	15	-	5.5		
	5	150	_		
Preset Enable or Reset Removal Time	10	80	- 1	กร	
	15	60	_		
	5	_	15		
Clock Rise and Fall Time, t <sub>r</sub> CL, t <sub>f</sub> CL*	10 15	_	5 5	μs	
	5	130			
Carry-In Setup Time, t <sub>S</sub>	10	60	- 1	ns	
	15	45	_		
	5	360	_		
Up-Down Setup Time, t <sub>S</sub>	10	160	_	ns	
	15	110	_		
	5	220	_		
Preset Enable or Reset Pulse Width, tw	10	100	_ }	ns	
	15	75	_		

<sup>•</sup>Time required after the falling edge of the reset or preset enable inputs before the rising edge of the clock will trigger the counter (similar to setup time).

<sup>\*</sup>If more than one unit is cascaded in the parallel clocked application, t<sub>r</sub>CL should be made less than or equal to the sum of the fixed propagation delay at 15 pF and the transition time of the carry output driving stage for the estimated capacitive load.

MAXIMUM RATINGS, Absolute-Maximum Values:	
DC SUPPLY-VOLTAGE RANGE, (V <sub>DD</sub> )	
Voltages referenced to VSS Terminal)	0.5V to +20V
INPUT VOLTAGE RANGE, ALL INPUTS	0.5V to V <sub>DD</sub> +0.5V
DC INPUT CURRENT, ANY ONE INPUT	±10mA
POWER DISSIPATION PER PACKAGE (PD):	
For T <sub>A</sub> = -55°C to +100°C	500mW
For TA = +100°C to +125°C	Derate Linearity at 12mW/°C to 200mW
For T <sub>A</sub> = +100°C to +125°C  DEVICE DISSIPATION PER OUTPUT TRANSISTOR	Derate Linearity at 12mW/°C to 200mW
• •	
DEVICE DISSIPATION PER OUTPUT TRANSISTOR	Types)100mW
DEVICE DISSIPATION PER OUTPUT TRANSISTOR FOR T <sub>A</sub> = FULL PACKAGE-TEMPERATURE RANGE (All Package OPERATING-TEMPERATURE RANGE (T <sub>A</sub> )	1Types)100mW 55°C to +125°C
DEVICE DISSIPATION PER OUTPUT TRANSISTOR FOR TA = FULL PACKAGE-TEMPERATURE RANGE (All Package)	1Types)100mW 55°C to +125°C

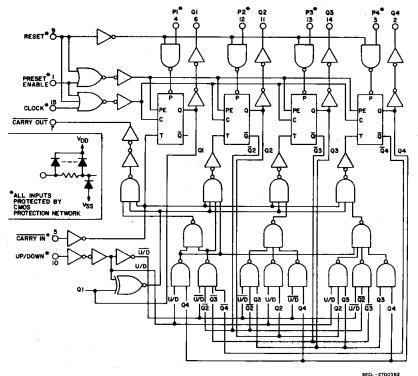


Fig.3 — Logic Diagram for CD45108.




Fig.5 - Minimum output high (source) current characteristics.




Fig.6 — Typical transition time vs. load capacitance.




Fig.1 - Typical output low (sink) current characteristics.




Fig. 2 – Minimum output low (sink) current characteristics.




Fig.4 - Typical output high (source) current characteristics.





Fig. 7 — Typical propagation delay time vs. load capacitance for clock-to-Q outputs.


### STATIC ELECTRICAL CHARACTERISTICS

CHARACTER-	COND	is	LIMITS AT INDICATED TEMPERATURES (°C)							UNITS		
ISTIC	٧o	VIN	VDD						+25		UNIT	
	(v)	(V)	(V)	-55	<b>-40</b>	+85	+125	Min.	Тур.	Max.	l	
Quiescent Device		0,5	5	5	5	150	150	_	0.04	5	μA	
Current, IDD Max.	_	0,10	10	10	10	300	300	-	.0.04	10		
	_	0,15	15	20	20	600	600	-	0.04	20	μΑ.	
	-	0,20	20	-100	100	3000	3000	-	0.08	100	ŀ	
Output Low	0.4	0,5	5	0.64	0.61	0.42	0.36	0.51	1	-		
(Sink) Current	0.5	0,10	10	1.6	1.5	1.1	0.9	1.3	2.6	-	_	
IOL Min.	1.5	0,15	15	4.2	4	2.8	2.4	3.4	6.8			
Output High	4.6	0,5	5	-0.64	-0.61	-0.42	-0.36	-0.51	-1	-	mA	
(Source)	2.5	0,5	5	-2	-1.8	-1.3	-1.15	-1.6	-3.2	-		
Current, IOH Min.	9.5	0,10	10	-1.6	~1.5	-1.1	-0.9	-1.3	-2.6	-		
TOH WITH.	13.5	0,15	15	4,2	-4	-2.8	-2.4	-3.4	-6.8	-		
Output Voltage:	-	0,5	5		0	.05		_	. 0	0.05		
Low-Level, VOL Max.	_	0,10	10		0.05				0	0.05	v	
VOL Max.		0,15	15	0.05				_	0	0.05		
Output Voltage:		0,5	5		4	.95		4.95	- 5	-	V	
High-Level,	_	0,10	10		9	.95		9.95	10	-		
VOH Min.	_	0,15	15		14	.95		14.95	15			
Input Low	0.5, 4.5		5		1	.5		_	_	1.5		
Voltage,	1, 9		10			3		_	_	3		
VIL Max.	1.5,13.5	-	15			4		-		4		
Input High	0.5, 4.5	-	5		3	3.5		3.5	_		V	
Voltage,	1, 9		10			7		7	_			
VIH Min.	1.5,13.5	-	15		1	1		11	_	_		
Input Current	_	0,18	18	±0.1	±0.1	±1	±1	-	±10-5	±0.1	μΑ	



SUPPLY VOLTS -- VDD 92CS-27006

Fig. 8 -- Typical maximum clock input frequency vs. supply voltage.



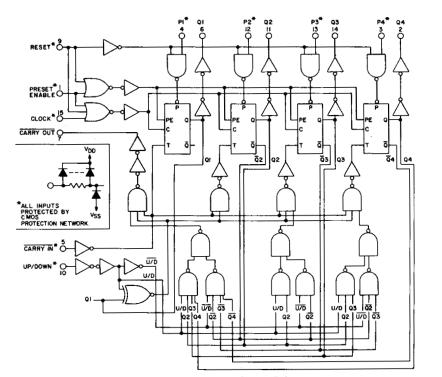


Fig. 16 - Logic Diagram for CD4516B.




Fig. 11 — Quiescent-device-current test circuit.




Fig. 12 - Input-current test circuit.

92CL - 27004R2

# DYNAMIC ELECTRICAL CHARACTERISTICS at T $_{A}$ = 25°C, C $_{L}$ = 50 pF, Input t $_{r}$ , t $_{f}$ = 20 ns, R $_{L}$ = 200 k $\Omega$

Characteristic	Conditions VDD (V)	Al Min.	Units		
Propagation Delay Time (tpHL, tpLH):		1,4,11,1	Тур.	Max.	<del>                                     </del>
Clock-to-Q Output (See Fig. 10)	5 10 15	_ _ 	200 100 75	400 200 150	ns
Preset or Reset-to-Q Output	5 10 15		210 105 80	420 210 160	ns
Clock-to-Carry Out	5 10 15	- - -	240 120 90	480 240 180	ns
Carry-In-to-Carry Out	5 10 15	 - -	125 60 50	250 120 100	ns
Preset or Reset-to-Carry Out	5 10 15	- - -	320 160 125	640 320 250	ns
Transition Time (t <sub>THL</sub> , t <sub>TLH</sub> ) (See Fig. 9)	5 10 15	_ _ _	100 50 40	200 100 80	ns
Max. Clock Input Frequency (f <sub>CL</sub> )	5 10 15	2 4 5.5	4 8 11	- - -	MHz
Input Capacitance (C <sub>IN</sub> )		-	5	7.5	pF
Set-up Time, t <sub>S</sub> Preset Enable to J <sub>n</sub>	5 10 15	25 10 10	12 6 5	<u>-</u>	
Hold times, t <sub>H</sub> Clock to Carry-In	5 10 15	60 30 30	30 4 1		ns
Clock to Up/Down	5 10 15	30 30 30	10 4 5		
Preset Enable to J <sub>n</sub>	5 10 15	70 40 40	35 20 20		





Fig. 13 - Input-voltage test circuit.




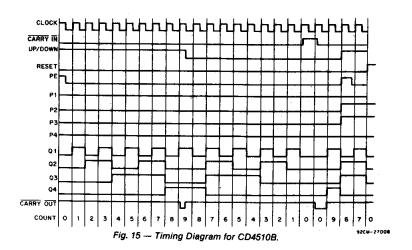


Fig. 14 — Power-dissipation test circuit and input waveform,




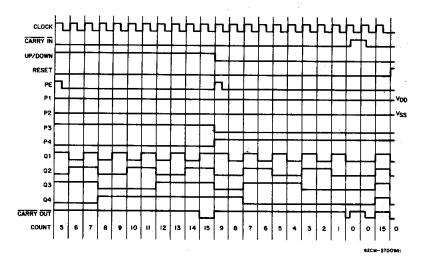


Fig. 16 — Timing diagram for CD4516B.

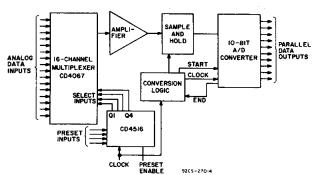


This acquisition system can be operated in the random access mode by jamming in the channel number at the present inputs, or in the sequential mode by clocking the CD4516B.


Fig. 17 — Typical 16-channel, 10-bit data acquisition system.

CL	lö	U/D	PΕ	R	ACTION					
'X	1	Х	0	٥	NO COUNT					
5	0	. 1	٥	٥	COUNT UP					
7	0	0	Ó	0	COUNT DOWN					
X	X	X	1		PRESET					
X	X	X	X	1	RESET					
-	V - DONG CARE									

TRUTH TABLE




Dimensions and Pad Layout for CD45108H.




Dimensions and Pad Layout for CD4516BH.

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils  $(10^{-3} \text{ inch})$ .

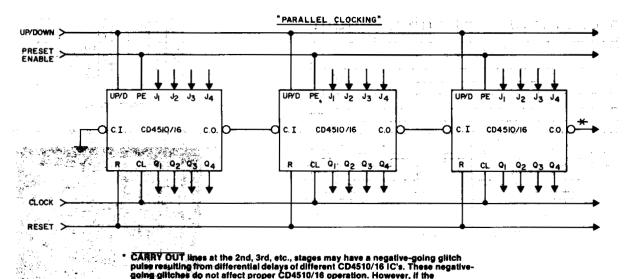

\* CARRY OUT lines at the 2nd, 3rd, etc., stages may have a negative-going glitch pulse resulting from differential delays of different CD4510/16 IC's. These negative-going glitches do not affect proper CD4510/16 operation. However, if the CARRY OUT signals are used to trigger other edge-sensitive logic devices, such as FF's or counters, the CARRY OUT signals should be gated with the clock signal using a 2-input OR gate such as CD4071B.

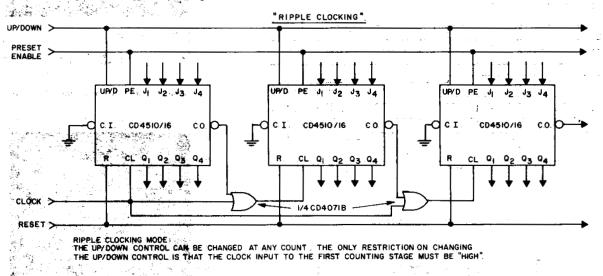

RIPPLE CLOCKING MODE:
THE UP/DOWN CONTROL CAR BE CHANGED AT ANY COUNT. THE ONLY RESTRICTION ON CHANGING
THE UP/DOWN CONTROL IS THAT THE CLOCK INPUT TO THE FIRST COUNTING STAGE MUST BE "HIGH".

For exacading counters operating in a fixed up-count or down-count mode, the OR gallet are military in the CL input at the large with CI grounded.

92CL-17194R5

Fig. 18 — Cascading counter packages.

PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2009

### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
CD4510BE	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD4510BEE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD4510BNSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4510BNSRE4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4510BNSRG4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4510BPWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4510BPWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4510BPWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BE	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD4516BEE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD4516BF	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
CD4516BF3A	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
CD4516BNSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BNSRE4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BNSRG4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BPW	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BPWE4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BPWG4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BPWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BPWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD4516BPWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

 $<sup>^{(1)}</sup>$  The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.



### PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2009

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




### TAPE AND REEL INFORMATION



# TAPE DIMENSIONS + K0 - P1 - B0 W Cavity - A0 -

A0	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

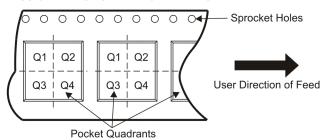

### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD4510BNSR	SO	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
CD4510BPWR	TSSOP	PW	16	2000	330.0	12.4	7.0	5.6	1.6	8.0	12.0	Q1
CD4516BNSR	SO	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
CD4516BPWR	TSSOP	PW	16	2000	330.0	12.4	7.0	5.6	1.6	8.0	12.0	Q1



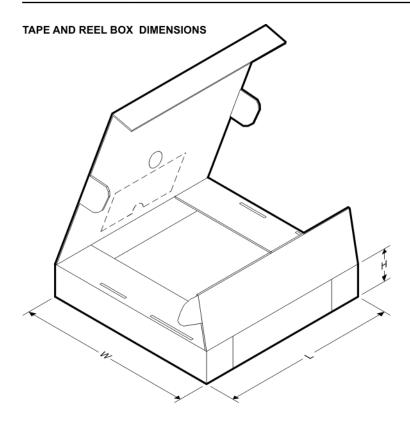

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD4510BNSR	SO	NS	16	2000	346.0	346.0	33.0
CD4510BPWR	TSSOP	PW	16	2000	346.0	346.0	29.0
CD4516BNSR	SO	NS	16	2000	346.0	346.0	33.0
CD4516BPWR	TSSOP	PW	16	2000	346.0	346.0	29.0

# PW (R-PDSO-G\*\*)

### 14 PINS SHOWN

# PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

# 14 LEADS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

### PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



# N (R-PDIP-T\*\*)

# PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

**Applications Products Amplifiers** amplifier.ti.com Audio www.ti.com/audio Data Converters Automotive www.ti.com/automotive dataconverter.ti.com DLP® Products Broadband www.dlp.com www.ti.com/broadband DSP Digital Control dsp.ti.com www.ti.com/digitalcontrol Clocks and Timers www.ti.com/clocks Medical www.ti.com/medical Military Interface www.ti.com/military interface.ti.com Optical Networking Logic logic.ti.com www.ti.com/opticalnetwork Power Mgmt power.ti.com Security www.ti.com/security Telephony Microcontrollers microcontroller.ti.com www.ti.com/telephony Video & Imaging www.ti-rfid.com www.ti.com/video RF/IF and ZigBee® Solutions www.ti.com/lprf Wireless www.ti.com/wireless

> Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2009, Texas Instruments Incorporated