


Comb Section Assembly

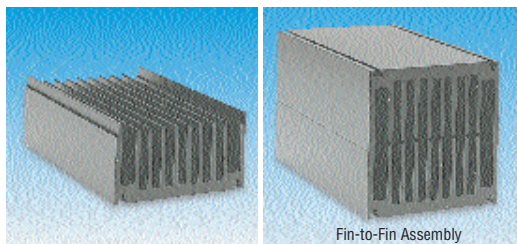


Two sections may be assembled fin-to-fin, providing a highly efficient force cooled assembly.

Order Code	H	W	D	Mfrs. List No.
526-812	64.5	119	200	173AB2000B
526-915	64.5	119	300	173AB3000B

184

R_{th} °C/W	Order Code	1+	10+	25+
0.63	526-812			
0.48	526-915			

Multi-Purpose Box Section

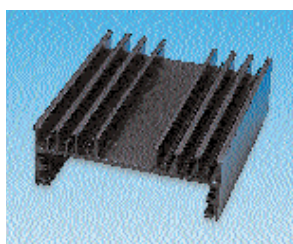

- Accepts up to 2 pcbs, 114.5mm width
- Undrilled, finned area for mounting most popular power devices
- Black anodised finish
- 3.3 dia mounting holes for No.6 self-tapping screw or M4 thread




Thermal Resistance (°C/W)	H	W	D	Mfrs. List No.	Order Code
1.0	47	128	150	52DN-01500-A-200	738-931
0.76	47	128	250	52DN-02500-A-200	738-943

229

Order Code	1+	10+	30+	100+
738-931				
738-943				

Comb Section 'Comb-Lok'

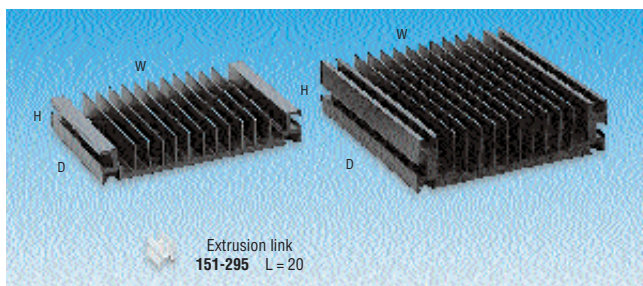

151-284 H = 25, W = 150, D = 100

151-290 H = 40, W = 150, D = 150

151-291 H = 40, W = 150, D = 250

151-293 H = 40, W = 250, D = 250

- Matt black anodised
- Incorporate T-slots
- Suitable for M4 cage nuts and M6 bolt heads
- Extension link allow sections to fit together



68

Order Multiple=1	R_{th} °C/W	Order Code	1+	10+	30+	100+
	1.7	151-284				
	0.9	151-290				
	0.65	151-291				
	0.30	151-293				
Extrusion Link		151-295				
Order Multiple=50			50+	250+	1250+	2500+
M4 Caged Nuts		522-697				

COLD CUBE™



- Ultra-high performance cooling
- Low weight/volume
- Fits a standard U2 rack
- Operates with 1 or 2 80mm fans, available separately, see Section 13



H	W	D	Order Code
82	75	60	936-406
82	75	100	567-840

Mfrs. List No. CC02 = 936-406 CC01 = 567-840

FOR SUITABLE 80MM FANS SEE BOOK 4, SECTION 8

144

R_{th} °C/W	Order Code	1+	10+	30+
0.12	567-840			
0.14	936-406			

COLD FIN and COLD FIN 2



- Ultra-Low thermal resistance
- Low weight
- Space efficient design
- Low volume
- Fans are available separately, see book 4, section 8

R_{th} (force cooled) °C/W	H	W	L	Fan Size	Mfrs. List No.	Order Code
COLD FIN						
0.1	51.5	125	125	120 120	CF1-1250-0515-1250BA	936-418
0.2	40.75	81.6	81.6	80 80	CF1-0816-0400-0816BA	936-431
0.05	130	153	200	150 dia	CF1-1500-1250-2000CA	311-0795
0.03	130	253	250	.250 dia*	CF1-2500-1250-2500CA	311-0825
COLD FIN 2						
0.13	80.5	81.6	150	80 80	CF2-0816-0805-1500NA	936-420
0.05	120	250	125	(120 120) 2	CF2-2500-1000-1250NA	311-0837

*For Comair Rotron 'Caravel' style fan, see book 4, section 8

247

Order Code	1+	10+	30+
936-418			
936-420			
936-431			
	1+	5+	10+
311-0795			
311-0825			
311-0837			

continued