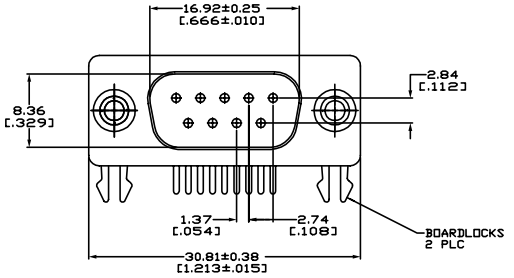

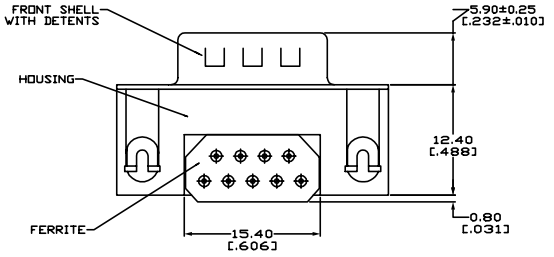

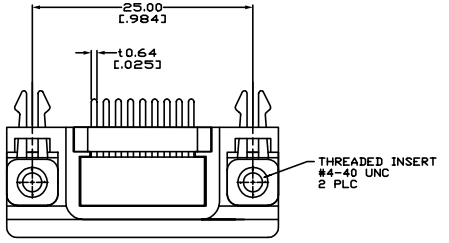

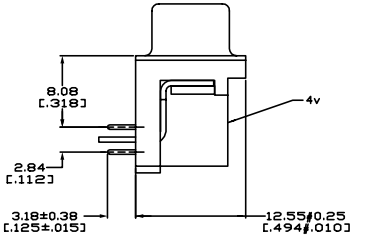

1. MATERIAL
   HOUSING: PBT, GLASS FILLED, UL RATED 94V-0, BLACK.
   FRONT SHELL: CARBON STEEL.
   CONTACTS, BOARDLOCKS AND INSERTS: BRASS.
2. FINISH
   FRONT SHELL: TIN PLATED.
   CONTACTS: GOLD FLASH OVER 2.54| m [.000100] MIN NICKEL
   ON ENTIRE CONTACT AREA.
   BOARDLOCKS AND INSERTS: NICKEL PLATED.
3. ELECTRICAL SPECIFICATIONS:
   20 OHMS AT 30 MHz.
   30 OHMS AT 50 MHz.
   50 OHMS AT 100 MHz.

4v SCI, 56-402-001 AND DATE CODE MARKED ON THIS SURFACE.

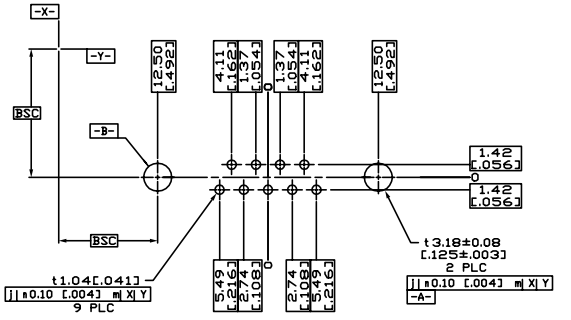

P.C. BOARD MOUNTING DIMENSIONS

P	LTR	REVISION RECORD	DATE	DWN	APVD
	4	REVISED PER 99146	28 OCT 99	DG	GL

DIMENSIONS: mm [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 [.012]; 1 PLC ±0.13 [.005]; 2 PLC ±0.1 [.003]; 3 PLC ±0.1 [.003]; 4 PLC ±0.1 [.003]
ANGLES: -
SURFACE TEXTURE: √

DWN: D.GELTZ	28 OCT 99	MATERIAL: -	HEAT TREAT: -
CHK: G.LURIE	28 OCT 99		
APVD: G.LURIE	28 OCT 99		

INTERCONNECT PRODUCTS DIVISION
FAIRVIEW, PENNSYLVANIA
SPECTRUM CONTROL INC.

NAME: PLUG ASSEMBLY, 9 POSITION, RIGHT ANGLE, FERRITE

SCALE	SIZE	DRAWING NO	SHEET	REV
4:1	A1	56-402-001	1 OF 1	4

THIS DRAWING IS A CONTROLLED DOCUMENT.

56-402-001

THIS DRAWING CONTAINS INFORMATION PROPRIETARY AND IS THE PROPERTY OF SPECTRUM CONTROL INC. AND IS NOT TO BE REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF SPECTRUM CONTROL INC. AND IS NOT TO BE USED FOR ANY PURPOSE OTHER THAN THE PURPOSE OF SPECTRUM CONTROL INC.

04-NOV-99 164522 gnltz /us/files/work/dwn/99146