




D A	D 7	- 61	
РΑ	ĸĸı	IN	U

MCL-S250YC

		REVISIONS						
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Geetha	28/5/08	Suresh	28/5/08	G. C	12/6/08

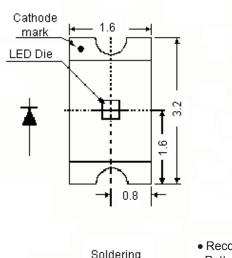



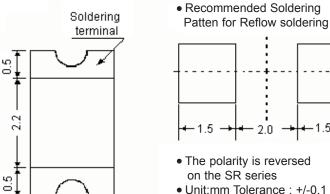

Dimensions: Millimetres

1.5

Specifications:

Dice material : GaAsP on GaP.

Emitted color : Yellow. Epoxy color : Water clear. Peak wavelength : 587nm. : 140 degrees. Viewing angle Luminous intensity (IV)

: 11mcd.



Electrical/Optical Characteristics at T_a = 25°C

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Test
Luminous Intensity	IV	5.5	11	18	mcd	IF = 20mA
Viewing Angle	2θ 1/2	-	140	-	degrees	1F - 2011A
Peak Emission Wavelength	• p	-	587	-		-
Dominant Wavelength	• 10	-	590	-	nm	-
Spectral Line Half-Width	Δλ	-	35	-		-
Forward Voltage	VF	1.7	2.1	2.6	V	IF = 20mA
Power Dissipation	Pd	-	-	85	-	-
Peak Forward Current (Duty 1/10 at 1KHz)	IF (Peak)	-	-	100	-	-
Recommended Operating Current	IF (Rec)	-	20	-	mA	-

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell pic 2008

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, **DIMENSIONS ARE** FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Geetha	28/05/08
CHECKED BY:	DATE:
Suresh	28/05/08
APPROVED BY:	DATE:
G.Cook	12/06/08

DRAWING TITLE: 1206 SMD LED - Yellow **ELECTRONIC FILE** DWG NO. SIZE

M10001141

SCALE: NTS

REV L-S250YC_DWG

U.O.M.: mm

SHEET: 1 OF 4

Α



PART NO.


MCL-S250YC


		REVISIONS						
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Geetha	28/5/08	Suresh	28/5/08	G. C	12/6/08

Absolute Maximum Ratings ($T_a = 25$ °C)

Reverse Voltage	5 Volt
Reverse Current	10μA (V _R = 5V)
Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 100°C
Lead Soldering Temperature Range 1.6mm (1/16 inch) from body	260°C for 5 Seconds

Yellow (GaAsP/GaP) λ P = 587nm)

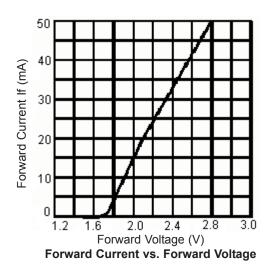

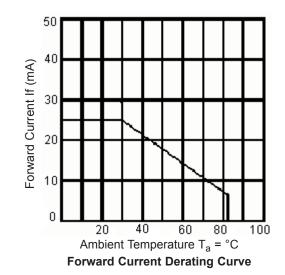

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from engligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group is liability for death or personal injury resulting from its regilgence. SPC MULTICOMP is the registered trademark of the Group. © Premier Fameli pic 2008.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Geetha	28/05/08
CHECKED BY:	DATE:
Suresh	28/05/08
APPROVED BY:	DATE:
G.Cook	12/06/08

	DRAWI	NG TITLE:						
1206 SMD LED - Yellow								
	SIZE A	DWG NO.	M10001141	ELECTRONIC FILE L-S250YC_DWG				REV A
_	SCAL	E: NTS	U.O.M.: mm	SHEET: 2 OI				4





PART NO.


MCL-S250YC

		REVISIONS						
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Geetha	28/5/08	Suresh	28/5/08	G. C	12/6/08

Yellow (GaAsP/GaP) λ P = 587nm)

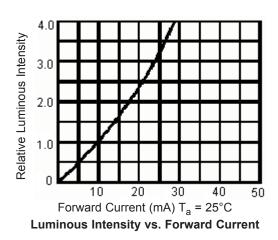

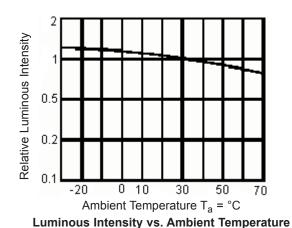

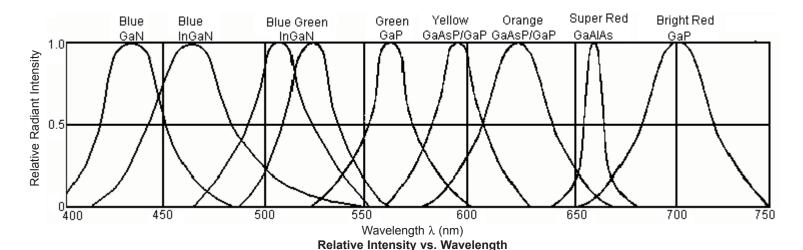

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its regilgence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2008.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Geetha	28/05/08
CHECKED BY:	DATE:
Suresh	28/05/08
APPROVED BY:	DATE:
G.Cook	12/06/08

DRAW	ING TITLE:						
]	1206 SMD LED - Yellow						
SIZE	DWG NO.	M10001141		ELECTRONIC FILE L-S250YC_DWG			
SCAL	E: NTS	U.O.M.: mm		SHEET: 3 O			



PART NO.

MCL-S250YC

	REVISIONS							
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Geetha	28/5/08	Suresh	28/5/08	G. C	12/6/08

Part Number Table

Description	Part Number		
LED, SMD, 1206, Yellow	MCL-S250YC		

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are is licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or or mission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:	DATE:
Geetha	28/05/08
CHECKED BY:	DATE:
Suresh	28/05/08
APPROVED BY:	DATE:
G.Cook	12/06/08

	DRAWI	NG TITLE:						
	1206 SMD LED - Yellow							
	SIZE	DWG NO.	M10001141	l -	TRONIC FILE			REV A
SCALE: NTS		E: NTS	U.O.M.: mm		SHEET:	4	OF	4