
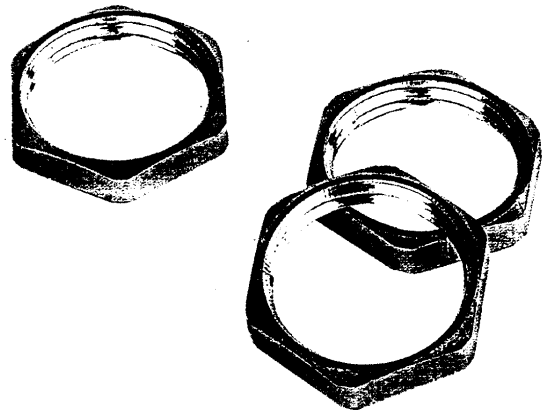


# SKINDICHT®

Accessories and separate gland parts  
Locknuts of brass  
with metric thread

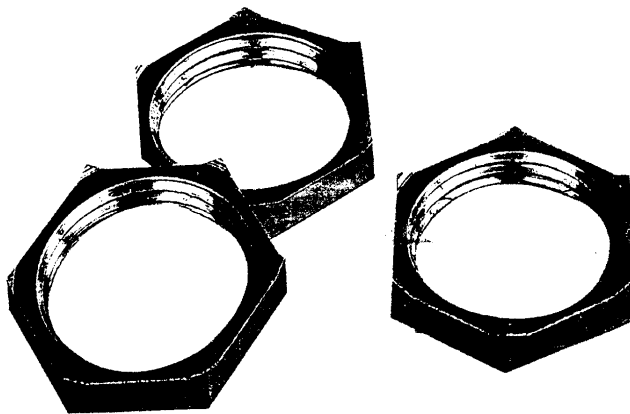

## SKINDICHT® SM-PE-M Earth-equipotential bending locknuts

SKINDICHT® SM-PE-M locknuts are required wherever varnished, anodized and powder coated housings are used. When the locknut is tightened, it cuts through the insulating layer guaranteeing optimum contact.

Material: Nickel plated brass

## SKINDICHT® SM-M Locknuts

A nickel-plated brass locknut in metric thread sizes to suit all brass glands.

Material: Nickel plated brass

On request also available with NPT thread

Type Part number	Size M	Wrench size mm	Height mm	Outside diameter mm	Pack size pieces
<b>SKINDICHT® SM-PE-M</b>					
5210 3300	12 x 1,5	15	3,5	16,5	100
5210 3310	16 x 1,5	19	3,5	20,9	100
5210 3320	20 x 1,5	24	3,7	26,4	100
5210 3330	25 x 1,5	30	4,2	33,0	50
5210 3340	32 x 1,5	36	4,7	39,6	50
5210 3350	40 x 1,5	46	5,5	50,6	25
5210 3360	50 x 1,5	60	5,5	66,0	10
<b>SKINDICHT® SM-M</b>					
5210 3000	12 x 1,5	15	3	16,5	100
5210 3010	16 x 1,5	19	3	20,9	100
5210 3020	20 x 1,5	24	3,5	26,4	100
5210 3030	25 x 1,5	30	4	33,0	100
5210 3040	32 x 1,5	36	4	39,6	100
5210 3050	40 x 1,5	46	5	50,6	50