

● PROFESSIONAL LED INDICATORS Ø8.1mm Mounting

**FEATURES**



**698 SERIES**

PACK QUANTITY = 10 PIECES

- Each product will operate over a wide voltage input range
- Black anodised aluminium housing
- Full internal potting to resist shock and vibration
- Sealed to IP67
- Fitted with an internal diode to provide reverse voltage protection to 1000Vdc

**SPECIFICATIONS**

Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC (Vdc) Vopr	CURRENT DC (mA) Iopr	LUMINOUS INTENSITY Iv@20mA (mcd)	WAVE LENGTH λp (nm)	OPERATING TEMP Topr	STORAGE TEMP Tstg	
<b>HIGH INTENSITY</b>									
698-501-63	Red	Smoked	12-28	8-20	11000	643	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-521-63	Yellow	Smoked	12-28	8-20	16000	591	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-532-63	Green	Smoked	12-28	8-20	23000	527	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-930-63	Blue	Smoked	12-28	8-20	7000	470	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-997-63	Cool White	Smoked	12-28	8-20	14000	*see below	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-501-75	Red	Smoked	110Vac	6	11000	643	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-521-75	Yellow	Smoked	110Vac	6	16000	591	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-532-75	Green	Smoked	110Vac	6	23000	527	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-930-75	Blue	Smoked	110Vac	6	7000	470	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
698-997-75	Cool White	Smoked	110Vac	6	14000	*see below	-40 ~ +95 <sup>^</sup>	-40 ~ +100	Yes
<b>UNITS</b>			<b>Vdc</b>	<b>mA</b>	<b>mcd</b>	<b>nm</b>	<b>°C</b>	<b>°C</b>	



<sup>^</sup> = Products must be derated according to the derating information. Each derating graph refers to specific LEDs. Refer to page 3.

997F-C	*Typical emission colour cool white			
x	0.245	0.361	0.356	0.264
y	0.229	0.385	0.351	0.220

Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.


**How to Order:**

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •

• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.

### 698 Series

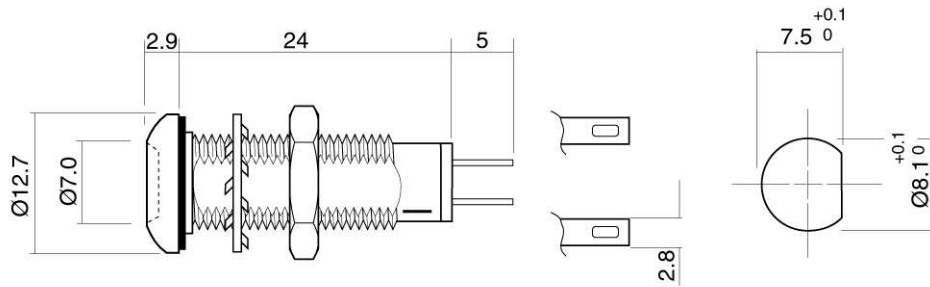


Dimensions in mm (Typical)  
Not to scale

Anode termination indicated by red sleeve  
Mounting hole to be clean and burr free

#### MATERIALS

Body	Aluminium grade 6063 black anodised
Nut	Stainless Steel grade 303
Panel Seal	Viton
Termination	Copper with silver flash finish
Lock Washer	Zinc plated steel
Fresnel lens	Polycarbonate
Encapsulation	PC5430
Header	Nylon6 A82

#### PUSH-ON CONNECTORS





925-000-00 is brass tin plated.  
For use with 698 series lamps.

Dimensions in mm (Typical)  
Not to scale

#### TECHNICAL CHARACTERISTICS

SERIES	MAXIMUM POWER DISSIPATION	PANEL CUTOUT	NUT MOUNTING TORQUE	MINIMUM MOUNTING CENTRES	MIN/MAX. PANEL THICKNESS
698	825	8.1	0.65	x,y=14.5	1.5-13.0
	mW	mm	Nm	mm	mm

#### DERATING INFORMATION

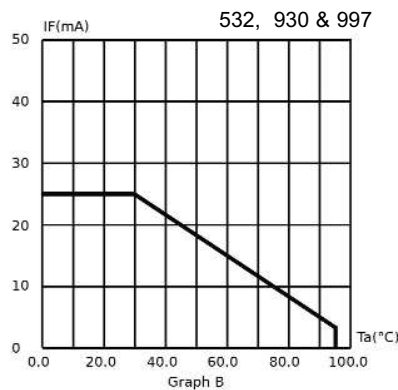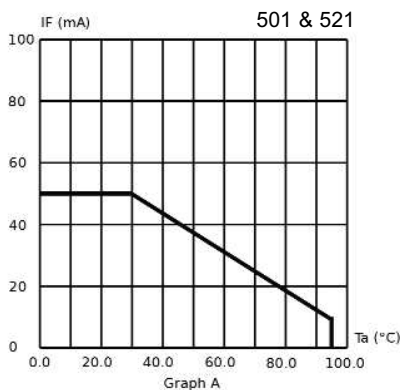

#### How to Order:

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •  
• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.



BS EN ISO 9001:2000  
Approved Manufacturer