




Designers' Choice

LED LENS CAPS & HOLDERS

LED LENS CAPS



FOR T-1 AND T-1 3/4

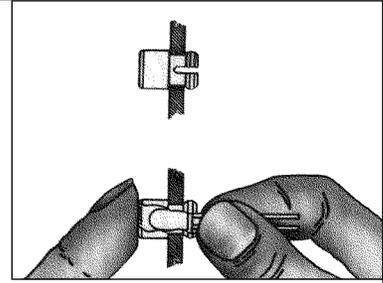

Designed for use with T-1 or T-1 3/4 LEDs, these Lens Caps are available in round or square configurations. They snap-mount through the front panel for easy, light-finger pressure, installation. The LED is inserted into the cap from behind the panel and held securely in place.

The Lens Cap protects the LED from physical damage while guarding the components from electrostatic discharge (ESD), up to 16KV. More economical

than indicator light assemblies, the caps feature striated lines and fresnel rings which permit up to 180° viewing angles with either diffused or non-diffused LED's. They provide exceptionally high contrast and visibility.

MATERIAL: Polycarbonate
Available in Red, Green, Yellow and Clear.

ROUND CAPS

Fig. 1




Fig. 2




Fig. 3





Fig. 4



Standard Height


| CAT. NO. | FIG. NO. | LED SIZE | COLOR | MTG. HOLE SIZE | MIN. MTG. CENTERS | PANEL THICKNESS |
|----------|----------|----------|--------|----------------|-------------------|-----------------|
| 8650 | 1 | T1 | RED | .171 | .250 | .031/.062 |
| 8651 | 1 | T1 | GREEN | .171 | .250 | .031/.062 |
| 8652 | 1 | T1 | YELLOW | .171 | .250 | .031/.062 |
| 8653 | 1 | T1 | CLEAR | .171 | .250 | .031/.062 |
| 8662 | 2 | T1 3/4 | RED | .250 | .375 | .062/.125 |
| 8663 | 2 | T1 3/4 | GREEN | .250 | .375 | .062/.125 |
| 8664 | 2 | T1 3/4 | YELLOW | .250 | .375 | .062/.125 |
| 8665 | 2 | T1 3/4 | CLEAR | .250 | .375 | .062/.125 |

Low Profile

| CAT. NO. | FIG. NO. | LED SIZE | COLOR | MTG. HOLE SIZE | MIN. MTG. CENTERS | PANEL THICKNESS |
|----------|----------|----------|--------|----------------|-------------------|-----------------|
| 8656 | 3 | T1 | RED | .171 | .250 | .062/.125 |
| 8657 | 3 | T1 | GREEN | .171 | .250 | .062/.125 |
| 8658 | 3 | T1 | YELLOW | .171 | .250 | .062/.125 |
| 8659 | 3 | T1 | CLEAR | .171 | .250 | .062/.125 |
| 8668 | 4 | T1 3/4 | RED | .250 | .375 | .031/.250* |
| 8669 | 4 | T1 3/4 | GREEN | .250 | .375 | .031/.250* |
| 8670 | 4 | T1 3/4 | YELLOW | .250 | .375 | .031/.250* |
| 8671 | 4 | T1 3/4 | CLEAR | .250 | .375 | .031/.250* |

SQUARE CAPS


Fig. 5

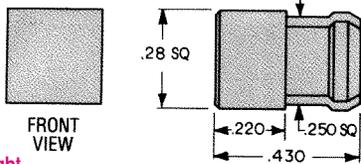

Standard Height

| CAT. NO. | FIG. NO. | LED SIZE | COLOR | MTG. HOLE SIZE | MIN. MTG. CENTERS | PANEL THICKNESS |
|----------|----------|----------|--------|----------------|-------------------|-----------------|
| 8680 | 5 | T1 3/4 | RED | .250 Sq. | .375 | .062/.125 |
| 8681 | 5 | T1 3/4 | GREEN | .250 Sq. | .375 | .062/.125 |
| 8682 | 5 | T1 3/4 | YELLOW | .250 Sq. | .375 | .062/.125 |
| 8683 | 5 | T1 3/4 | CLEAR | .250 Sq. | .375 | .062/.125 |


Fig. 6



Low Profile


| CAT. NO. | FIG. NO. | LED SIZE | COLOR | MTG. HOLE SIZE | MIN. MTG. CENTERS | PANEL THICKNESS |
|----------|----------|----------|--------|----------------|-------------------|-----------------|
| 8674 | 6 | T1 | RED | .171 | .250 | .062/.125 |
| 8675 | 6 | T1 | GREEN | .171 | .250 | .062/.125 |
| 8676 | 6 | T1 | YELLOW | .171 | .250 | .062/.125 |
| 8677 | 6 | T1 | CLEAR | .171 | .250 | .062/.125 |
| 8686 | 7 | T1 3/4 | RED | .250 | .375 | .031/.250* |
| 8687 | 7 | T1 3/4 | GREEN | .250 | .375 | .031/.250* |
| 8688 | 7 | T1 3/4 | YELLOW | .250 | .375 | .031/.250* |
| 8689 | 7 | T1 3/4 | CLEAR | .250 | .375 | .031/.250* |

Fig. 7




*When mounting T-1 3/4 Low Profile Caps (Fig. 4 or Fig. 7) in panels .125 thick or less a spacer must be used. Spacer CAT. NO. 8692 MATERIAL: White Nylon 3.8 O.D. x 1/4 I.D. x 1/8 Lg.

"SNAP-IN" T-1 & T-1^{3/4} LED HOLDERS

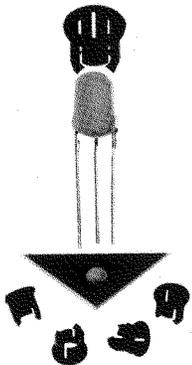

Designed for use with T-1 & T-1 3/4 LED's in .060 - .070 thick panels. The holder snaps into the front panel with easy, light-finger pressure. The LED snaps into the holder from behind the panel and is held securely in place.



MATERIAL: Nylon 6/6, Black

| CAT. NO. | LED SIZE | A | B | C | MTG. HOLE SIZE |
|----------|----------|------|------|------|----------------|
| 8309 | T-1 | .114 | .232 | .188 | .171 |
| 8310 | T-1 3/4 | .200 | .315 | .274 | .250 |

