





PRODUCT NO.  
SEE SHEET 4

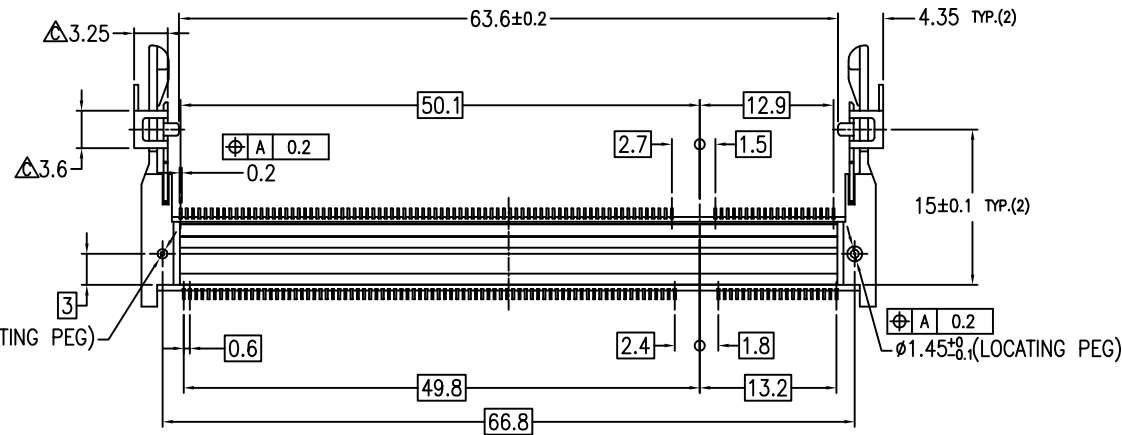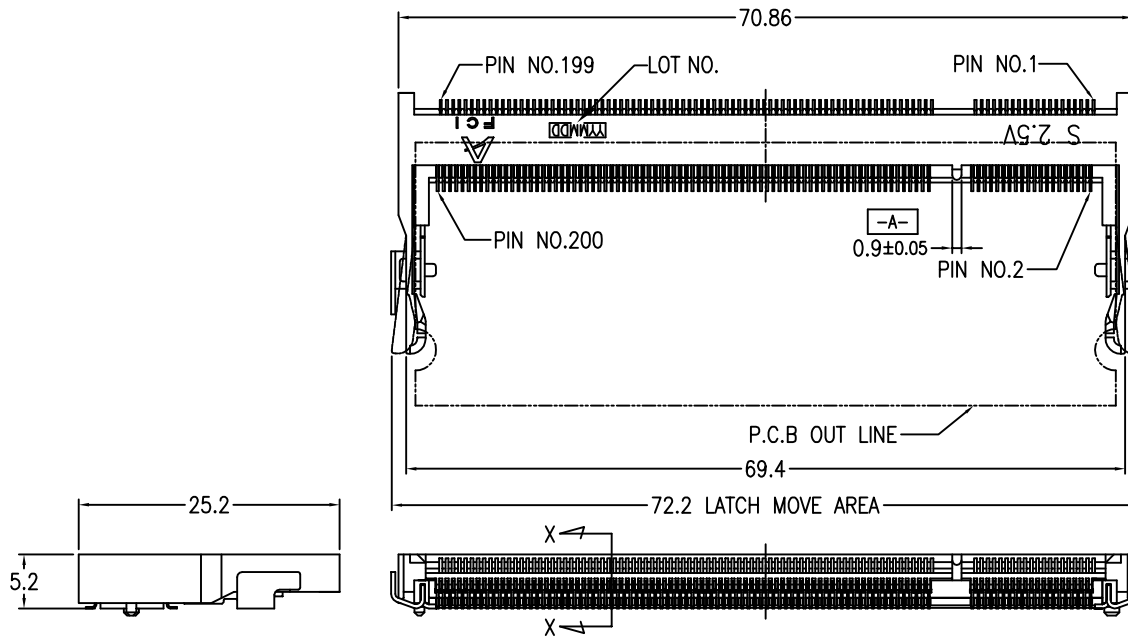

NOTE


- PRODUCT SPEC. : GS-12-195
- PACKAGING SPEC. : GS-14-786
- MATERIAL
  - HOUSING : LCP, UL94V-0, COLOR BLACK
  - CONTACT : COPPER ALLOY
  - HOLD DOWN : BRASS
- FINISH
  - TERMINAL : SEE TABLE
  - HOLD DOWN : SEE TABLE
- CO-PLANARITY : 0.1 MAX.(INCLUDE HOLD DOWN)
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDER APPLICATION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date						
G	J04-0132	M.H	04/06/04	linear	.X ± 0.30	projection	title DDR SO-DIMM 0.6 mm PITCH 200 POS. STANDARD TYPE ASS'Y		
H	T05-0022	R.C	01/27/05		.XX ± 0.30				
J	T05-0026	R.C	02/04/05	angles	0° ±2°		 MM scale 2:1		
K	PG05-0388	K.W	10/13/05	dr	M.Hasegawa 4/6/04				
L	PG08-0333	B.L	12/01/08	enr	M.Hasegawa 4/6/04		product family 50UF SO-DIMM size dwg no B 59354		
				chr					
				appd			code JP sheet 1 of 4		
sheet index	revision sheet	L 1	L 2	L 3	L 4				



PRODUCT NO.

59354-x52xx



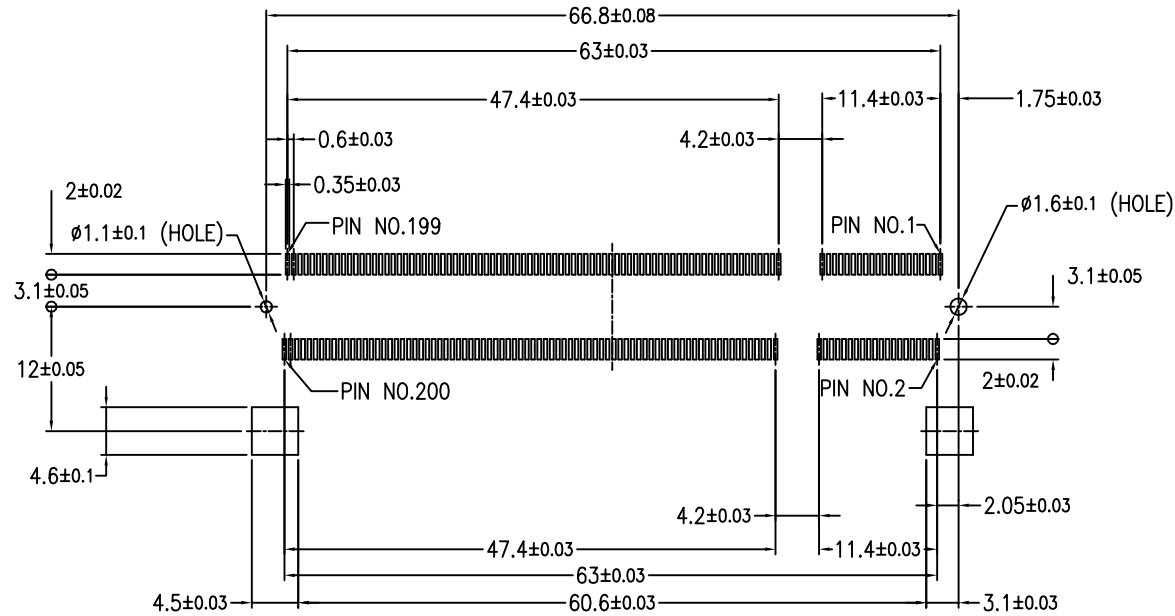


RECOMMENDED MOUNTING P.C.B LAYOUT

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY	FCI			
ltr	ecn no	dr	date	linear	.X	$\pm 0.30$		www.fciconnect.com			
L					.XX	$\pm 0.30$	projection	title DDR SO-DIMM 0.6 mm PITCH 200 POS. STANDARD TYPE ASS'Y			
				angles	0°	$\pm 2^\circ$					
				dr	M.Hasegawa	11/10/03	MM	product family 50UF SO-DIMM			code
				enr	M.Hasegawa	11/10/03		size dwg no			JP
				chr			scale	B 59354			sheet
				appd							2 of
sheet index	revision sheet										



PRODUCT NO.  
59354-x52xx

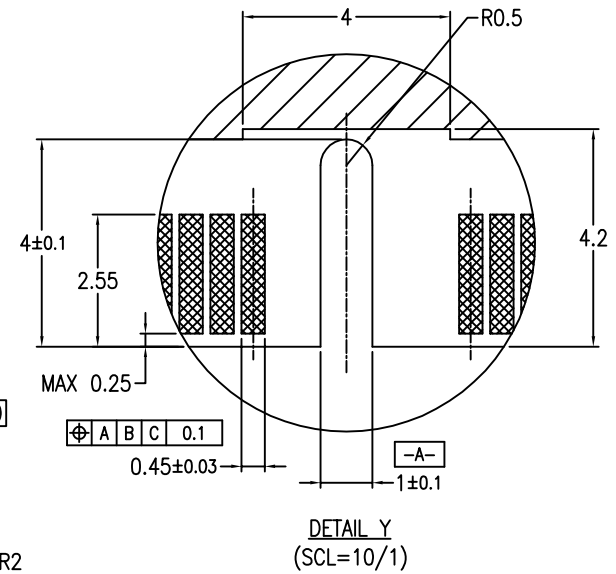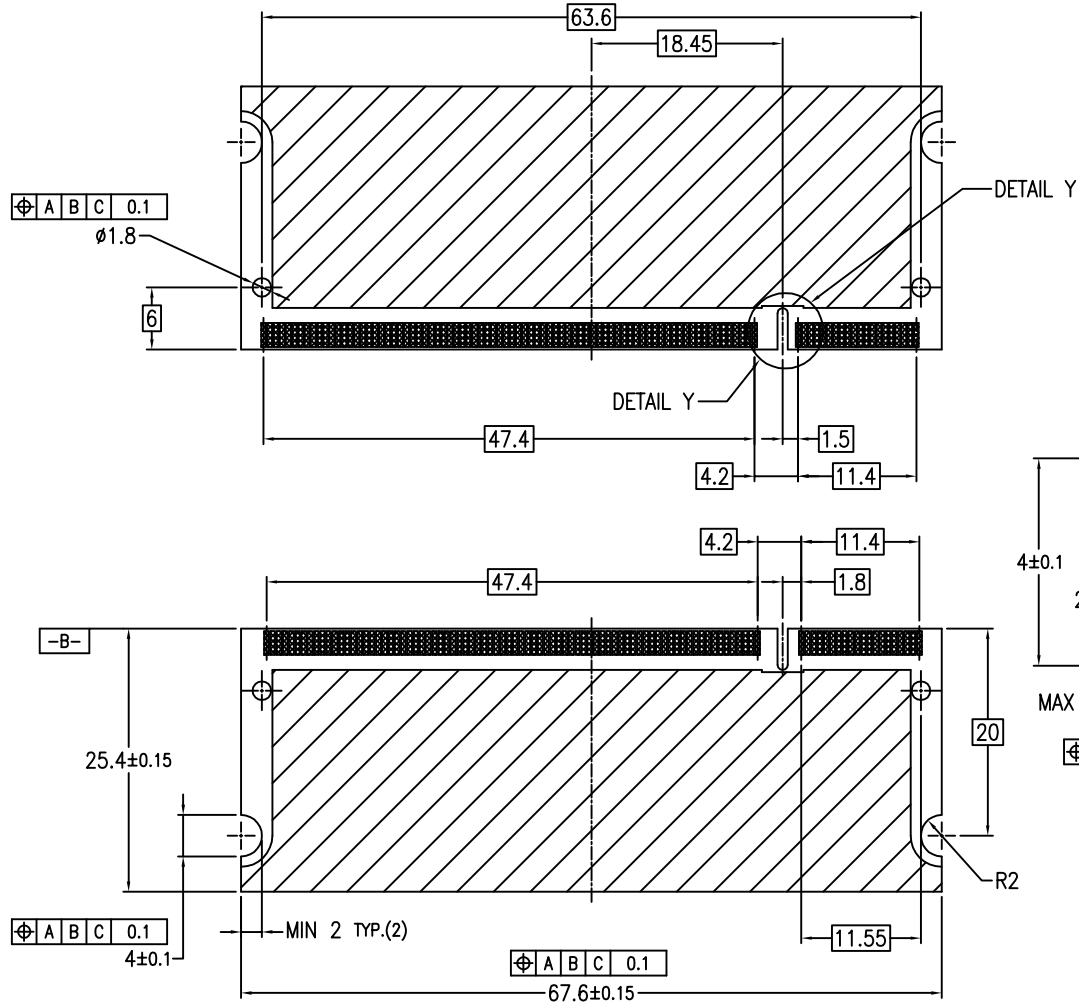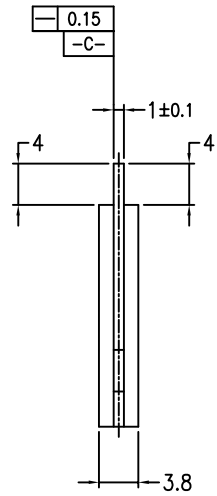

RECOMMENDED MODULE P.C.B. LAYOUT

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.X ± 0.30 .XX ± 0.30				
L				linear		projection	title DDR SO-DIMM 0.6 mm PITCH 200 POS. STANDARD TYPE ASS'Y		
				angles	0° ±2°				
		dr	M.Hasegawa	11/10/03		MM	product family 50UF SO-DIMM size dwg no		code JP sheet 3 of
		enr	M.Hasegawa	11/10/03		scale			
		chr				2:1	B 59354		
		appd							
sheet index	revision sheet								



PRODUCT NO.	LOCATING PEG	TERMINAL CONTACT AREA FINISH	HOLD DOWN FINISH	SOLDER TAIL FINISH	
59354-052FS	YES	Au FLASH	Pure Sn PLATING	Au FLASH PLATING	
59354-152FS	NO				
59354-052TS	YES	Au 0.3μm MIN.			
59354-152TS	NO				
59354-052AS	YES	Au 0.76μm MIN.			
59354-152AS	NO				
59354-052FC	YES	Au FLASH	Sn-Cu PLATING		
59354-152FC	NO				
59354-052TC	YES	Au 0.3μm MIN.			
59354-152TC	NO				
59354-052AC	YES	Au 0.76μm MIN.			
59354-152AC	NO				
59354-252FS	YES	Au FLASH		Pure Sn PLATING	Pure Sn PLATING
59354-352FS	NO				
59354-252TS	YES	Au 0.3μm MIN.			
59354-352TS	NO				
59354-252AS	YES	Au 0.76μm MIN.			
59354-352AS	NO				
59354-252FC	YES	Au FLASH	Sn-Cu PLATING		
59354-352FC	NO				
59354-252TC	YES	Au 0.3μm MIN.			
59354-352TC	NO				
59354-252AC	YES	Au 0.76μm MIN.			
59354-352AC	NO				

PRODUCT NO.	LOCATING PEG	TERMINAL CONTACT AREA FINISH	HOLD DOWN FINISH	SOLDER TAIL FINISH
59354-452FS	YES	Au FLASH	Pure Sn PLATING	Sn-Pb PLATING
59354-552FS	NO			
59354-452TS	YES	Au 0.3μm MIN.		
59354-552TS	NO			
59354-452AS	YES	Au 0.76μm MIN.		
59354-552AS	NO			
59354-452FC	YES	Au FLASH	Sn-Cu PLATING	
59354-552FC	NO			
59354-452TC	YES	Au 0.3μm MIN.		
59354-552TC	NO			
59354-452AC	YES	Au 0.76μm MIN.		
59354-552AC	NO			

△ 59354-□□□□□ LF

<PACKING METHOD>

R : TAPE REEL  
DEFAULT : TRAY

<HOLD DOWN FINISH>

S : Pure Sn

B : Sn-Pb

<CONTACT AREA FINISH>

F : Au FLASH

T : Au 0.3μm MIN.

A : Au 0.76μm MIN.

<TOTAL HEIGHT>

52 : 5.2mm

<LOCATING PEG, SOLDER TAIL FINISH>

0 : YES, Au FLASH

1 : NO, Au FLASH

2 : YES, Pure Sn PLATING

3 : NO, Pure Sn PLATING

4 : YES, Sn-Pb PLATING

5 : NO, Sn-Pb PLATING

For Rohs OPTIONS:  
TAIL PLATING CODE MUST BE 0~3.  
HOLD DOWN PLATING CODE MUST BE "S".  
"LF" CODE IS EXIST IN THE END.  
EX: 59354-252TSLF

FOR NOT Rohs COMPATIBLE:  
THIS "LF" CODE IS "BLANK".  
EX:59354-452TS

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI			
ltr	ecn no	dr	date				www.fciconnect.com			
L				linear	.X ± 0.30	projection	title DDR SO-DIMM 0.6 mm PITCH 200 POS. STANDARD TYPE ASS'Y			
					.XX ± 0.30					
				angles	0° ±2°		product family 50UF SO-DIMM			
				dr	M.Hasegawa 4/6/04	MM				
				enr	M.Hasegawa 4/6/04	scale	size dwg no			
				chr		2:1				
				appd			B 59354			
sheet index	revision sheet									
							code JP			
							sheet 4 of			