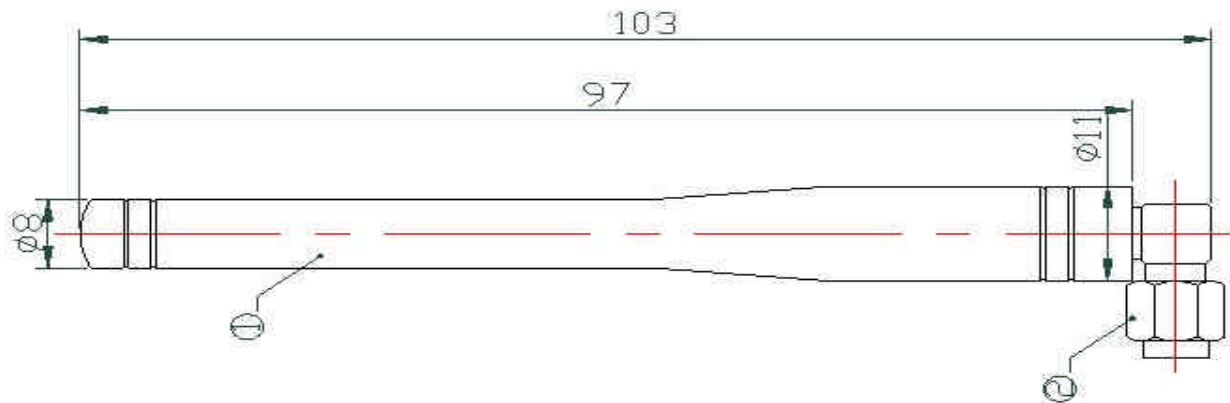
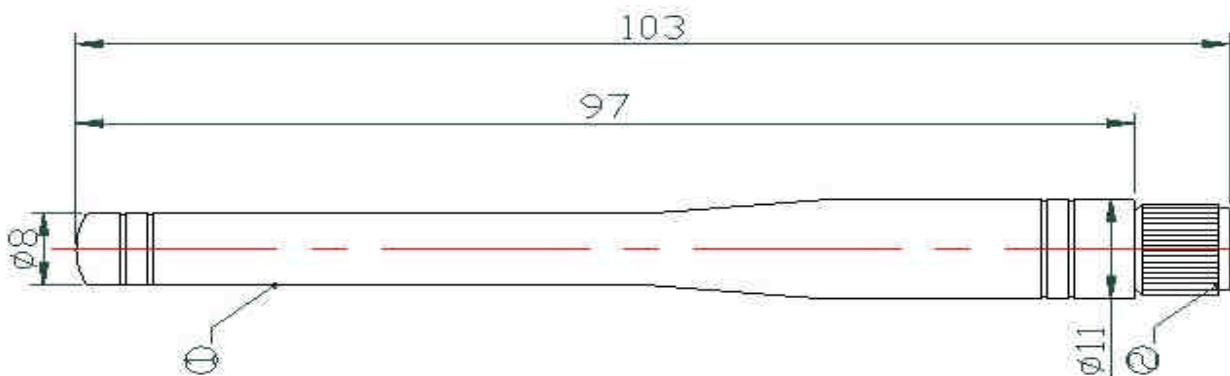


LPRS Antenna 900MHz**Figure 1 right-angled SMA**

1. Application: Transceiver purposes
2. Dimensions: As per drawings
3. Materials:
4. Electrical Characteristics
 - i) Resonant Frequency: 900MHz
 - ii) Return Loss: -17 dB or less
 - iii) Radiation Pattern: Omni Directional
 - iv) Polarization: Vertical
 - v) Standing Wave Ratio(S.W.R.): = 1.7
 - vi) Insulation resistance: 500Mohm @ DC 500V
5. Pulling test performance
 - i) Between sleeve and cap: 6.8Kg for 3 sec
 - ii) Between connector and sleeve: 6.8Kg for 3 sec
 - iii) Between coaxial wire and connector: 6.8Kg for 1min
6. General Characteristics
 - i) Storage Temperature: -30° to + 75°
 - ii) Operating Temperature: -30° to + 75°
 - iii) Vibration Test: There shall be no defects in appearance or the mechanical and electrical functions after the antenna being tested by regular mounting device under the following conditions:
 - a) Displacement: ±5° of axis original position
 - b) Duration: 1000 cycles/minute
 - c) Time: 5 minutes
 - iv) Shock Resistance: Satisfy the electrical and mechanical characteristics after drop down with 100g upon rubber block

**Figure 2****Figure 3 straight SMA**

Product Order Codes

Description	Order Code
900MHz Antenna with straight male SMA connector	ANT-900MS
900MHz Antenna with right-angled male SMA connector	ANT-900MR

Please contact the sales office for availability and other variants of the standard product.

Document History

Issue	Date	Revision
1-0	Jan 2005	Preliminary

Copyright

The information contained in this data sheet is the property of Low Power Radio Solutions Ltd and copyright is vested in them with all rights reserved. Under copyright law this documentation may not be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine readable form in whole or in part without the written consent of Low Power Radio Solutions Ltd.

The circuitry and design of the modules are also protected by copyright law.

Disclaimer

Low Power Radio Solutions Ltd has an on going policy to improve the performance and reliability of their products; we therefore reserve the right to make changes without notice. The information contained in this data sheet is believed to be accurate however we do not assume any responsibility for errors or any liability arising from the application or use of any product or circuit described herein. This data sheet neither states nor implies warranty of any kind, including fitness for any particular application.



For further information or technical assistance please contact:

Tel: +44 (0)1993 709418
 Fax: +44 (0)1993 708575
 Web: <http://www.lprs.co.uk>
 Email: info@lprs.co.uk

Low Power Radio Solutions Ltd

Two Rivers Industrial Estate
 Station Lane
 Witney
 Oxon
 OX28 4BH
 England



Web: <http://www.easy-radio.co.uk>

The above address is a dedicated web site for Easy-Radio