



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH IS PROHIBITED.

2 BLADES MODEL



- 6 = RG6 (5C2V)
- 8 = RG58 (3C2V), Y-ConCable
- 9 = RG59 / 62 (4C2V)
- D = RG174

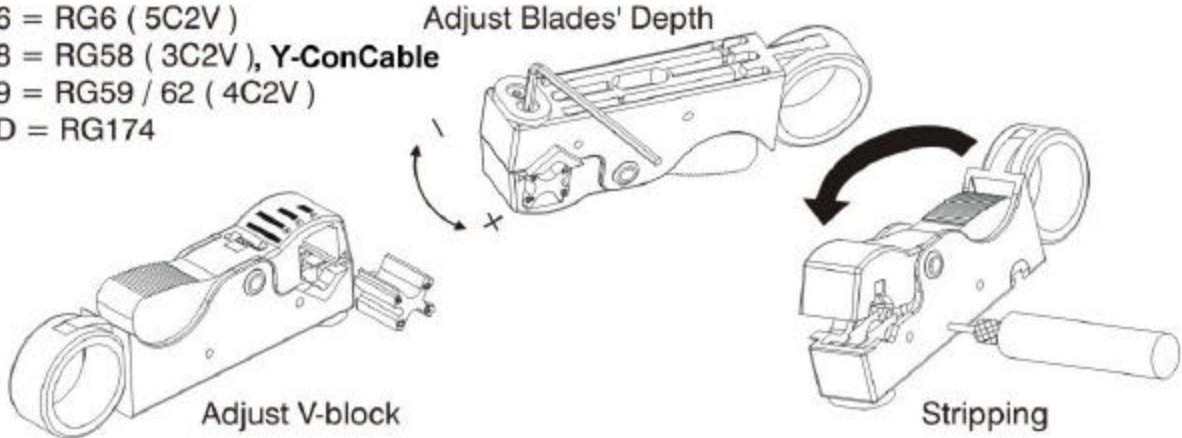

Instructions

- **Stripping Length:** This stripper can strip cable in four lengths 4, 6, 8, and 12mm. The stripping length is preset to 6mm. If you want to strip other lengths, you may adjust the blade's position.
- **Blades' Depth:** You may use the hex wrench, which is stored in the bottom of the tool to adjust the blade's depth. Insert the hex wrench into the blade depth adjuster on the bottom of the stripper, then rotate the hex wrench clockwise (to cut smaller cable) or counterclockwise (to cut larger cable). Repeat above steps to set the other blade.
- **Stripping Cable:**
 1. The V-block is reversible. Use hex wrench to push the V-block out of the housing, align the character on the V-block with the arrow, then insert the V-block into its housing. The indicated arrow < recommended the RG cable size mark in front of the V-block. 6 = RG6 (5C2V), 8 = RG58 (3C2V) and Y-ConCable's, 9 = RG59/62, D = RG-174 .
 2. Press the knurled portion on the upper jaw to open the stripper's jaws.
 3. Insert the cable you want to strip through the V-block until the cable reaches the V-shaped cable guide. Then release the upper jaw to close the jaws.
 4. Insert your index finger into the stripper's finger ring, turn the stripper clockwise 1-4 times. The cable's insulation is cut while you turn the stripper.
 5. Open the jaws and remove the cable. Pull away the outer jacket and dielectric to expose the inner conductor.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES: ±0.?

REV.	REVISION DESCRIPTION	INITIALS	REV. DATE
5			
4			
3			
2			
1			



DO NOT SCALE DRAWING

CLASSIFICATION:

Customer-drawing

NOTES:

	NAME	DATE
DESIGN	HK	04.11.2002
DRAWN	HK	04.11.2002
CHECKED	HK	04.11.2002
Q.A.	WM	04.11.2002
APPROVED	HK	04.11.2002

TITLE: Y-Con Tool 20
Cable stripping tool

DWG NO.: Customer-P(090)A31

REV. ORIGIN	REV.
-	-

ANGLE PROJECTION: First

WEIGHT: 0.00g

APPROVED HK 04.11.2002

SCALE: 1:1

SHEET 1 OF 1

A4 - ASSEMBLY