



# Sensor Actuator Interface

Catalogue

## Sensor Actuator Interface

Introduction

Sensor and actuator cables

Fieldbus, data cables and accessories

Plug in connector and protective caps

IP67 Remote I/O system SAI Active

JACKPAC® (IP67)

Passive distributors

M23 Connectors and cables

Tools and markers

A

B

C

D

E

F

G

H

I

## Appendix

Technical appendix

Index

Search according to type or order number, Addresses worldwide

W

X

# Sensor and actuator cables

**M12 one end without connector**



Page B.11

**M12 one end without connector, shielded**



Page B.16

**Twin cabling M12 one end without connector**



Page B.17

**M8 one end without connector**



Page B.18

**M5 one end without connector**



Page B.22

**Connecting cables M12 to M12**



Page B.25

**Connecting cables M12 to M12 shielded**



Page B.28

**Connecting cables M12 to M8**



Page B.29

**Connecting cables M8 to M8**



Page B.32

**Twin sensor cables**



Page B.37

**M12 one end without connector, B-coded**



Page B.41

**Valve cables**



Page B.45

**Connecting cables**



Page B.51

# Fieldbus, data cables and accessories

## PROFIBUS-DP - cables



Page C.6

## PROFIBUS-DP plug-in connector (M12, SubD)



Page C.10

## PROFIBUS-DP - FBCon T-distributor



Page C.22

## PROFIBUS-PA - cables



Page C.28

## PROFIBUS-PA plug-in connector



Page C.31

## PROFIBUS-PA - FBCon T-distributor



Page C.34

## PROFIBUS-PA - FBCon T-distributor with surge protection



Page C.40

## PROFIBUS-PA - FBCon T-distributor ATEX Ex(ia)



Page C.50

## CANopen & DeviceNet™ - cables (M12, M8)



Page C.58

## CANopen & DeviceNet - connectors



Page C.63

## ASI - Cables



Page C.64

## ASI - T-piece



Page C.65

## Ethernet cables



Page C.66

## Ethernet plug-in connector



Page C.70

## FOUNDATION Fieldbus - connector (7/8")



Page C.72

## Accessories cable glands



Page C.73



# Plug in connector and protective caps

## Customisable connectors M12



Page D.7

## Customisable connectors M8



Page D.17

## Insulation displacement connection M12



Page D.22

## Insulation displacement connection M8



Page D.24

## T distributor



Page D.25

## Twin plugs and wall bushings



Page D.26

## Protective caps



Page D.27

## Built in plugs M12



Page D.29

## Built in plugs M8/M5



Page D.31

## Valve plugs for custom assembly



Page D.32

## Protective sleeve adapter



Page D.34

# IP67 Remote I/O system SAI Active

## SAI-AU for PROFIBUS-DP



Page E.8

## SAI-AU for CANopen



Page E.12

## SAI-AU for DeviceNet™



Page E.16

## SAI-AU for EtherNet/IP™



Page E.20

## SAI-AU for Modbus TCP



Page E.24

## SAI-AU Pro Gateway for PROFIBUS-DP



Page E.30

## SAI-AU Pro Gateway for EtherNet/IP™ and DeviceNet™



Page E.32

## SAI-AU Pro Gateway for Modbus TCP and Modbus ASCII



Page E.34

## SAI-AU Pro subbus modules with digital inputs/outputs



Page E.36

## SAI-AU Pro subbus modules with analogue input/outputs



Page E.37

## SAI-AU Pro subbus module “counter”



Page E.38

## SAI-AU Pro subbus module “thermo”



Page E.39

## SAI-AU Pro subbus module “PT100”



Page E.40

## SAI-AU Wireless for PROFIBUS-DP



Page E.44

# JACKPAC® (IP67)

## JACKPAC®



Page F.3

## JACKPAC® test



Page F.6

## Empty housing SAI JACKPAC®



Page F.8

# Passive distributors

## M12



Page G.8

## M12 Line



Page G.10

## M12 DIP with DIP-switch coding



Page G.13

## M12 ECO



Page G.15

## M12 Push-Pull



Page G.17

## M12 CNOMO



Page G.21

## M12 bayonet joint



Page G.22

## M12 IDC



Page G.26

## M12 VA stainless steel



Page G.28

## M12 metal distributors



Page G.32

## M12 distributors 1:1



Page G.36

## M12 distributors, 8-pole



Page G.37

## M12 for NPN and PNP sensors



Page G.38

## M12 wall bushing



Page G.39

## M12 Pre-assembled hood version



Page G.42

## M8



Page G.48

## M8 Line



Page G.50

## M8 distributor with solder pins



Page G.51

## M5 Line



Page G.56

## M12 Ex Zone 1 and Zone 22



Page G.59

# M23 Connectors and cables



## Housings for signal transmission




Page H.12

## Built-in connectors for signal transmission




Page H.13

## Inserts for signal transmission



Page H.14

## Contacts for signal transmission



Page H.16

## Housings for power transmission




Page H.18

## Built-in connectors for power transmission




Page H.19

## Inserts for power transmission



Page H.20

## Contacts for power transmission



Page H.21

## Moulded M23 cables



Page H.22

## SAI distributor with M23



Page H.23

# Tools and markers

## Screwty® for M8/M12/M23



Page I.5

## Cutting tools



Page I.7

## Sheathing and insulation stripping tools



Page I.8

## M23 crimping tools



Page I.12

## Identification systems



Page I.14



# Sensor Actuator Interface

---

<b>Sensor Actuator Interface</b>	Introduction	A.2
----------------------------------	--------------	-----

---

# Technology is Priority One

## A

We would like to give some details about the many interesting innovations that have appeared since the release of the last SAI Catalogue. These pages describe solutions that are designed to make your work easier.

## M23 connectors

In addition to the SAI distributors and the moulded cables, Weidmüller now offers a wide line of M23 connectors. A distinction is made between connectors for power and connectors for signals. There are also a variety of housing types such as the plug housing, coupling housing and add-on flange. Crimp versions are typical whereby the individual components can be ordered separately. Sets or inserts with contacts are also available on request.



## M12 with plastic nuts

Plastic nuts are not used as a cost savings measure. The cost that nuts contribute to the entire expense is simply too small to be a factor. Instead, plastic is used because it has better resistance when compared to nickel-plated metals. In certain applications, the standard metal nuts can oxidise and degrade. For such uses, nuts made from plastic can help to increase the lifespan. M8 cables fitted with plastic nuts are also available on request.



### M12 with stainless-steel nut

The stainless steel nuts can be used in cases when the plastic nuts do not meet your mechanical requirements. Weidmüller also offers moulded versions in addition to the customisable M12 connectors. Our stainless steel nuts are made from a special high quality stainless steel. A small selection of these types are shown in our catalogue. Other variations can also be produced on request.



### M8 and M12 lines with yellow cable

In a trend towards machine standardisation, sensor cables with yellow cladding are often routed in machines. Weidmüller also offers these sensor cables in our standard line. Since such cables are typically used in tooling machines, they are designed only as halogen free PUR cables in this colour.



### Profibus Sub-D connector with M12 outlet

Market research indicates that the connection to the Sub-D connector is a common source of error during machine malfunctions. It is also a fairly complex task to install a Sub-D connector on a Profibus cable. We sought to find a solution that would solve both of these problems. So we introduced a Sub-D connector with an M12 outlet. This ensures "Plug & Play" functionality for this connection. The M12 cable only needs to be screwed on. All components are completely tested so that they will deliver a safe, reliable connection.





# Are you already a Weidmüller customer?


**A****Then why not order your M12 or M8 cables from us!**

Weidmüller supplies an extremely wide range of M12 and M8 cables, naturally with proven Weidmüller quality.

To answer as many demands as possible, we offer:

- PVC cables
- PUR/PVC cables
- PUR/halogen-free cables

Of course, with very short delivery times and favourable conditions. Please do not hesitate to contact us and ask for an offer or any additional information.

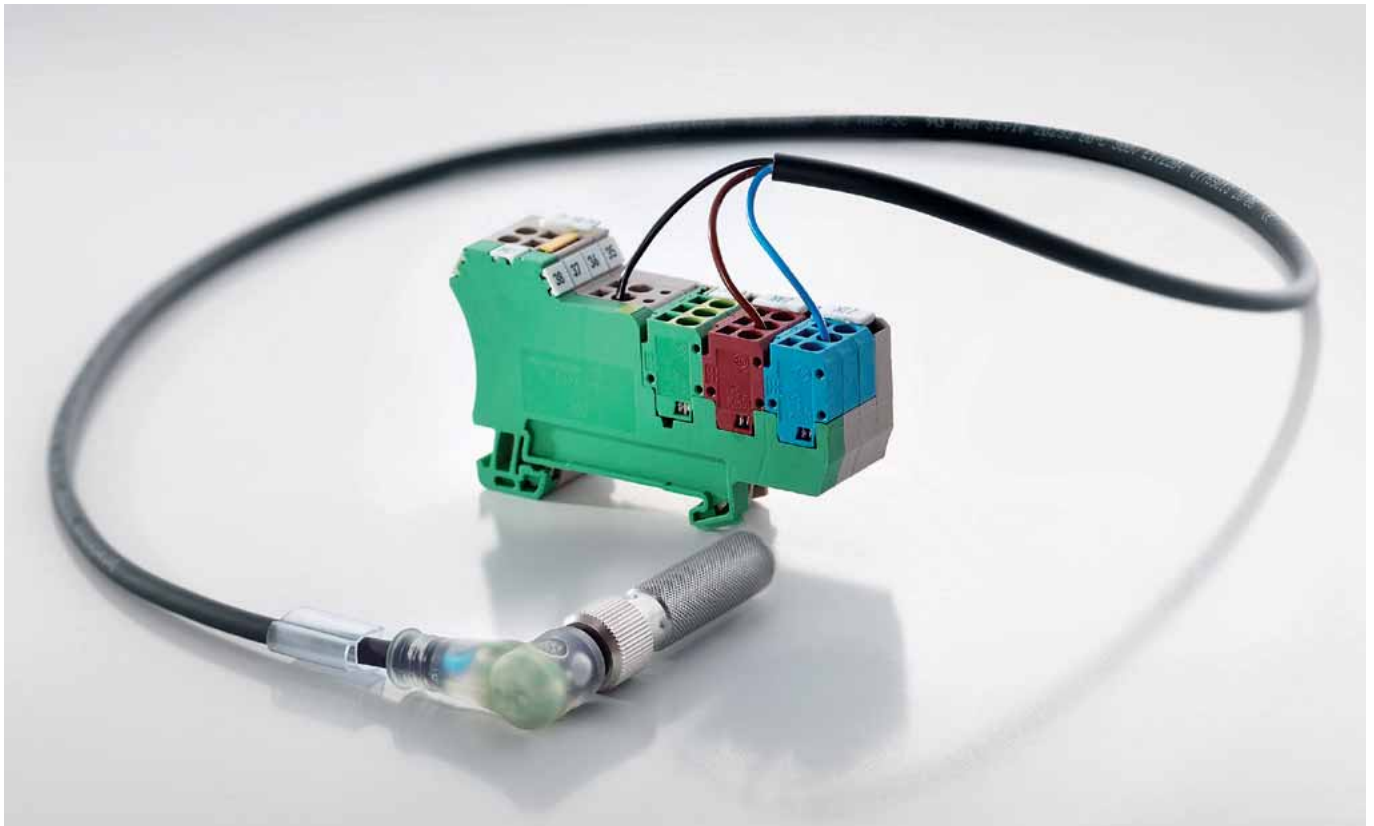

# Sensor and actuator cables

<b>Sensor and actuator cables</b>	Introduction	B.2
	Overview of sensor cables	B.4
	Sensor cables	B.10
	Power cables	B.40
	Valve cables	B.44
	Connecting cable for sensors and actuators	B.51
	Connecting cables for Weidmüller distributors	B.52

## SAI cable

**B** Weidmüller manufactures its own SAI cable. This ensures optimal versatility. We do not use fully automatic machines which are difficult to adapt. That is why Weidmüller is well known for delivering promptly with quick turnaround times despite our wide variety of available options. We can also develop and produce solutions for specific customer requirements. We regularly produce cables, for example, with customer specific labels and logos.

But naturally it is the cost of this increased flexibility that is the decisive factor. In order to meet your cost requirements, an additional production line has been specially designed for keeping costs down. The line produces top selling products that are marketed for their economical cost factors.



Sensor cables from Weidmüller: shown here with yellow and black cables, together with bus cables



### Easy to identify

The EAN number on each label can be scanned in.



### Resistant to vibration

M8 with vibration resistance



### High quality

Compatible for use with robots;  
recyclable, halogen-free cables



### Versatile

Customised cables



One end without connector



Connecting cables



Valve cables



Connection cables / bus cables

Overview of sensor cables

B

	No. of poles	Cable material	One end free			M8 socket straight		
			PUR	PUR halogen-free	PVC	PUR	PUR halogen-free	PVC
One end free		1.5 m 3.0 m 5.0 m 10.0 m variable						
M8 plug straight	4(S) 1(+) 3(-)	1.5 m 3.0 m 5.0 m 10.0 m variable	1824590150 1824590300 1824590500 1824591000 1824590000	1926970150 1926970300 1926970500 1926971000 1926970000	1927230150 1927230300 1927230500 1927231000 1927230000	1824570150 1824570300 1824570500 1824571000 1824570000	1926890150 1926890300 1926890500 1926891000 1926890000	1927150150 1927150300 1927150500 1927151000 1927150000
	2(0) 1(+) 4(S) 3(-)	1.5 m 3.0 m 5.0 m 10.0 m variable	1906270150 1906270300 1906270500 1906271000 1906270000	1926990150 1926990300 1926990500 1926991000 1926990000	1927250150 1927250300 1927250500 1927251000 1927250000	***	***	***
	4(S) 1(+) 3(-)	1.5 m 3.0 m 5.0 m 10.0 m variable	1857550150 1857550300 1857550500 1857551000 1857550000	1927050150 1927050300 1927050500 1927051000 1927050000	1927310150 1927310300 1927310500 1927311000 1927310000	On request	On request	On request
	2(0) 1(+) 4(S) 3(-)	1.5 m 3.0 m 5.0 m 10.0 m variable	1857560150 1857560300 1857560500 1857561000 1857560000	1927070150 1927070300 1927070500 1927071000 1927070000	1927330150 1927330300 1927330500 1927331000 1927330000	***	***	***
M12 plug straight	3(-) 1(+) 4(S)	1.5 m 3.0 m 5.0 m 10.0 m variable	9457810150 9457810300 9457810500 9457811000 9457810000	1926620150 1926620300 1926620500 1926621000 1926620000	1925430150 1925430300 1925430500 1925431000 1925430000	1824570150 1824570300 1824570500 1824571000 1824570000	1926890150 1926890300 1926890500 1926891000 1926890000	1927150150 1927150300 1927150500 1927151000 1927150000
	2(0) 3(-) 1(+) 4(S)	1.5 m 3.0 m 5.0 m 10.0 m variable	9456100150 9456100300 9456100500 9456101000 9456100000	1926630150 1926630300 1926630500 1926631000 1926630000	1925440150 1925440300 1925440500 1925441000 1925440000	***	***	***
	2(0) 3(-) 1(+) 4(S)	1.5 m 3.0 m 5.0 m 10.0 m variable	9457610150 9457610300 9457610500 9457611000 9457610000	1926640150 1926640300 1926640500 1926641000 1926640000	1925450150 1925450300 1925450500 1925451000 1925450000	***	***	***
	3(-) 1(+) 4(S)	1.5 m 3.0 m 5.0 m 10.0 m variable	9456690150 9456690300 9456690500 9456691000 9456690000	1926700150 1926700300 1926700500 1926701000 1926700000	1925510150 1925510300 1925510500 1925511000 1925510000	On request	On request	On request
M12 plug 90°	2(0) 3(-) 1(+) 4(S)	1.5 m 3.0 m 5.0 m 10.0 m variable	1906260150 1906260300 1906260500 1906261000 1906260000	1926710150 1926710300 1926710500 1926711000 1926710000	1925520150 1925520300 1925520500 1925521000 1925520000	***	***	***
	1.5 m 3.0 m 5.0 m 10.0 m variable	9457670150 9457670300 9457670500 9457671000 9457670000	1926720150 1926720300 1926720500 1926721000 1926720000	1925530150 1925530300 1925530500 1925531000 1925530000	***	***	***	

Preferred types / extracted from the complete line. Please make a separate inquiry for information about the M8 snap-on version, twin cabling and others.

M8 socket


straight



PUR	PUR halogen-free	PVC
-----	------------------	-----

9457850150	1927000150	1927260150
9457850300	1927000300	1927260300
9457850500	1927000500	1927260500
9457851000	1927001000	1927261000
9457850000	1927000000	1927260000

90°



PUR	PUR halogen-free	PVC
-----	------------------	-----


9457380150	1927060150	1927320150
9457380300	1927060300	1927320300
9457380500	1927060500	1927320500
9457381000	1927061000	1927321000
9457380000	1927060000	1927320000



PUR	PUR halogen-free	PVC
-----	------------------	-----

9456150150	1927080150	1927340150
9456150300	1927080300	1927340300
9456150500	1927080500	1927340500
9456151000	1927081000	1927341000
9456150000	1927080000	1927340000

90° angle with 2 LEDs



PUR	PUR halogen-free	PVC
-----	------------------	-----

9457460150	1927090150	1927350150
9457460300	1927090300	1927350300
9457460500	1927090500	1927350500
9457461000	1927091000	1927351000
9457460000	1927090000	1927350000

***	***	***
1880470150	1926900150	1927160150
1880470300	1926900300	1927160300
1880470500	1926900500	1927160500
1880471000	1926901000	1927161000
1880470000	1926900000	1927160000

1824580150	1926910150	1927170150
1824580300	1926910300	1927170300
1824580500	1926910500	1927170500
1824581000	1926911000	1927171000
1824580000	1926910000	1927170000

***	***	***
1857660150	1926920150	1927180150
1857660300	1926920300	1927180300
1857660500	1926920500	1927180500
1857661000	1926921000	1927181000
1857660000	1926920000	1927180000

1877250150	1926930150	1927190150
1877250300	1926930300	1927190300
1877250500	1926930500	1927190500
1877251000	1926931000	1927191000
1877250000	1926930000	1927190000

***	***	***
On request	On request	On request

1857670150	1926950150	1927210150
1857670300	1926950300	1927210300
1857670500	1926950500	1927210500
1857671000	1926951000	1927211000
1857670000	1926950000	1927210000

***	***	***
1857680150	1926960150	1927220150
1857680300	1926960300	1927220300
1857680500	1926960500	1927220500
1857681000	1926961000	1927221000
1857680000	1926960000	1927220000

***	***	***
On request	On request	On request
***	***	***

***	***	***
9456660150	1938070150	1938200150
9456660300	1938070300	1938200300
9456660500	1938070500	1938200500
9456661000	1938071000	1938201000
9456660000	1938070000	1938200000

9457980150	1938050150	1938180150
9457980300	1938050300	1938180300
9457980500	1938050500	1938180500
9457981000	1938051000	1938181000
9457980000	1938050000	1938180000

***	***	***
9456670150	1938080150	1938210150
9456670300	1938080300	1938210300
9456670500	1938080500	1938210500
9456671000	1938081000	1938211000
9456670000	1938080000	1938210000

9457760150	***	***
9457760300	***	***
9457760500	***	***
9457761000	***	***
9457760000	***	***

***	***	***
On request	On request	On request

1906330150	1938060150	1938190150
1906330300	1938060300	1938190300
1906330500	1938060500	1938190500
1906331000	1938061000	1938191000
1906330000	1938060000	1938190000

***	***	***
1906340150	1938090150	1938220150
1906340300	1938090300	1938220300
1906340500	1938090500	1938220500
1906341000	1938091000	1938221000
1906340000	1938090000	1938220000

***	***	***
***	***	***
***	***	***

***	***	***
-----	-----	-----






***	***	***
-----	-----	-----

***	***	***
-----	-----	-----

***	***	***
-----	-----	-----

Overview of sensor cables

B

		M12 socket				
		straight				
		 				
		 				
		PUR	PUR halogen-free	PVC		
		PUR	PUR halogen-free	PVC		
One end free		No. of poles				
		Cable material				
		1.5 m	9457820150	1926760150	1925570150	
		3.0 m	9457820300	1926760300	1925570300	
M8 plug	straight	1.5 m	1937950150	1938100150	1938230150	
		3.0 m	1937950300	1938100300	1938230300	
		5.0 m	1937950500	1938100500	1938230500	
		10.0 m	1937951000	1938101000	1938231000	
	variable	1937950000	1938100000	1938230000		
	90°	1.5 m	***	***	***	
		3.0 m	***	***	***	
		5.0 m	***	***	***	
		10.0 m	***	***	***	
	variable	***	***	***		
	M12 plug	straight	1.5 m	9457230150	1926490150	1925300150
			3.0 m	9457230300	1926490300	1925300300
5.0 m			9457230500	1926490500	1925300500	
10.0 m			9457231000	1926491000	1925301000	
variable		9457230000	1926490000	1925300000		
90°		1.5 m	1821050150	On request	On request	
		3.0 m	1821050300	On request	On request	
		5.0 m	1821050500	On request	On request	
		10.0 m	1821051000	On request	On request	
variable		1821050000	On request	On request		
90°		1.5 m	***	***	***	
		3.0 m	***	***	***	
	5.0 m	***	***	***		
	10.0 m	***	***	***		
variable	***	***	***			

M12 socket

straight



90°



PUR	PUR halogen-free	PVC
-----	------------------	-----

9457910150	1926780150	1925590150
9457910300	1926780300	1925590300
9457910500	1926780500	1925590500
9457911000	1926781000	1925591000
9457910000	1926780000	1925590000

PUR	PUR halogen-free	PVC
-----	------------------	-----

9457320150	1926820150	1925630150
9457320300	1926820300	1925630300
9457320500	1926820500	1925630500
9457321000	1926821000	1925631000
9457320000	1926820000	1925630000

PUR	PUR halogen-free	PVC
-----	------------------	-----

9457740150	1926830150	1925640150
9457740300	1926830300	1925640300
9457740500	1926830500	1925640500
9457741000	1926831000	1925641000
9457740000	1926830000	1925640000

PUR	PUR halogen-free	PVC
-----	------------------	-----

9457690150	1926840150	1925650150
9457690300	1926840300	1925650300
9457690500	1926840500	1925650500
9457691000	1926841000	1925651000
9457690000	1926840000	1925650000

***	***	***
***	***	***

1937960150	1938110150	1938240150
1937960300	1938110300	1938240300
1937960500	1938110500	1938240500
1937961000	1938111000	1938241000
1937960000	1938110000	1938240000

***	***	***
1937990150	1938140150	1938270150
1937990300	1938140300	1938270300
1937990500	1938140500	1938270500
1937991000	1938141000	1938271000
1937990000	1938140000	1938270000

***	***	***
***	***	***

***	***	***
***	***	***

1937970150	1938120150	1938250150
1937970300	1938120300	1938250300
1937970500	1938120500	1938250500
1937971000	1938121000	1938251000
1937970000	1938120000	1938250000

***	***	***
1938000150	1938150150	1938280150
1938000300	1938150300	1938280300
1938000500	1938150500	1938280500
1938001000	1938151000	1938281000
1938000000	1938150000	1938280000

***	***	***
***	***	***

***	***	***
***	***	***

9457390150	1926530150	1925340150
9457390300	1926530300	1925340300
9457390500	1926530500	1925340500
9457391000	1926531000	1925341000
9457390000	1926530000	1925340000

***	***	***
9457310150	1926540150	1925350150
9457310300	1926540300	1925350300
9457310500	1926540500	1925350500
9457311000	1926541000	1925351000
9457310000	1926540000	1925350000

***	***	***
***	***	***

9457340150	1926510150	1925320150
9457340300	1926510300	1925320300
9457340500	1926510500	1925320500
9457341000	1926511000	1925321000
9457340000	1926510000	1925320000

***	***	***
1815670150	1926570150	1925380150
1815670300	1926570300	1925380300
1815670500	1926570500	1925380500
1815671000	1926571000	1925381000
1815670000	1926570000	1925380000

***	***	***
1906310150	1926580150	1925390150
1906310300	1926580300	1925390300
1906310500	1926580500	1925390500
1906311000	1926581000	1925391000
1906310000	1926580000	1925390000

***	***	***
9457270150	1926550150	1925360150
9457270300	1926550300	1925360300
9457270500	1926550500	1925360500
9457271000	1926551000	1925361000
9457270000	1926550000	1925360000

***	***	***
9456500150		
9456500300		
9456500500	On request	On request
9456501000		
9456500000		

***	***	***
***	***	***

***	***	***
***	***	***




***	***	***
9457900150	1926590150	1925400150
9457900300	1926590300	1925400300
9457900500	1926590500	1925400500
9457901000	1926591000	1925401000
9457900000	1926590000	1925400000

B



Overview of sensor cables

B

		M12 socket				
		90° angle with 2 LEDs				
						
						
		PUR	PUR halogen-free	PVC		
		PUR	PUR halogen-free	PVC		
One end free		No. of poles				
		Cable material				
		1.5 m	9457800150	1926650150	1925460150	
		3.0 m	9457800300	1926650300	1925460300	
M8 plug	straight	1.5 m	***	***	***	
		3.0 m	***	***	***	
		5.0 m	***	***	***	
		10.0 m	***	***	***	
	variable	***	***	***		
	90°	1.5 m	***	***	***	
		3.0 m	***	***	***	
		5.0 m	***	***	***	
		10.0 m	***	***	***	
	variable	***	***	***		
	M12 plug	straight	1.5 m	9457790150	1926600150	1925410150
			3.0 m	9457790300	1926600300	1925410300
5.0 m			9457790500	1926600500	1925410500	
10.0 m			9457791000	1926601000	1925411000	
variable		9457790000	1926600000	1925410000		
90°		1.5 m	***	***	***	
		3.0 m	***	***	***	
		5.0 m	***	***	***	
		10.0 m	***	***	***	
variable		***	***	***		
90°		1.5 m	On request	On request	On request	
		3.0 m	***	***	***	
	5.0 m	***	***	***		
	10.0 m	***	***	***		
variable	***	***	***			



# Sensor cables with plug at one end only

## M12



## M8



## M8 Snap connection



## Twin cabling



## M5



## Sensor/actuator cable pre-assembled with M8/M12 plug-in connector at one end

Machine designers frequently require individual cable lengths. Sensor cables with a connector fitted at one end only can be easily adapted to the corresponding situation. The cables are available in many different versions: straight, 90° and with all common pole numbers (3,4 and 5). Male plugs and Female sockets can be assembled to suit individual customer requirements for connecting cables. The cable sheathing is of PUR (polyurethane) and is suitable for use with cable carrier systems. Plugs and cables are in neutral black.


## Sensor cables

Weidmüller can supply various cable lengths as indicated in the following table:


## Typical cable lengths are:

- 1.5 m
- 3.0 m
- 5.0 m
- 10.0 m

## Example of designation

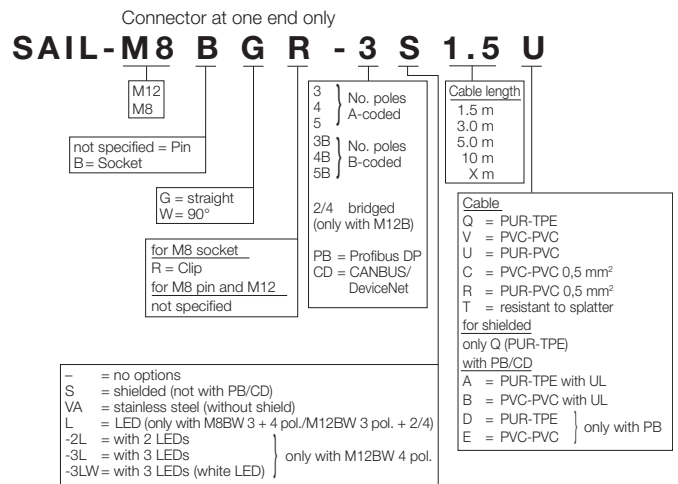

**M12 one end without connector**  
**A-coded**



**Ordering data**

Male, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
Male, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
Note	
Other versions on request	

3-pole	
Type	Order No.
SAIL-M12G-3-1.5V	1925430150
SAIL-M12G-3-1.5U	9457810150
SAIL-M12G-3-1.5Q	1926620150
SAIL-M12G-3-1.5QGE	1092980150
SAIL-M12G-3-1.5T	1021750150
SAIL-M12W-3-1.5V	1925510150
SAIL-M12W-3-1.5U	9456690150
SAIL-M12W-3-1.5Q	1926700150
SAIL-M12W-3-1.5QGE	1093160150
SAIL-M12W-3-1.5T	1021760150
SAIL-M12BG-3-1.5V	1925570150
SAIL-M12BG-3-1.5U	9457820150
SAIL-M12BG-3-1.5Q	1926760150
SAIL-M12BG-3-1.5QGE	1092910150
SAIL-M12BG-3-1.5T	1968590150
SAIL-M12BW-3-1.5V	1925630150
SAIL-M12BW-3-1.5U	9457320150
SAIL-M12BW-3-1.5Q	1926820150
SAIL-M12BW-3-1.5QGE	1092940150
SAIL-M12BW-3-1.5T	1968560150
Note	
Other versions on request	

4-pole	
Type	Order No.
SAIL-M12G-4-1.5V	1925440150
SAIL-M12G-4-1.5U	9456100150
SAIL-M12G-4-1.5Q	1926630150
SAIL-M12G-4-1.5QGE	1077750150
SAIL-M12G-4-1.5T	1021770150
SAIL-M12W-4-1.5V	1925520150
SAIL-M12W-4-1.5U	1906260150
SAIL-M12W-4-1.5Q	1926710150
SAIL-M12W-4-1.5QGE	1093170150
SAIL-M12W-4-1.5T	1021790150
SAIL-M12BG-4-1.5V	1925580150
SAIL-M12BG-4-1.5U	9457730150
SAIL-M12BG-4-1.5Q	1926770150
SAIL-M12BG-4-1.5QGE	1092920150
SAIL-M12BG-4-1.5T	1968580150
SAIL-M12BW-4-1.5V	1925640150
SAIL-M12BW-4-1.5U	9457740150
SAIL-M12BW-4-1.5Q	1926830150
SAIL-M12BW-4-1.5QGE	1092960150
SAIL-M12BW-4-1.5T	1968570150
Note	
Other versions on request	

5-pole	
Type	Order No.
SAIL-M12G-5-1.5V	1925450150
SAIL-M12G-5-1.5U	9457610150
SAIL-M12G-5-1.5Q	1926640150
SAIL-M12G-5-1.5QGE	1092990150
SAIL-M12G-5-1.5T	1021650150
SAIL-M12W-5-1.5V	1925530150
SAIL-M12W-5-1.5U	9457670150
SAIL-M12W-5-1.5Q	1926720150
SAIL-M12W-5-1.5QGE	1093180150
SAIL-M12W-5-1.5T	1021660150
SAIL-M12BG-5-1.5V	1925590150
SAIL-M12BG-5-1.5U	9457910150
SAIL-M12BG-5-1.5Q	1926780150
SAIL-M12BG-5-1.5QGE	1092930150
SAIL-M12BG-5-1.5T	1021670150
SAIL-M12BW-5-1.5V	1925650150
SAIL-M12BW-5-1.5U	9457690150
SAIL-M12BW-5-1.5Q	1926840150
SAIL-M12BW-5-1.5QGE	1092970150
SAIL-M12BW-5-1.5T	1021690150
Note	
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	





Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

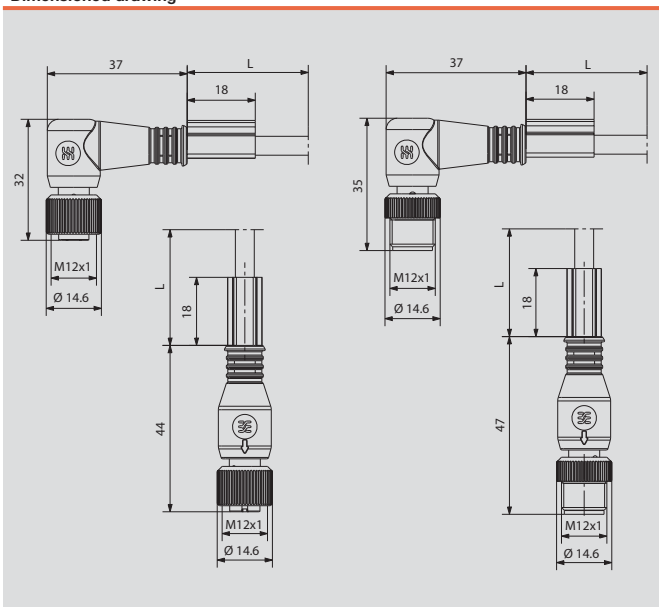

Sensor cables

M12 one end without connector  
A-coded  
with plastic threaded ring



Ordering data

<b>Male, straight</b>	
PUR	1.5 m
<b>Male, angled</b>	
PUR	1.5 m
<b>Female, straight</b>	
PUR	1.5 m
<b>Female, angled</b>	
PUR	1.5 m
<b>Note</b>	

3-pole

Type	Order No.
SAIP-M12G-3-1.5U	1108800150
SAIP-M12W-3-1.5U	1108670150
SAIP-M12BG-3-1.5U	1108730150
SAIP-M12BW-3-1.5U	1108770150

4-pole

Type	Order No.
SAIP-M12G-4-1.5U	1108810150
SAIP-M12W-4-1.5U	1108680150
SAIP-M12BG-4-1.5U	1108740150
SAIP-M12BW-4-1.5U	1108780150

5-pole

Type	Order No.
SAIP-M12G-5-1.5U	1108820150
SAIP-M12W-5-1.5U	1108690150
SAIP-M12BG-5-1.5U	1108750150
SAIP-M12BW-5-1.5U	1108790150

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data




Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

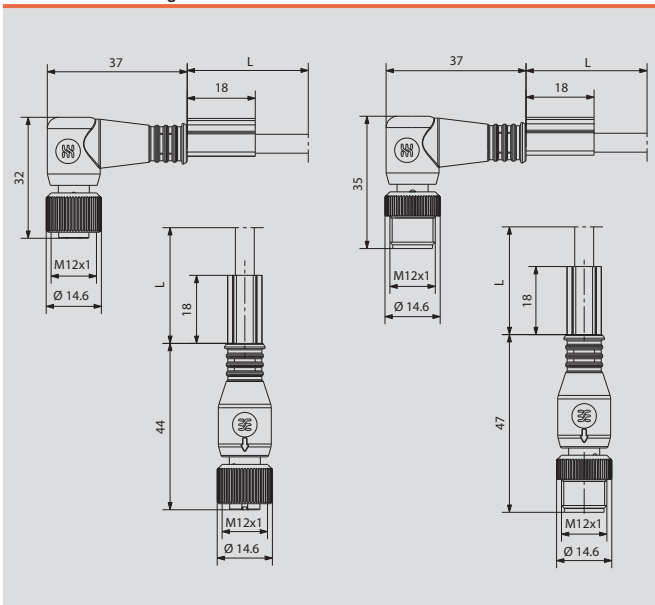

**M12 one end without connector  
A-coded  
with stainless-steel  
threaded ring  
1.4404/316L**



**Ordering data**

<b>Female, straight</b>	
PUR	1.5 m
<b>Female, angled</b>	
PUR	1.5 m
<b>Note</b>	

	<b>4-pole</b>
<b>Type</b>	<b>Order No.</b>
SAIL-M12BG-VA-4-1,5U	9457950150
SAIL-M12BW-VA-4-1,5U	9457960150

	<b>4-pole</b>
<b>Type</b>	<b>Order No.</b>
SAIL-M12BG-VA-2/4-1,5U	1939410150
SAIL-M12BW-VA-2/4-1,5U	1939370150

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	


Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

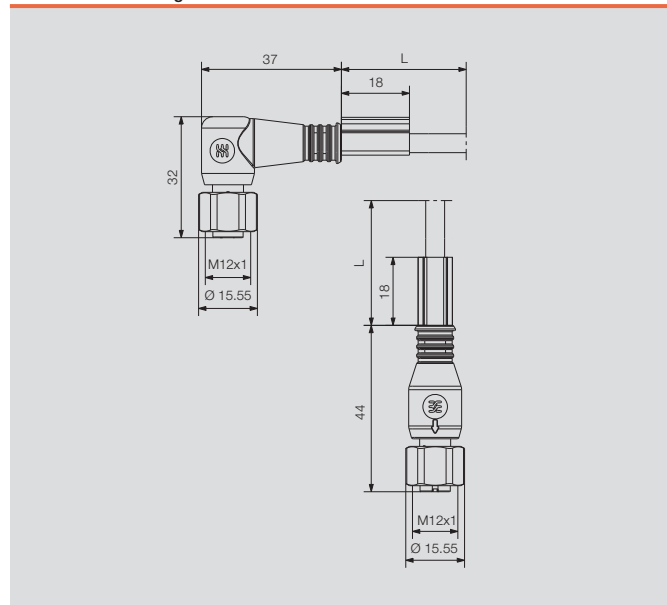




**M12 one end without connector with LED A-coded female, angled**




Female



**2 LEDs 3-pole**

Type	Order No.
SAIL-M12BW-3L1.5V	1925460150
SAIL-M12BW-3L1.5U	9457800150
SAIL-M12BW-3L1.5Q	1926650150
SAIL-M12BW-3L1.5QGE	1114880150
SAIL-M12BW-3L1.5T	1004330150


Other versions on request



**2 LEDs 4-pole**

Type	Order No.
SAIL-M12BW-4-2L1.5V	1925470150
SAIL-M12BW-4-2L1.5U	9456380150
SAIL-M12BW-4-2L1.5Q	1926660150
SAIL-M12BW-4-2L1.5QGE	1092950150
SAIL-M12BW-4-2L1.5T	1007000150

Other versions on request



**3 LEDs 4-pole**

Type	Order No.
SAIL-M12BW-4-3L1.5V	1963960150
SAIL-M12BW-4-3L1.5U	1963940150
SAIL-M12BW-4-3L1.5Q	1963950150

Other versions on request

**Ordering data**

Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m

**Note**

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable





**Dimensioned drawing**

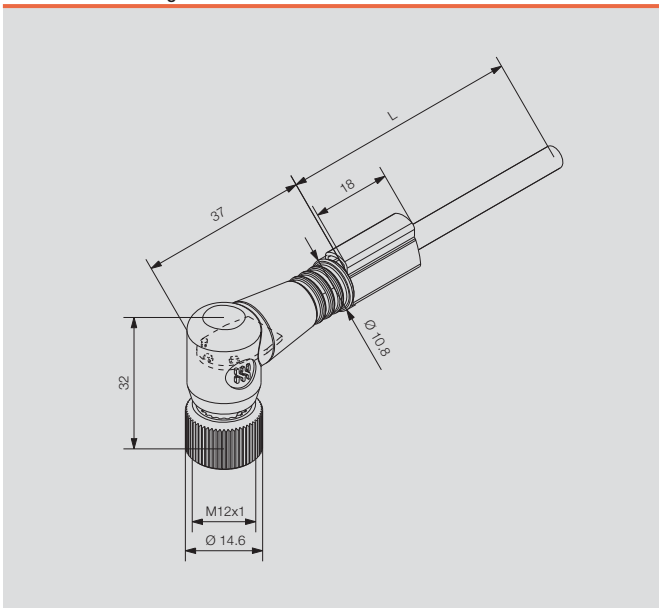



Sensor cables

M12 one end without connector shielded A-coded



Ordering data

<b>Male, straight</b>	
PUR halogen-free	1.5 m
<b>Male, angled</b>	
PUR halogen-free	1.5 m
<b>Female, straight</b>	
PUR halogen-free	1.5 m
<b>Female, angled</b>	
PUR halogen-free	1.5 m
<b>Note</b>	

3-pole

Type	Order No.
SAIL-M12G-3S1.5Q	1906470150
SAIL-M12W-3S1.5Q	1906500150
SAIL-M12BG-3S1.5Q	1867410150
SAIL-M12BW-3S1.5Q	1906950150
Other versions on request	

4-pole

Type	Order No.
SAIL-M12G-4S1.5Q	1906480150
SAIL-M12W-4S1.5Q	1059650150
SAIL-M12BG-4S1.5Q	1812540150
SAIL-M12BW-4S1.5Q	1808970150
Other versions on request	

5-pole

Type	Order No.
SAIL-M12G-5S1.5Q	1926690150
SAIL-M12W-5S1.5Q	1906520150
SAIL-M12BG-5S1.5Q	9456140150
SAIL-M12BW-5S1.5Q	1906540150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data


Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable


Dimensioned drawing

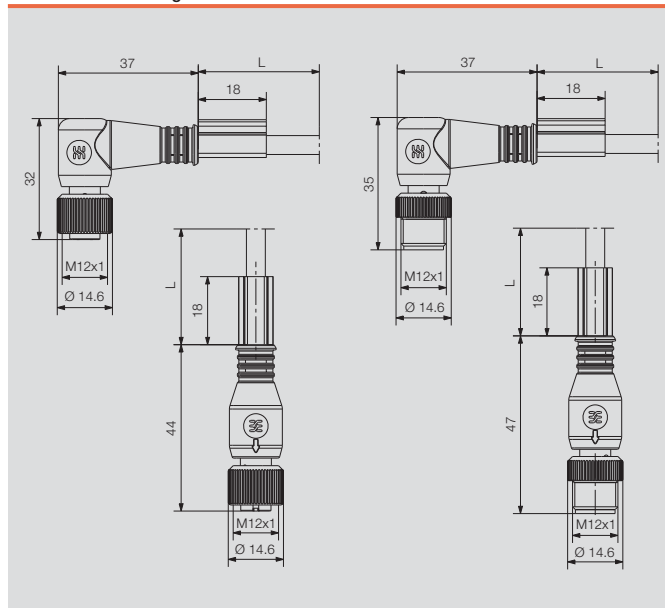

**Twin cabling**  
**M12 one end without connector**




Male



**Ordering data**

<b>Male straight - open ended</b>	
PUR	1.5 m
<b>Note</b>	

	<b>3-pole</b>	
<b>Type</b>	SAIL-ZW-3-1.5U	<b>Order No.</b>
		<b>1964310150</b>

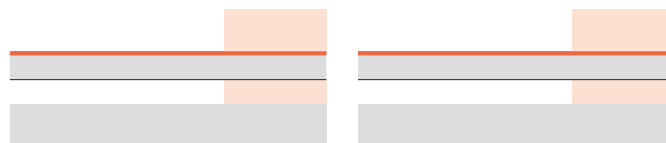

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	




Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

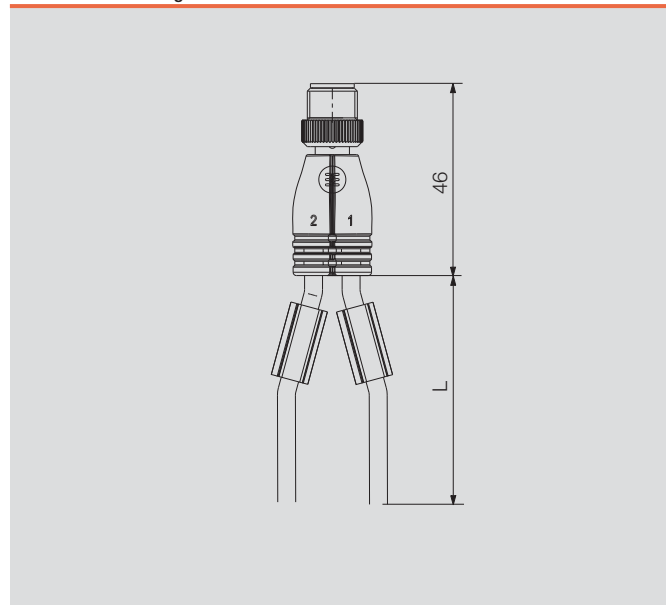

Sensor cables

M8 one end without connector



Ordering data

Male, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Male, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Note	

3-pole

Type	Order No.
SAIL-M8G-3-1.5V	1927230150
SAIL-M8G-3-1.5U	1824590150
SAIL-M8G-3-1.5Q	1926970150
SAIL-M8W-3-1.5V	1927310150
SAIL-M8W-3-1.5U	1857550150
SAIL-M8W-3-1.5Q	1927050150
SAIL-M8BG-3-1.5V	1927240150
SAIL-M8BG-3-1.5U	9457450150
SAIL-M8BG-3-1.5Q	1926980150
SAIL-M8BG-3-1.5QGE	1093190150
SAIL-M8BW-3-1.5V	1927320150
SAIL-M8BW-3-1.5U	9457380150
SAIL-M8BW-3-1.5Q	1927060150
SAIL-M8BW-3-1.5QGE	1093220150
Other versions on request	

4-pole

Type	Order No.
SAIL-M8G-4-1.5V	1927250150
SAIL-M8G-4-1.5U	1906270150
SAIL-M8G-4-1.5Q	1926990150
SAIL-M8W-4-1.5V	1927330150
SAIL-M8W-4-1.5U	1857560150
SAIL-M8W-4-1.5Q	1927070150
SAIL-M8BG-4-1.5V	1927260150
SAIL-M8BG-4-1.5U	9457850150
SAIL-M8BG-4-1.5Q	1927000150
SAIL-M8BG-4-1.5QGE	1093200150
SAIL-M8BW-4-1.5V	1927340150
SAIL-M8BW-4-1.5U	9456150150
SAIL-M8BW-4-1.5Q	1927080150
SAIL-M8BW-4-1.5QGE	1093240150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

Technical data


Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

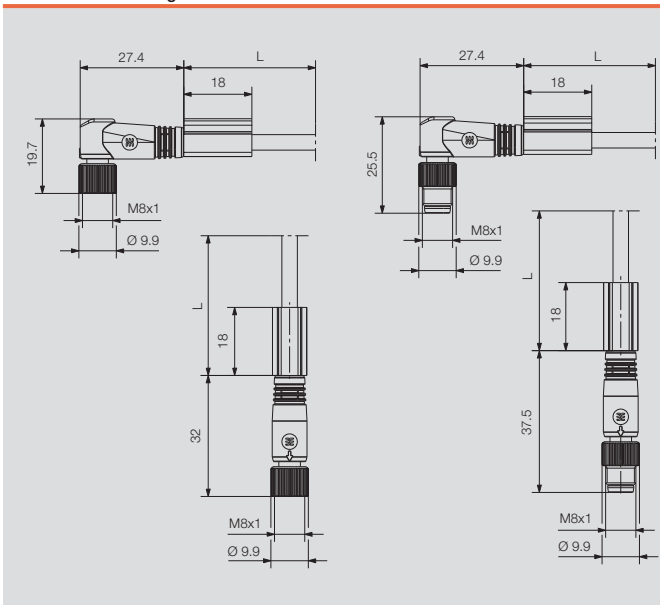

**M8 one end without connector snap-on connection**



**Ordering data**

Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Note	

3-pole	
Type	Order No.
SAIL-M8BGR-3-1.5V	1948710150
SAIL-M8BGR-3-1.5U	1827020150
SAIL-M8BGR-3-1.5Q	1948610150
SAIL-M8BWR-3-1.5V	1948720150
SAIL-M8BWR-3-1.5U	1827010150
SAIL-M8BWR-3-1.5Q	1948620150
Other versions on request	

4-pole	
Type	Order No.
SAIL-M8BGR-4-1.5V	1948730150
SAIL-M8BGR-4-1.5U	1948530150
SAIL-M8BGR-4-1.5Q	1948630150
SAIL-M8BWR-4-1.5V	1948740150
SAIL-M8BWR-4-1.5U	1948540150
SAIL-M8BWR-4-1.5Q	1948640150
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 65
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	



Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**


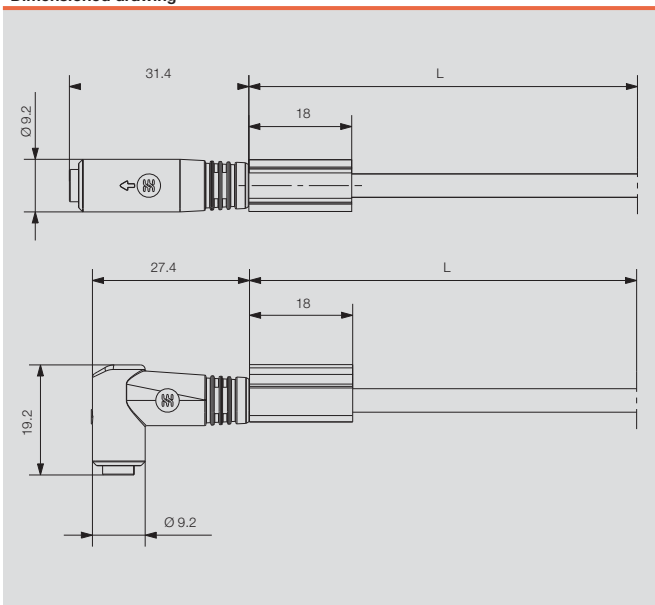


Sensor cables

M8 one end without connector with LED



Female



Ordering data

Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
<b>Note</b>	

2 LEDs

3-pole

Type	Order No.
SAIL-M8BW-3L1.5V	1927350150
SAIL-M8BW-3L1.5U	9457460150
SAIL-M8BW-3L1.5Q	1927090150
SAIL-M8BW-3L1.5QGE	1093210150
Other versions on request	

2 LEDs

4-pole

Type	Order No.
SAIL-M8BW-4L1.5V	1927360150
SAIL-M8BW-4L1.5U	1906400150
SAIL-M8BW-4L1.5Q	1927100150
SAIL-M8BW-4L1.5QGE	1093230150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data


Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable



Dimensioned drawing

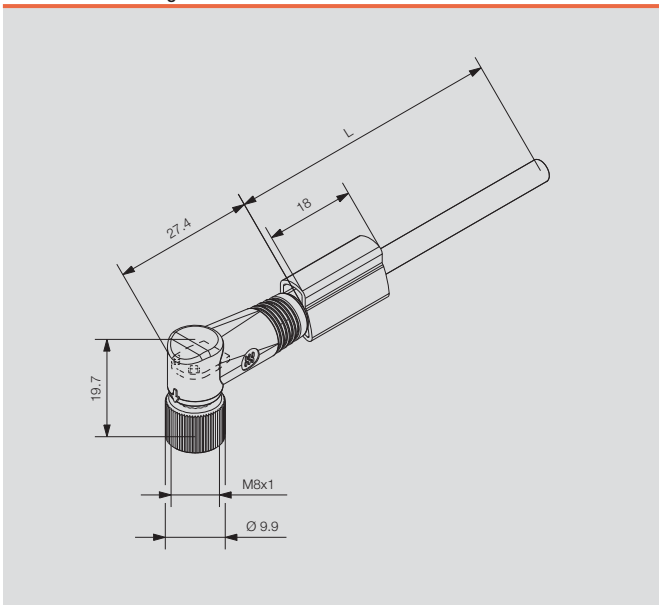

**M8 one end without connector shielded**



**Male Female**



**Ordering data**

Male, straight	
PUR	1.5 m
Male, angled	
PUR	1.5 m
Female, straight	
PUR	1.5 m
Female, angled	
PUR	1.5 m
<b>Note</b>	

**3-pole**

Type	Order No.
SAIL-M8G-3S1.5U	1906560150
SAIL-M8W-3S1.5U	1906580150
SAIL-M8BG-3S1.5U	1906600150
SAIL-M8BW-3S1.5U	1906620150
Other versions on request	

**4-pole**

Type	Order No.
SAIL-M8G-4S1.5U	1906570150
SAIL-M8W-4S1.5U	1906590150
SAIL-M8BG-4S1.5U	1906610150
SAIL-M8BW-4S1.5U	1906630150
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	




Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

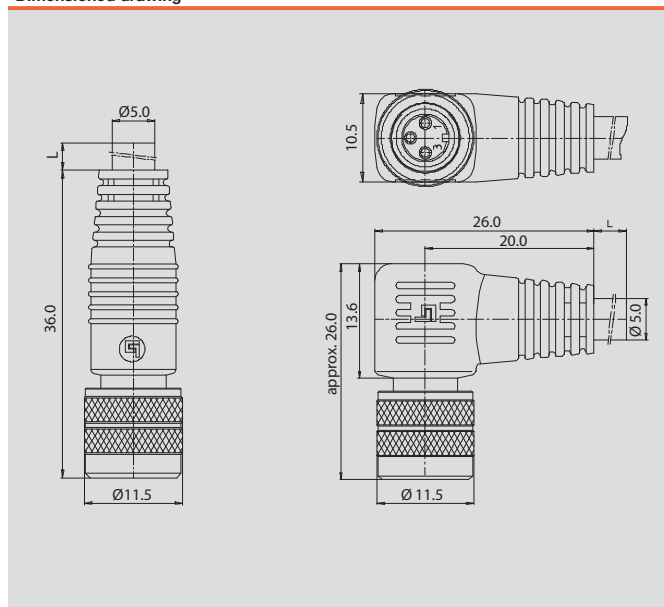

Sensor cables

M5 one end without connector



Ordering data

Male, straight	
PUR	1.5 m
Male, angled	
PUR	1.5 m
Female, straight	
PUR	1.5 m
Female, angled	
PUR	1.5 m
<b>Note</b>	

3-pole

Type	Order No.
SAIL-M5G-3P-1.5U	1854060150
SAIL-M5W-3P-1.5U	1873280150
SAIL-M5BG-3P-1.5U	1873290150
SAIL-M5BW-3P-1.5U	1873260150
Other versions on request	

4-pole

Type	Order No.
SAIL-M5G-4P-1.5U	1871700150
SAIL-M5W-4P-1.5U	1873240150
SAIL-M5BG-4P-1.5U	1873250150
SAIL-M5BW-4P-1.5U	1873270150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data

Rated current	1 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

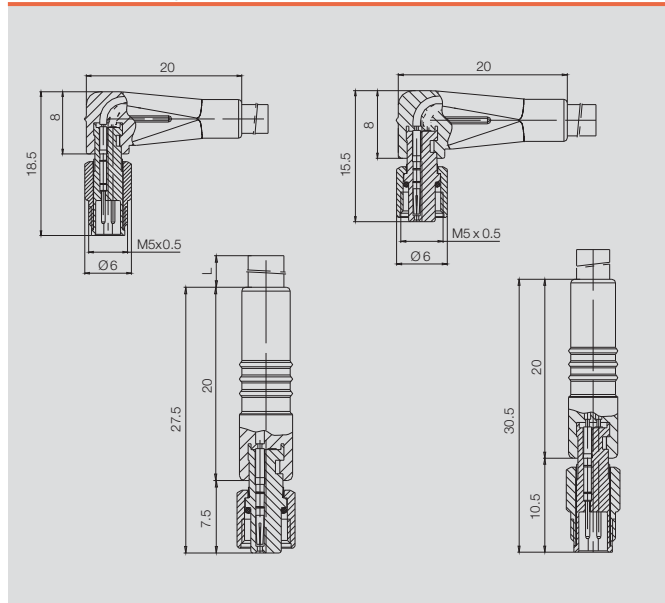





# Connecting cables

## M12



## M8



## M8 Snap connection



## Twin cabling



Many applications with sensors require suitable connecting cables. The connecting cables are available in different designs. The M12/M8 plug-in connectors are available in straight and 90° versions and also with LEDs.

- When plugged in, the M12 connecting cables comply with IP68 ingress protection class.
- The cable sheathing is black and made of polyurethane (PUR or PVC).
- The connecting cables are supplied with two marking sleeves. Corresponding tags TM-I 18 for the marking sleeves can be found in chapter I.


### Sensor cables

Weidmüller can supply various cable lengths as indicated in the following table:

#### Typical cable lengths are:

- 1.5 m
- 3.0 m
- 5.0 m
- 10.0 m





### Example of designation

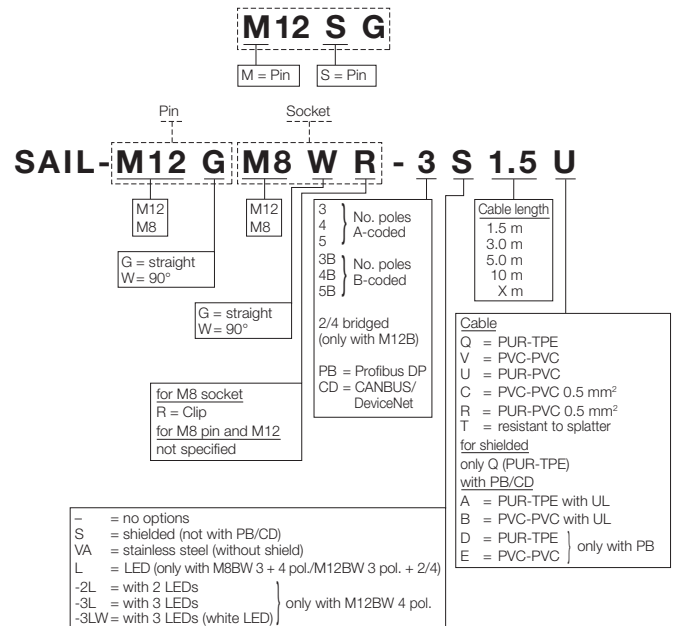

Connecting cables

M12 to M12

A-coded



Ordering data

Male, straight - Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
Male, angled - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
<b>Note</b>	

3-pole	
Type	Order No.
SAIL-M12GM12G-3-1.5V	1925300150
SAIL-M12GM12G-3-1.5U	9457230150
SAIL-M12GM12G-3-1.5Q	1926490150
SAIL-M12GM12G-3-1.5QGE	1093010150
SAIL-M12GM12G-3-1.5T	1021710150
SAIL-M12GM12W-3-1.5V	1925340150
SAIL-M12GM12W-3-1.5U	9457390150
SAIL-M12GM12W-3-1.5Q	1926530150
SAIL-M12GM12W-3-1.5QGE	1093050150
SAIL-M12GM12W-3-1.5T	1021720150
SAIL-M12WM12W-3-1.5V	1925380150
SAIL-M12WM12W-3-1.5U	1815670150
SAIL-M12WM12W-3-1.5Q	1926570150
Other versions on request	

4-pole	
Type	Order No.
SAIL-M12GM12G-4-1.5V	1925310150
SAIL-M12GM12G-4-1.5U	1906300150
SAIL-M12GM12G-4-1.5Q	1926500150
SAIL-M12GM12G-4-1.5QGE	1093020150
SAIL-M12GM12G-4-1.5T	1021730150
SAIL-M12GM12W-4-1.5V	1925350150
SAIL-M12GM12W-4-1.5U	9457310150
SAIL-M12GM12W-4-1.5Q	1926540150
SAIL-M12GM12W-4-1.5QGE	1093070150
SAIL-M12GM12W-4-1.5T	1021740150
SAIL-M12WM12W-4-1.5V	1925390150
SAIL-M12WM12W-4-1.5U	1906310150
SAIL-M12WM12W-4-1.5Q	1926580150
Other versions on request	

5-pole	
Type	Order No.
SAIL-M12GM12G-5-1.5V	1925320150
SAIL-M12GM12G-5-1.5U	9457340150
SAIL-M12GM12G-5-1.5Q	1926510150
SAIL-M12GM12G-5-1.5QGE	1093030150
SAIL-M12GM12G-5-1.5T	1011970150
SAIL-M12GM12W-5-1.5V	1925360150
SAIL-M12GM12W-5-1.5U	9457270150
SAIL-M12GM12W-5-1.5Q	1926550150
SAIL-M12GM12W-5-1.5QGE	1093080150
SAIL-M12GM12W-5-1.5T	1011990150
SAIL-M12WM12W-5-1.5V	1925400150
SAIL-M12WM12W-5-1.5U	9457900150
SAIL-M12WM12W-5-1.5Q	1926590150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

Technical data

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable





Dimensioned drawing

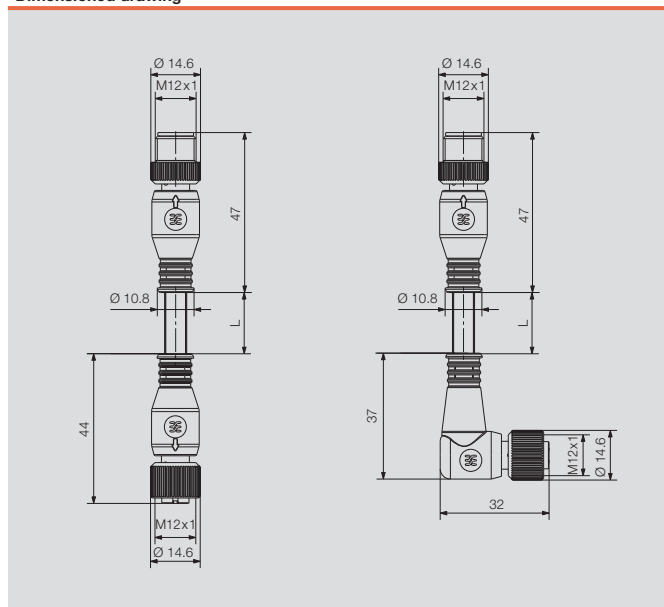



Connecting cables

M12 to M12, LED  
A-coded  
male, straight -  
female, angled



Ordering data

Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Resistant to welding beads	1.5 m
<b>Note</b>	

2 LEDs	3-pole
Type	Order No.
SAIL-M12GM12W-3L1.5V	1925410150
SAIL-M12GM12W-3L1.5U	9457790150
SAIL-M12GM12W-3L1.5Q	1926600150
SAIL-M12GM12W-3L1.5T	1004320150
Other versions on request	

2 LEDs	4-pole
Type	Order No.
SAIL-M12GM12W-4-2L1.5V	1925420150
SAIL-M12GM12W-4-2L1.5U	1906410150
SAIL-M12GM12W-4-2L1.5Q	1926610150
SAIL-M12GM12W-4-2L1.5T	1004310150
Other versions on request	

3 LEDs	4-pole
Type	Order No.
SAIL-M12GM12W-4-3L1.5V	1963930150
SAIL-M12GM12W-4-3L1.5U	1963910150
SAIL-M12GM12W-4-3L1.5Q	1232810150
SAIL-M12GM12W-4-3LW1.5QGE	1093060150
SAIL-M12GM12W-4-3LW1.5T	1020930150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

Technical data

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	





Chapter W includes additional technical specifications for the cable

Dimensioned drawing

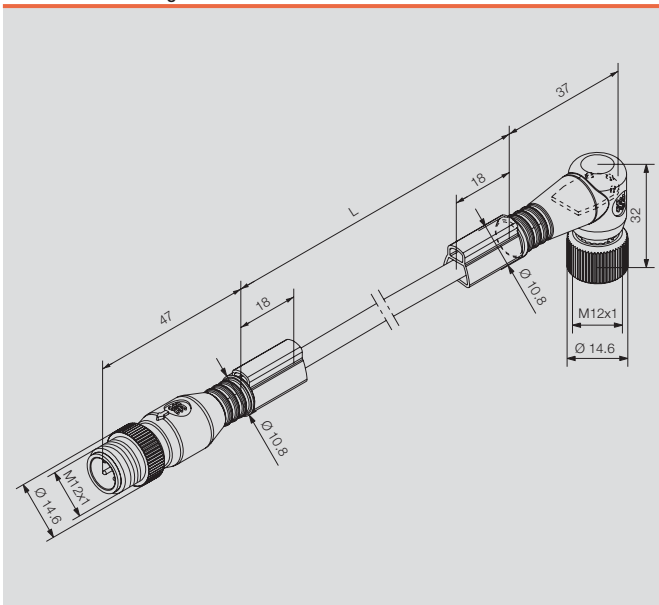

Sensor cables

Connecting cables  
M12 to M12  
A-coded  
shielded



Ordering data

<b>Male, straight - Female, straight</b>	
PUR halogen-free	1.5 m
<b>Male, straight - Female, angled</b>	
PUR halogen-free	1.5 m
<b>Male, angled - Female, angled</b>	
PUR halogen-free	1.5 m
<b>Note</b>	

3-pole

Type	Order No.
SAIL-M12GM12G-3S1.5Q	1058490150
SAIL-M12GM12W-3S1.5Q	1059470150
SAIL-M12WM12W-3S1.5Q	1059720150
Other versions on request	

4-pole

Type	Order No.
SAIL-M12GM12G-4S1.5Q	1058500150
SAIL-M12GM12W-4S1.5Q	1059480150
SAIL-M12WM12W-4S1.5Q	1059730150
Other versions on request	

5-pole

Type	Order No.
SAIL-M12GM12G-5S1.5Q	1058510150
SAIL-M12GM12W-5S1.5Q	1059540150
SAIL-M12WM12W-5S1.5Q	1059740150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data




Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

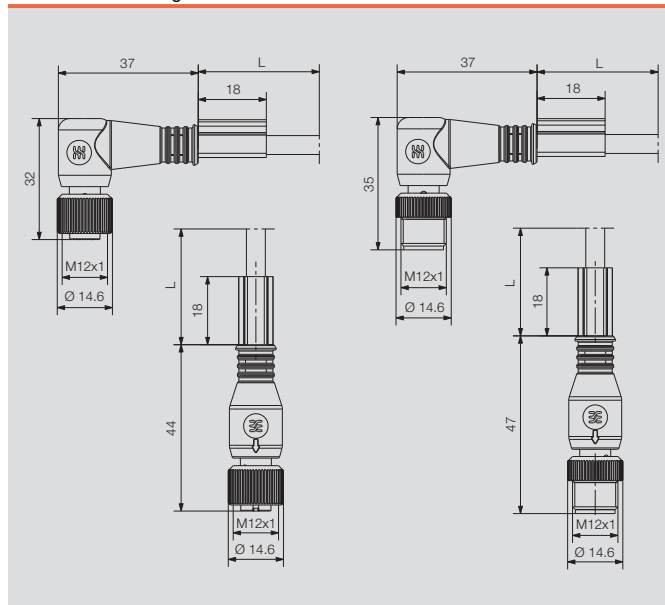

Connecting cables  
M12 to M8



Ordering data

Male, straight - Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Male, angled - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Note	

3-pole	
Type	Order No.
SAIL-M12GM8G-3-1.5V	1938170150
SAIL-M12GM8G-3-1.5U	9457770150
SAIL-M12GM8G-3-1.5Q	1938040150
SAIL-M12GM8W-3-1.5V	1938180150
SAIL-M12GM8W-3-1.5U	9457980150
SAIL-M12GM8W-3-1.5Q	1938050150
SAIL-M12WM8W-3-1.5V	1938190150
SAIL-M12WM8W-3-1.5U	1906330150
SAIL-M12WM8W-3-1.5Q	1938060150
Other versions on request	

4-pole	
Type	Order No.
SAIL-M12GM8G-4-1.5V	1938200150
SAIL-M12GM8G-4-1.5U	9456660150
SAIL-M12GM8G-4-1.5Q	1938070150
SAIL-M12GM8W-4-1.5V	1938210150
SAIL-M12GM8W-4-1.5U	9456670150
SAIL-M12GM8W-4-1.5Q	1938080150
SAIL-M12WM8W-4-1.5V	1938220150
SAIL-M12WM8W-4-1.5U	1906340150
SAIL-M12WM8W-4-1.5Q	1938090150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

Technical data

Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	



Chapter W includes additional technical specifications for the cable

Dimensioned drawing

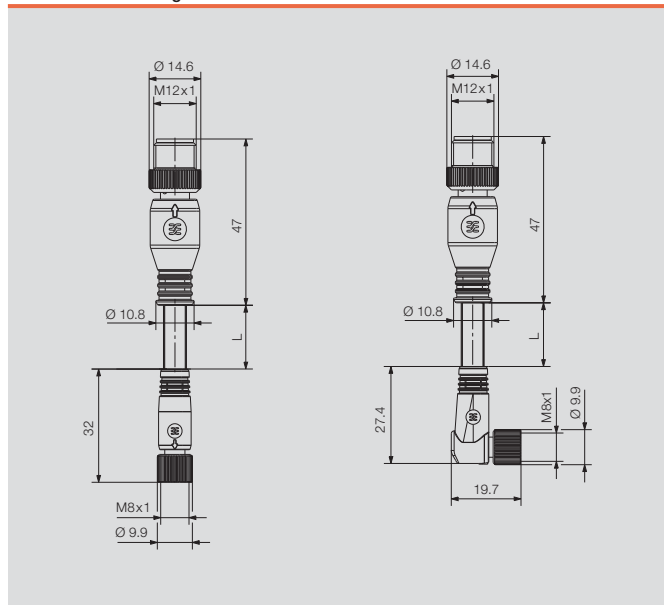

Sensor cables

Connecting cables  
M12 to M8  
snap-on connection



B

Ordering data

Male, straight - Female, straight	
PUR	1.5 m
Male, straight - Female, angled	
PUR	1.5 m
PUR halogen-free yellow	1.5 m
<b>Note</b>	

3-pole

Type	Order No.
SAIL-M12GM8GR-3-1.5U	1984530150
SAIL-M12GM8WR-3-1.5U	9457570150
SAIL-M12GM8WR-3-1.5QGE	1093150150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data




Rated current	4 A
Protection class	IP 65
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

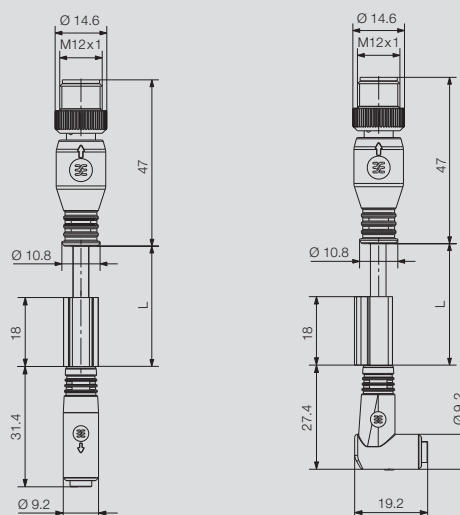

**Connecting cables**  
**M12 to M8 LED**



**Ordering data**

Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
<b>Note</b>	

**2 LEDs**

**3-pole**

Type	Order No.
SAIL-M12GM8W-3L1.5V	<b>1962290150</b>
SAIL-M12GM8W-3L1.5U	<b>9457760150</b>
SAIL-M12GM8W-3L1.5Q	<b>1962270150</b>
SAIL-M12GM8W-3L1.5QGE	<b>1093110150</b>
Other versions on request	

**2 LEDs**

**4-pole**

Type	Order No.
SAIL-M12GM8W-4L1.5V	<b>1962300150</b>
SAIL-M12GM8W-4L1.5U	<b>1906430150</b>
SAIL-M12GM8W-4L1.5Q	<b>1962280150</b>
SAIL-M12GM8W-4L1.5QGE	<b>1093130150</b>
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable




**Dimensioned drawing**

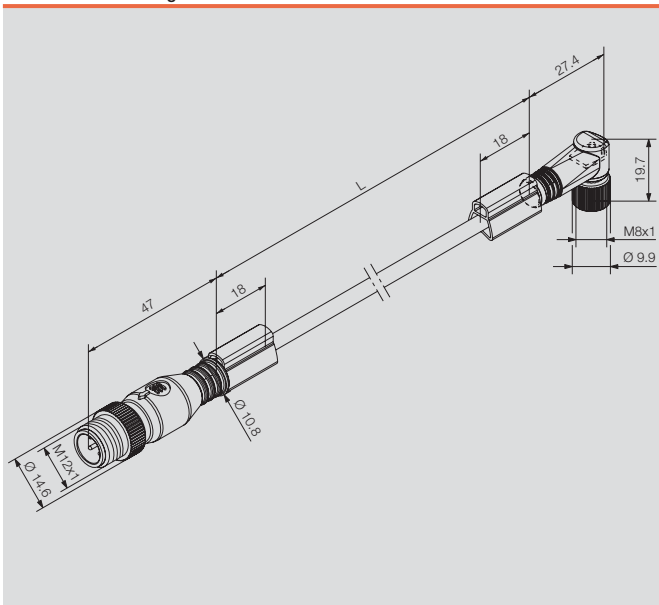



Sensor cables

Connecting cables  
M8 to M8



Ordering data

Male, straight - Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
PUR halogen-free yellow	1.5 m
Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Male, angled - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Note	

3-pole

Type	Order No.
SAIL-M8GM8G-3-1.5V	1927150150
SAIL-M8GM8G-3-1.5U	1824570150
SAIL-M8GM8G-3-1.5Q	1926890150
SAIL-M8GM8G-3-1.5QGE	1104470150
SAIL-M8GM8W-3-1.5V	1927170150
SAIL-M8GM8W-3-1.5U	1824580150
SAIL-M8GM8W-3-1.5Q	1926910150
SAIL-M8WM8W-3-1.5V	1927210150
SAIL-M8WM8W-3-1.5U	1857670150
SAIL-M8WM8G-3-1.5Q	1078750150
Other versions on request	

4-pole

Type	Order No.
SAIL-M8GM8G-4-1.5V	1927160150
SAIL-M8GM8G-4-1.5U	1880470150
SAIL-M8GM8G-4-1.5Q	1926900150
SAIL-M8GM8W-4-1.5V	1927180150
SAIL-M8GM8W-4-1.5U	1857660150
SAIL-M8GM8W-4-1.5Q	1926920150
SAIL-M8WM8W-4-1.5V	1927220150
SAIL-M8WM8W-4-1.5U	1857680150
SAIL-M8WM8W-4-1.5Q	1926960150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

Technical data




Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

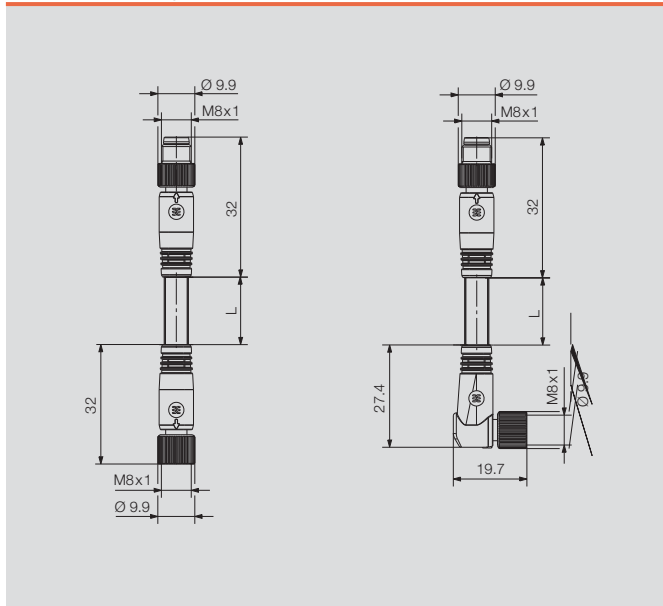

**Connecting cables**  
**M8 to M8**  
**snap-on connection**



**Ordering data**

Male, straight - Female, straight	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
Male, angled - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
<b>Note</b>	

**3-pole**

Type	Order No.
SAIL-M8GM8GR-3-1.5V	1948650150
SAIL-M8GM8GR-3-1.5U	1948470150
SAIL-M8GM8GR-3-1.5Q	1948550150
SAIL-M8GM8WR-3-1.5V	1948660150
SAIL-M8GM8WR-3-1.5U	1948480150
SAIL-M8GM8WR-3-1.5Q	1948560150
SAIL-M8WM8WR-3-1.5V	1948670150
SAIL-M8WM8WR-3-1.5U	1948490150
SAIL-M8WM8WR-3-1.5Q	1948570150
Other versions on request	

**4-pole**

Type	Order No.
SAIL-M8GM8GR-4-1.5V	1948680150
SAIL-M8GM8GR-4-1.5U	1948500150
SAIL-M8GM8GR-4-1.5Q	1948580150
SAIL-M8GM8WR-4-1.5V	1948690150
SAIL-M8GM8WR-4-1.5U	1948510150
SAIL-M8GM8WR-4-1.5Q	1948590150
SAIL-M8WM8WR-4-1.5V	1948700150
SAIL-M8WM8WR-4-1.5U	1948520150
SAIL-M8WM8WR-4-1.5Q	1948600150
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxx0150
	3.0 m	xxxxx0300
	5.0 m	xxxxx0500
	10.0 m	xxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 65
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	



Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

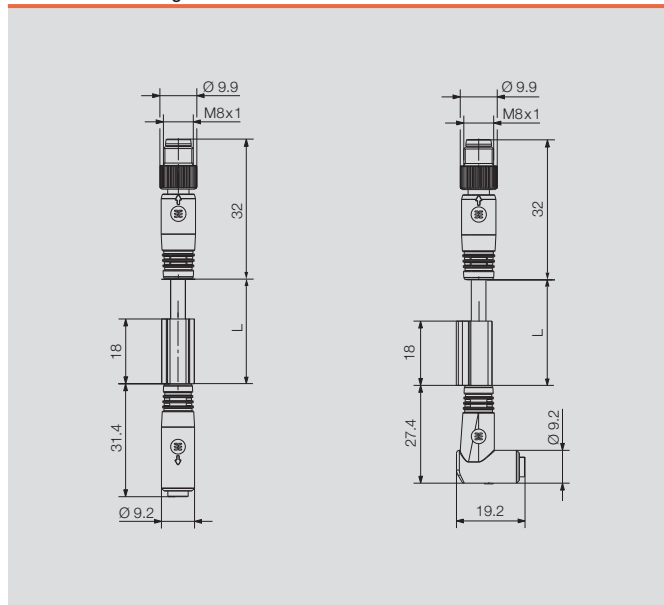

Sensor cables

Connecting cables  
M8 to M8 LED



Ordering data

Male, straight - Female, angled	
PVC	1.5 m
PUR	1.5 m
PUR halogen-free	1.5 m
<b>Note</b>	

2 LEDs

3-pole

Type	Order No.
SAIL-M8GM8W-3L1.5V	1927190150
SAIL-M8GM8W-3L1.5U	1877250150
SAIL-M8GM8W-3L1.5Q	1926930150
Other versions on request	

2 LEDs

4-pole

Type	Order No.
SAIL-M8GM8W-4L1.5V	1927200150
SAIL-M8GM8W-4L1.5U	1906450150
SAIL-M8GM8W-4L1.5Q	1926940150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data

Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

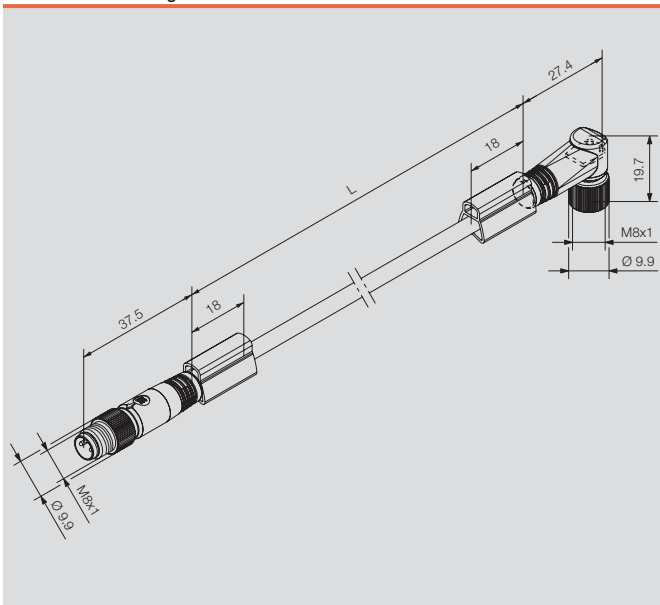



# Twin sensor cables with three plug-in connectors: M12/M8

## Twin sensor cables



In general, two sensor cables can be fed with a M12 connector to the distributor. A wide variety of wiring arrangements are possible with these cables. All M12 and M8 connections can be implemented.

Weidmüller has all the necessary components ready. With mechanical engineering, this type of application is an exception.


### 4-pole connection

In the SAI distributor, the 4 pole socket is fitted with pins 1, 3, 4 and 5. The 4 pole SAI plug is fitted with pins 1, 2, 3 and 4. This corresponds to market standards.


Special care must be taken when wiring combinations of 4-pole plugs and distributors.

### Designation




Twin plug  
Bifurcation open for "1" and "2" ends

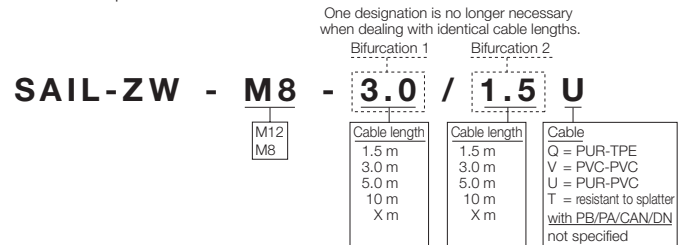

Twin plug  
Connecting cable

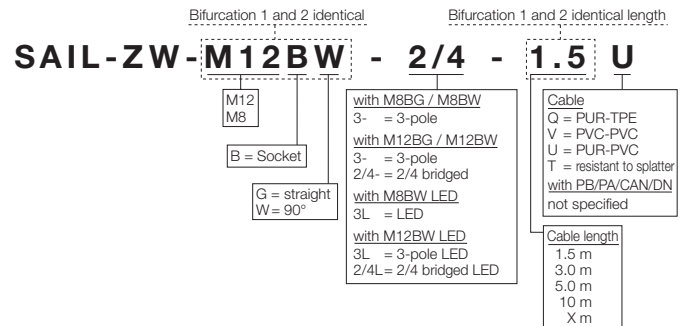

**Twin cabling**  
**M12 to M12**



**Ordering data**

Male straight - 2 females straight	
PUR	1.5 m
Male straight - 2 females angled	
PUR	1.5 m
Note	

Type	Order No.
SAIL-ZW-M12BG-3-1.5U	1005460150
SAIL-ZW-M12BW-3-1.5U	1005270150

Type	Order No.
SAIL-ZW-M12BW-3L1.5U	1912110150

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	




Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

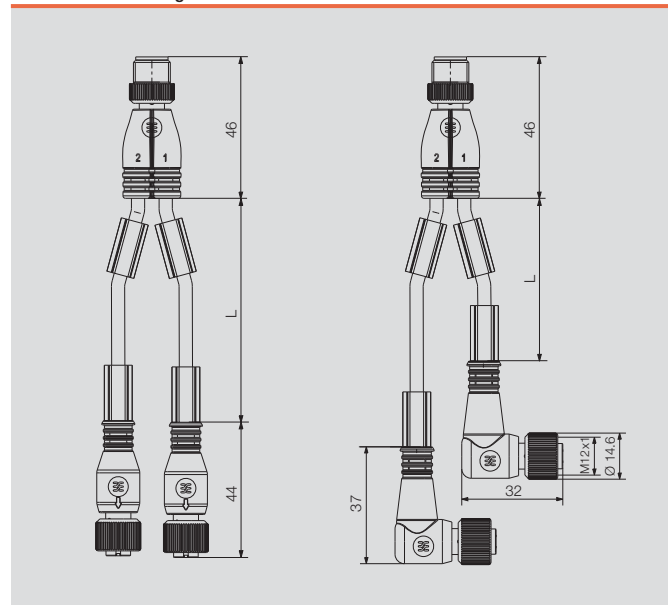

Sensor cables

Twin cabling  
M12 to M12  
bridge between  
pins 2 and 4



Ordering data

Male straight - 2 females straight	
PUR	1.5 m
Male straight - 2 females angled	
PUR	1.5 m
<b>Note</b>	

3-pole	
Type	Order No.
SAIL-ZW-M12BG-2/4-1.5U	1812550150
SAIL-ZW-M12BW-2/4-1.5U	1964280150

2 LEDs		3-pole	
Type	Order No.	Type	Order No.
SAIL-ZW-M12BW-2/4L1.5U	1964290150		

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data




Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

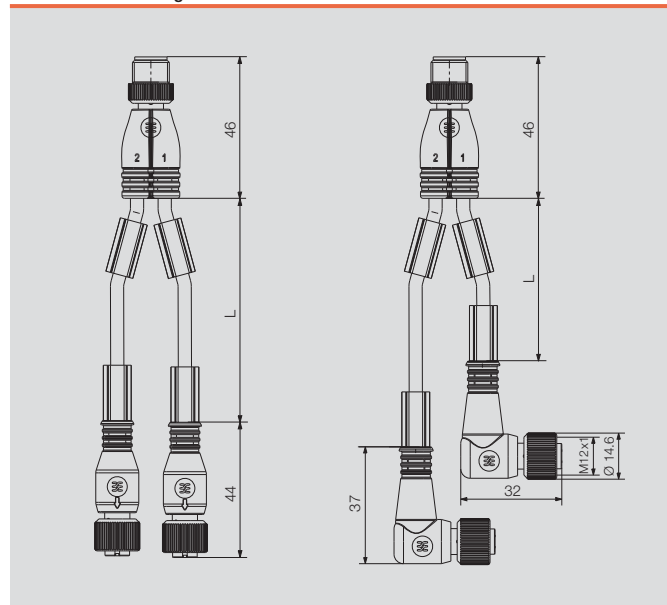

**Twin cabling**  
**M12 to M8**



**Ordering data**

Male straight - 2 females straight	
PUR	1.5 m
PUR halogen-free yellow	1.5 m
Male straight - 2 females angled	
PUR	1.5 m
PUR halogen-free yellow	1.5 m
<b>Note</b>	

Type	Order No.
SAIL-ZW-M8BG-3-1.5U	9457490150
SAIL-ZW-M8BG-3-1.5QGE	1093250150
Other versions on request	

Type	Order No.
SAIL-ZW-M8BW-3-1.5U	1964300150
SAIL-ZW-M8BW-3-1.5QGE	1093260150
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.25 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	60 V (3-pole) / 30 V (4-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

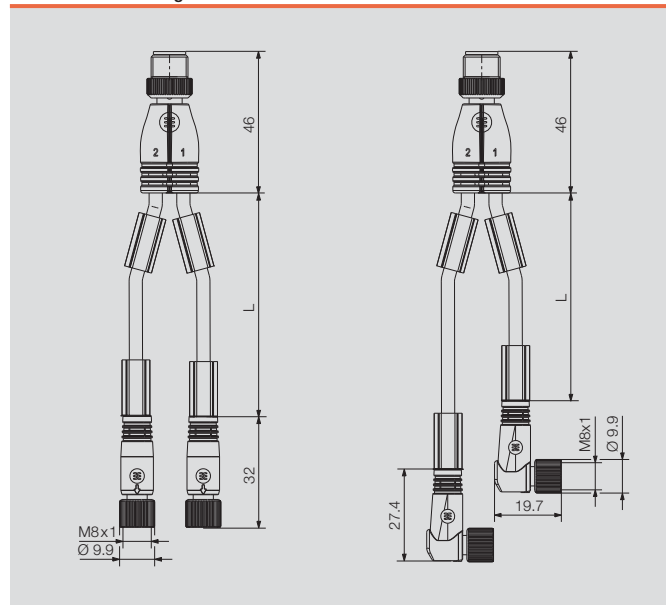







## B-coded M12 cables



Connector coding is very important whenever the potential for damage exists when connectors are incorrectly plugged together. This risk is particularly high when you are working with different voltages in your facility and these voltages must be plugged in. For example, it is not unusual to connect 110 or 230 V with a M12 plug-in connector. However if a 24 V electric potential is connected with a 110 or 230 V line, it will inevitably lead to destructive results. B-coding has been introduced for such cases. B-coded connectors are shaped so that they can not be fitted together unless extreme force is used. This coding makes it safe to use the standard M12 connector system in a single machine for different voltages which may exceed 24 V. For the SAI Active Universal System, the power plug is A-coded since it only provides 24 V. The Profibus DP also takes advantage of this coding scheme. It is currently the only bus system using B-coded M12 plugs for IP67-protected connections. In this case, special approved bulk stock cable is used instead of the power cables.

**M12 one end without connector unshielded B-coded**



**Ordering data**

<b>Male, straight</b>	
PUR halogen-free	1.5 m
<b>Male, angled</b>	
PUR halogen-free	1.5 m
<b>Female, straight</b>	
PUR halogen-free	1.5 m
<b>Female, angled</b>	
PUR halogen-free	1.5 m
<b>Note</b>	

**3-pole**

Type	Order No.
SAIL-M12G-3B-1.5Q	1057770150
SAIL-M12W-3B-1.5Q	1057800150
SAIL-M12BG-3B-1.5Q	1057740150
SAIL-M12BW-3B-1.5Q	1061890150

**4-pole**

Type	Order No.
SAIL-M12G-4B-1.5Q	1057780150
SAIL-M12W-4B-1.5Q	1057810150
SAIL-M12BG-4B-1.5Q	1057750150
SAIL-M12BW-4B-1.5Q	1061900150

**5-pole**

Type	Order No.
SAIL-M12G-5B-1.5Q	1057790150
SAIL-M12W-5B-1.5Q	1057820150
SAIL-M12BG-5B-1.5Q	1061880150
SAIL-M12BW-5B-1.5Q	1057760150

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	





Chapter W includes additional technical specifications for the cable

**Dimensioned drawing**

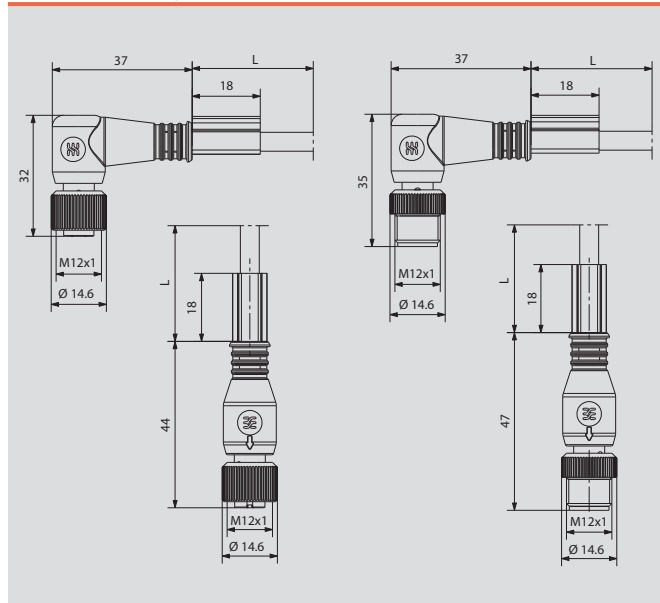

Power cables

M12 connecting cable  
unshielded  
B-coded



Ordering data

Male, straight - Female, straight	
PUR halogen-free	1.5 m
Male, straight - Female, angled	
PUR halogen-free	1.5 m
Male, angled - Female, angled	
PUR halogen-free	1.5 m
Male, angled - Female, straight	
PUR halogen-free	1.5 m
<b>Note</b>	

3-pole

Type	Order No.
SAIL-M12GM12G-3B-1.5Q	1057830150
SAIL-M12GM12W-3B-1.5Q	1057900150
SAIL-M12WM12W-3B-1.5Q	1061910150
SAIL-M12WM12G-3B-1.5Q	1057870150
Other versions on request	

4-pole

Type	Order No.
SAIL-M12GM12G-4B-1.5Q	1057840150
SAIL-M12GM12W-4B-1.5Q	1057910150
SAIL-M12WM12W-4B-1.5Q	1061920150
SAIL-M12WM12G-4B-1.5Q	1057880150
Other versions on request	

5-pole

Type	Order No.
SAIL-M12GM12G-5B-1.5Q	1057850150
SAIL-M12GM12W-5B-1.5Q	1057920150
SAIL-M12WM12W-5B-1.5Q	1061930150
SAIL-M12WM12G-5B-1.5Q	1057890150
Other versions on request	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data

Rated current	4 A
Protection class	IP 67
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	250 V (3- and 4-pole) / 125 V (5-pole)
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

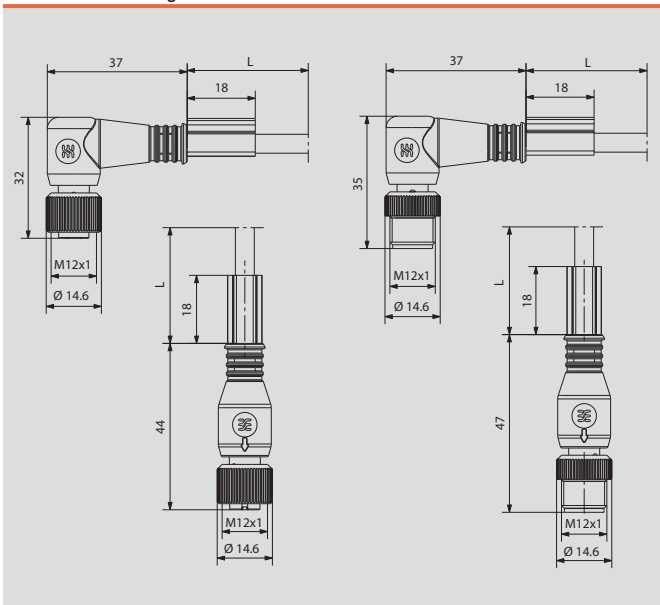



# Valve plug, ISO 4400



B

Machine builders frequently need different cable lengths for valve plugs. Valve plugs with free cable ends can be used to adjust the cable exactly to the lengths required.

Weidmüller can of course also supply valve plugs as connecting cables with M12 plugs.

The status of the valve plug is shown by an LED. Every valve plug is fitted with a protective circuit.


The Weidmüller range includes valve plugs of type A, B and C to DIN and industry standards.

Weidmüller plugs comply with IP67 ingress protection class when plugged in.


The outgoing direction is also crucial. Weidmüller can supply 0° versions, i.e. the outgoing direction of the cable is at the PE contact.

**Valve plug Type A**

**Valve plug Type B**

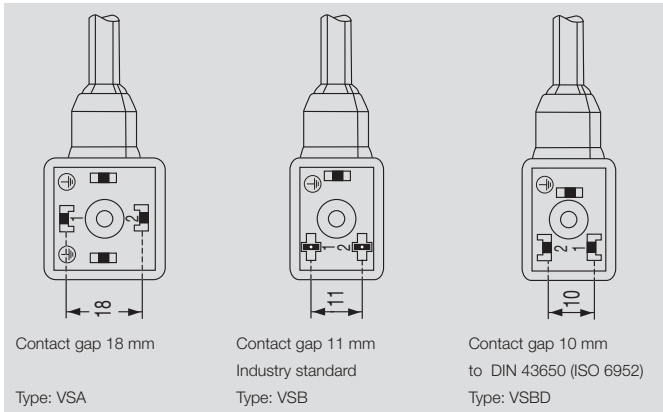


**Valve plug Type C**

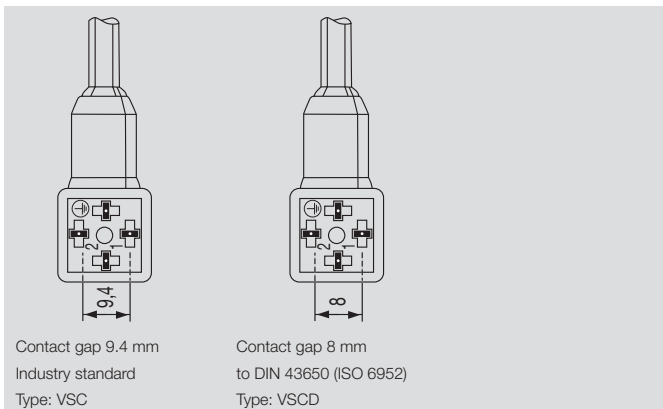

## Types

Type	Contact gap
Type A	18 mm
Type B industry standard	11 mm
Type B DIN	10 mm
Type C industry standard	9.4 mm
Type C DIN	8.0 mm

## Example of designation

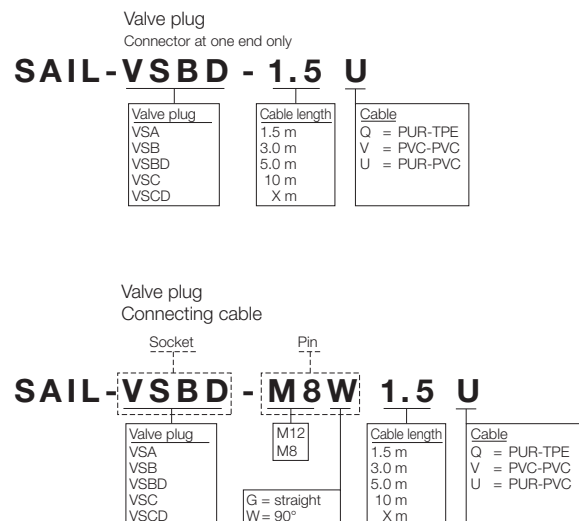

Design A



B

Ordering data

Open cable end - valve plug	1.5 m
Male straight - valve plug	1.5 m
Male angled - valve plug	1.5 m
Note	

A	
Type	Order No.
SAIL-VSA-1.5U	9457710150
SAIL-VSA-M12G-1.5U	9457040000
SAIL-VSA-M12W-1.5U	1857690150
Other versions on request	


Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed to order other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data

Sheathing colour	grey
Sheath material	PUR
Rated current	4 A
Protection class	IP 67
Core cross-section	0.75 mm <sup>2</sup>
Contact surface	tinned
Temperature range of housing	-25...+85 °C
Rated voltage	24 V
(acc. to VDE standard 0110 ISO group C)	

L in the drawing is the cable length

Dimensioned drawing

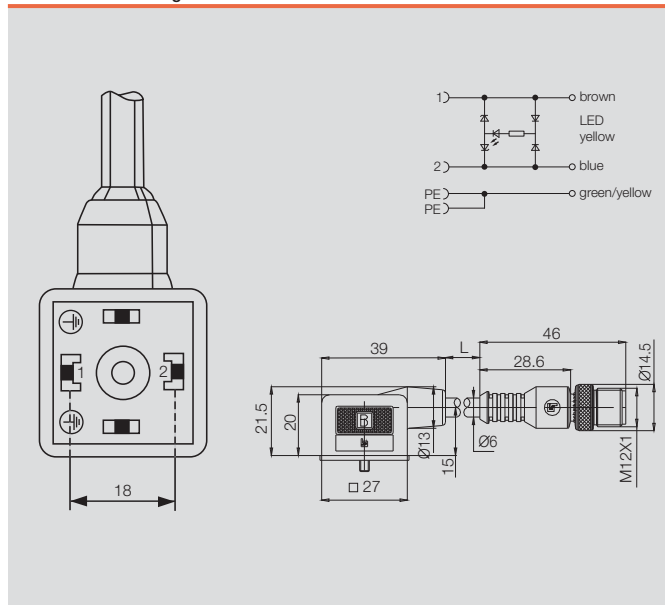

## Valve cables

### Design B/BD

B = Industrial standard  
BD = DIN Standard



## B

### Ordering data

<b>Open cable end - valve plug</b>	1.5 m
<b>Male straight - valve plug</b>	1.5 m
<b>Male angled - valve plug</b>	1.5 m
<b>Note</b>	

### B

Type	Order No.
SAIL-VSB-1.5U	9457930150
SAIL-VSB-M12G-1.5U	9457680150
SAIL-VSB-M12W-1.5U	1857700150
Other versions on request	

### BD

Type	Order No.
SAIL-VSBD-1,5U	9456070150
SAIL-VSBD-M12G-1.5U	9457780150
SAIL-VSBD-M12W-1.5U	1857710150
Other versions on request	

### Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed to order other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

### Technical data

Sheathing colour	grey
Sheath material	PUR
Rated current	4 A
Protection class	IP 67
Core cross-section	0.75 mm <sup>2</sup>
Contact surface	tinned
Temperature range of housing	-25...+85 °C
Rated voltage	24 V
(acc. to VDE standard 0110 ISO group C)	

L in the drawing is the cable length

### Dimensioned drawing

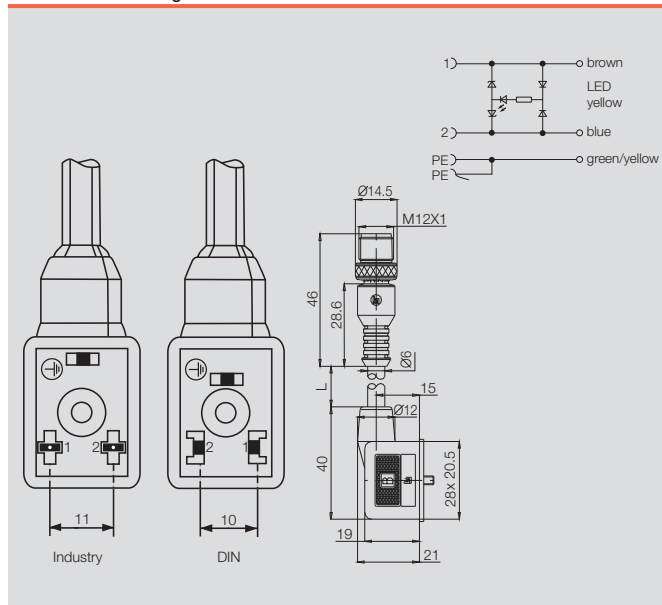

**Design C/CD**

C = Industrial standard  
 CD = DIN Standard



**Ordering data**

<b>Open cable end - valve plug</b>	1.5 m
<b>Male straight - valve plug</b>	1.5 m
<b>Male angled - valve plug</b>	1.5 m
<b>Note</b>	

C	
Type	Order No.
SAIL-VSC-1.5U	9457920150
SAIL-VSC-M12G-1.5U	9457400150
SAIL-VSC-M12W-1.5U	1857720150
Other versions on request	

CD	
Type	Order No.
SAIL-VSCD-1.5U	9456240150
SAIL-VSCD-M12G-1.5U	9456170150
SAIL-VSCD-M12W-1.5U	1857730150
Other versions on request	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed to order other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Sheathing colour	grey
Sheath material	PUR
Rated current	4 A
Protection class	IP 67
Core cross-section	0.5 mm <sup>2</sup>
Contact surface	tinned
Temperature range of housing	-25...+85 °C
Rated voltage	24 V
(acc. to VDE standard 0110 ISO group C)	

L in the drawing is the cable length

**Dimensioned drawing**

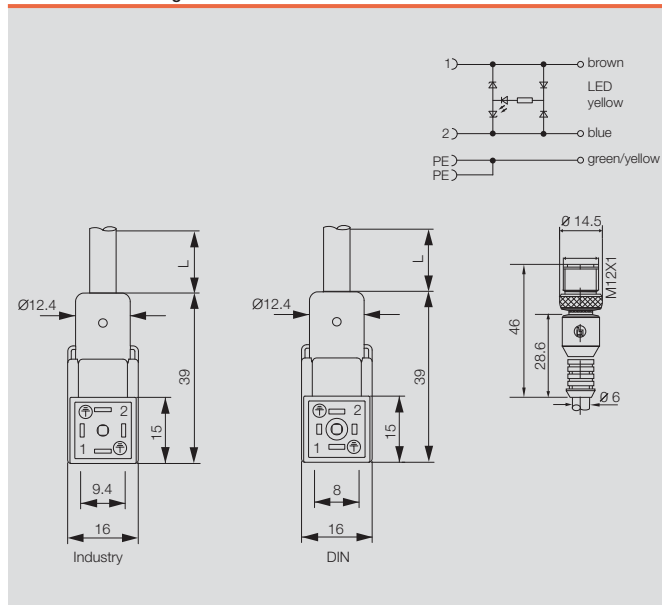



# Introduction

## Type A



When building special machines, individual cable lengths are frequently required which are then joined directly to Weidmüller's IDC distributors. Our product portfolio of course contains a corresponding valve plug for such applications.

## Type B



This valve plug has a transparent enclosure with integral seal. In addition, a protective sleeve can be slipped over the cable to protect the connected line. The connection cross-section is 0.5 mm<sup>2</sup> for direct connection to our SAI IDC distributor. The status of the valve plug is indicated by an LED. All valve plugs are fitted with protective circuits.

## Type C




The Weidmüller range includes valve plug forms A, B and C to DIN and industry standards. The plug conforms to ingress protection class IP 67 when plugged in.

### Type

Type	Contact gap
Type A	18 mm
Type B industry standard	11 mm
Type B DIN	10 mm
Type C industry standard	9.4 mm
Type C DIN	8.0 mm

### Valve plug Type A



Contact gap 18 mm

Type VSA

### Valve plug Type B



Contact gap 11 mm industry standard

Type VSB



Contact gap 10 mm to DIN 43650 (ISO 6952)

Type VSBD

### Valve plug Type C



Contact gap 9.4 mm industry standard

Type VSC



Contact gap 8 mm to DIN 43650 (ISO 6952)

Type VSCD

**Design A**

Suitable for IDC plug-in connectors and protective hose connection



**B**

**Ordering data**

Open cable end - valve plug	1.5 m
Note	

**A**

Type	Order No.
SAIL-VSA-1.5U(0.5)	1845120150
Supplied without protective hose	

**Standard cable lengths**


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed to order other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

**Technical data**

Sheathing colour	black
Sheath material	PUR
Rated current	4 A
Protection class	IP 67
Core cross-section	0.5 mm <sup>2</sup>
Contact surface	tinned
Temperature range of housing	-25...+85 °C
Rated voltage	24 V
(acc. to VDE standard 0110 ISO group C)	

L in the drawing is the cable length

**Dimensioned drawing**

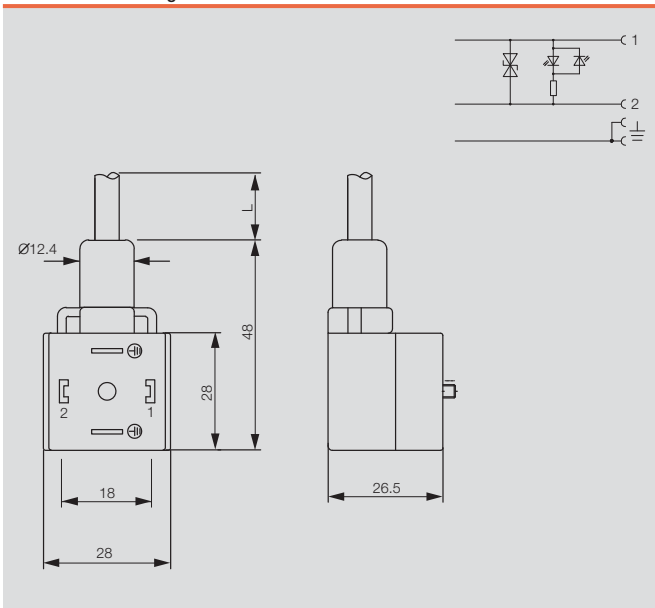

Valve cables

Design B/BD

B = industry standard  
 BD = DIN standard

Suitable for IDC  
 plug-in connectors and protective  
 hose connection



B

Ordering data

Open cable end - valve plug	1.5 m
Note	

B

Type	Order No.
SAIL-VSB-1.5U(0.5)	1845140150
Supplied without protective hose	

BD

Type	Order No.
SAIL-VSBD-1.5U(0.5)	1845160150
Supplied without protective hose	

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed to order other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data

Sheathing colour	black
Sheath material	PUR
Rated current	4 A
Protection class	IP 67
Core cross-section	0.5 mm <sup>2</sup>
Contact surface	tinned
Temperature range of housing	-25...+85 °C
Rated voltage	24 V
(acc. to VDE standard 0110 ISO group C)	

L in the drawing is the cable length

Dimensioned drawing

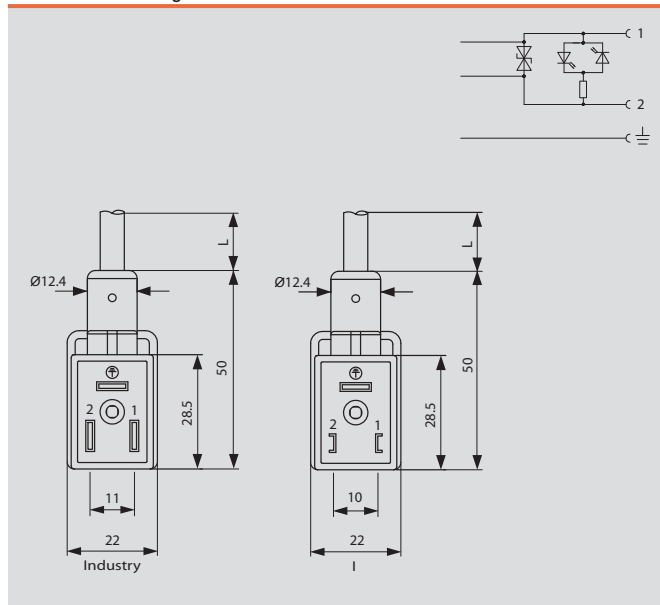

## Cables 3, 4, 5 poles



Weidmüller can provide the following types of cables for connecting sensors and actuators:

- The outer sheathing of the cables is made from polyurethane and the inner stranded wires have PVC insulation.
- They are available with 3, 4 and 5 poles.
- In addition, the cables are also available with PVC outer sheathing and PVC insulation internally.

B

### Ordering data

PUR	Qty.	Order No.
SAIH-SLL-3x0.34mm <sup>2</sup> (PUR)	100 m	1902110000
SAIH-SLL-4x0.25mm <sup>2</sup> (PUR)	100 m	1902120000
SAIH-SLL-4x0.34mm <sup>2</sup> (PUR)	100 m	1902130000
SAIH-SLL-3x0.25mm <sup>2</sup> (PUR)	100 m	1902140000
SAIH-SLL-5x0.25mm <sup>2</sup> (PUR)	100 m	1902100000
<b>PUR halogen-free</b>		
SAIH-SLL-3x0.34mm <sup>2</sup> (TPE)	100 m	1022940000
SAIH-SLL-4x0.34mm <sup>2</sup> (TPE)	100 m	1022950000
SAIH-SLL-5x0.34mm <sup>2</sup> (TPE)	100 m	1022960000
SAIH-SLL-3x0.25mm <sup>2</sup> (TPE)	100 m	1022970000
SAIH-SLL-4x0.25mm <sup>2</sup> (TPE)	100 m	1022980000
<b>PVC</b>		
SAIH-SLL-3x0.34mm <sup>2</sup> (PVC)	100 m	1902160000
SAIH-SLL-4x0.25mm <sup>2</sup> (PVC)	100 m	1902170000
SAIH-SLL-4x0.34mm <sup>2</sup> (PVC)	100 m	1902180000
SAIH-SLL-3x0.25mm <sup>2</sup> (PVC)	100 m	1902190000
SAIH-SLL-5x0.25mm <sup>2</sup> (PVC)	100 m	1902150000
<b>Information</b>		

### Technical data

Colour		black
Cross-section	mm <sup>2</sup>	0.25 ... 0.34
Qty.		100 Meter

### Information

## Bus cables



Owing to their easy assembly and adaptability, Weidmüller distributors have become very popular among machine manufacturers. For such applications, Weidmüller can also supply corresponding bus cables for custom assembly.

The bus cables are available in three different versions. All bus cables are suitable for moving cable carriers and are available by the metre. All three trunk cables can be ordered in individual lengths. A typical order quantity is a 500 metre drum. The colour coding of wires conforms to the standard in mechanical engineering.

The connection hoods of the M12 SAI distributors are always fitted with the same terminals so that only one type of cable is required.

### Advantages of bus cables supplied by the metre:

- Special lengths for bus cables
- No cable waste
- No storage space required for different cable lengths
- Bulk stock will be cut to desired length.

### Ordering data

Type	Qty.	Order No.
SAIH-SLL 3 x 0.75 – 16 x 0.34	1 m	9457560000
SAIH-SLL 5 x 0.75 – 16 x 0.34	1 m	9457970000
SAIH-SLL 3 x 0.75 – 8 x 0.34	1 m	9457420000

# Fieldbus, data cables and accessories

<b>Fieldbus, data cables and accessories</b>	Introduction	C.2
	Fieldbus distributor - Overview	C.4
	PROFIBUS-DP - cables	C.6
	PROFIBUS-DP - connectors (M12, Sub-D)	C. 10
	PROFIBUS-DP - FBCon T-distributor	C. 22
	PROFIBUS-PA - cables	C. 26
	PROFIBUS PA - connectors	C. 31
	PROFIBUS-PA - FBCon T-distributor	C. 34
	PROFIBUS-PA - FBCon T-distributor with surge protection	C. 40
	PROFIBUS-PA - FBCon T-distributor ATEX Ex(ia)	C. 50
	CANopen & DeviceNet™ - cables (M12, M8)	C. 58
	CANopen & DeviceNet™ - connectors	C. 63
	ASI - Cables	C. 64
	ASI - T-piece	C. 65
	Ethernet cables	C. 66
	Ethernet plug-in connector	C. 70
	FOUNDATION Fieldbus - connector (7/8")	C. 72
	Accessories cable glands	C. 73

## Bus cables

The bus system lies at the heart of automation engineering. High quality products are essential here if you hope to achieve long term, smooth functionality.

It's not only the slaves and controllers that play a significant role; the type of cables and connection mechanisms in use are also very important. The Weidmüller bus cables are the perfect solution here. The products which we manufacture ourselves (used, for example, in the Profibus, industrial Ethernet and CANopen/DeviceNet sectors) have a 360 degree shielding

within the moulding. This provides effective protection for signal and data transmission.

Delivery times are another decisive factor. Our special production strategy allows us to quickly manufacture parts that are customised to a specific order. We have a dedicated department that is focussed on this strategy and located near the Detmold central warehouse in order to keep delivery times to a minimum.



Bus cables: shown here in the standard colours:

blue (Profibus-PA Ex i), black (CANopen/DeviceNet or Profibus-PA), magenta (Profibus-DP) and green (industrial Ethernet) together with the sensor cables



Cables



M12 plug-in connector



Sub-D connector



FBCon T-distributor




# System description, fieldbus components

FBCon fieldbus distributors are available in industrial and Ex(ia) versions. They are used for coupling 1- 8field devices or sensors. The connection is made via spur. The spur is connected by an M12 plug in connector or directly via an EMC cable gland. The communication and device powering is handled by a common 2-core wire.

The distributors offer the following features irrespective of the version:

- Tension clamp connection technology
- Surge protection for the main line
- Current limiter for each stub line
- EMC cable gland
- M12 plug in connectors
- External earth stud
- Interruption-free bus operation
- Industrial specification
- Bus termination integrated (non EX)
- Ⓜ ATEX version
- Pressure equalising element
- IP65, IP66, IP67 Ingress protection class
- Stainless steel versions
- PROFIBUS-PA compatible

## Typical PROFIBUS system layout

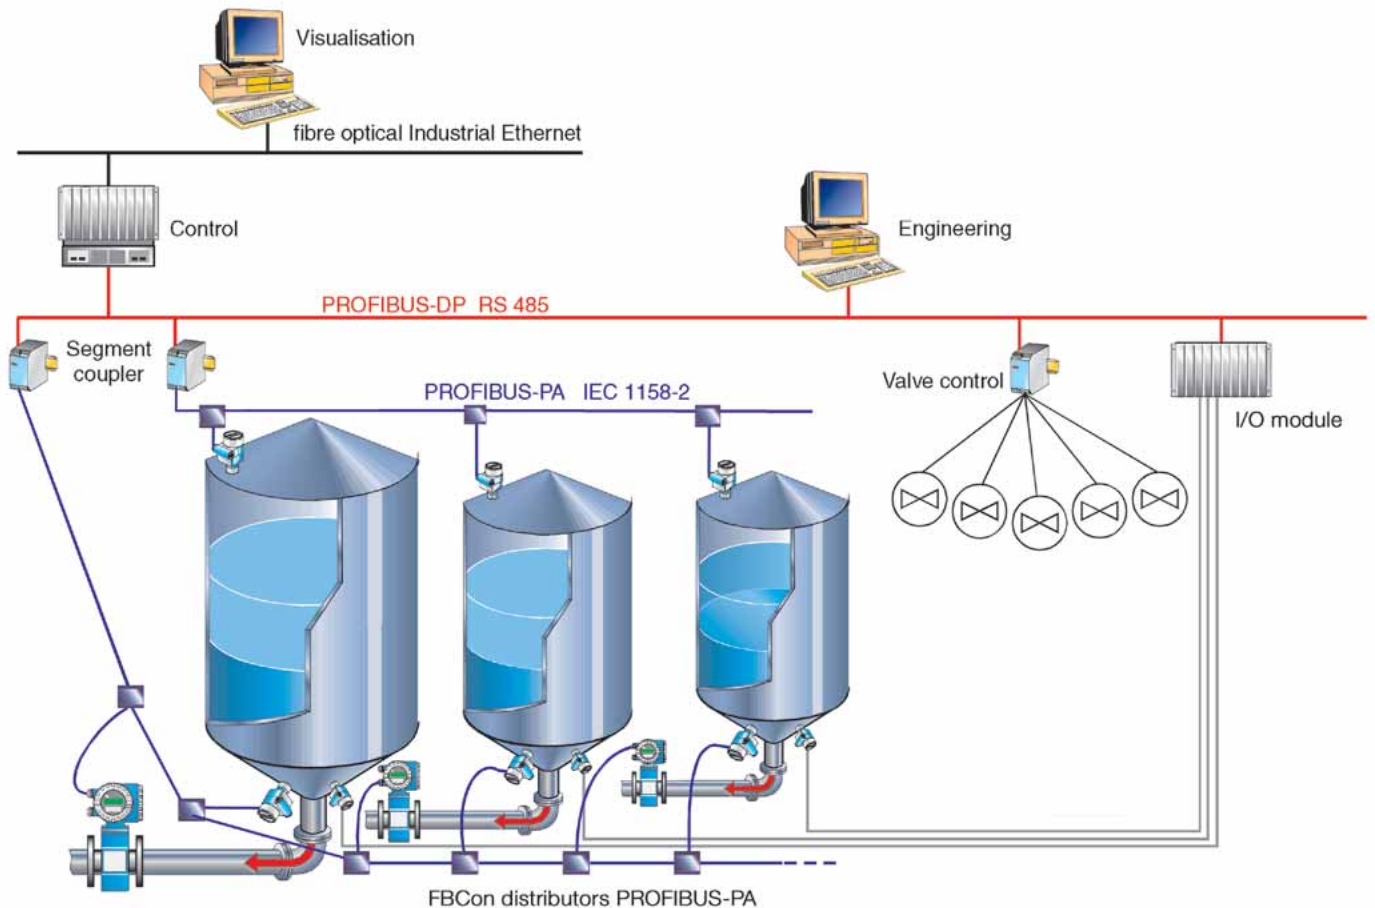


## Product coding

The FBCon family of distributors includes various forms.  
The product name indicates the respective features as follows:

FBCon	Field Bus Connection
PA	PROFIBUS-PA Process Automation
DP	PROFIBUS-DP Decentralised Periphery
SS	Stainless Steel
CG	Stainless steel cable gland on stainless steel housing. On standard aluminium housings, the cable gland is nickel-plated brass.
PCG	Plastic Cable Gland
CG/M12	M12 plug-in connector for the stub cables and cable gland for the trunk cable
1way	Number of outgoing stub lines
Limiter	Current limiter: protects the PROFIBUS-PA network in the event of an overload in the stub line
OVP	Surge protection: protects the system in the event of a voltage surge
EX	Approved for potentially explosive areas
ATEX	For explosive atmospheres

The standard distributors are grey. The Ex approved distributors are painted blue.

PROFIBUS-PA distributors are generally equipped with a switch in terminating resistor. In potentially explosive areas, the terminating resistor is manufactured with a separate box. This must be used instead of the right-hand cable gland. In the case of PROFIBUS-DP, an additional external 24 V DC power supply is required. This makes the terminator independent of the last station in the network.

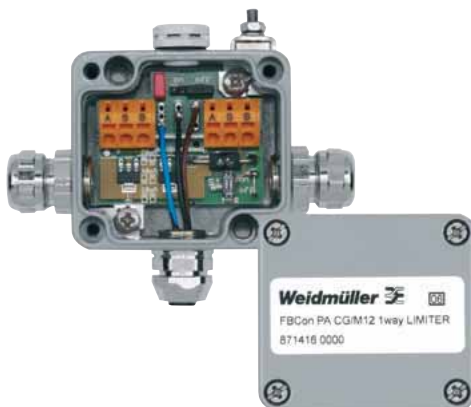

**FBCon PA CG/M12 1way Limiter**



**FBCon SS PCG 1way**





**FBCon PA CG 1way Ex**





PROFIBUS-DP bulk lengths

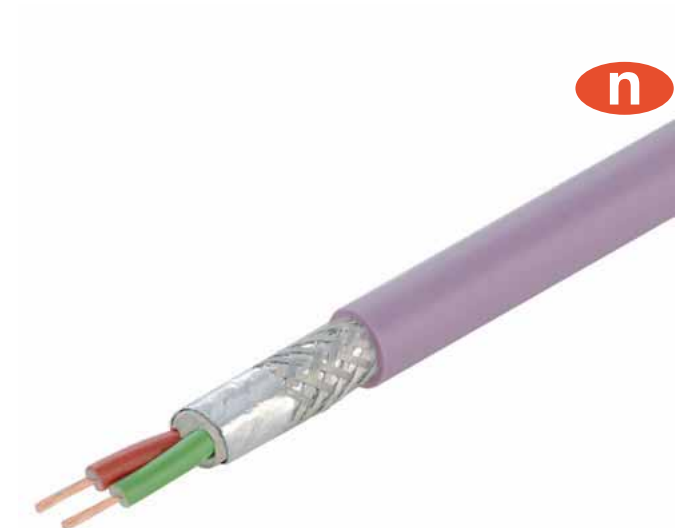

n

PROFIBUS-DP bulk lengths

Ordering data

	Type	Order No.
Metre goods	SAIH-PB-2X0.24-PUR	123262000


Technical data

Electrical characteristics at 20 °C	Requirement	Test specifications
Conductor resistance		EN 50 289 Parts 1-2
AWG 24	≤ 84.0 Ω/km	
Insulation resistance	≥ 1 GΩ • km	EN 50 289 Parts 1-4
Operational capacity	A/A	EN 50 289 Parts 1-5
at 800 Hz	≤ 35 nF/km	
Capacitive earth coupling		EN 50 289 Parts 1-5
at 800 Hz	< 1500 pF/km	
Characteristic impedance		EN 50 289 Parts 1-11
at 9.6 kHz	300 Ω (RW)	
at 38.4 kHz	(185 ± 20) Ω	
at 3-20 MHz	(150 ± 15) Ω	
Conductor attenuation (nominal values)		EN 50 289 Parts 1-8
AWG 24		
at 9.6 kHz	3 dB/km	
at 38.4 kHz	5 dB/km	
at 4 MHz	26 dB/km	
at 16 MHz	55 dB/km	
Test voltage (U <sub>50</sub> ) (50 Hz, 1 min.)		EN 50 289 Parts 1-3
Wire/wire	500 V	
Wire/shield	500 V	

Thermal characteristics	Requirement
Permitted operating temperature range	
Static usage:	
TPE-U sheathing	-40°C to +70°C
Dynamic usage (routing/installation):	
TPE-U sheathing	-20 °C to +60 °C


Mechanical characteristics	Requirement
Max. permitted strain load:	
Static	50 N/mm <sup>2</sup>
Dynamic	20 N/mm <sup>2</sup>
Bending radius *)	Stranded Litz conductor (AWG 24)
simple	7.5 x d
multiple	15 x d

PROFIBUS-DP bulk lengths



PROFIBUS-DP bulk lengths

n

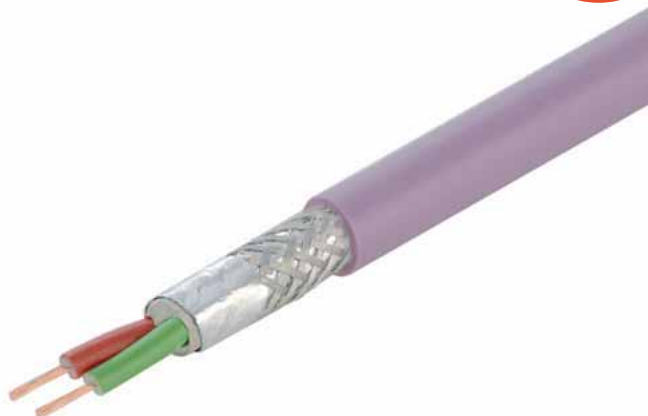

Fieldbus, data cables and accessories

C

Ordering data

Metre goods	<b>Type</b> SAIH-PB-2X0.34-PVC DE	<b>Order No.</b> 1933640000
-------------	--------------------------------------	--------------------------------

Technical data

Assembly		
Wire	Conductor: copper wire, without insulation, AWG 22, 0.64 mm Ø nominal Insulation: PE foam, 2.55 mm Ø nominal	
Pair	2 wires according to 4.1 (red, green) to pair stranded, 5.1 mm Ø nominal	
Wrapping	Plastic foil, 5.2 mm Ø nominal	
Shield	a) AL foil, 5.4 mm Ø nominal b) Braiding tin-plated copper, coverage approx. 60 %, 6.0 mm Ø nominal	
Outer cladding	PVC YM, 7.8 ±0.2 mm Ø nominal	
Electrical characteristics at 20 °C		
Conductor resistance	≤ 55 Ω/km	
Insulation resistance	≥ 1 GΩ • km	
Operational capacity	30 pF/m nominal	
Characteristic impedance	9.6 KHz (RW)	270 Ω
	38.4 KHz (RW)	185 Ω
	3 – 20 MHz	150 ± 15 Ω
Attenuation	9.6 KHz	2.2 dB/Km
	38.4 KHz	3.4 dB/Km
	100 KHz	4.5 dB/Km
	1 MHz	11.5 dB/Km
	3 MHz	18.2 dB/Km
	10 MHz	33.2 dB/Km
Test voltage (50 Hz, 1 min.)	Wire/wire	1.5 kVeff
	Wire/shield	1.5 kVeff
Mechanical and thermal characteristics		
Temperature range	Stationary	-40 °C to +70 °C
	moving	
Min. permitted bending radius	Once	1.5 kVeff
	Multiple	1.5 kVeff
Max. tensile load resistance	Static	1.5 kVeff
	Dynamic	1.5 kVeff
Thermal fire load (guideline value)	good	

Tension clamp connection M12,  
stainless steel  
B-coded

SAIS / SAIB VA

straight



Ordering data

Male	5-pole, PG 9
Socket	5-pole, PG 9
Note	


Type	Qty.	Order No.
SAIS 5/9-VA-B-COD	1	1920720000
SAIB 5/9-VA-B-COD	1	1920730000

Technical data

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
Note	PB = PROFIBUS (B-COD)

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
Note	PB = PROFIBUS (B-COD)

Dimensioned drawing

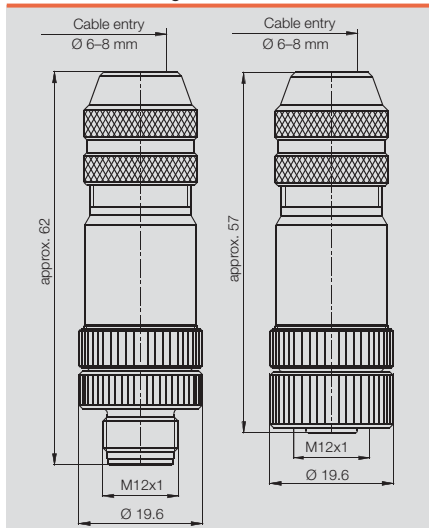

PB = PROFIBUS (B-COD)

Screw connection M12, metal (EMC)  
B-coded



SAISM / SAIBM

straight



SAISW / SAIBW

Angled



Ordering data

Male	5-pole, PG 9
Socket	5-pole, PG 9
Note	

Type	Qty.	Order No.
SAISM 5/8S M12 5P B-COD	1	1784790000
SAIBM 5/8S M12 5P B-COD	1	1784780000

Type	Qty.	Order No.
SAISW-M-5/8 M12 B-COD	1	1944570000
SAIBW-M-5/8 M12 B-COD	1	1944580000


Technical data

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	


Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

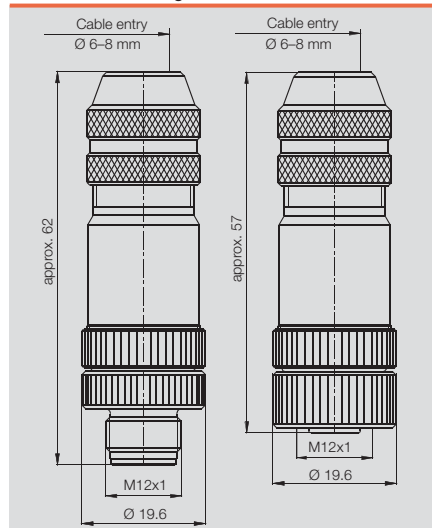

Dimensioned drawing

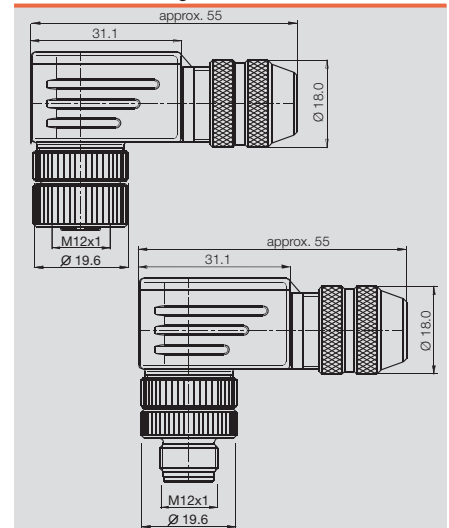



IDC connection  
B-coded

SAIS / SAIB

straight



Ordering data

Male	3-pole, PG 9
Socket	3-pole, PG 9
Note	


Type	Qty.	Order No.
SAIS-3-IDC-M12B-COD	1	1864730000
SAIB-3-IDC-M12B-COD	1	1864740000

Technical data

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	7...8.8 mm
Cross-section for connected wire	0.34 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	PB = PROFIBUS (B-COD) IE = Industrial Ethernet (D-COD)

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	7...8.8 mm
Cross-section for connected wire	0.34 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	PB = PROFIBUS (B-COD) IE = Industrial Ethernet (D-COD)

Dimensioned drawing

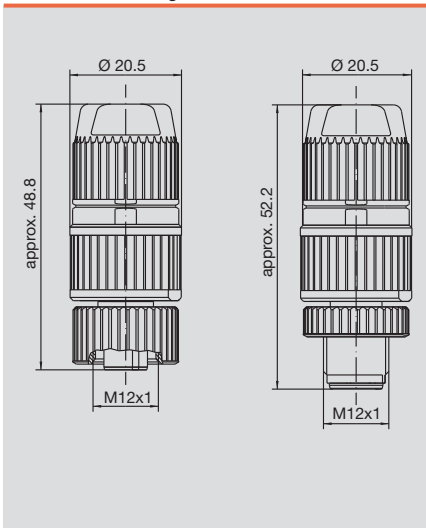

PB = PROFIBUS (B-COD)  
IE = Industrial Ethernet (D-COD)



# Sub-D



This compact connector provides a convenient bus connection for all standardised PROFIBUS-DP devices. A data transmission rate of max. 12 Mbps is possible. An additional Sub-D connector on top of the plug enables analysis/programming devices to be connected without modifying the wiring.


C

The 9-pin sub-D connector is available in four versions:

1. without terminating resistor
2. with built in terminating resistor
3. with switch in terminating resistor and connection for programming unit via IDC connection
4. with switch in terminating resistor and connection for programming unit via tension clamp connection.

- T-piece functions
- Good shield contact
- Ample space for connecting the bus cable
- Cable entry can be closed off with blanking panel
- Fully insulated housing
- Reliable strain relief

## PB-DP SUB-D

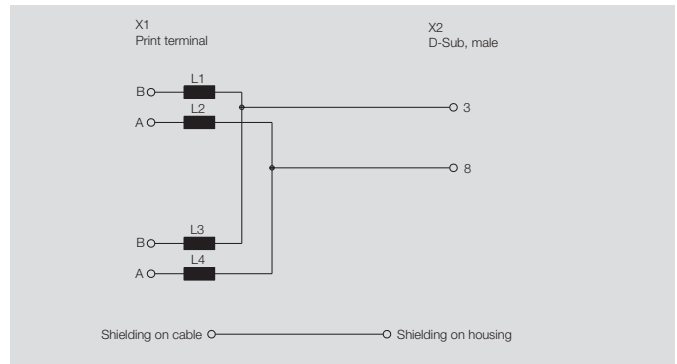

### Technical data

Data transmission rate		max. 12 Mbps
ESD		protection to IEC 801-2
Operating temperature	°C	0 ... 60
Storage temperature	°C	-25 ... +80
Ingress protection class		IP 40
Dimensions (LxWxH)	mm	64.6 x 47.5 x 16
Housing material		PC UL 94 V-1
Plug-in connector		sub-D 9-pin
Cable connection		2 No. horizontal
Cable diameter	mm	4.5 ... 8
Single conductor cross-section	mm <sup>2</sup>	rigid max. 1.5 flexible max. 1.0
Type of connection	Screw	8395500000 and 8460860000
	IDC	1916980000
	Tension clamp	1934200000
<b>Note</b>		

### Ordering data

Type	Qty.	Order No.
PB-DP SUB-D	1	8395500000

# Sub-D





## PB-DP SUB-D TERM



## PB-DP SUB-D IDC/ZF TERM PS



C

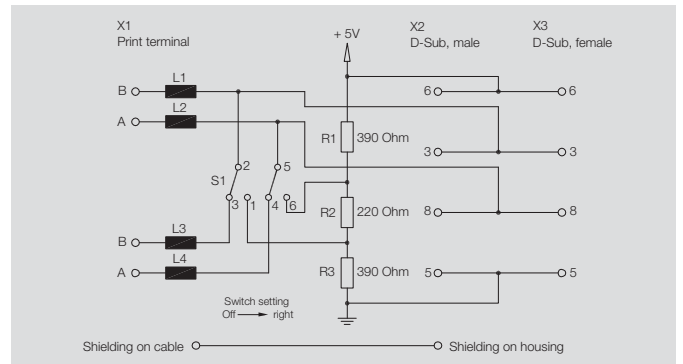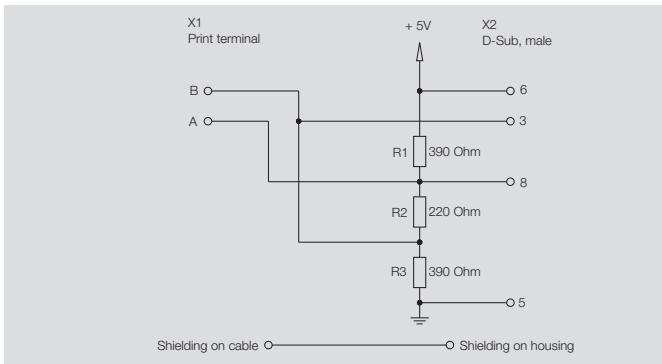

### Ordering data

Type	Qty.	Order No.
PB-DP SUB-D TERM	1	8460860000

### Ordering data

Type	Qty.	Order No.
PB-DP SUB-D IDC TERM PS	1	1919680000
PB-DP SUB-D ZF TERM PS	1	1934200000

## PROFIBUS-DP - connectors (M12, Sub-D)

### PROFIBUS Sub-D connector with M12 (90°)

Weidmüller's new Sub-D product line features fully shielded connector variants that enable direct tapping with M12 cables. This allows you to avoid the types or errors that often occur when installing similar connectors with screw connections. The increased contact reliability of the Sub-D connectors more than compensates for the cost of the extra M12 connectors.

#### Special features:

- Complete shielded housing
- Compact housing for small places
- Connection without any mistake because of the M12 connector
- 100% certified components


#### Technical data

Data rate	acc. to PROFIBUS Specification, 12Mbit/s
Connector pinning	acc. to PROFIBUS Specification
PROFIBUS DP connector	D-Sub 9-polig, male
PROFIBUS DP program connector	D-Sub 9-polig, female
PROFIBUS cable connector	M12 B coded, male + female, Pin 2 and 4, connected, Cable output: M12 female, Cable entry: M12 male
Mechanical lifetime	200 connections
Temperature range	-20 °C to +70 °C
Humidity	Max. 75 % at +25 °C, non condensing
Ingress protection class	IP30
Housing material	ZnAl
D-Sub screw connection	UNC 4-40

#### Note

### PB-DP SUB-D M12 TERM

PROFIBUS-Connector 90° M12 with switch, without programming connector

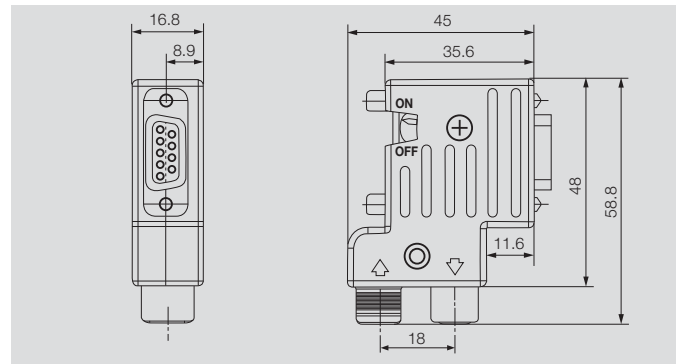


#### Ordering data

Type	Qty.	Order No.
PB-DP SUB-D M12 TERM	1	1140650000

PROFIBUS Sub-D connector with M12 (90°)

**PB-DP SUB-D M12 TERM PS**

PROFIBUS-Connector 90° M12 with switch, with programming connector

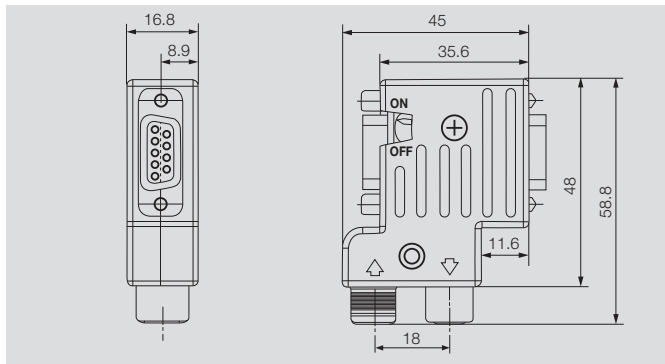

**Ordering data**

Type	Qty.	Order No.
PB-DP SUB-D M12 TERM PS	1	1140640000

**PROFIBUS-DP - connectors (M12, Sub-D)**

**PROFIBUS Sub-D Connector with tension clamp connection (35°)**


The new Sub-D Family from Weidmüller offers a fully shielded version.

**Special features:**

- Completely shielded housing
- Compact design for use in small spaces

**PB-DP SUB-D ZF35TERM**

PROFIBUS-Connector 35° with switch, without programming connector

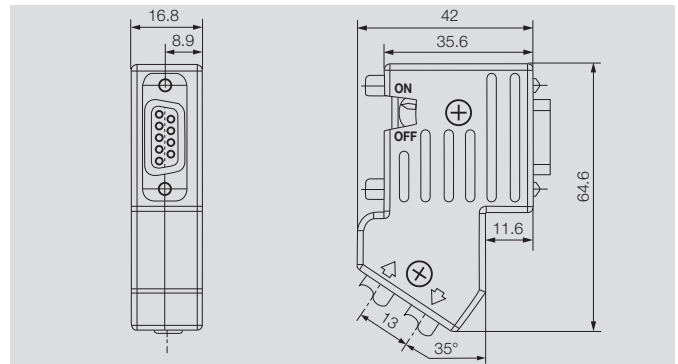

**Technical data**

Data rate	acc. to PROFIBUS Specification, 12Mbit/s
Connector pinning	acc. to PROFIBUS Specification
PROFIBUS DP connector	D-Sub 9-polig, male
PROFIBUS DP program connector	D-Sub 9-polig, female
PROFIBUS cable connector	Tension clamp
Mechanical lifetime	200 mating cycles
Temperature range	-20 °C to +70 °C
Humidity	Max. 75 % at +25 °C, non condensing
Ingress protection class	IP30
Housing material	ZnAl
D-Sub screw connection	UNC 4-40

**Note**


**Ordering data**

Type	Qty.	Order No.
PB-DP SUB-D ZF35TERM	1	1173220000

PROFIBUS Sub-D Connector with tension clamp connection (35°)

**PB-DP SUB-D ZF35TERM PS**

PROFIBUS-Connector 35° with switch, with programming connector

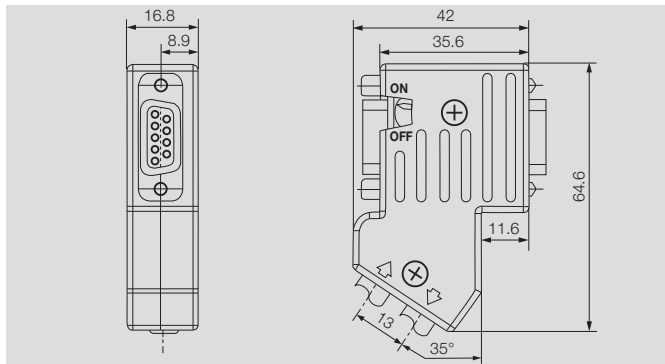

**Ordering data**

Type	Qty.	Order No.
PB-DP SUB-D ZF35TERM PS	1	1173240000





## PROFIBUS-DP - connectors (M12, Sub-D)

### PROFIBUS Sub-D Connector with tension clamp connection (90°)


The new Sub-D Family from Weidmüller offers a fully shielded Version.

#### Special features:

- Completely shielded housing
- Compact design for use in small spaces

#### PB-DP SUB-D ZF

PROFIBUS-Connector 90° without switch, without programming connector

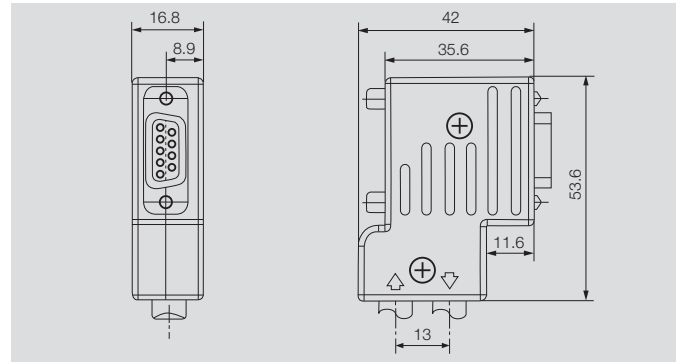

#### Technical data

Data rate	acc. to PROFIBUS Specification, 12Mbit/s
Connector pinning	acc. to PROFIBUS Specification
PROFIBUS DP connector	D-Sub 9-polig, male
PROFIBUS DP program connector	D-Sub 9-polig, female
PROFIBUS cable connector	Tension clamp
Mechanical lifetime	200 mating cycles
Temperature range	-20 °C to +70 °C
Humidity	Max. 75 % at +25 °C, non condensing
Ingress protection class	IP30
Housing material	ZnAl
D Sub screw connection	UNC 4-40

#### Note

#### Ordering data

Type	Qty.	Order No.
PB-DP SUB-D ZF	1	1161890000

PROFIBUS Sub-D Connector with tension clamp connection (90°)



**PB-DP SUB-D ZF TERM**

PROFIBUS-Connector 90° with switch, without programming connector



**PB-DP SUB-D ZF TERM PS**

PROFIBUS-Connector 90° with switch, with programming connector

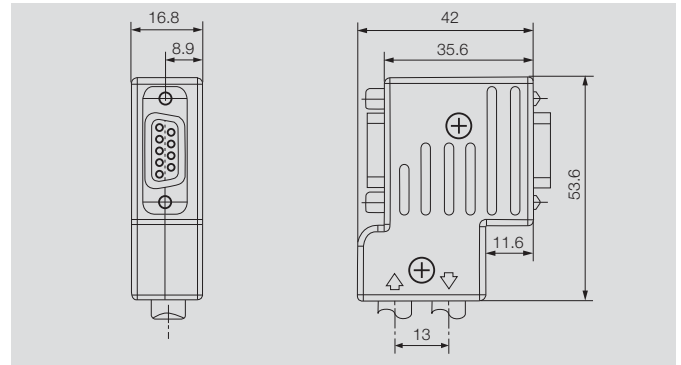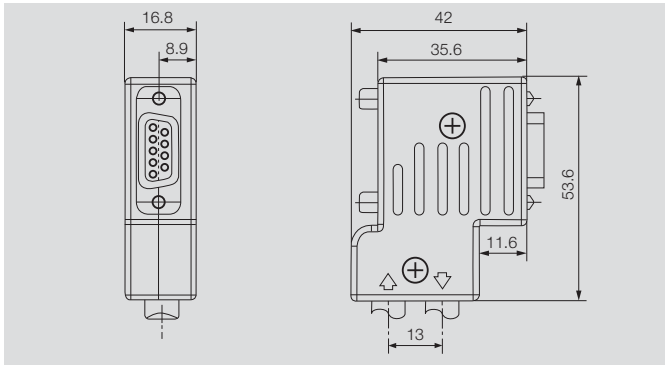

**Ordering data**

Type	Qty.	Order No.
PB-DP SUB-D ZF TERM	1	1161870000

**Ordering data**

Type	Qty.	Order No.
PB-DP SUB-D ZF TERM PS	1	1161880000

# PROFIBUS-DP distributors



## PROFIBUS-DP distributor

The PROFIBUS-DP topology is a line structure. The spur (T-distributor) connects the individual field devices or remote I/Os to the bus cable. The length of the spur cable depends on the transmission rate and should be as short as possible. The total of all spur lengths for transmission rates up to 1.5 MBaud may not exceed max. 6.6 m. The trunk cable passes through an EMC cable gland into an aluminium or stainless steel enclosure where it is connected to a tension clamp terminal. The spur line to the device is connected using a B-coded M12 socket or an EMC cable gland. Terminating resistors must be wired onto the start and end of the PROFIBUS-DP network. The Terminator modules can take care of this task. The electrically isolated 24-VDC power supply for the bus terminator is routed into the cable gland on the right side. The housing features a pressure-compensation mechanism that counters the effects of climatic fluctuations. The guidelines issued by the PROFIBUS user organisation must be observed.

## PROFIBUS-DP

### Technical data

Operating temperature	-25 °C to 55 °C
Ingress protection class	IP 66
Enclosure material	High grade aluminium alloy (AL - SI 12)
Finish	Painted RAL 7001
PROFIBUS-DP connection	Tension clamp terminals 0.5 – 1.5 mm <sup>2</sup>
Cable entry	Cable gland M16
Cable gland clamping range	5.5 – 9.5 mm
Contact surface	M12 plug/socket CuZnAu
Transmission rate	Max. 1.5 MBaud
Power supply bus connection	Bus terminator 24 VDC +/-10 %
Trunk cable via cable gland	


### Installation advice

Torques	
M16 cable gland at enclosure	6.0 Nm
Union nut, M16 cable gland	4.0 Nm
Enclosure cover	1.8 – 2.0 N
External earthing cable	1.8 – 2.0 Nm
Adaptor/stud cable	0.5 Nm

### Pin assignment

Pin no.	Connection	Wire colour
Pin 1	unassigned	
Pin 2	RxDx/TxD-N / A-wire	green
Pin 3	unassigned	
Pin 4	RxDx/TxD-N / B-wire	red
Pin 5	shield	
Cable gland	shield	

### Socket B-coded




### 1-channel distributor

Cable gland



### 1-channel distributor

M12 connection

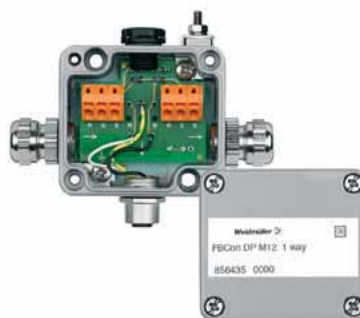

### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon DP CG 1way	branch line CG	1	8564340000
<b>Stainless steel enclosure</b>			
FBCon SS DP PCG 1way	all connections PCG	1	8714260000


### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon DP M12 1way	branch line M12	1	8564350000
<b>Stainless steel enclosure</b>			
FBCon SS DP M12 1way	branch line M12	1	8714270000


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


### Dimensioned drawing

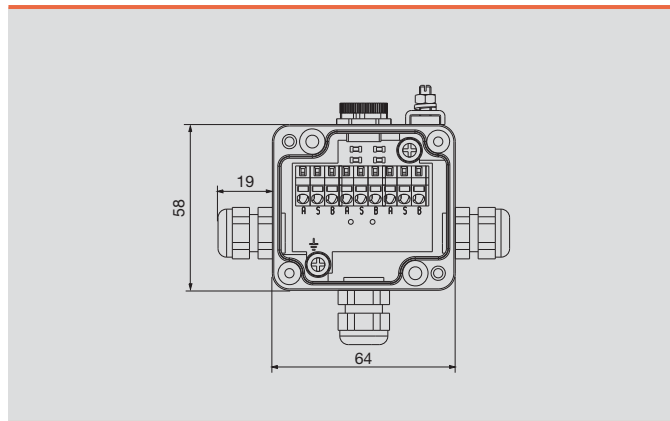


### Dimensioned drawing

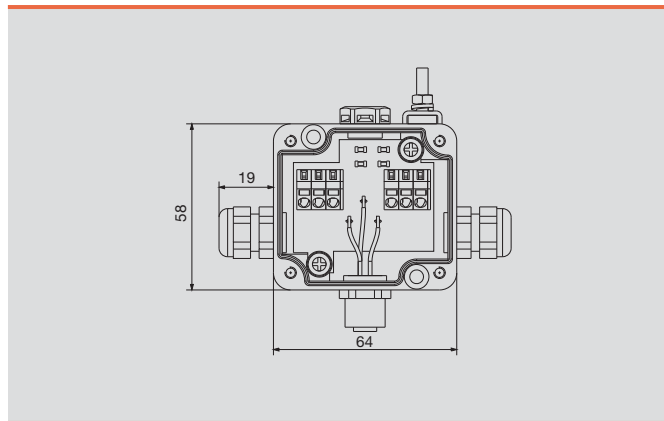

### Wiring diagram

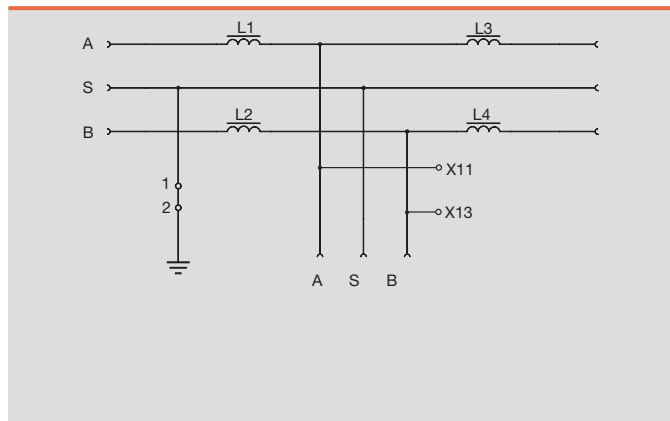

### Wiring diagram

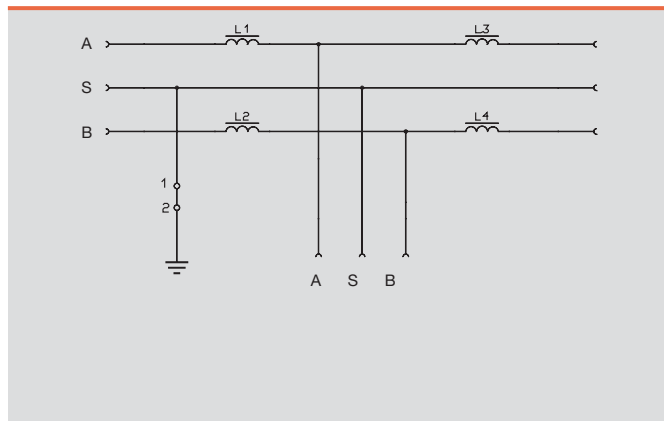


### Terminator

Cable gland



### Terminator

M12 connection

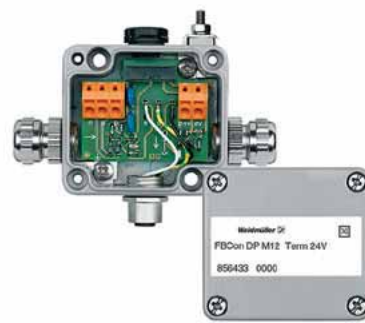

### Ordering data


Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon DP CG Term 24V	branch line CG	1	8564290000
<b>Stainless steel enclosure</b>			
FBCon SS DP PCG Term 24V	all connections PCG	1	8714240000

### Ordering data


Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon DP M12 Term 24V	branch line M12	1	8564330000
FBCon DP M12 Term 5V	branch line M12	1	8564320000
<b>Stainless steel enclosure</b>			
FBCon SS DP M12 Term 24V	branch line M12	1	8714250000

CG = brass cable gland  
PCG = plastic cable gland


### Dimensioned drawing

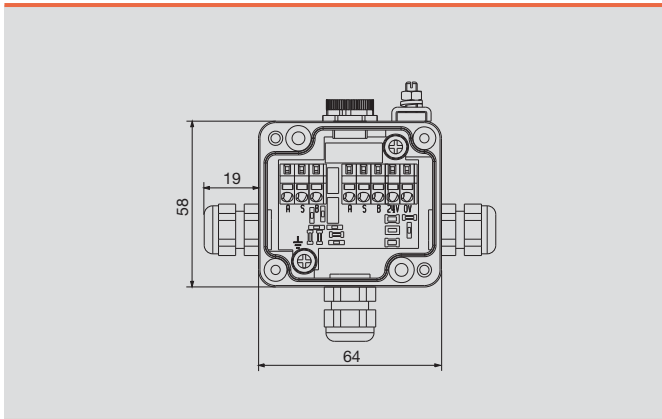


### Dimensioned drawing

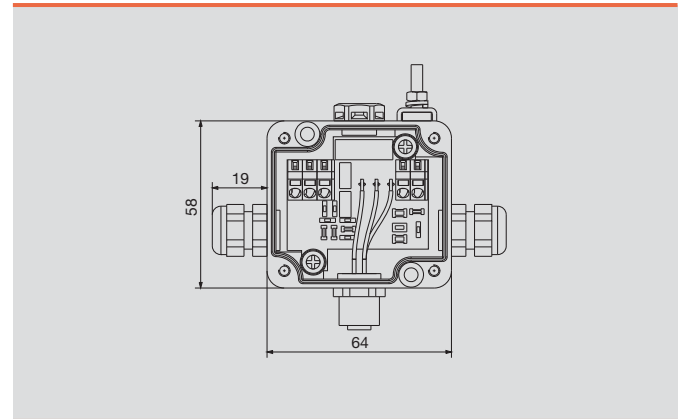

### Wiring diagram

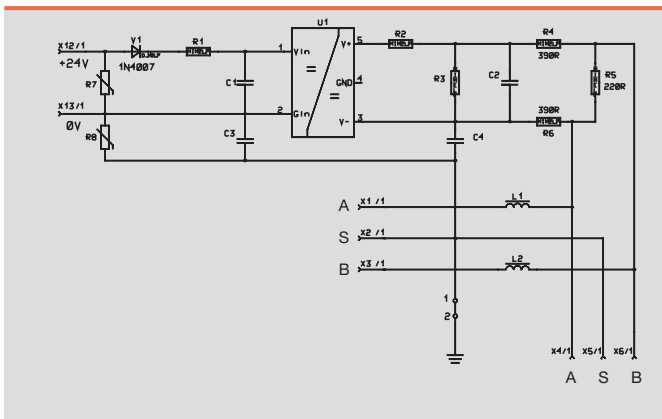

### Wiring diagram

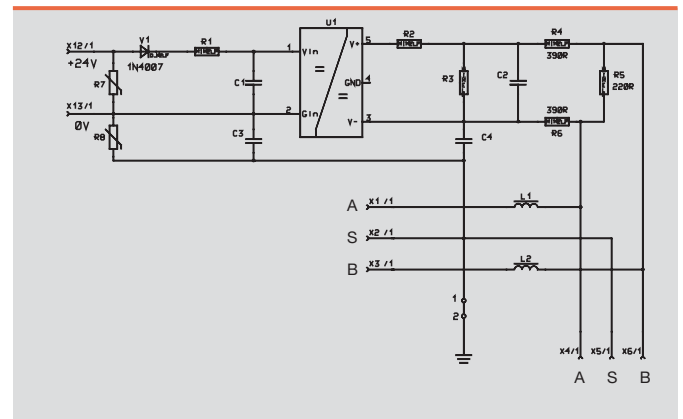



# PROFIBUS-DP IP 20 T-distributor




The distributor for PROFIBUS-DP enables the user to connect it conveniently in the electrical cabinet.

They can be mounted on TS32/35 rails and used to connect standardised PROFIBUS-DP lines. Spur cables can also be connected. Please note that spur cables should be kept as short as possible. Part No. 8788580000 has a 9-pin sub-D socket for connecting analysis/programming devices.

- T-piece functions
- Good shield contact
- Ample space for connecting the bus cable
- TS 32/35 terminal rail mounting
- Standardised Sub-D connection for PROFIBUS-DP

C

## RS PB-DP T

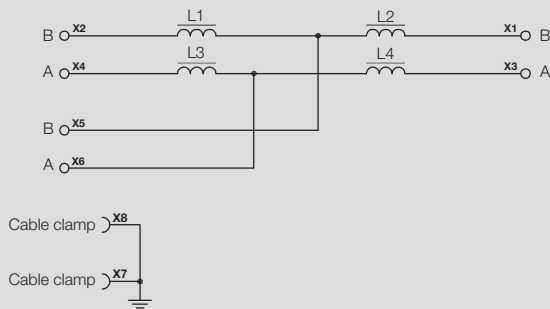

## Technical data


Data transmission rate		max. 1.5 Mbps (with max. 6.6 m spur line) max. 12 Mbps (no spur lines)
Operating temperature	°C	0 ... 55
Storage temperature	°C	-25 ... +70
Ingress protection class		IP 20
Dimensions (LxWxH)	mm	70 x 45 x 42
Plug-in connector		sub-D 9-pin
Cable diameter	mm	4.5 ... 8
Single conductor cross-section	mm <sup>2</sup>	0.5 ... 2.5
Type of connection		screw

## Information

## Ordering data

Type	Qty.	Order No.
RS PB-DP T	1	8800040000
RS PB-DP T SUB-D	1	8788580000

## RS PB-DP T SUB-D

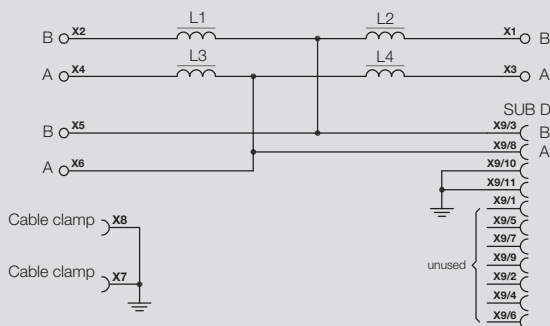





**The PROFIBUS-PA**

is an open fieldbus standard (EN 50170, IEC 1158-2, DIN 19245). It was specifically designed for the requirements of process engineering, such as remote powering and intrinsic safety. The PROFIBUS-PA enables operation of several PA sensors and actuators on one bus line.

The devices are powered using twin cable technology, and the transmission of process data is digital.


Integration in the PROFIBUS-DP network is done by means of a segment coupler.

Specific advantages of PROFIBUS-PA:

- Low wiring costs
- Minimal planning costs for the process control system
- Remote interrogation or programming of the field device
- Further development and support by the PROFIBUS User Organisation

Whether for servicing or system modification, the PROFIBUS-PA FB connectors from Weidmüller enable connection or replacement of field devices without interrupting the bus system.

An extensive range of accessories such as pre-assembled cables and plug connectors rounds off the programme.

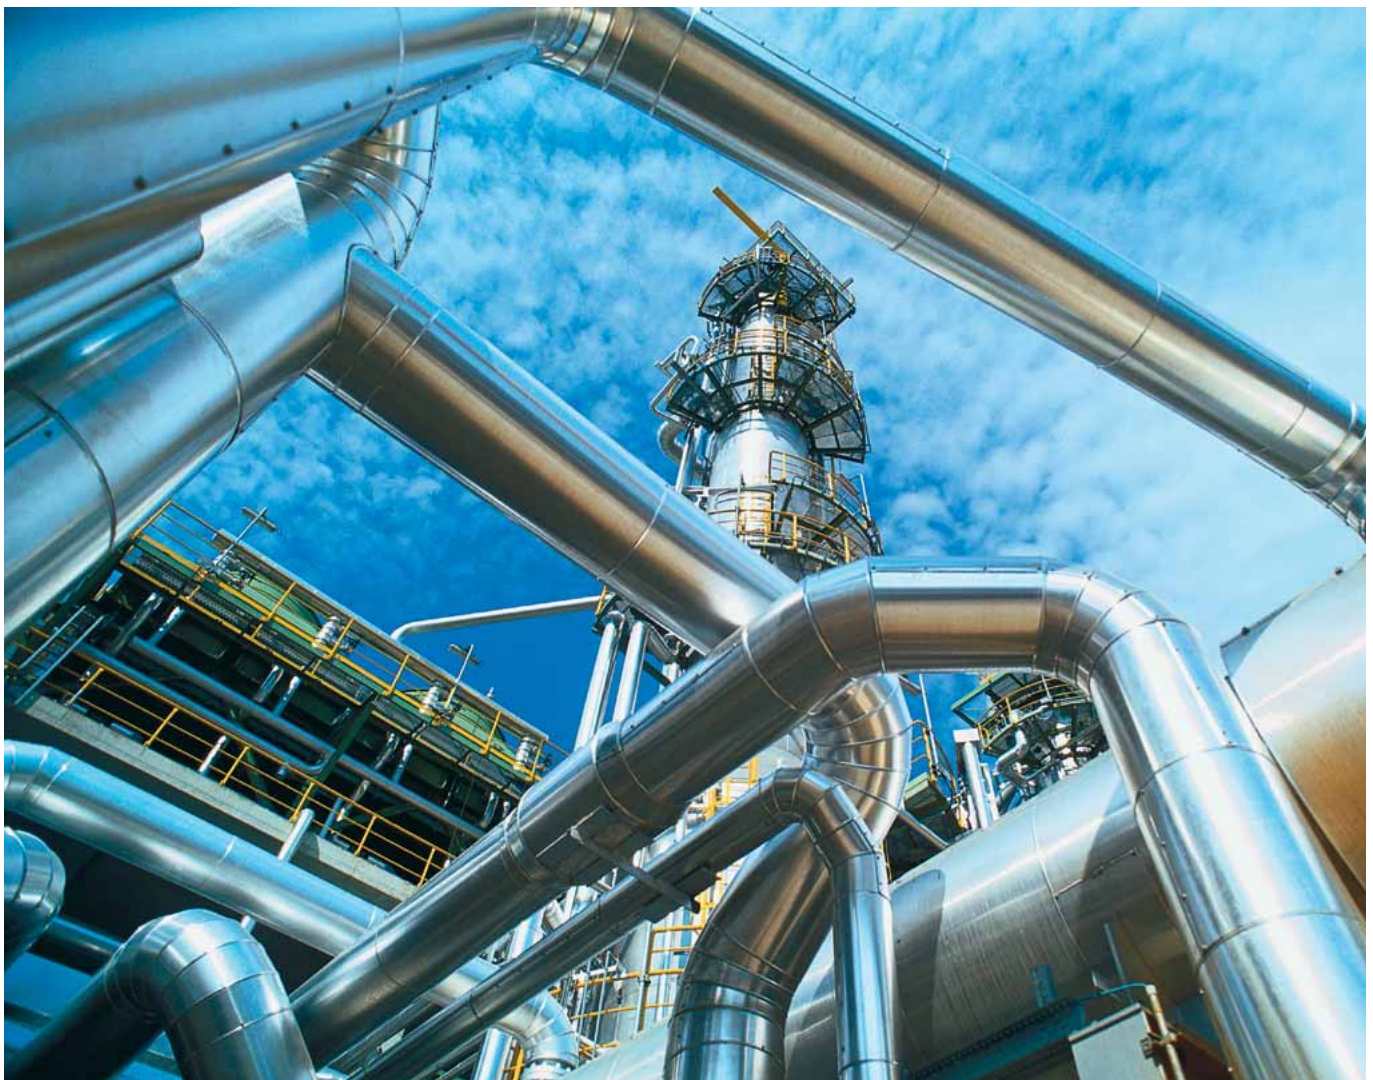



PROFIBUS-PA cables




PROFIBUS-PA connectors





Profibus PA distributors



Cables



Male Female



Ordering data

Designation	
<b>Industrial zone</b>	
<b>One side without connector, male</b>	
M12 EMV/black/1M	1 m
M12 EMV/black/2M	2 m
M12 EMV/black/5M	5 m
M12 EMV/black/10M	10 m
<b>One side without connector, female</b>	
M12 EMV/black/1M	1 m
M12 EMV/black/2M	2 m
M12 EMV/black/5M	5 m
M12 EMV/black/10M	10 m
<b>Connecting cables, male - female</b>	
M12 EMV/black/1M	1 m
M12 EMV/black/2M	2 m
M12 EMV/black/5M	5 m
M12 EMV/black/10M	10 m
<b>Note</b>	

Type	Order No.
<b>PROFIBUS-PA cable</b>	
FBC PA M12 M 1M	1785120100
FBC PA M12 M 2M	1785120200
FBC PA M12 M 5M	1785120500
FBC PA M12 M 10M	1785121000
<b>One side without connector, female</b>	
FBC PA M12 FM 1M	1785110100
FBC PA M12 FM 2M	1785110200
FBC PA M12 FM 5M	1785110500
FBC PA M12 FM 10M	1785111000
<b>Connecting cables, male - female</b>	
FBC PA M12 M-FM 1M	1785100100
FBC PA M12 M-FM 2M	1785100200
FBC PA M12 M-FM 5M	1785100500
FBC PA M12 M-FM 10M	1785101000
Other lengths available on request	

Wall bushing



Ordering data


Type	Length	Qty.	Order No.
SAI-WDF-5P M12 60 mm	60 mm	1	1819450000

Customisable male and female connectors are still required for use with cables that have a connector on only one end.


Technical data

Wire resistance (loop)	max. $\Omega$ /km	44	
Insulation resistance	min. $G\Omega$ x km	5	
Working capacity at 800 Hz	nom. nF/km	52	
Inductance 800 Hz	mH/km	ca. 0.4	
Characteristic impedance at 31.25 kHz	$\Omega$	100 $\pm$ 20 %	
	at $\geq$ 1 MHz nom. $\Omega$	80	
Wave attenuation			
- at 39 kHz	max. d/B 100 m	0.3	
- at 100 kHz	nom. d/B 100 m	0.35	
- at 1 MHz	nom. d/B 100 m	1.2	
Signal dispersion speed			
	nom. [%]	79	
Coupling resistance up to 30 MHz			
	max. mOhm/m	250	
Operating voltage (not for three-phase use)			
	Peak value V	100	
Test voltage	Wire/wire	$U_{eff}$ V	1500
	Wire/shield	$U_{eff}$ V	1500
<b>Mechanical specifications</b>			
Stationary bending radius	mm	65	
Temperature range			
Stationary	$^{\circ}C$	-5 ... 60	
moving	$^{\circ}C$	-30 ... 80	
<b>Note</b>			

Dimensioned drawing


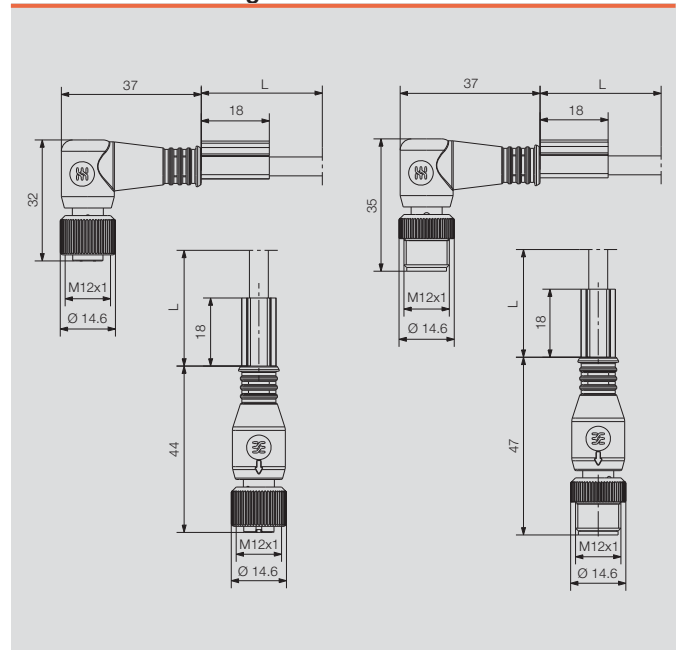


Ex i-cables



Male

Female



Ordering data

Designation	
<b>Intrinsically safe zone Exi</b>	
<b>One side without connector, male</b>	
M12 EMV/blue/1M	1 m
M12 EMV/blue/2M	2 m
M12 EMV/blue/5M	5 m
M12 EMV/blue/10M	10 m
<b>One side without connector, female</b>	
M12 EMV/blue/1M	1 m
M12 EMV/blue/2M	2 m
M12 EMV/blue/5M	5 m
M12 EMV/blue/10M	10 m
<b>Connecting cables, male - female</b>	
M12 EMV/blue/1M	1 m
M12 EMV/blue/2M	2 m
M12 EMV/blue/5M	5 m
M12 EMV/blue/10M	10 m
<b>Note</b>	

Type	Order No.
<b>PROFIBUS-PA cable</b>	
FBCEX PA M12 M 1M	1785150100
FBCEX PA M12 M 2M	1785150200
FBCEX PA M12 M 5M	1785150500
FBCEX PA M12 M 10M	1785151000
<b>One side without connector, female</b>	
FBCEX PA M12 FM 1M	1785140100
FBCEX PA M12 FM 2M	1785140200
FBCEX PA M12 FM 5M	1785140500
FBCEX PA M12 FM 10M	1785141000
<b>Connecting cables, male - female</b>	
FBCEX PA M12 M-FM 1M	1785130100
FBCEX PA M12 M-FM 2M	1785130200
FBCEX PA M12 M-FM 5M	1785130500
FBCEX PA M12 M-FM 10M	1785131000
Other lengths available on request	

Wall bushing



Ordering data


Type	Length	Qty.	Order No.
SAI-WDF-5P M12 60 mm	60 mm	1	1819450000

Customisable male and female connectors are still required for use with cables that have a connector on only one end.


Technical data

Wire resistance (loop)	max. $\Omega$ /km	44	
Insulation resistance	min. $G\Omega$ x km	5	
Working capacity at 800 Hz	nom. nF/km	52	
Inductance 800 Hz	mH/km	ca. 0.4	
Characteristic impedance at 31.25 kHz	$\Omega$	100 $\pm$ 20 %	
	at $\geq$ 1 MHz	nom. $\Omega$	80
Wave attenuation			
- at 39 kHz	max. d/B 100 m	0.3	
- at 100 kHz	nom. d/B 100 m	0.35	
- at 1 MHz	nom. d/B 100 m	1.2	
Signal dispersion speed			
	nom. [%]	79	
Coupling resistance up to 30 MHz			
	max. mOhm/m	250	
Operating voltage (not for three-phase use)			
	Peak value V	100	
Test voltage	Wire/wire	$U_{eff}$ V	1500
	Wire/shield	$U_{eff}$ V	1500
<b>Mechanical specifications</b>			
Stationary bending radius	mm	65	
Temperature range			
Stationary	$^{\circ}C$	-5 ... 60	
Moving	$^{\circ}C$	-30 ... 80	
<b>Note</b>			

Dimensioned drawing

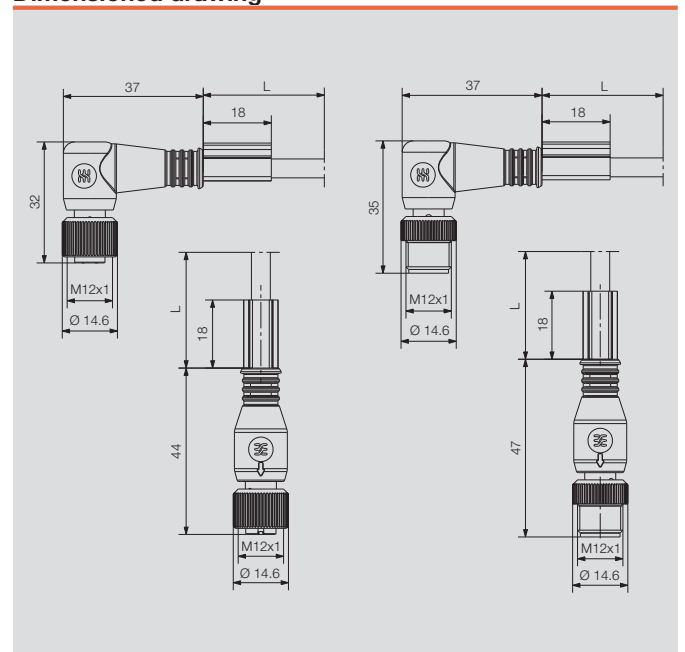

PROFIBUS-PA bulk lengths

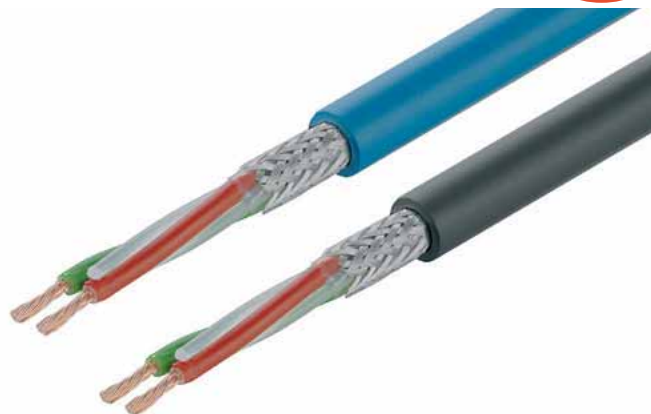

PROFIBUS-PA bulk lengths

**Application:**

Fieldbus cable for PROFIBUS-PA field networks in accordance with IEC 1158-2

The cable is suitable for installation in both dry and humid spaces. When used with the black, UV-resistant cladding, it can also be installed outdoors.

**General characteristics:**

None of the materials used for the cables and during their production contain materials which are detrimental to paint adhesion (**they are LBS-free**).

**LBS** = Materials detrimental to paint adhesion

Ordering data

Type	Order No.
SAIH-PB-PA-2X1.0-PVC-BL	<b>1232630000</b>
SAIH-PB-PA-2X1.0-PVC-SW	<b>1232640000</b>

Technical data

Assembly		
Conductor	Copper wire, without insulation, 1.0 mm <sup>2</sup> , finely stranded	
Insulating sleeve	Foam skin (O2YS), wire Ø approx. 2.55 mm Wire colours: red and green	
Stranding	2 wires with 2 drain wires approx. 1.0 mm Ø stranded	
Wrapping	1 layer insulation foil	
Shield	Braiding made from tin-plated copper wire, Coverage 85 % ± 5	
Outer cladding	PVC, blue RAL 5015 or black Outer diameter: 8.0 mm ± 0.4	
Electrical characteristics at 20 °C		
Wire resistance (loop)	max. Ω/km	44
Insulation resistance	min. GΩ x km	5
Working capacity		
at 800 Hz	nom. nF/km	52
Inductance		
at 800	Hz mH/km	ca. 0.4
Characteristic impedance		
at 31.25 kHz	Ω	100 ± 20 %
at ≥ 1 MHz	nom. Ω	80
Wave attenuation		
at 39 kHz	max. dB/100 m	0.3
at 100 kHz	nom. dB/100 m	0.35
at 1 MHz	nom. dB/100 m	1.2
Signal dispersion speed	nom. [%]	79
Coupling resistance		
at 30 MHz	max. mOhm/m	250
Operating voltage		
(not for three-phase use)	Peak value V	100
Test voltage		
Wire/wire	U <sub>est.</sub> V	1500
Wire/shield	U <sub>est.</sub> V	1500
Mechanical and thermal characteristics		
Min. bending radius stationary installed / during installation	mm	65
Temperature range during installation	°C	-5 to +60
Temperature range stationary installed	°C	-30 to +80
Flammability	Flame retardant in accordance with VDE 0482, part 265-2-1 / IEC 60 332-1	

Screw connection M12, metal (EMC)  
A-coded



FBCon / SAIS

straight



SAISW / SAIBW

Angled



Ordering data

Male	
	4-pole, PG 9
	5-pole, PG 9
Socket	
	4-pole, PG 9
	5-pole, PG 9
Note	

Type	Qty.	Order No.
FBCon M12 4P M EMC	1	9455640000
SAIS-M-5/8S M12 5P A-COD	1	1784740000
Other versions on request		

Type	Qty.	Order No.
SAISW-M-4/8 M12	1	1803930000
SAISW-M-5/8 M12	1	1803940000
Other versions on request		


Technical data

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	


Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

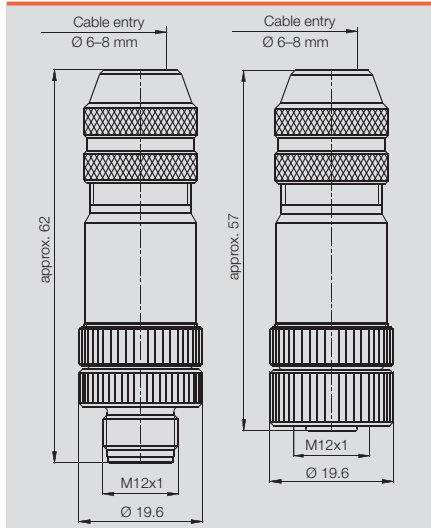

Dimensioned drawing

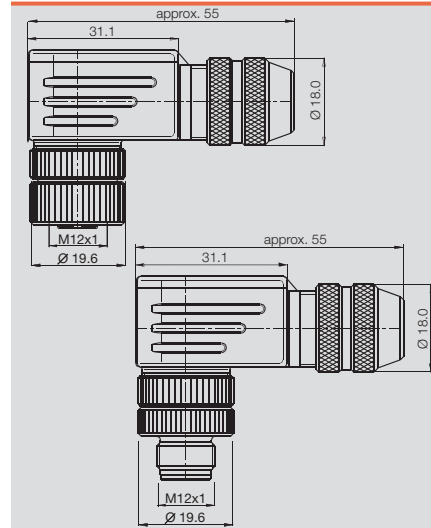

Tension clamp connection M12,  
stainless steel  
A-coded



SAIS / SAIB VA

straight



Ordering data

Male	5-pole, PG 9
Socket	5-pole, PG 9
Note	


Type	Qty.	Order No.
SAIS 5/9-VA	1	1920700000
SAIB 5/9-VA	1	1920710000

Technical data

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
Note	PB = PROFIBUS (B-COD)

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
Note	PB = PROFIBUS (B-COD)

Dimensioned drawing

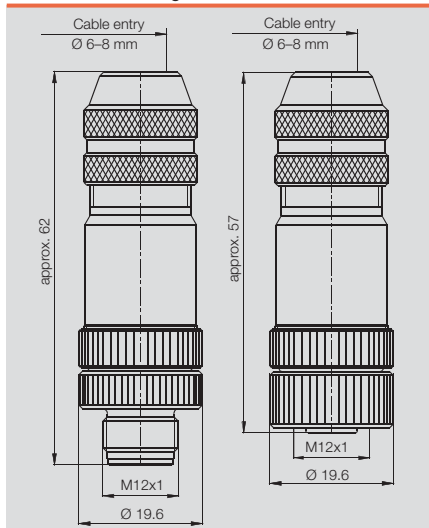

PB = PROFIBUS (B-COD)

Positioning plug connector



Positioning plug connector



Ordering data

Positioning plug connector PG9 500 mm
Adapter PG9 / M20
Positioning plug connector PG 13.5 150 mm
Positioning plug connector PG 13.5 300 mm
Positioning plug connector M 20 150 mm
Positioning plug connector M 20 300 mm
Positioning plug connector M 20 300 mm
<b>Note</b>

Type	Qty.	Order No.
SAIE-M12S-4-0.5U-AEH-VA	1	1861220001
SAIE-EW-M20/PG9-SW24-VA	1	1950270000

Technical data

No. of poles	4
Version	pin
Temperature range	-40 ... 85 °C
Housing material	stainless steel (VA)
Connection thread	PG 9
Plug thread	M12
Strand cross-section	0.34 mm <sup>2</sup>
Housing class of protection to DIN 40050 IEC 529	IP 67
Strand length (fitted with wire-end ferrules )	500 mm
Nominal current per contact	4 A
Rated voltage	250 V
Contact surface	gold-plated
Type of connection	screw
Flammability class to UL-94	
Nominal voltage to VDE standard 0110/ISO Group C	V
Resistance to creepage	
Contact resistance to IEC 512 Part 2	m Ω
Insulation resistance to IEC 512 Part 2	Ω


Note

Fitting information


	Torque settings
Set screw	1.8 - 2.0 Nm
Knurled ring	hand-tight
Lock-nut	6.25 Nm

If the device is exposed to vibration, we recommend using a stub cable to isolate the device from the vibration.

Dimensioned drawing

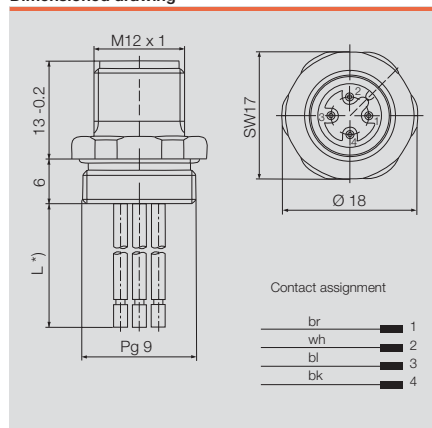

Dimensioned drawing

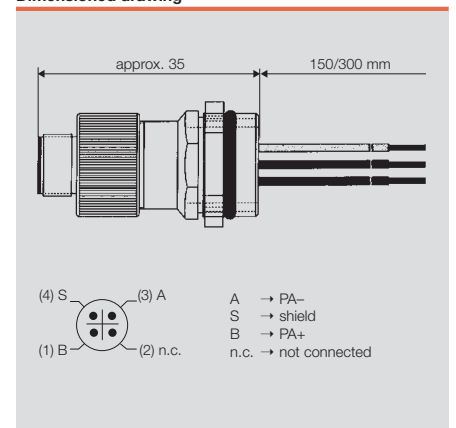

# FBCon distributors for the industrial segment



## PROFIBUS-PA T-connector

- for industrial applications
- standard

The **PROFIBUS-PA** installation products are increasingly used in the:

- food and beverage industry
- Process industries and
- chemical industry.

The product range offers a wide choice of customer solutions also for use in harsh conditions. This includes standard and EX versions of single and multi-way design with M12 plug-in connection or cable gland. Weidmüller offers a solution for almost every application. If you cannot find your solution here, please contact the branch / sales office responsible for you.

## PROFIBUS-PA T-connector

### standard

- 1, 2, 4, 8-way with EMC cable gland Industrial + EX / ATEX
- Surge protection optional

The **PROFIBUS-PA T-connector** is intended for direct coupling of measuring devices, sensors, actuators, etc.

- IP 66 Ingress protection class
- Modular design
- Uninterruptible bus operation for service situations
- Simple handling
- Low installation costs
- External earth stud
- Pressure equalising element
- EMC cable gland





# FBCon Fieldbus distributor

## PROFIBUS-PA Fieldbus distributor: sturdy and well-tested

FBCon fieldbus distributors are available in industrial and Ex(ia) versions. They are used for coupling 1- 8field devices or sensors. The connection is made via spur. The spur is connected by an M12 plug-in connector or directly via an EMC cable gland. The communication and device powering is handled by a common 2-core wire.

The PROFIBUS-PA distributors normally feature a switchable terminating resistor. For the Ex zone, the terminating resistor is made with a separate box. Current limiting variants help to ensure that the facility can operate smoothly.

Weidmüller offers a comprehensive line of accessories including pre-assembled PROFIBUS-PA cables in the standard lengths, and plug in connectors for a wide variety of applications.


- Fieldbus distributor for PROFIBUS-PA and PROFIBUS-DP
- Standard distributor for use in the safe zone Aluminium housing for connecting from 1 to 8 field devices
- Stainless steel distributor for applications in the food processing industry, for connecting from 1 to 8 field devices
- Intrinsically safe (ia) Ex version in aluminium housing for connecting from 1 to 8 field devices
- EMC cable gland for a secure contact with the shielding

## Technical data for PROFIBUS-PA standard distributors

Temperature range	
Operating temperature	from -40 °C to 85 °C
Ingress protection class	IP 66
Housing material	High-quality aluminium alloy (AL-Si 12)
Surface	Stove-enamelled RAL 7001
PROFIBUS-PA connection	Tension clamp connection 0.5 - 1.5 mm <sup>2</sup>
Cable entry	Cable gland M16
Clamping range	5.5 - 9.5 mm
Measuring device connector M12 x 14-pin	Contacts MS, surface CUZnAu
Information	

## Handling information

Torques	
M16 gland to housing	6.25 Nm
M16 union nut on cable gland	4.5 Nm
Housing cover	1.8 - 2.0 Nm
External earth stud	1.8 - 2.0 Nm

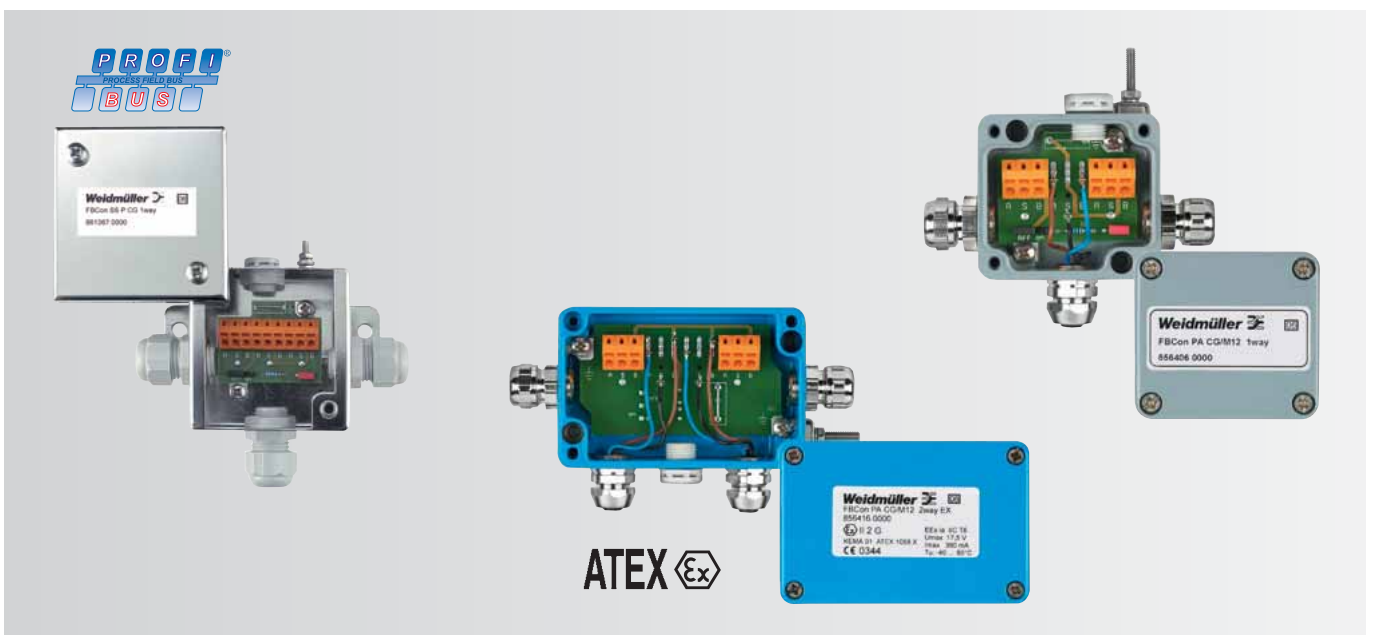




1-channel distributor

Cable gland



1-channel distributor

M12 connection

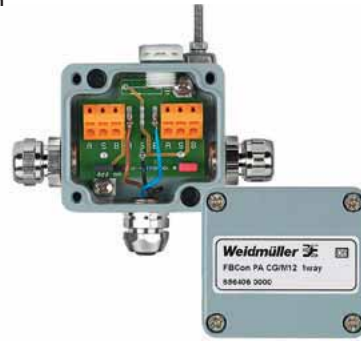

Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 1way	branch line CG	1	8564090000
<b>Stainless steel enclosure</b>			
FBCon SS CG 1way	branch line CG	1	8703430000
FBCon SS PCG 1way	all connections PCG	1	8613670000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 1way	branch line M12	1	8564060000
<b>Stainless steel enclosure</b>			
FBCon SS CG/M12 1way	branch line M12	1	8726020000


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

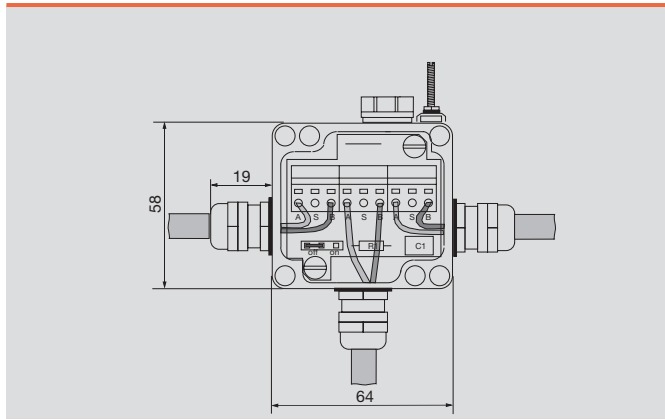


Dimensioned drawing

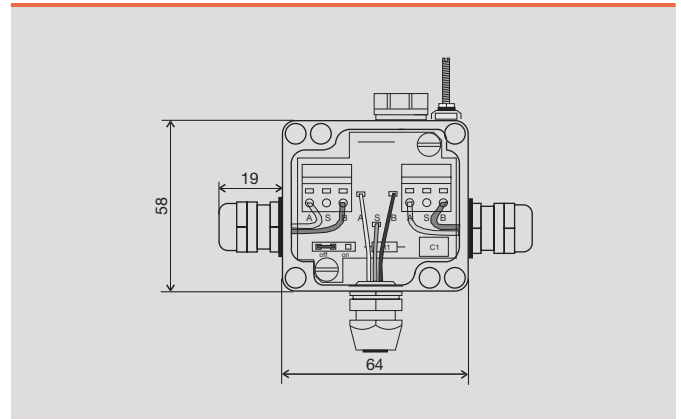

Wiring diagram

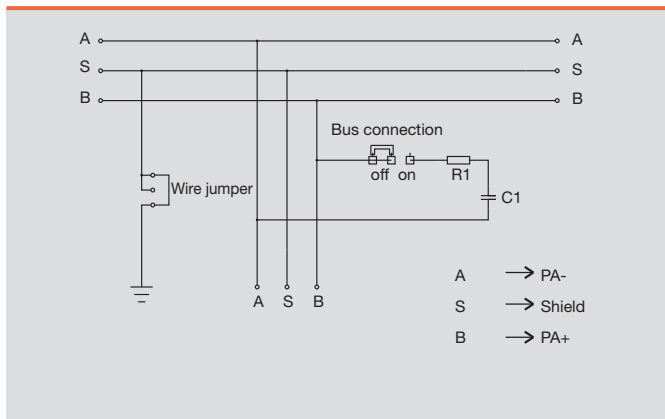

Wiring diagram

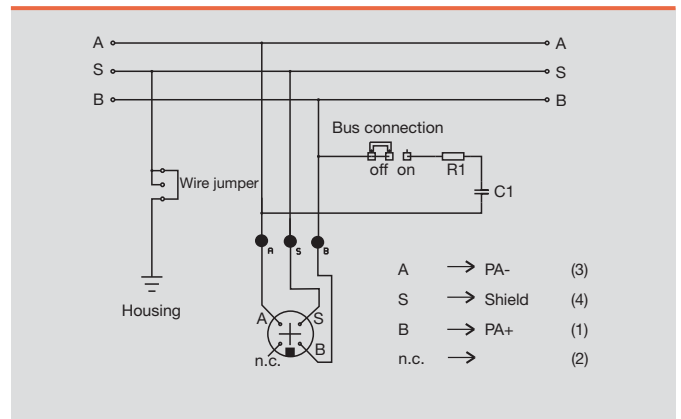

2-channel distributor

Cable gland



2-channel distributor

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 2way	branch line CG	1	8564100000
<b>Stainless steel enclosure</b>			


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 2way	branch line M12	1	8564070000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

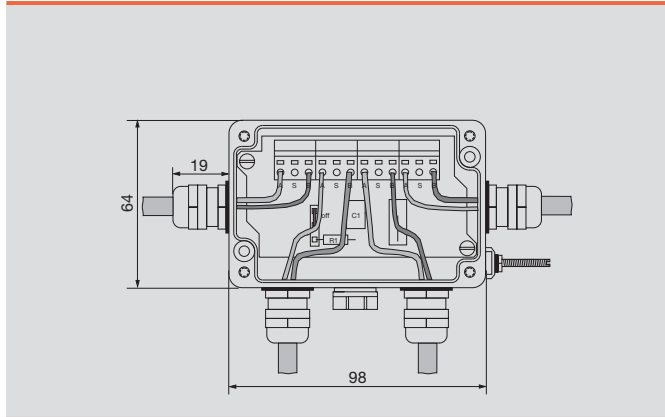


Dimensioned drawing

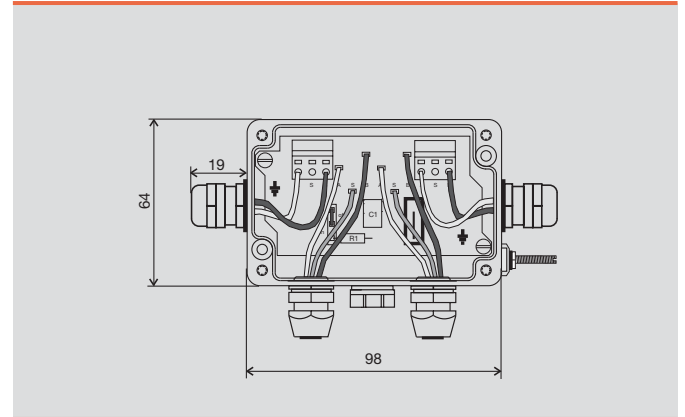

Wiring diagram

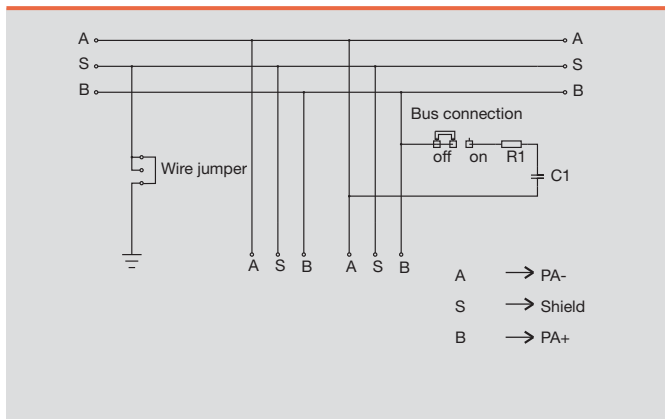

Wiring diagram

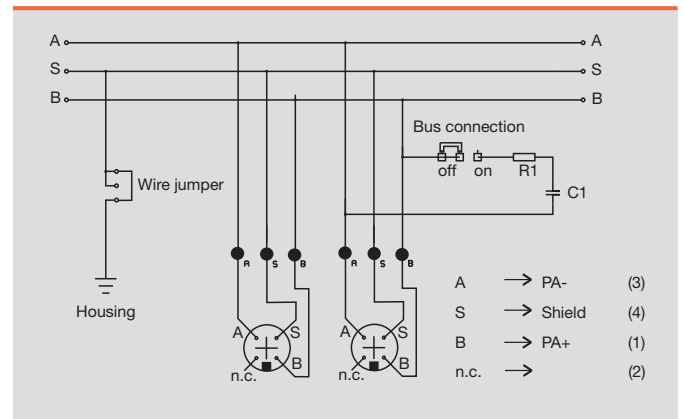

4-channel distributor

Cable gland



4-channel distributor

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 4way	branch line CG	1	8564110000
<b>Stainless steel enclosure</b>			
FBCon SS CG 4way	branch line CG	1	8703450000
FBCon SS PCG 4way	all connections PCG	1	8613680000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 4way	branch line M12	1	8564080000
<b>Stainless steel enclosure</b>			
FBCon SS CG/M12 4way	branch line M12	1	8726040000


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

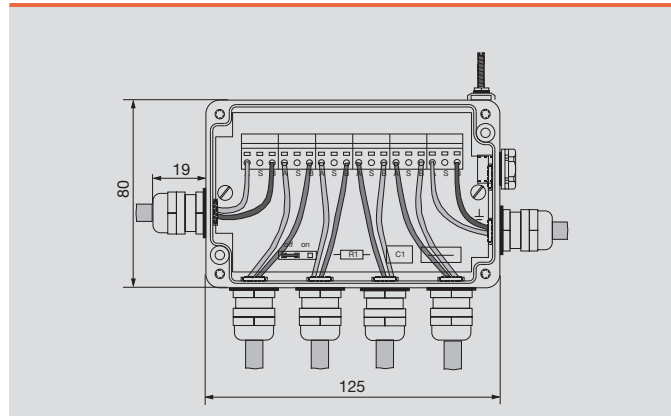


Dimensioned drawing

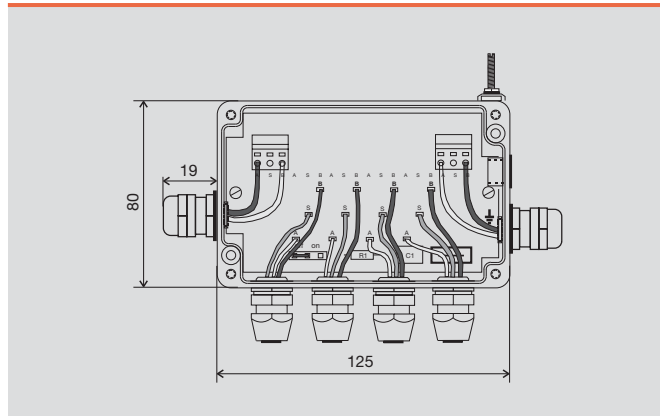

Wiring diagram

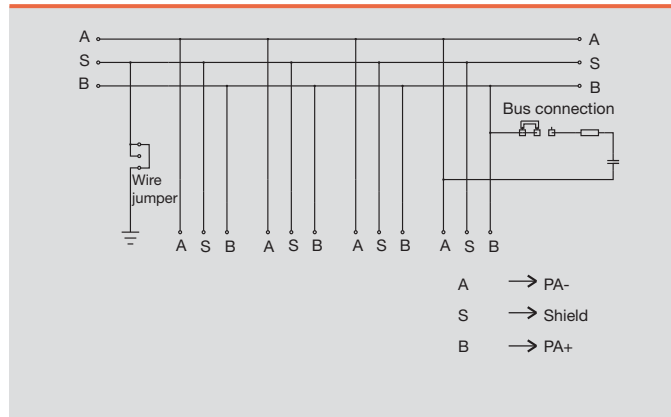

Wiring diagram

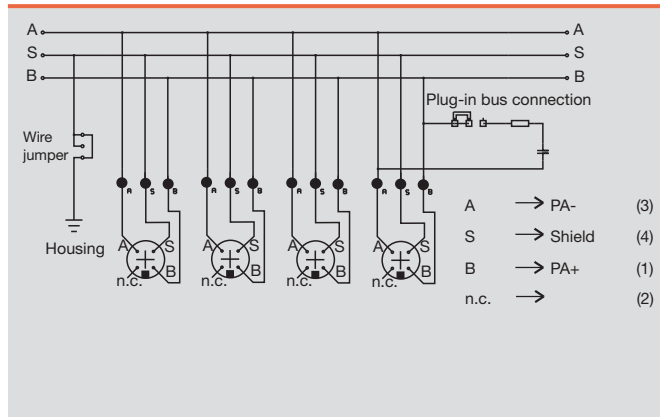

8-channel distributor

Cable gland



8-channel distributor

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 8way	branch line CG	1	8564300000
<b>Stainless steel enclosure</b>			
FBCon SS CG 8way	branch line CG	1	8703470000
FBCon SS PCG 8way	all connections PCG	1	8640720000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 8way	branch line M12	1	8564310000
<b>Stainless steel enclosure</b>			
FBCon SS CG/M12 8way	branch line M12	1	8726050000


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

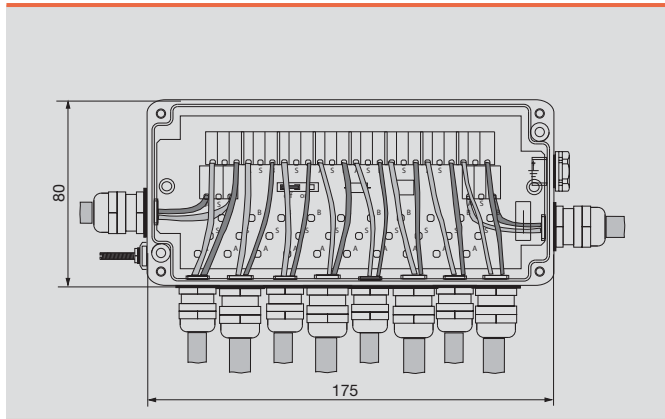


Dimensioned drawing

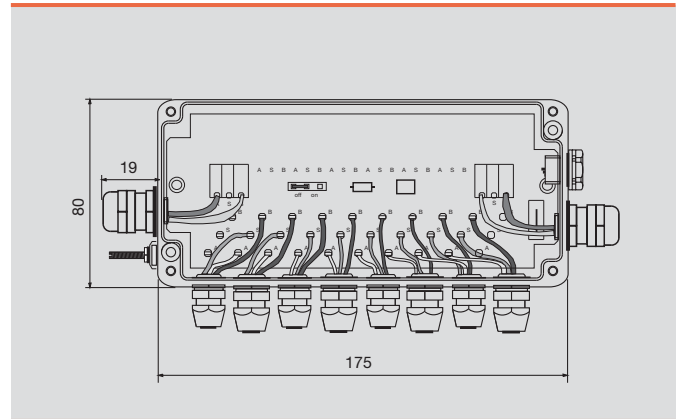


Wiring diagram

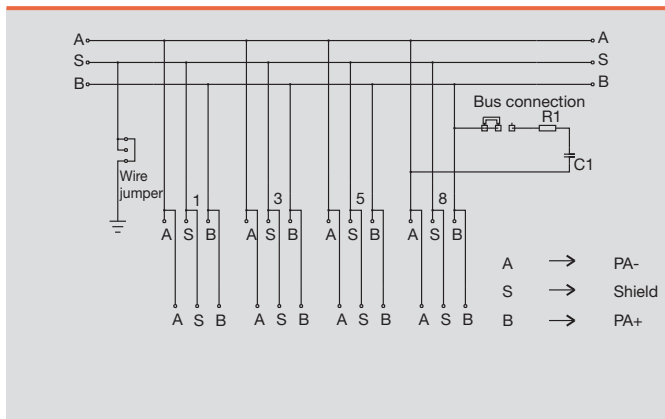

Wiring diagram

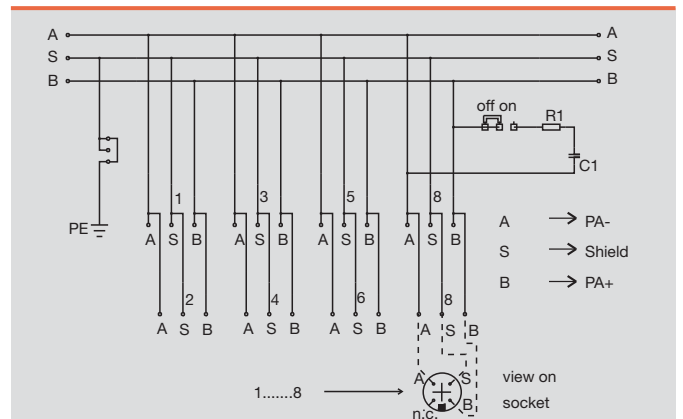

Fieldbus components for industrial applications with surge protection or current limiter

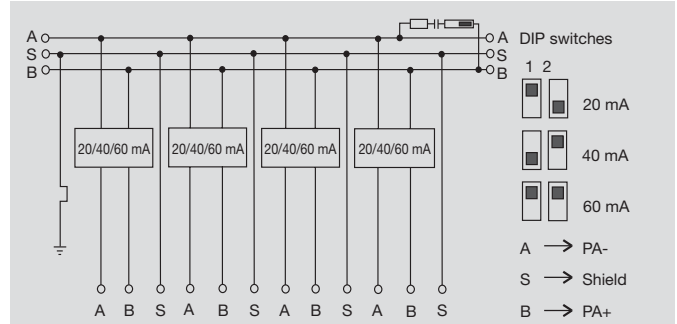

Example: 4-way module with current limiter

PROFIBUS-PA T-connectors

Fine surge protection or integrated current limiting mechanisms are designed for protecting connected measuring devices, sensors or actuators from surge voltages. Gas-discharge tubes and suppressor diodes are voltage-limiting protection mechanisms. If a rapidly rising voltage pulse reaches the input of a T-connector with surge protection, the gas discharge tube ignites and discharges a high current.

The residual pulse is limited by a suppressor diode. In the case of a slow rise in voltage, the pulse is processed by

the diode alone. The housing is connected to the protective earth via an external earth stud.

When using the connectors for current limiting, the PROFIBUS-PA network is protected against short circuits with protective circuitry.

The current can be set to either 20 mA, 40 mA or 60 mA by means of two DIP switches.

Surge protection  
Technical data

Operating temperature	-40 °C to 85 °C
Ingress protection class	IP 67
Enclosure material	High grade aluminium alloy (AL - SI 12)
Finish	Painted RAL 7001
PROFIBUS-PA connection	Tension clamp terminals 0.5 - 1.5 mm <sup>2</sup>
Cable entry	Cable gland M16
Branch	M12 socket (4-pin)
Cable gland clamping range	5.5 - 9.5 mm
Nominal voltage DC/AC	U <sub>N</sub> = 24 V DC/18 V AC
Max. permissible operating voltage	U <sub>c</sub> = 30 V DC/21 V AC
Rated current at 30 °C	I <sub>N</sub> = 500 mA
Trip surge voltage (1 kV/μs)	< 600 V
Rated discharge surge current (8/20 μs)	I <sub>SN</sub> = 10 KA (wire-wire, wire-PE)
Output voltage limit (8/20 μs)	U <sub>p</sub> = 65 V
PROFIBUS-PA bus terminator	Via jumper

Installation advice

<b>Torques</b>	
Screw terminals	0.4 Nm
M16 cable gland at enclosure	6.0 Nm
Union nut M16 cable gland	4.0 Nm
Enclosure cover	1.8 - 2.0 Nm
External earthing cable	1.8 - 2.0 Nm

Limiter  
Technical data

Operating temperature	-40 °C to 85 °C
Ingress protection class	IP 67
Enclosure material	High grade aluminium alloy (AL - SI 12)
Finish	Painted RAL 7001
PROFIBUS-PA connection	Tension clamp terminals 0.5 - 1.5 mm <sup>2</sup>
Cable entry	Cable gland M16
Branch	M12 socket (4-pin)
Cable gland clamping range	5.5 - 9.5 mm
Short-circuit protection per station	20, 40, 60 mA settings
PROFIBUS-PA bus terminator	Via jumper

Installation advice

<b>Torques</b>	
Screw terminals	0.4 Nm
M16 cable gland at enclosure	6.0 Nm
Union nut M16 cable gland	4.0 Nm
Enclosure cover	1.8 - 2.0 Nm
External earthing cable	1.8 - 2.0 Nm

1-channel distributor (OVP)

Cable gland



1-channel distributor (OVP)

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 1way OVP	branch line CG	1	8714120000
<b>Stainless steel enclosure</b>			
FBCon SS PCG 1way OVP	all connections PCG	1	8715270000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 1way OVP	branch line M12	1	8714080000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

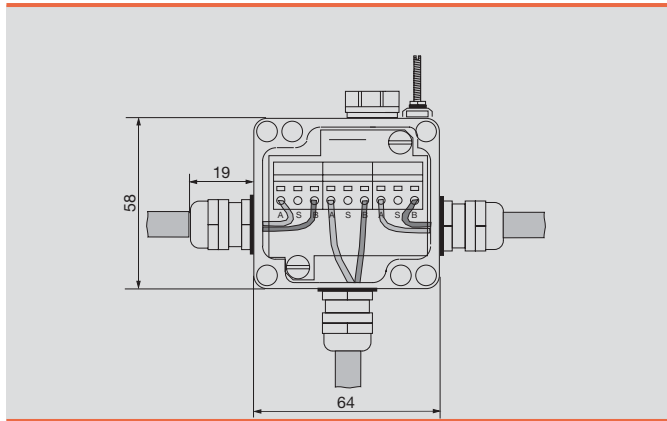


Dimensioned drawing

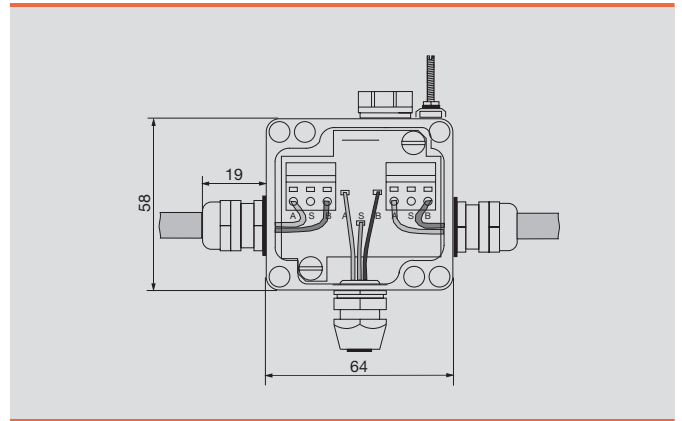

Wiring diagram

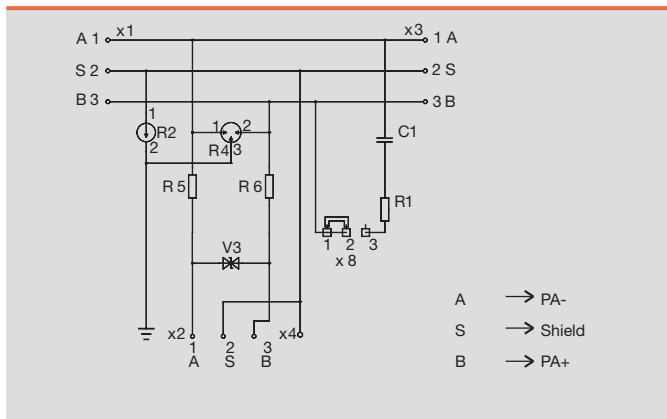

Wiring diagram

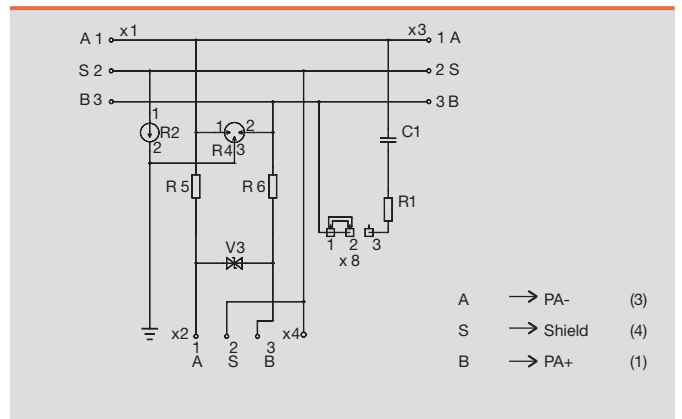

# PROFIBUS-PA - FBCon T-distributor with surge protection

## 2-channel distributor (OVP)

Cable gland



## 2-channel distributor (OVP)

M12 connection



### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 2way OVP	branch line CG	1	8714130000
<b>Stainless steel enclosure</b>			


### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 2way OVP	branch line M12	1	8714090000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


### Dimensioned drawing

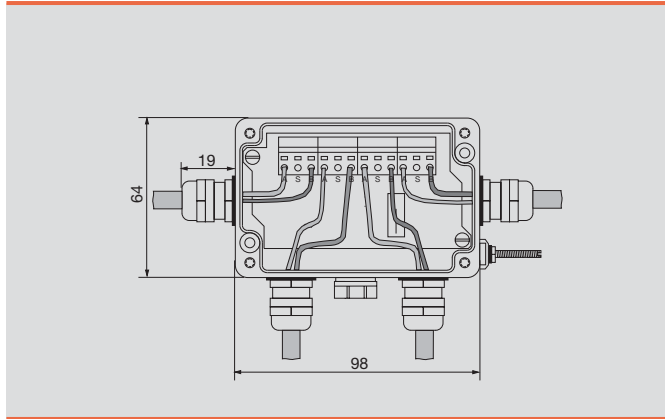


### Dimensioned drawing

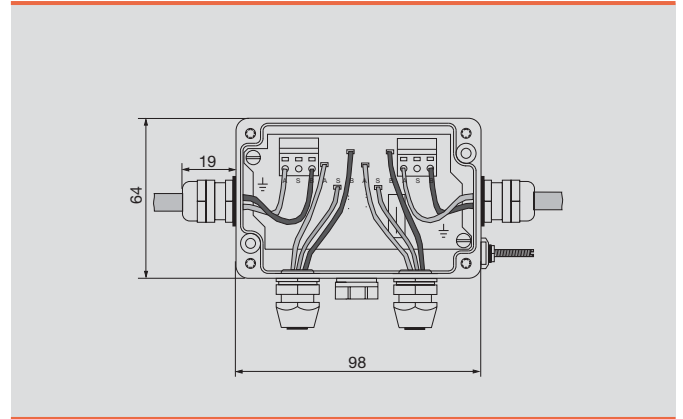

### Wiring diagram

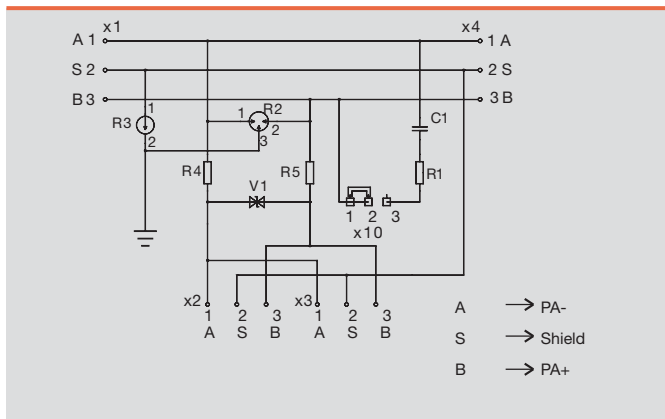

### Wiring diagram

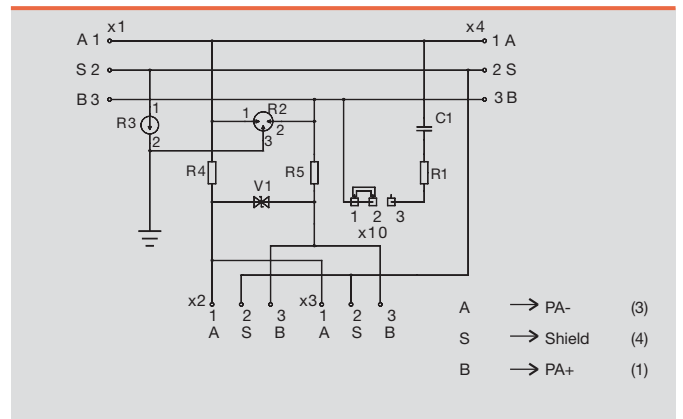


4-channel distributor (OVP)

Cable gland



4-channel distributor (OVP)

M12 connection

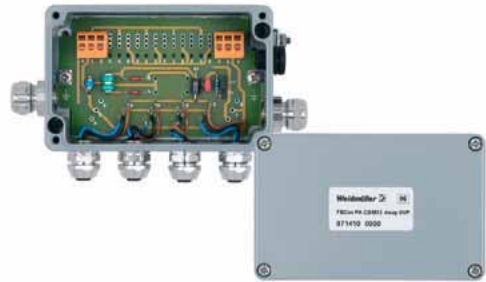

Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 4way OVP	branch line CG	1	8714140000
<b>Stainless steel enclosure</b>			
FBCon SS PCG 4way OVP	all connections PCG	1	8726080000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 4way OVP	branch line M12	1	8714100000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

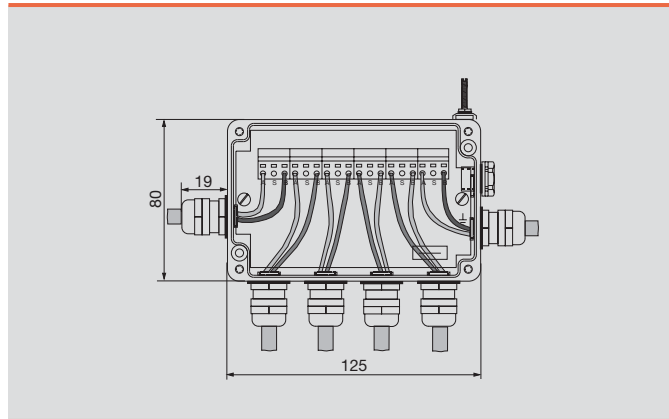


Dimensioned drawing

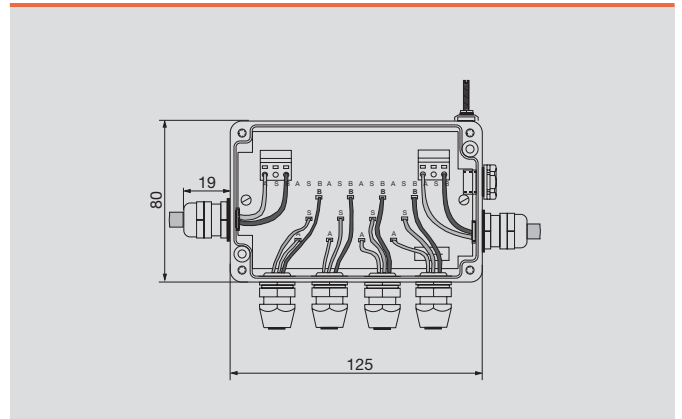

Wiring diagram

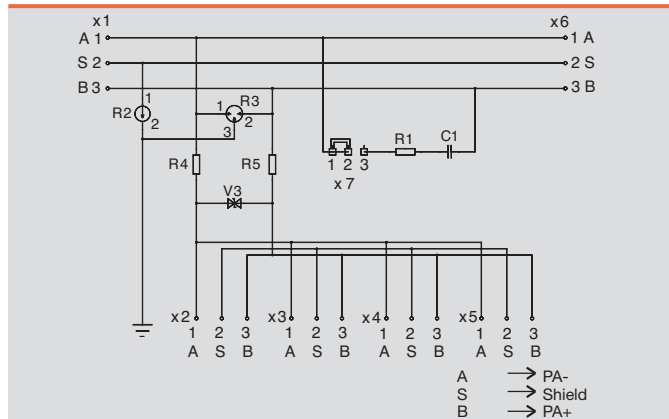

Wiring diagram

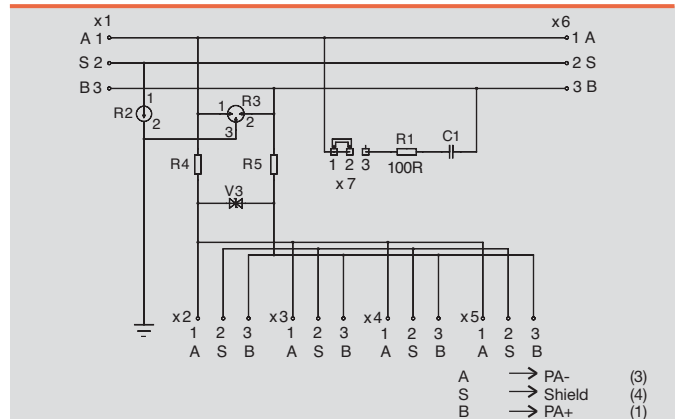





1-channel distributor (limiter)

Cable gland



1-channel distributor (limiter)

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 1way Limiter	branch line CG	1	8714200000
<b>Stainless steel enclosure</b>			
FBCon SS PCG 1way Limiter	all connections PCG	1	8726110000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 1way Limiter	branch line M12	1	8714160000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

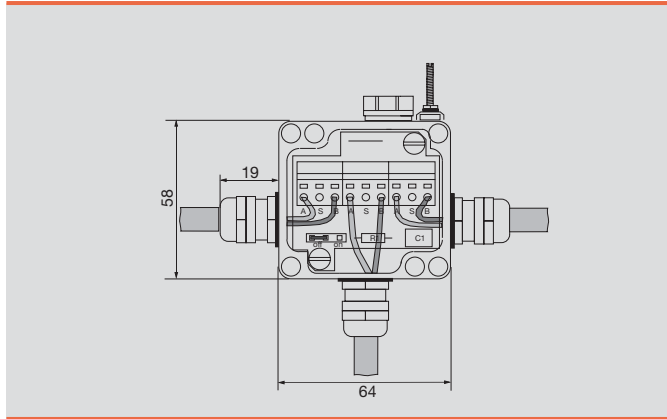


Dimensioned drawing

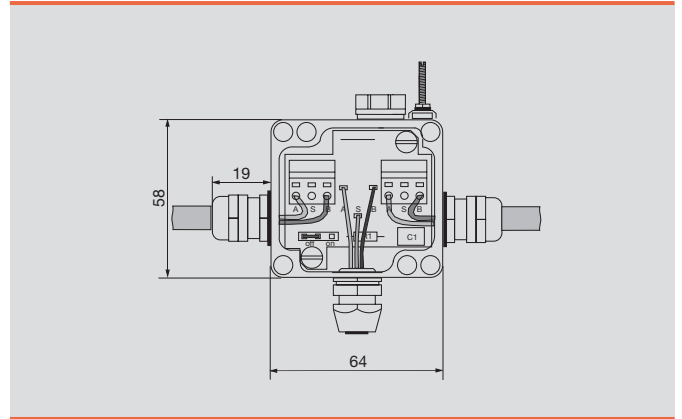

Wiring diagram

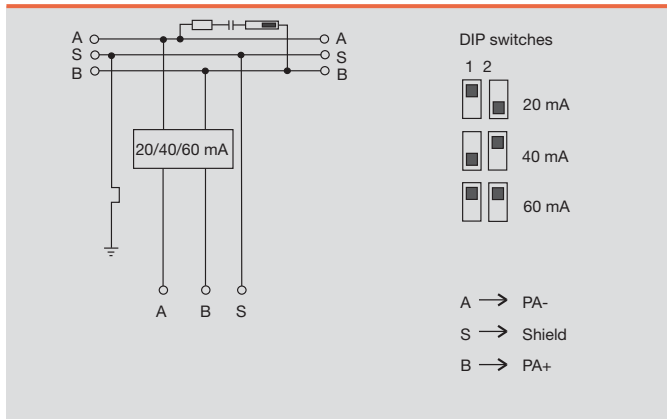

Wiring diagram

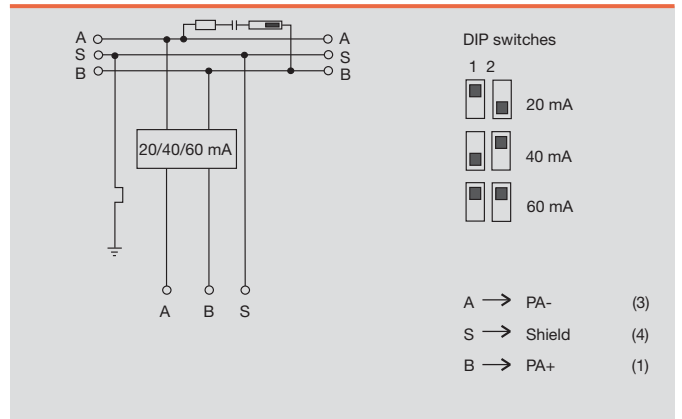

PROFIBUS-PA - FBCon T-distributor with surge protection


2-channel distributor (limiter)

Cable gland



2-channel distributor (limiter)

M12 connection

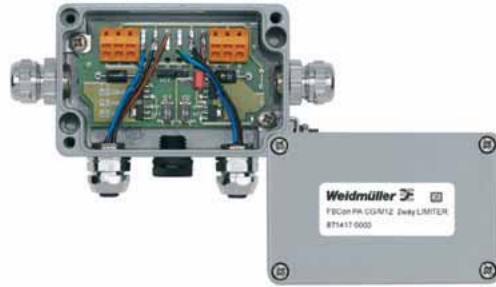

Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 2way Limiter	branch line CG	1	8714210000
<b>Stainless steel enclosure</b>			


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 2way Limiter	branch line M12	1	8714170000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

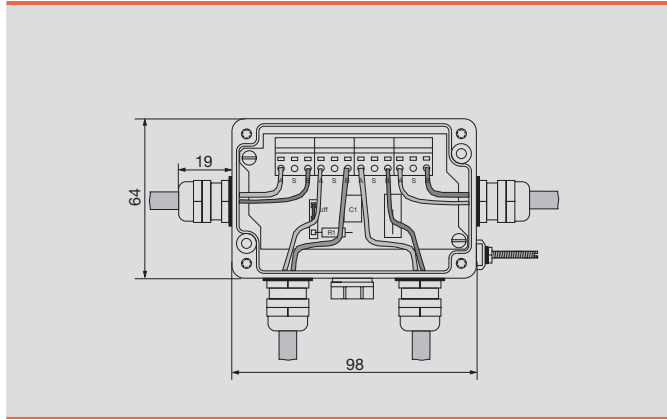


Dimensioned drawing

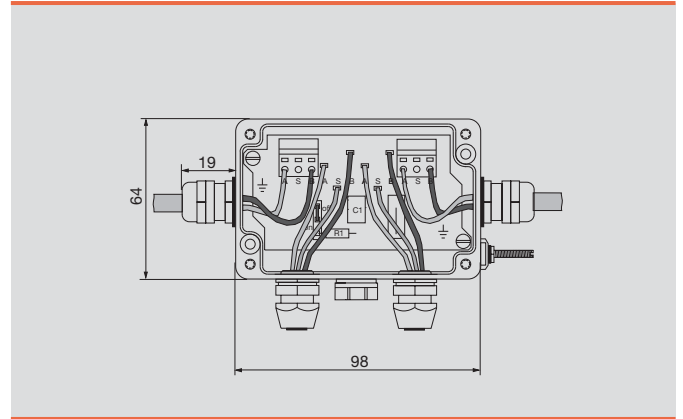

Wiring diagram

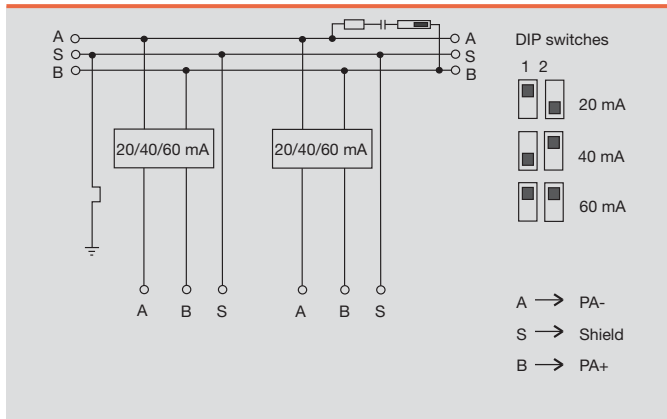

Wiring diagram

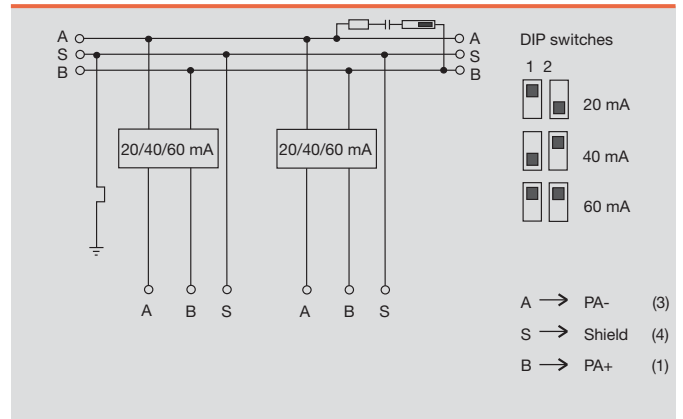

4-channel distributor (limiter)

Cable gland



4-channel distributor (limiter)

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 4way Limiter	branch line CG	1	8714220000
<b>Stainless steel enclosure</b>			
FBCon SS PCG 4way Limiter	all connections PCG	1	8715260000


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 4way Limiter	branch line M12	1	8714180000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

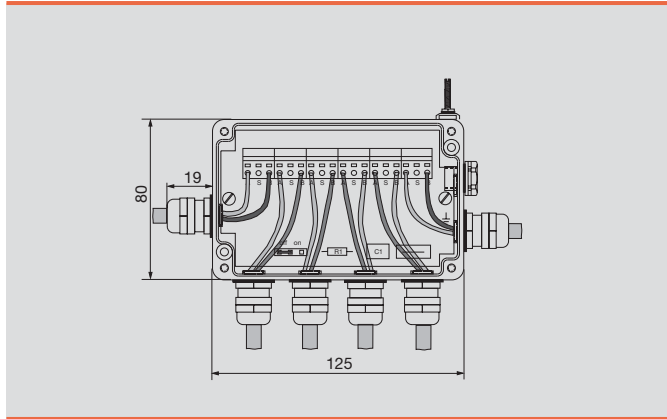


Dimensioned drawing

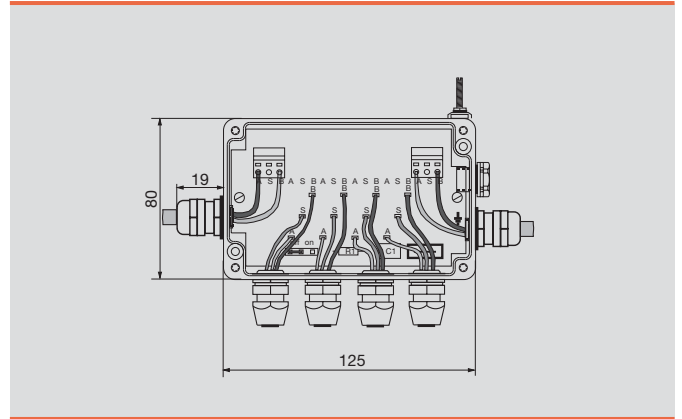

Wiring diagram

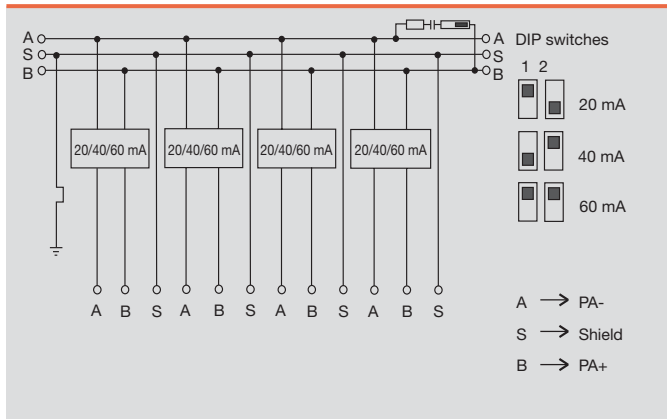

Wiring diagram

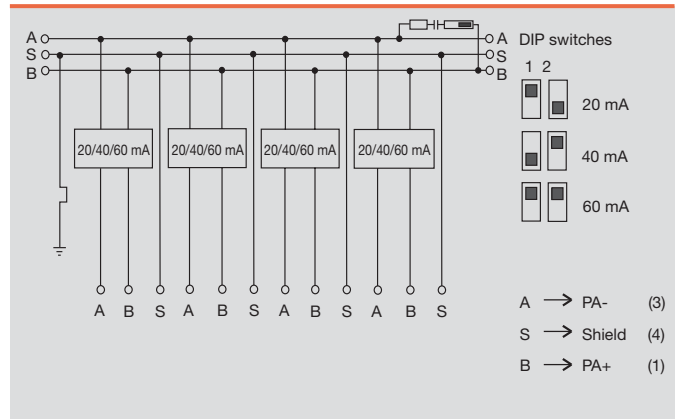

## PROFIBUS-PA - FBCon T-distributor with surge protection

### 8-channel distributor (limiter)

Cable gland



### 8-channel distributor (limiter)

M12 connection



C

#### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 8way Limiter	branch line CG	1	8714230000
<b>Stainless steel enclosure</b>			
FBCon SS PCG 8way Limiter	all connections PCG	1	8726160000


#### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 8way Limiter	branch line M12	1	8714190000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


#### Dimensioned drawing

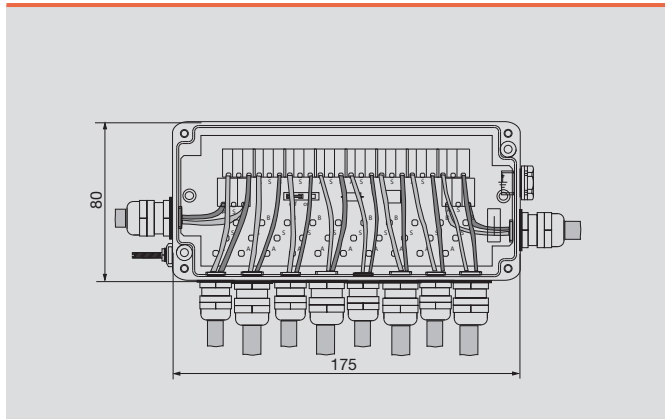


#### Dimensioned drawing

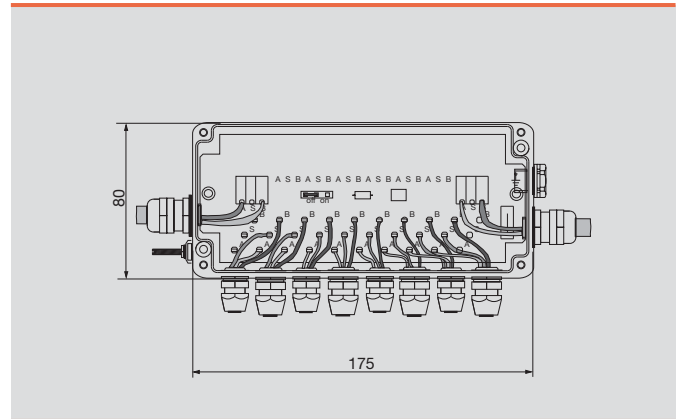

#### Wiring diagram

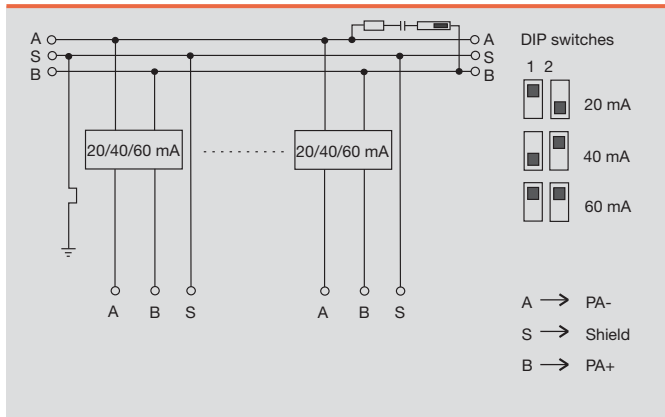

#### Wiring diagram

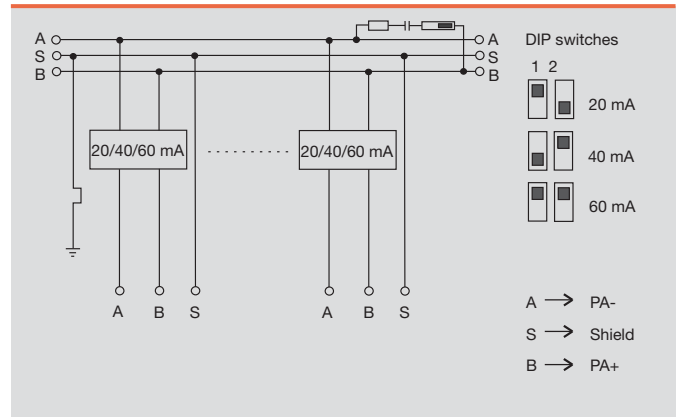



## FBCon distributors for Ex areas



### PROFIBUS-PA T-connector

- Ex(ia)

The PROFIBUS-PA installation products are increasingly used in

- food industry
- basic industries and
- chemical industry.

The product range offers a wide choice of customer solutions also for use in harsh conditions. This includes standard and EX versions of single and multi-way design with M12 plug in connection or cable gland. Weidmüller offers a solution for almost every application. If you cannot find your solution here, please contact the branch / sales office responsible for you.

### PROFIBUS-PA T-connector

- Ex(ia)
- 1-way
- 2-way
- 4-way
- 8-way

The PROFIBUS-PA T connector in Ex(ia) specification is intended for direct coupling of measuring devices, sensors, actuators, etc. in potentially explosive areas.

- Approval for intrinsically safe use ATEX approval
- IP 66 Ingress Protection Class
- Modular design
- Uninterruptible bus operation
- Simple handling
- External earth terminal
- External bus terminator









### 1-channel distributor Ex

Cable gland



### 1-channel distributor Ex

M12 connection



#### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 1way Ex	branch line CG	1	8564180000
<b>Stainless steel enclosure</b>			


#### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 1way Ex	branch line M12	1	8564150000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


#### Dimensioned drawing

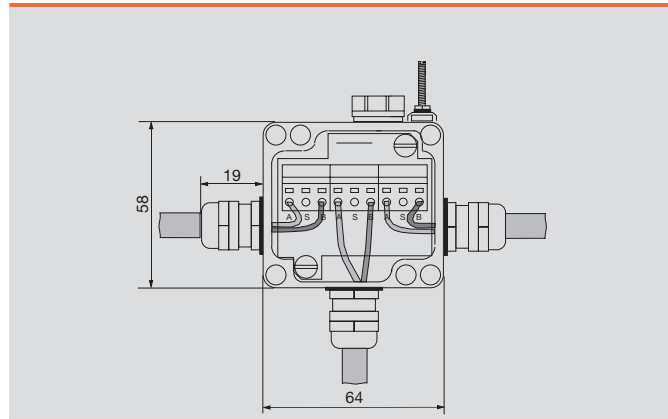


#### Dimensioned drawing

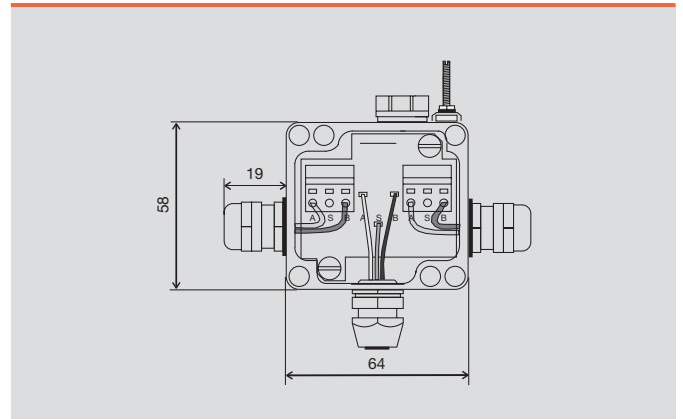

#### Wiring diagram

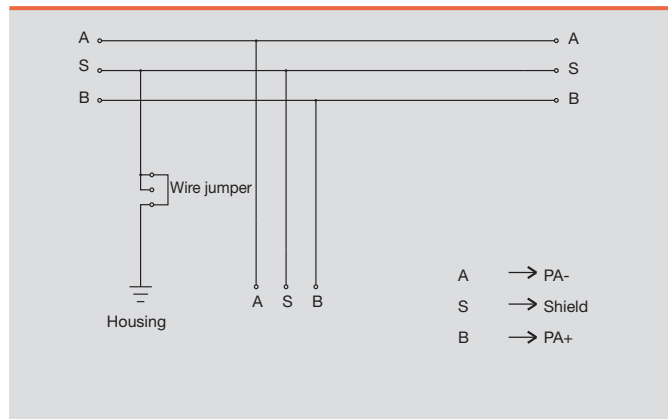

#### Wiring diagram

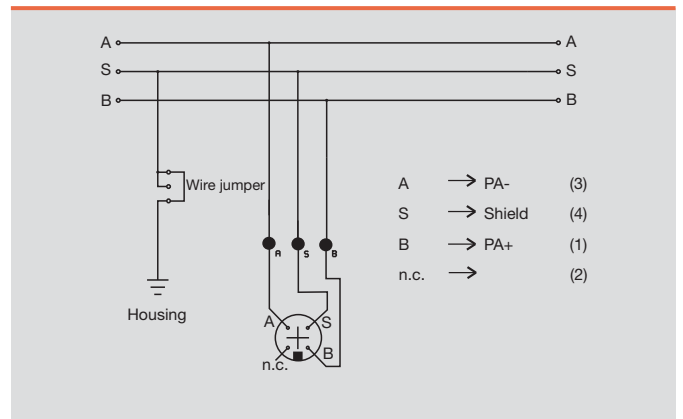

2-channel distributor Ex

Cable gland



2-channel distributor Ex

M12 connection



Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 2way Ex	branch line CG	1	8564190000
<b>Stainless steel enclosure</b>			


Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 2way Ex	branch line M12	1	8564160000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


Dimensioned drawing

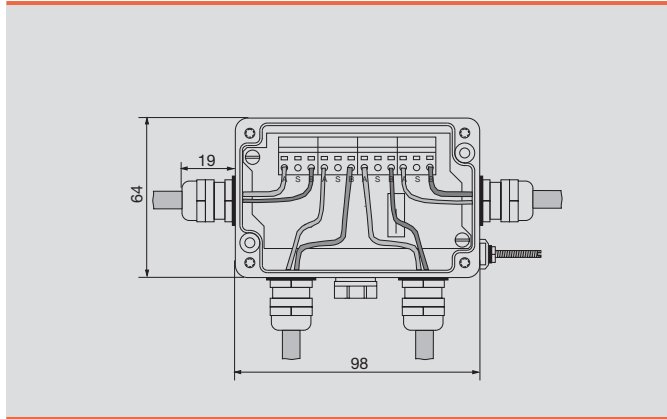


Dimensioned drawing

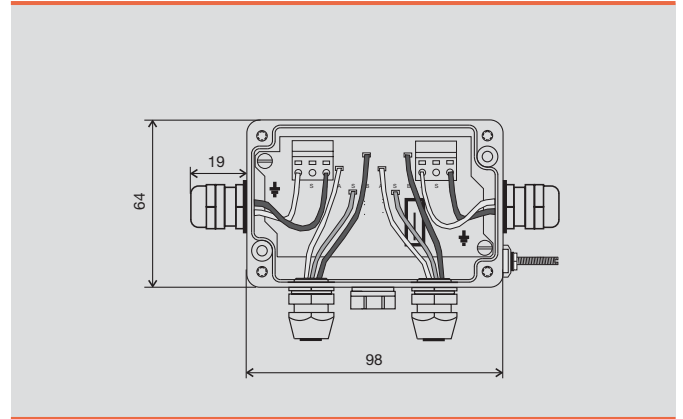

Wiring diagram

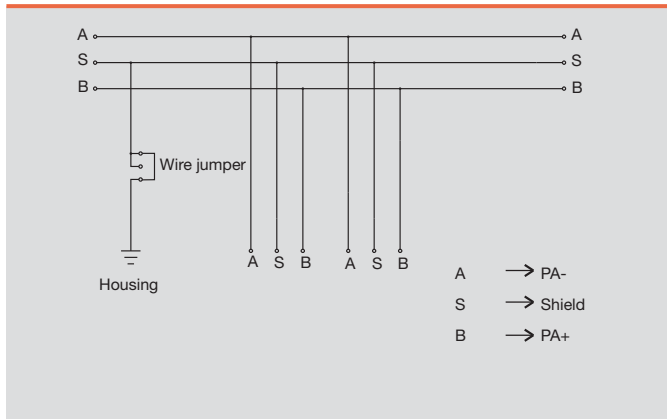


Wiring diagram

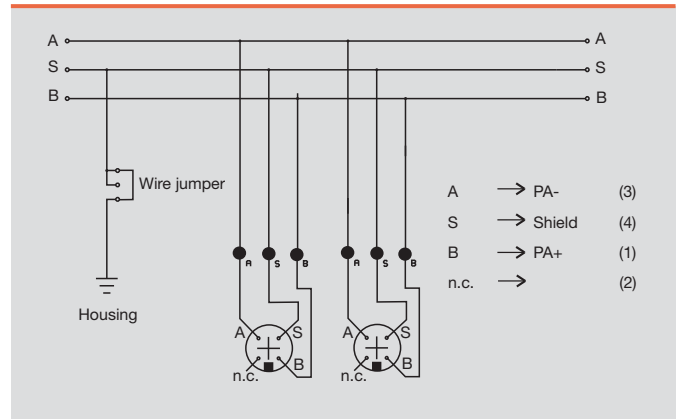


### 4-channel distributor Ex

Cable gland

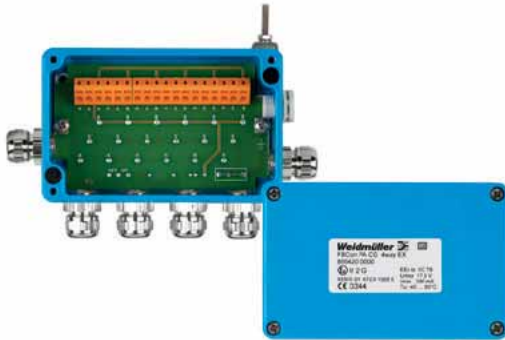

### 4-channel distributor Ex

M12 connection

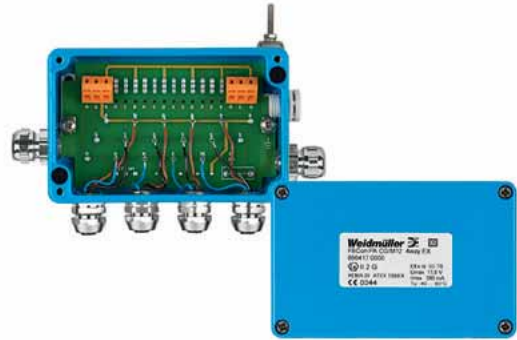

#### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 4way Ex	branch line CG	1	8564200000
<b>Stainless steel enclosure</b>			


#### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 4way Ex	branch line M12	1	8564170000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


#### Dimensioned drawing

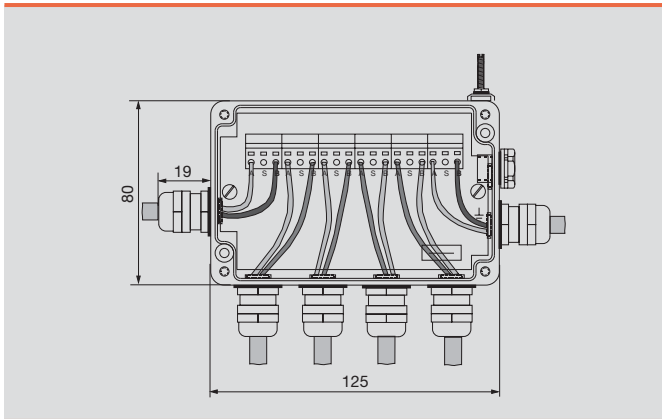


#### Dimensioned drawing

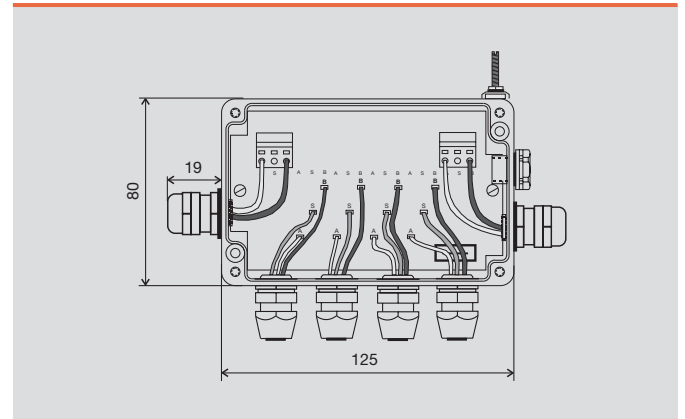

#### Wiring diagram

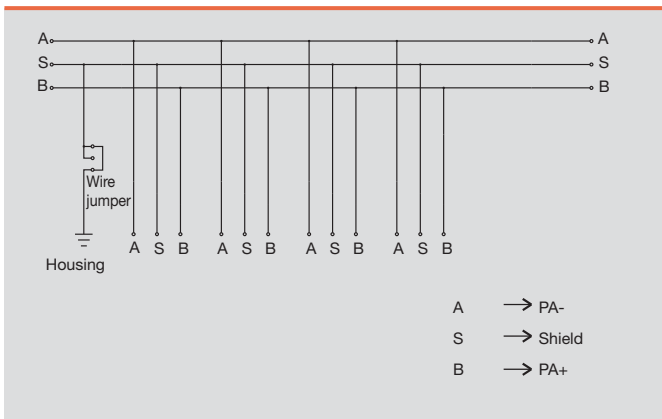


#### Wiring diagram

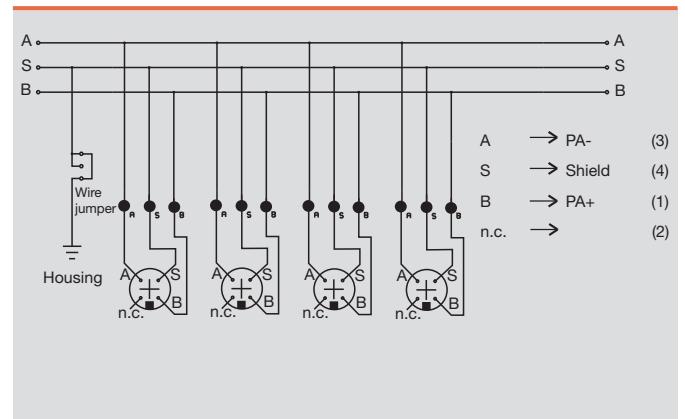


### 8-channel distributor Ex

Cable gland

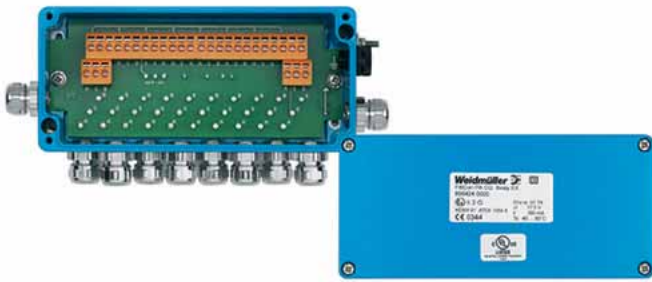

### 8-channel distributor Ex

M12 connection

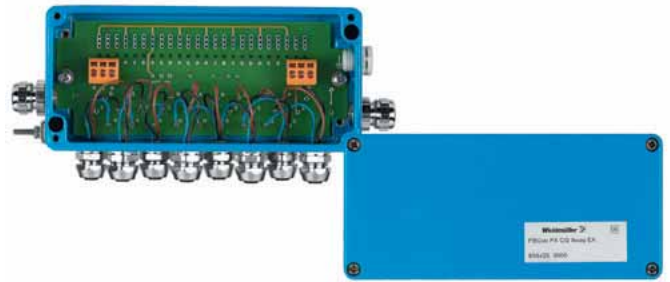

### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG 8way Ex	branch line CG	1	8564240000
<b>Stainless steel enclosure</b>			


### Ordering data

Type	Type of connection	Qty.	Order No.
<b>Aluminium housing</b>			
FBCon PA CG/M12 8way Ex	branch line M12	1	8564250000
<b>Stainless steel enclosure</b>			


CG = brass cable gland  
PCG = plastic cable gland

CG = brass cable gland  
PCG = plastic cable gland


### Dimensioned drawing

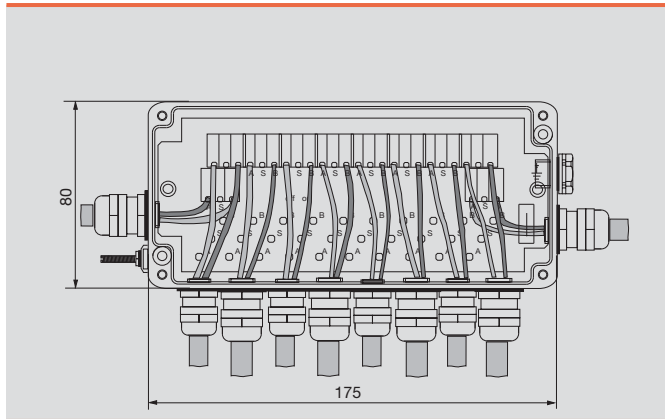


### Dimensioned drawing

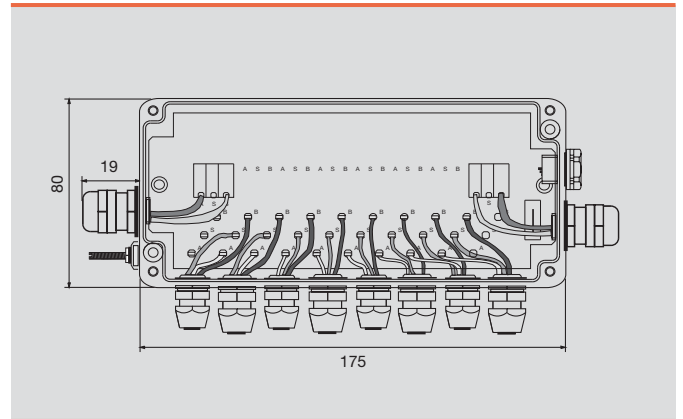

### Wiring diagram

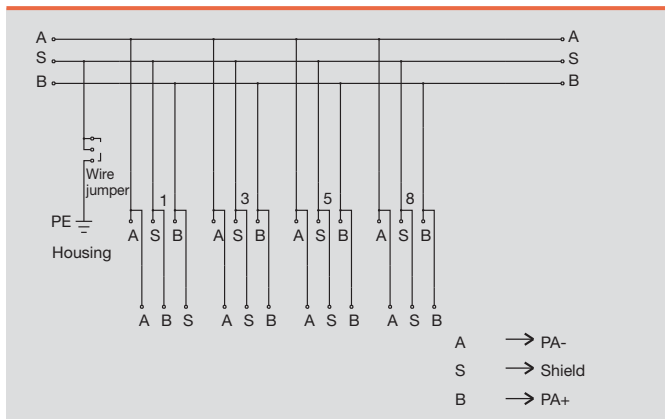



### Wiring diagram

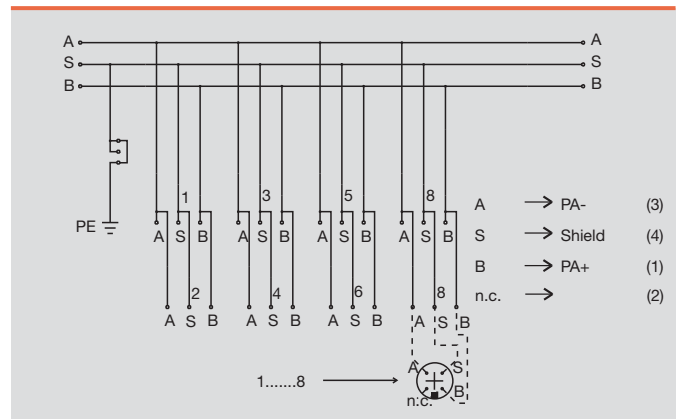

**FBCon bus terminator**  
**FBCon bus terminator without earth connection**



**FBCon Bus Terminator with earth connection**

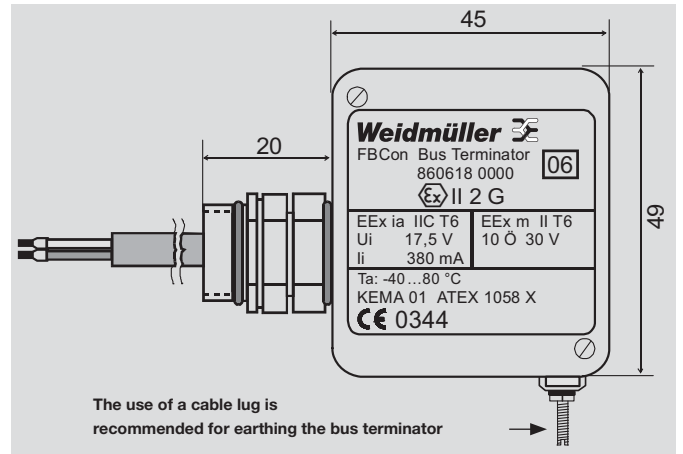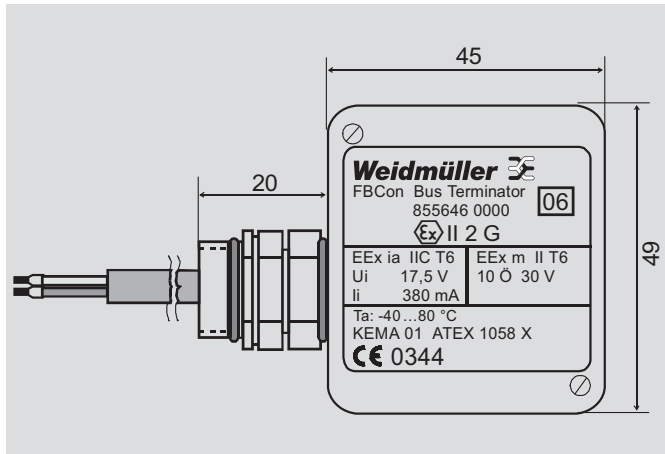

**Ordering data**

Type	Qty.	Order No.
FBCon bus terminator EEx with locking clip, without earth connection	1	8556460000
FBCon bus terminator EEx without locking clip, without earth connection	1	8606190000

**Technical data**

Operating temperature	-40 °C to 80 °C
Ingress protection class	IP 66
Enclosure material	High grade aluminium alloy (Al - Si 12)
Finish	Black powder-coated
Connection lead	2 x 0.14 mm <sup>2</sup>
Cable entry	Bus adapter M16


**Ordering data**

Type	Qty.	Order No.
FBCon Bus Terminator EEx mit Rastfuß + mit Erdschluss	1	8606180000
FBCon Bus Terminator EEx ohne Rastfuß + mit Erdschluss	1	8606200000


**Technical data**

Operating temperature	-40 °C to 80 °C
Ingress protection class	IP 66
Enclosure material	High grade aluminium alloy (Al - Si 12)
Finish	Black powder-coated
Connection lead	2 x 0.14 mm <sup>2</sup>
Cable entry	Bus adapter M16


**Wiring diagram**

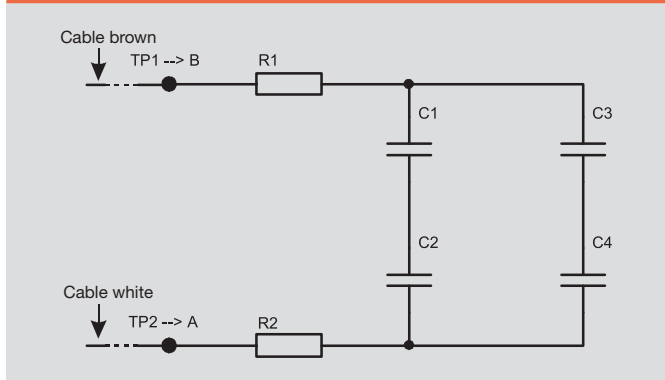

**Housing cover without clip-on foot**

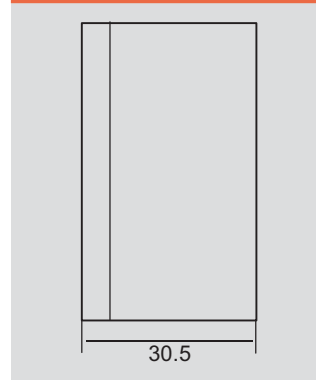



**Housing cover with clip-on foot**

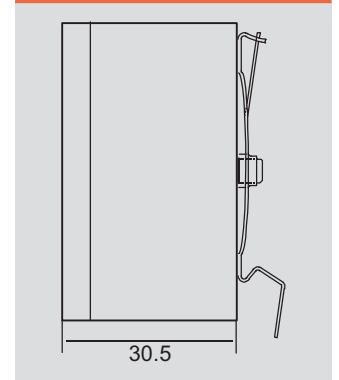





CAN/DeviceNet cables™  
connecting cables




Ordering data

Male, straight - Female, straight	
PUR/TPE	1.5 m
PVC/PVC	1.5 m
Male, straight - Female, angled	
PUR/TPE	1.5 m
PVC/PVC	1.5 m
Male, angled - Female, angled	
PUR/TPE	1.5 m
PVC/PVC	1.5 m
<b>Note</b>	

5-pole

Type	Order No.
SAIL-M12GM12G-CD-1.5A	1964710150
SAIL-M12GM12G-CD-1.5B	1060130150
SAIL-M12GM12W-CD-1.5A	1061990150
SAIL-M12GM12W-CD-1.5B	1062190150
SAIL-M12WM12W-CD-1.5A	1062150150
SAIL-M12WM12W-CD-1.5B	1062210150
Other versions on request	

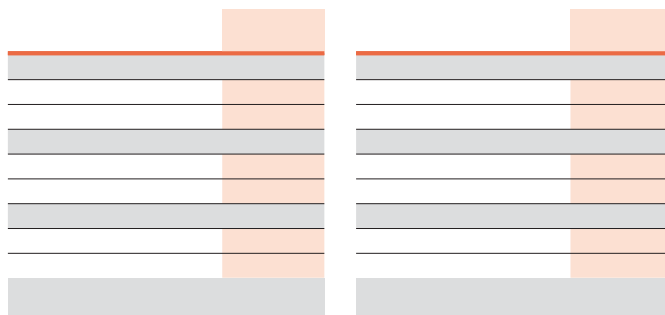

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data

Sheathing colour	black
Protection class	IP 67
Core cross-section	2x 0.34 + 2x 0.22 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

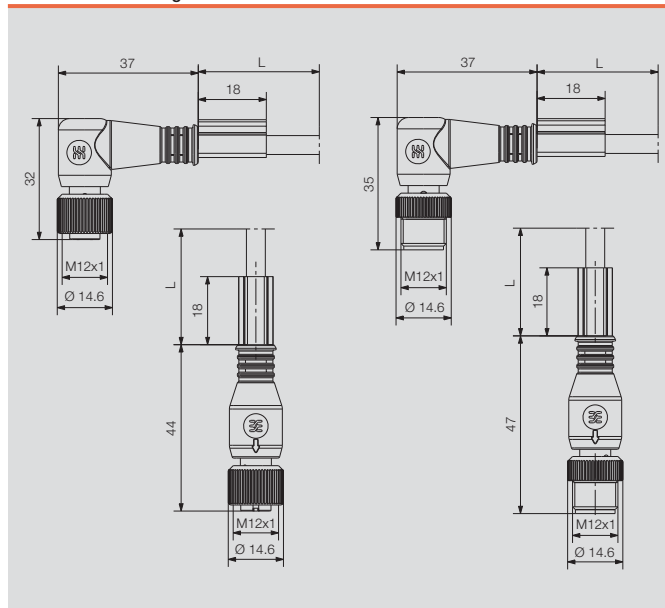






## Universal Pro cables

The four-pole Standard M8 sensor cables are especially well suited for the Universal Pro system. With their diameter of 0.34 mm<sup>2</sup>, these cables allow a system to be expanded up to 50 meters. The 360° shielding guarantees that signal transmission is error-free.



Male

Female

### Technical data

Cable construction	
No. of poles	4
Sheathing colour	grey
Material	PUR/PUR
Core cross-section	0.34 mm <sup>2</sup>
Contact surface	Gold-plated
Nominal voltage	30 V
Rated current	4 A
Protection class	IP 67
Ambient temperature, min.	-30 °C
Ambient temperature, max.	90 °C

#### Note

L in the drawing is the cable length

### Ordering data

Male, straight - female, straight	Type	(Qty. = 1)	Order No.
0.3 m	SAIL-M8GM8G-4S-0.3Q-SB		1981900030
1.0 m	SAIL-M8GM8G-4S-1.0Q-SB		1981900100
1.5 m	SAIL-M8GM8G-4S-1.5Q-SB		1981900150
3.0 m	SAIL-M8GM8G-4S-3.0Q-SB		1981900300
5.0 m	SAIL-M8GM8G-4S-5.0Q-SB		1981900500
10.0 m	SAIL-M8GM8G-4S-10Q-SB		1981901000
15.0 m	SAIL-M8GM8G-4S-15Q-SB		1981901500
20.0 m	SAIL-M8GM8G-4S-20Q-SB		1981902000
Female, straight - open end			
1.5 m	SAIL-M8BG-4S-1.5Q-SB		1981910150
3.0 m	SAIL-M8BG-4S-3.0Q-SB		1981910300
5.0 m	SAIL-M8BG-4S-5.0Q-SB		1981910500
10.0 m	SAIL-M8BG-4S-10Q-SB		1981911000

#### Note

Other versions on request


## Terminating resistor




### Ordering data

Type	Qty.	Order No.
SAI END CAN M8 4P	1	1955340000

## Dimensions

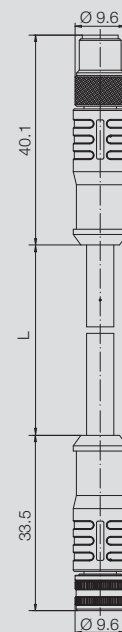

## CAN/DeviceNet™ bulk lengths



**CANopen**  
**PROFI**  
 PROCESS FIELD BUS  
**BUS**

## CAN/DeviceNet bulk lengths

## Ordering data

Male	Type	Order No.
4-pole	SAIH-CD-2x0.34/2x0.22-PURs	<b>1058630000</b>

## Technical data

## Component A (1x2x0.34) ST

Conductor	Tin-plated copper 0.34 mm <sup>2</sup> (19 wires) according to UL 1581 Tab 20.1
Insulation	Polyolefine mixture according to UL Style 80 °C 30 V colour code: 2 conductor red/black Diameter: 1.6 ±0.1 mm
Assembly	Two twisted conductors + aluminium-polyester band (Ai exterior)

## Element B (1x2x0.22) ST


Conductor	Tin-plated copper 0.22 mm <sup>2</sup> (19 wires) according to UL 1581 Tab 20.1
Insulation	Polyethylene foam skin Colour code: 2 conductors white/blue Diameter: approx. 2.0 mm
Assembly	Two twisted conductors + aluminium-polyester band (Ai exterior)
Complete assembly	Element A + Element B drilled
Drain wire	Tin-plated copper 0.34 mm <sup>2</sup> (19 wires) according to UL 1581 Tab 20.1
Shield	Tin-plated copper braiding, coverage 85 ± 5 %
Band	Fibre band
Outer cladding	Polyurethane mixture according to UL Style 80 °C 30 V Colour code: black RAL 9005
Marking	Not required

## General characteristics:

Nom. impedance 0.3-20 MHz	(pair 2 x 0.22 mm <sup>2</sup> ) - 120 ±10 % Ω
Nominal power rating 800 Hz	(pair 2 x 0.22 mm <sup>2</sup> ) - 39 pF/mt
Operating voltage	Low-voltage computer cable
Test voltage	1000 V
Conductor resistance	Conductor A: max. 55 Ω/km at 20 °C Conductor B: max. 90 Ω/km at 20 °C
Min. bending radius	5 x D (during installation) 10 x D (during operations)
Temperature range	-40 °C...+80 °C (during installation) -10 °C ... +80 °C (during operations)
Reference	UL 1581
Attenuation (max.) (pair 0.22 mm <sup>2</sup> )	0,5 MHz ... 1,64 db/100mt 1,0 MHz ... 2,30 db/100mt
Max. speed	180 mt/min
Max. acceleration	5 mt/s <sup>2</sup>
Copper weight	33,6 kg/km (ca.)
Total weight	79 kg/km (ca.)

## Note

Screw connection M12, metal (EMC)



SAISM / SAIBM

straight



SAISW / SAIBW

Angled



Ordering data

<b>Male</b>	5-pole, PG 9
<b>Socket</b>	5-pole, PG 9
<b>Note</b>	

Type	Qty.	Order No.
SAIS-M-5/8S M12 5P A-COD	1	1784740000
SAIB-M-5/8S M12 5P A-COD	1	1784750000
Other versions on request		

Type	Qty.	Order No.
SAISW-M-5/8 M12	1	1803940000
SAIBW-M-5/8 M12	1	1803920000
Other versions on request		


Technical data

Type of connection
Housing main material
Contact tube diameter
Cable diameter
Cross-section for connected wire
Rated current
Rated voltage
Temperature range of housing
Protection class
Contact surface
<b>Note</b>


Screw connection
CuZn
M12
6...8 mm (PG9)
0.14 - 0.75 mm <sup>2</sup>
4 A
125 V
-25...+85 °C
IP 67
gold-plated

Screw connection
CuZn
M12
6...8 mm (PG9)
0.14 - 0.75 mm <sup>2</sup>
4 A
125 V
-25...+85 °C
IP 67
gold-plated

Dimensioned drawing

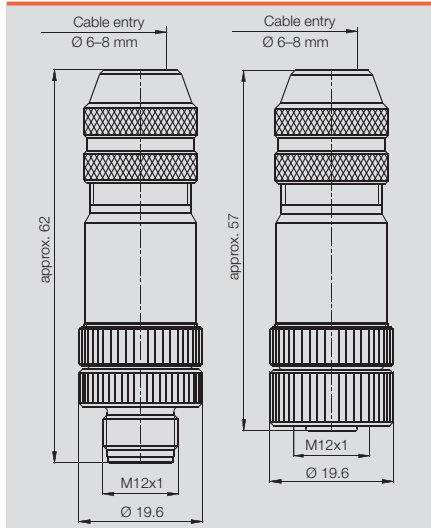

Dimensioned drawing

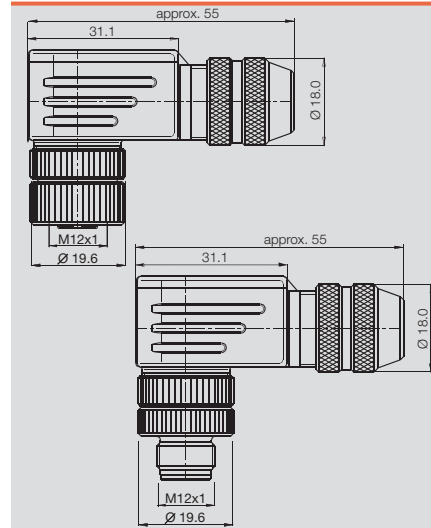






## Ethernet cables

### Assembled cable - dragline cable M12 straight



### Assembled cable - dragline cable M12 straight

#### Note

#### Application:

Weidmüller's dragline cable can be used wherever lines are subjected to frequent or constant movement in industrial environments - and not only in dragline applications. They are:

- Sturdy
- Flexible
- Pre-assembled with D-coded M12 connectors

### Ordering data

Cat.5 PROFINET, PUR, M12-M12	Type	Order No.
1.5 m	IE-C5DD4UG0015MCSMCS-E	1025950015
3.0 m	IE-C5DD4UG0030MCSMCS-E	1025950030
5.0 m	IE-C5DD4UG0050MCSMCS-E	1025950050
10.0 m	IE-C5DD4UG0100MCSMCS-E	1025950100
Cat.5 PROFINET, PUR, M12-open		
1.5 m	IE-C5DD4UG0015MCSXXX-X	1025940015
3.0 m	IE-C5DD4UG0030MCSXXX-X	1025940030
5.0 m	IE-C5DD4UG0050MCSXXX-X	1025940050
10.0 m	IE-C5DD4UG0100MCSXXX-X	1025940100
Cat.5 PROFINET, PUR, M12-RJ45		
1.5 m	IE-C5DD4UG0015MCSA20-E	1044470015
3.0 m	IE-C5DD4UG0030MCSA20-E	1044470030
5.0 m	IE-C5DD4UG0050MCSA20-E	1044470050
10.0 m	IE-C5DD4UG0100MCSA20-E	1044470100
Cat.5 PROFINET, PUR, M12-M12 female		
1.5 m	IE-C5DD4UG0015MSSMCS-E	1059330015
3.0 m	IE-C5DD4UG0030MSSMCS-E	1059330030
5.0 m	IE-C5DD4UG0050MSSMCS-E	1059330050
10.0 m	IE-C5DD4UG0100MSSMCS-E	1059330100
Note		

### Accessories


Type	Order No.
Transparent sleeves, 12-mm length	TM 4/12 HF/HB 1719840000
Transparent sleeves, 18-mm length	TM 4/18 HF/HB 1719850000
Insertion label, yellow, 12 mm	TM-I 12 NEUTRAL GE 1718411687
Insertion label, yellow, 18 mm	TM-I 18 NEUTRAL GE 1718431687
Note	

### Technical data

Category	Cat.5 (IEC 11801) / Cat.5e (TIA 568-B)
Cross-section	4*AWG 22/7 - 0.36 mm <sup>2</sup>
Sheath diameter	6.3-6.7 mm
Material sheath	PUR
Sheathing colour	green (RAL 6018)
Insulation cross-section	1.5 mm
Min. bending radius, repetitive	8 x conductor cross-section
Ambient temperature (operational)	-40 °C...+70 °C
Abrasion resistance	very good
Halogen	to IEC 60754-2
Resistance to spread of flame	acc. to IEC 60332-1
Resistance to oils	acc. to IEC 60811-2-1

**Note:**

## Assembled cable - dragline cable M12 angled



## Assembled cable - dragline cable M12 angled

### Note

### Application:

Weidmüller's dragline cable can be used wherever lines are subjected to frequent or constant movement in industrial environments - and not only in dragline applications. They are:

- Sturdy
- Flexible
- Pre-assembled with D-coded M12 connectors

## Ordering data

Cat.5 PROFINET, PUR, M12 straight-M12 angled	Type	Order No.
1.5 m	IE-C5DD4UG0015MCSMCA-E	1059770015
3.0 m	IE-C5DD4UG0030MCSMCA-E	1059770030
5.0 m	IE-C5DD4UG0050MCSMCA-E	1059770050
10.0 m	IE-C5DD4UG0100MCSMCA-E	1059770100
Cat.5 PROFINET, PUR, M12 angled-M12 angled		
1.5 m	IE-C5DD4UG0015MCAMCA-E	1059890015
3.0 m	IE-C5DD4UG0030MCAMCA-E	1059890030
5.0 m	IE-C5DD4UG0050MCAMCA-E	1059890050
10.0 m	IE-C5DD4UG0100MCAMCA-E	1059890100
Cat.5, PUR, M12 angled-open		
1.5 m	IE-C5DD4UG0015MCAXXX-X	1059750015
3.0 m	IE-C5DD4UG0030MCAXXX-X	1059750030
5.0 m	IE-C5DD4UG0050MCAXXX-X	1059750050
10.0 m	IE-C5DD4UG0100MCAXXX-X	1059750100
Note		

## Accessories

Type	Order No.
Transparent sleeves, 12-mm length	TM 4/12 HF/HB 1719840000
Transparent sleeves, 18-mm length	TM 4/18 HF/HB 1719850000
Insertion label, yellow, 12 mm	TM-I 12 NEUTRAL GE 1718411687
Insertion label, yellow, 18 mm	TM-I 18 NEUTRAL GE 1718431687
Note	


## Technical data

Category	Cat.5 (IEC 11801) / Cat.5e (TIA 568-B)
Cross-section	4*AWG 22/7 - 0.36 mm <sup>2</sup>
Sheath diameter	6.3-6.7 mm
Material sheath	PUR
Sheathing colour	green (RAL 6018)
Insulation cross-section	1.5 mm
Min. bending radius, repetitive	8 x conductor cross-section
Ambient temperature (operational)	-40 °C...+70 °C
Abrasion resistance	very good
Halogen	to IEC 60754-2
Resistance to spread of flame	acc. to IEC 60332-1
Resistance to oils	acc. to IEC 60811-2-1

### Note:



## Assembled cable - railway cable M12 straight



## Assembled cable - railway cable M12 straight

**Note**

**Description**  
Weidmüller's industrial Ethernet rail cables are used on railway vehicles for both interior and exterior installations. They can connect parts which are fixed or which are occasionally in motion. In compliance with EN 50155 specifications.

## Ordering data

Cat.5 PUR, M12-M12	Type	Order No.
1.5 m	IE-C5DB4RE0015MCSMCS-E	1010850015
3.0 m	IE-C5DB4RE0030MCSMCS-E	1010850030
5.0 m	IE-C5DB4RE0050MCSMCS-E	1010850050
10.0 m	IE-C5DB4RE0100MCSMCS-E	1010850100
Cat.5, PUR, M12-open		
1.5 m	IE-C5DB4RE0015MCSXXX-X	1010840015
3.0 m	IE-C5DB4RE0030MCSXXX-X	1010840030
5.0 m	IE-C5DB4RE0050MCSXXX-X	1010840050
10.0 m	IE-C5DB4RE0100MCSXXX-X	1010840100
Cat.5 PUR, M12-M12 female		
1.5 m	IE-C5DB4RE0015MSSMCS-E	1059340015
3.0 m	IE-C5DB4RE0030MSSMCS-E	1059340030
5.0 m	IE-C5DB4RE0050MSSMCS-E	1059340050
10.0 m	IE-C5DB4RE0100MSSMCS-E	1059340100
Note		

## Accessories


Type	Order No.
Transparent sleeves, 12-mm length	TM 4/12 HF/HB 1719840000
Transparent sleeves, 18-mm length	TM 4/18 HF/HB 1719850000
Insertion label, yellow, 12 mm	TM-I 12 NEUTRAL GE 1718411687
Insertion label, yellow, 18 mm	TM-I 18 NEUTRAL GE 1718431687
Note	

## Technical data

Category	Cat.5 (IEC 11801) / Cat.5e (TIA 568-B)
Cross-section	2*2*AWG 22/7 - 2*2*0.36 mm <sup>2</sup>
Sheath diameter	6.95-7.55 mm
Material sheath	Radox GKW S
Sheathing colour	black
Insulation cross-section	1.95 mm
Min. bending radius, repetitive	6.0 x conductor cross-section
Ambient temperature (operational)	-40 °C...+90 °C
Abrasion resistance	very good
Halogen	to IEC 60754-2
Resistance to spread of flame	to IEC 60332-1
Resistance to oils	acc. EN 50306-3

**Note:**

## Assembled cable - rail cable M12, angled



## Assembled cable - railway cable M12 angled

## Note

## Description

Weidmüller's industrial Ethernet rail cables are used on railway vehicles for both interior and exterior installations. They can connect parts which are fixed or which are occasionally in motion. In compliance with EN 50155 specifications.

## Ordering data

Cat.5 PUR, M12 straight-M12 angled		Type	Order No.
	1.5 m	IE-C5DB4RE0015MCSMCA-E	1059940015
	3.0 m	IE-C5DB4RE0030MCSMCA-E	1059940030
	5.0 m	IE-C5DB4RE0050MCSMCA-E	1059940050
	10.0 m	IE-C5DB4RE0100MCSMCA-E	1059940100
Cat.5, PUR, M12 angled-open			
	1.5 m	IE-C5DB4RE0015MCAXXX-X	1059900015
	3.0 m	IE-C5DB4RE0030MCAXXX-X	1059900030
	5.0 m	IE-C5DB4RE0050MCAXXX-X	1059900050
	10.0 m	IE-C5DB4RE0100MCAXXX-X	1059900100
Cat.5 PUR, M12 angled-M12 angled			
	1.5 m	IE-C5DB4RE0015MCAMCA-E	1059970015
	3.0 m	IE-C5DB4RE0030MCAMCA-E	1059970030
	5.0 m	IE-C5DB4RE0050MCAMCA-E	1059970050
	10.0 m	IE-C5DB4RE0100MCAMCA-E	1059970100
Note			

## Accessories

Type	Order No.
Transparent sleeves, 12-mm length	TM 4/12 HF/HB 1719840000
Transparent sleeves, 18-mm length	TM 4/18 HF/HB 1719850000
Insertion label, yellow, 12 mm	TM-I 12 NEUTRAL GE 1718411687
Insertion label, yellow, 18 mm	TM-I 18 NEUTRAL GE 1718431687
Note	

## Technical data

Category	Cat.5 (IEC 11801) / Cat.5e (TIA 568-B)
Cross-section	2*2*AWG 22/7 - 2'2*0.36 mm <sup>2</sup>
Sheath diameter	6.95-7.55 mm
Material sheath	Radox GKW S
Sheathing colour	black
Insulation cross-section	1.95 mm
Min. bending radius, repetitive	6.0 x conductor cross-section
Ambient temperature (operational)	-40 °C...+90 °C
Abrasion resistance	very good
Halogen	to IEC 60754-2
Resistance to spread of flame	to IEC 60332-1
Resistance to oils	acc. EN 50306-3

## Note:

## Ethernet plug-in connector

Tension clamp connection M12,  
metal (EMC)  
D-coded

# Industrial Ethernet

C

### SAISM / SAIBM

straight



### SAISW / SAIBW

angled



### Ordering data

<b>Male</b>	4-pole, PG 9
<b>Socket</b>	4-pole, PG 9
<b>Note</b>	

Type	Qty.	Order No.
SAISM-4/8S-M12-4P D-COD	1	1892120000
SAIBM-4/8S-M12-4P D-COD	1	1892130000

Type	Qty.	Order No.
SAISW-4/8S-M12 4P D-ZF	1	1803930001
SAIBW-4/8S-M12 4P D-ZF	1	1139330000


### Technical data

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	


Type of connection	Tension clamp connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

Type of connection	Tension clamp connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

### Dimensioned drawing

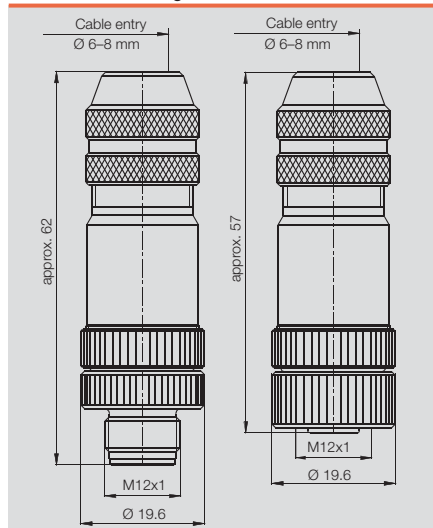

### Dimensioned drawing

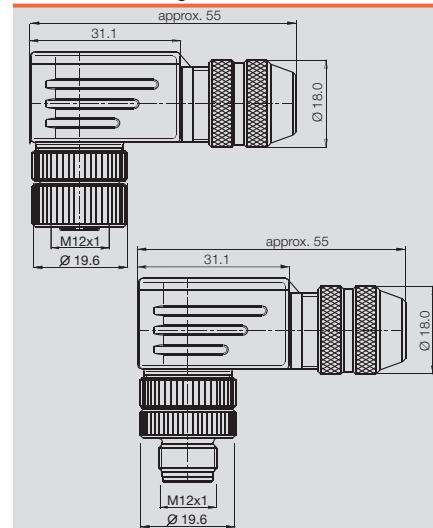

Screw connection M12, metal (EMC)  
D-coded

# Industrial Ethernet

## SAISM / SAIBM

straight



## SAISW

angled



### Ordering data

<b>Male</b>	4-pole, PG 9
<b>Socket</b>	4-pole, PG 9
<b>Note</b>	

Type	Qty.	Order No.
SAISM-4/8S-M12-4P D-COD	1	1892120000
SAIBM-4/8S-M12-4P D-COD	1	1892130000

Type	Qty.	Order No.
SAISW-4/8S-M12-4P D-COD	1	1160550000


### Technical data

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	


Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

### Dimensioned drawing

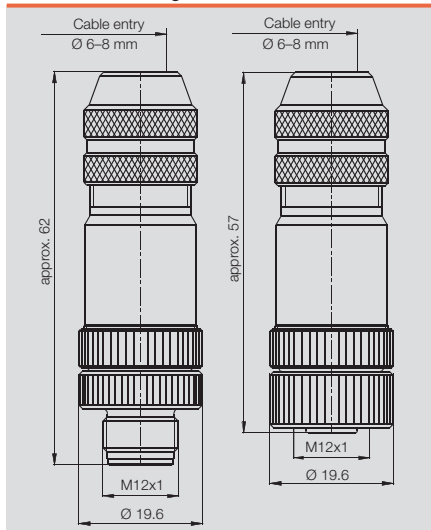

### Dimensioned drawing

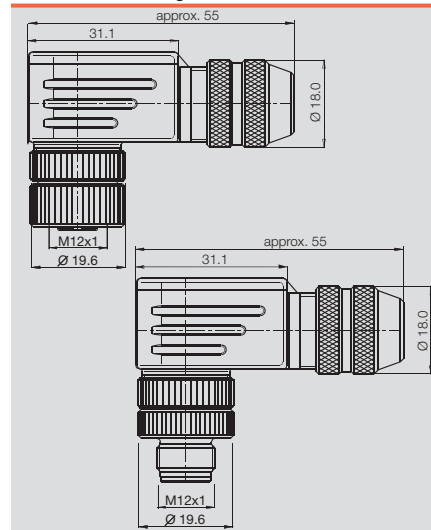



# FOUNDATION Fieldbus - connector (7/8")

## Plug-in connector FBCon 7/8"

### Plug-in connector straight (plug)



### Plug-in connector 90° (plug)

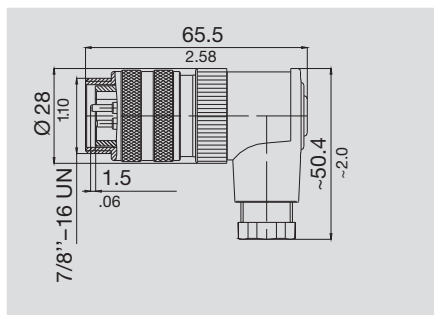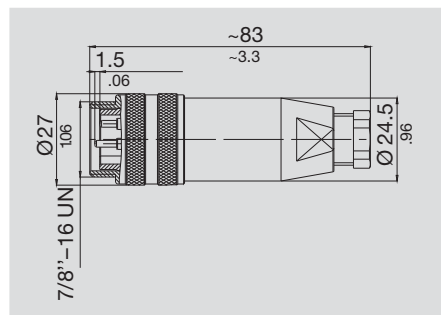

Ordering data		4-pole
Type	Qty.	Order No.
FBCon 7/8" 4P M	1	1808840000



Ordering data		4-pole
Type	Qty.	Order No.
FBCon 7/8" 4P M (A)	1	1808830000

Technical data	
No. of poles	4
Lock	Screw 7/8" UNF
Cable gland	PG 9
Connection	Screw
Connection cross-section	max. 1,5 mm <sup>2</sup>
Connection cross-section	16 AWG
Enclosure protection class	IP 67
Mechanical service life	>500 plugging cycles
Upper limit temperature	+ 85 °C
Lower limit temperature	- 40 °C

### Plug-in connector straight (socket)



### Plug-in connector 90° (socket)

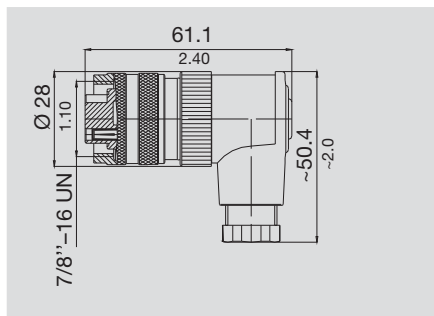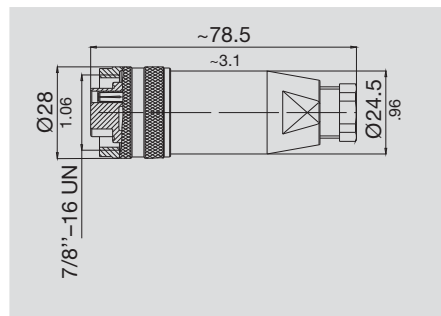

Ordering data		4-pole
Type	Qty.	Order No.
FBCon 7/8" 4P FM	1	1812480000

Ordering data		4-pole
Type	Qty.	Order No.
FBCon 7/8" 4P FM (A)	1	1812470000

Electrical data	
Rated voltage	250 V
Rated surge voltage	4000 V
Polution severity	3
Surge category	II
Insulation material group	III
Test surge voltage	4800 V
Rated current	9 A (40°)
Volume resistivity	≤ 5 mΩ
Insulation resistance	> 10 <sup>10</sup> Ω

Materials		
Contact pins	CuZn	(brass)
Contact surface	Au	(gold)
Socket body	PUR/PA	(UL 94 HB)
Enclosure cable plug	PBT	(UL 94 V-0)
Threaded ring	Anodised aluminium	

Accessories for fieldbus distributors

Cable glands – plastic – IP68



Ordering data

Type	Qty.	Order No.
VG M16-1/K68	50	1909860000

Cable glands – brass – IP68



Ordering data

Type	Qty.	Order No.
VG M16-1/MS68	50	1909910000

Cable glands – brass – 1/EMC



Ordering data

Type	Qty.	Order No.
VG M16-MS 1/EMV	50	1909500000

Cable glands – brass – EEx e, IP68



Ordering data

Type	Qty.	Order No.
VG M16-EXE MS	50	1737210000

Sealing rings – 9005



Ordering data

Type	Qty.	Order No.
GWDR M16-NP	50	1736230000

Blanking plugs – brass



Ordering data

Type	Qty.	Order No.
VP M16-MS65	100	1777730000

Blanking plugs – plastic - EEx e



Ordering data

Type	Qty.	Order No.
VG M16-EXE SW	50	1737070000

Pressure compensation element – plastic – DAE



Ordering data

Type	Qty.	Order No.
DAE M12 PA short	10	1868560000

For technical data, refer to Catalogue 5 – Enclosures and Cable Glands



# Plug in connector and protective caps

<b>Plug in connector and protective caps</b>	SAI connectors	D.2
	Customisable connectors	D.4
	Connectors – accessories	D.25
	Built in plugs	D.28
	Valve plugs for custom assembly	D.32
	Protective sleeve adapter	D.34



# SAI connectors

Self assembled M8 and M12 connectors are integral and essential connectivity components. They are available with a wide variety of different wire connection methods. Weidmüller offers all of the secure connection methods, which include screw, tension clamp, IDC or solder connection mechanisms. One highlight in this line are the shielded, D-coded M-12 connectors. They are available in male and female versions also with the tension-clamp connection.

## D

The eight pole screw connection connectors are a special favourite. These are available in shielded or unshielded versions.





### Fast

The M12 connectors also come with the tension clamp conductor connection method, in either shielded or unshielded.



### Versatile

Eight pole M12 connectors, shielded, with screw connection and a cable outer insulation diameter of 8 – 10 mm.



### Proven

M8 connectors with screw connections for the conductor are much easier to assemble compared to connectors which require soldering.



### Safe

M8 connectors with shield connections are in increasing demand as the trend towards miniaturization continues.



#### M12 connectors

Screw and tension clamp connection



#### M8 connectors

Screw and solder connection



#### M8 and M12 connectors

Insulation displacement connection (IDC)



#### M8 and M12 connectors

T distributor



#### Protective caps for SAI distributors



#### M12/M8/M5

Built in connectors



#### Customisable valve connectors

# Overview of M8 and M12 screw connections

M8



Plugs and sockets (screw connection) for custom assembly to make up M8 and M12 connections.

Machine builders frequently need individual cable lengths. To meet this demand, Weidmüller can supply M8 and M12 plug in connectors for custom assembly.

D

M12

M12 Metal



The plug in connectors are available with different cable gland diameters. In the 90° versions, the outgoing direction of the cable can be changed in 90° steps. The connected plug in connectors comply with IP 67 ingress protection classification. There are also plug in connectors available for double assignment of distributors.

Screwty



This is the perfect tool for all common cable glands on sensor and actuator cables.

The Screwty fits M12 and M8 round plugs. Both types can be used for the plugs and sockets on custom cables.

The handle of every Screwty has a conventional 1/4 inch fitting and can be used for all sizes. Simply turn the tool to tighten or release a round plug.

Of course, the Screwty is also available with a torque fitting. This adjustable attachment can be used for all sizes. The torque can be infinitely adjusted between 0.5 and 1.7 Nm.

IDC-Tool



Weidmüller offers various products with insulation displacement connection for M12 connectors. These include the IDC connection elements, which can be directly screwed to a distributor, such as part nos. 9457720000 and 1766810000. In addition, there are two M12 IDC adapters with part nos. 1781550001 and 1781540001. All four elements can be fitted by hand with no additional tools. When there are many connections to be made in a day, however, use of the copyright protected IDC tool is recommended. This tool works like a knurled screw on the terminal.

# Overview of SAI connector M12

## Plastic

Screw connection	straight			angled		
	3-pole	4-pole	5-pole	3-pole	4-pole	5-pole
PG7 Male	1871710000	9457550000	9456940000	1021280000	9457290000	9456950000
PG7 Female	1924940000	9457240000	9457250000	1021310000	9457700000	9457260000
<b>Screw connection</b>						
PG9 Male	1021480000	1807340000	1807350000			
PG9 Female	1021510000	1807230000	1807250000			
<b>Screw connection</b>	8-pole	12-pole (Solder connection)				
PG 9 Male	1836970000	1924950000				
PG9 Female	1836960000	1924960000				
<b>IDC connection</b>	(0.14 - 0.34 mm <sup>2</sup> )	(0.34 - 0.75 mm <sup>2</sup> )				
	4-pole	4-pole				
Male	1781550001	1852740000				
Female	1781540001	1852730000				
<b>Tension clamp connection</b>			5-pole			
Male			1906390000			
Female			1924970000			

## Metal

A-coded Screw connection	straight			angled		
	3-pole	4-pole	5-pole	3-pole	4-pole	5-pole
PG7 Male			1191030000			
PG7 Female			1191020000			
PG9 Male		9455640000	1784740000		1803930000	1803940000
PG9 Female		8426220000	1784750000		1803910000	1803920000
<b>Tension clamp connection</b>						
PG9 Male						
PG9 Female		1784740002				
<b>B-coded Screw connection</b>						
PG9 Male			1784790000			1944570000
PG9 Female			1784780000			1944580000
<b>D-coded Screw connection</b>						
PG9 Male		1892120000				
PG9 Female		1892130000				
<b>D-coded Tension clamp connection</b>						
PG9 Male		1892120001			1803930001	
PG9 Female		1892130001			1139330000	

D

# Overview of M8 connectors

## Plastic

Screw connection	straight			angled		
	3-pole	4-pole	5-pole	3-pole	4-pole	5-pole
Male Screw connection	1803860000	1803850000				
Female Screw connection	1803870000	1803880000				
Male IDC connection	1784040001	1784060001				
Female IDC connection	1784030001	1784050001				
Male Solder connection				1920990000	1921000000	
Female Solder connection				1920970000	1920980000	

## Metal

	straight			angled		
	3-pole	4-pole	5-pole	3-pole	4-pole	5-pole
Male Screw connection	1010060000	1010070000				
Female Screw connection	1010080000	1010090000				
Male Solder connection	1921030000	1921040000				
Female Solder connection	1921010000	1921020000				

Screw connection M12, A-coded

SAIS / SAIB

straight



SAISW / SAIBW

angled



Ordering data

Male	
	3-pole, PG 7
	3-pole, PG 9
	4-pole, PG 7
	4-pole, PG 9
Socket	
	3-pole, PG 7
	3-pole, PG 9
	4-pole, PG 7
	4-pole, PG 9
Note	

Type	Qty.	Order No.
SAIS-3/7	1	1021470000
SAIS-3/9	1	1021480000
SAIS-4/7	1	9457550000
SAIS-4/9	1	1807340000
Other versions on request		

Type	Qty.	Order No.
SAISW-3/7	1	1021280000
SAISW-3/9	1	1021290000
SAISW-4/7	1	9457290000
SAISW-4/9	1	1807360000
Other versions on request		


Technical data

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	


Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	

Dimensioned drawing

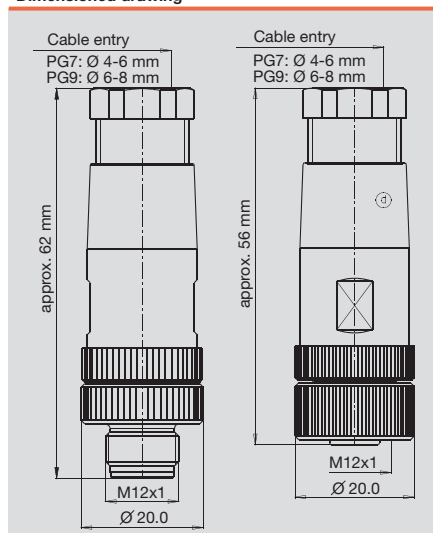

Dimensioned drawing

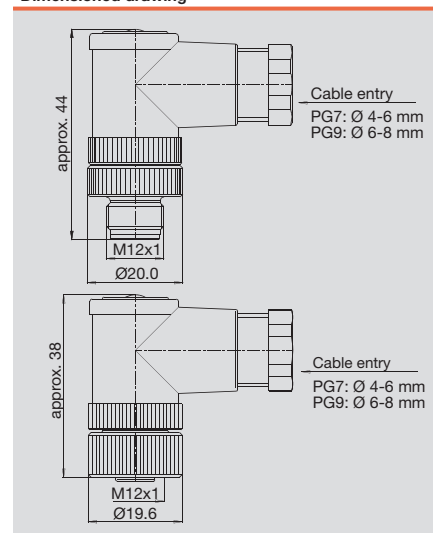

## Customisable connectors

### Screw connection M12, A-coded

#### SAIS / SAIB

##### straight



#### SAISW / SAIBW

##### angled



Plug in connector and protective caps

D

### Ordering data

Male	
	5-pole, PG 7
	5-pole, PG 9
	8-pole, PG 9
Socket	
	5-pole, PG 7
	5-pole, PG 9
	8-pole, PG 9
Note	

Type	Qty.	Order No.
SAIS-5/7	1	9456940000
SAIS-5/9	1	1807350000
SAIS-8/9	1	1836970000
Other versions on request		

Type	Qty.	Order No.
SAISW-5/7	1	9456950000
SAISW-5/9	1	1807370000
Other versions on request		


### Technical data

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	


Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	

### Dimensioned drawing

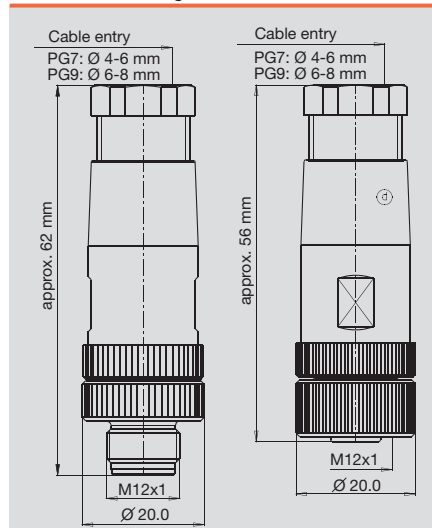

### Dimensioned drawing

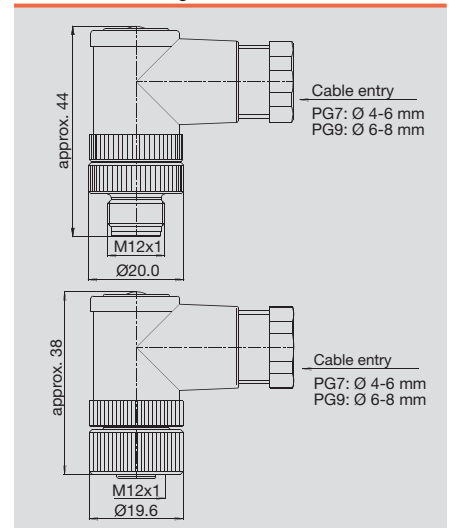

Screw connection M12, A-coded

SAIS / SAIB

straight



SAISW / SAIBW

angled



Ordering data

Male	
	4-pole, PG 7
	5-pole, PG 7
Socket	
	4-pole, PG 7
	5-pole, PG 7
Note	

Type	Qty.	Order No.
SAIS-4/7-(KV)	1	1921060000
SAIS-5/7-(KV)	1	1921050000
Other versions on request		

Type	Qty.	Order No.
SAISW-4/7-(KV)	1	1962620000
SAISW-5/7-(KV)	1	1962610000
Other versions on request		


Technical data

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	
KV = plastic cable gland	


Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	
KV = plastic cable gland	

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	CuSnZn
Note	
KV = plastic cable gland	

Dimensioned drawing

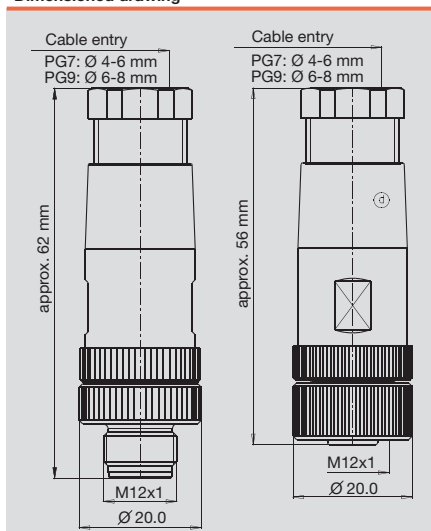

Dimensioned drawing

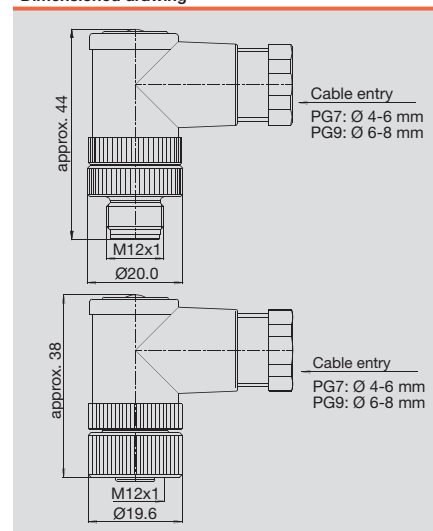

KV = plastic cable gland



## Customisable connectors

### Tension clamp connection M12, stainless steel

A-Codiert

B-Codiert

### SAIS / SAIB VA

straight



D

#### Ordering data

Male	
	5-pole, PG 9
	5-pole, PG 9
Socket	
	5-pole, PG 9
	5-pole, PG 9
Note	


Type	Qty.	Order No.
SAIS 5/9-VA	1	1920700000
SAIS 5/9-VA-B-COD	1	1920720000
SAIB 5/9-VA	1	1920710000
SAIB 5/9-VA-B-COD	1	1920730000

#### Technical data

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
Note	PB = PROFIBUS (B-COD)

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
Note	PB = PROFIBUS (B-COD)

#### Dimensioned drawing

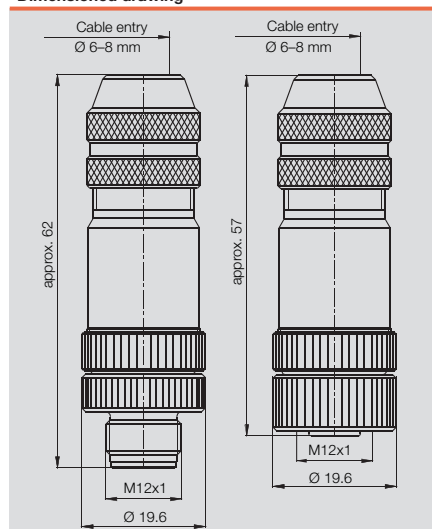

PB = PROFIBUS (B-COD)

**SAI M12 plug  
with shield connection**

**SAISM / SAISB 8/11**

straight



**Ordering data**

<b>Male</b>	8-pole, PG 11
<b>Socket</b>	8-pole, PG 11
<b>Note</b>	


Type	Qty.	Order No.
SAISM-8/11	1	1118910000
SAIBM-8/11	1	1118920000

**Technical data**

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	8...10 mm (PG11)
Cross-section for connected wire	0.14 - 0.5 mm <sup>2</sup>
Rated current	2 A
Rated voltage	60 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	8...10 mm (PG11)
Cross-section for connected wire	0.14 - 0.5 mm <sup>2</sup>
Rated current	2 A
Rated voltage	60 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

**Dimensioned drawing**

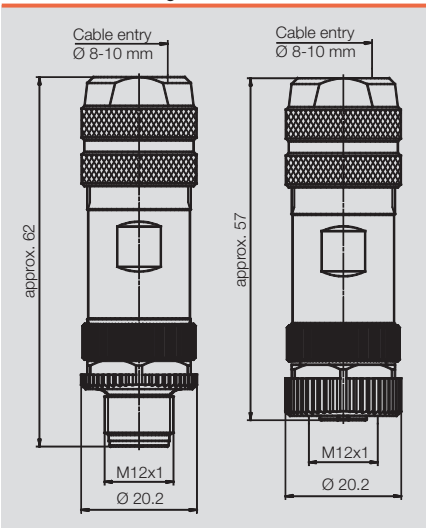

Screw connection M12, metal (EMC)  
A-coded

FBCon / SAIS

straight



SAISW / SAIBW

angled



Plug in connector and protective caps

D

Ordering data

Male	
	4-pole, PG 9
	5-pole, PG 9
Socket	
	4-pole, PG 9
	5-pole, PG 9
Note	

Type	Qty.	Order No.
FBCon M12 4P M EMC	1	9455640000
SAIS-M-5/8S M12 5P A-COD	1	1784740000
Other versions on request		

Type	Qty.	Order No.
SAISW-M-4/8 M12	1	1803930000
SAISW-M-5/8 M12	1	1803940000
Other versions on request		


Technical data

Type of connection
Housing main material
Contact tube diameter
Cable diameter
Cross-section for connected wire
Rated current
Rated voltage
Temperature range of housing
Protection class
Contact surface
Note


Screw connection
CuZn
M12
6...8 mm (PG9)
0.14 - 0.75 mm <sup>2</sup>
4 A
250 V
-25...+85 °C
IP 67
CuSnZn

Screw connection
CuZn
M12
6...8 mm (PG9)
0.14 - 0.75 mm <sup>2</sup>
4 A
125 V
-25...+85 °C
IP 67
gold-plated

Dimensioned drawing

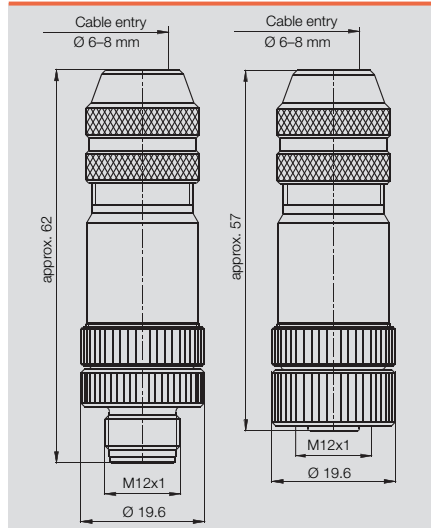

Dimensioned drawing

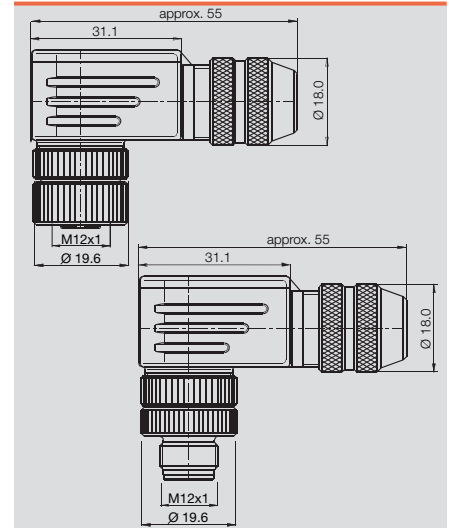

Screw connection M12, metal (EMC)  
B-coded  
D-coded



Industrial Ethernet

SAISM / SAIBM

straight



SAIS / SAIB

straight



Ordering data

Male	
	3-pole, PG 9
	4-pole, PG 9
	5-pole, PG 9
Socket	
	3-pole, PG 9
	4-pole, PG 9
	5-pole, PG 9
Note	

Type	Qty.	Order No.
SAISM-4/8S-M12-4P D-COD	1	1892120000
SAISM 5/8S M12 5P B-COD	1	1784790000
SAIBM-4/8S-M12-4P D-COD	1	1892130000
SAIBM 5/8S M12 5P B-COD	1	1784780000

Type	Qty.	Order No.
SAIS-3-IDC-M12B-COD	1	1864730000
SAIB-3-IDC-M12B-COD	1	1864740000


Technical data

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	


Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	7...8.8 mm
Cross-section for connected wire	0.34 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	
PB = PROFIBUS (B-COD)	
IE = Industrial Ethernet (D-COD)	

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	7...8.8 mm
Cross-section for connected wire	0.34 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	
PB = PROFIBUS (B-COD)	
IE = Industrial Ethernet (D-COD)	

Dimensioned drawing

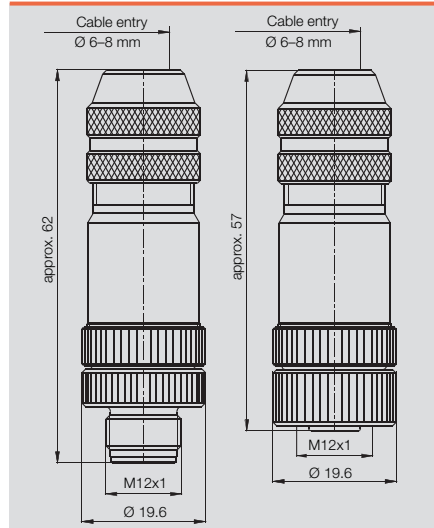

Dimensioned drawing

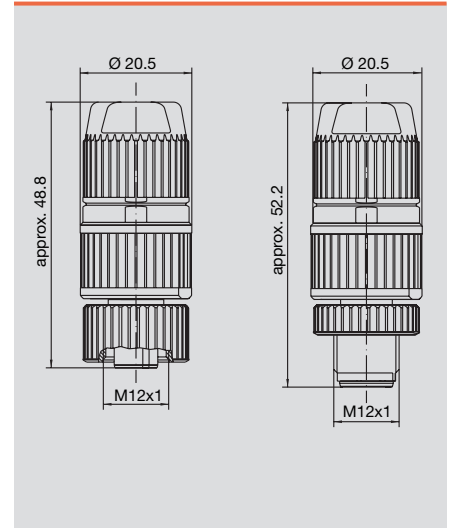

Customisable connectors

Screw connection M12, metal (EMC)  
B-coded



SAISW / SAIBW

angled



D

Ordering data

Male	5-pole, PG 9
Socket	5-pole, PG 9
Note	


Type	Qty.	Order No.
SAISW-M-5/8 M12 B-COD	1	1944570000
SAIBW-M-5/8 M12 B-COD	1	1944580000

Technical data

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.14 - 0.75 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

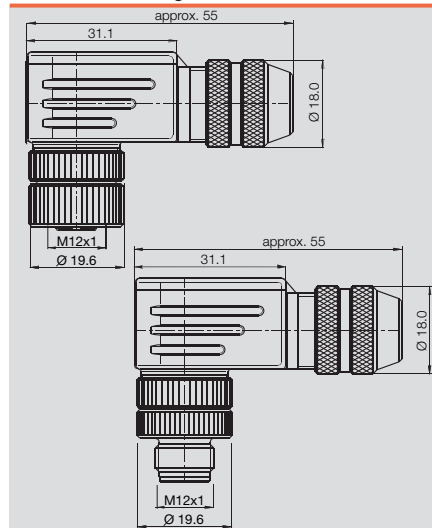

Tension clamp connection, metal  
D-coded

# Industrial Ethernet

Plug in connector and protective caps

D

## Ordering data

<b>Male</b>	4-pole, PG 9
<b>Socket</b>	4-pole, PG 9
<b>Note</b>	

## Technical data

Type of connection	Tension clamp connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	6...8 mm (PG9)
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	250 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

## SAISM / SAIBM

straight



Type	Qty.	Order No.
SAISM-4/8S-M12 4P D-ZF	1	1892120001
SAIBM-4/8S-M12 4P D-ZF	1	1892130001


## SAISW / SAIBW

angled




Type	Qty.	Order No.
SAISW-4/8S-M12 4P D-ZF	1	1803930001
SAIBW-4/8S-M12 4P D-ZF	1	1139330000

## Dimensioned drawing

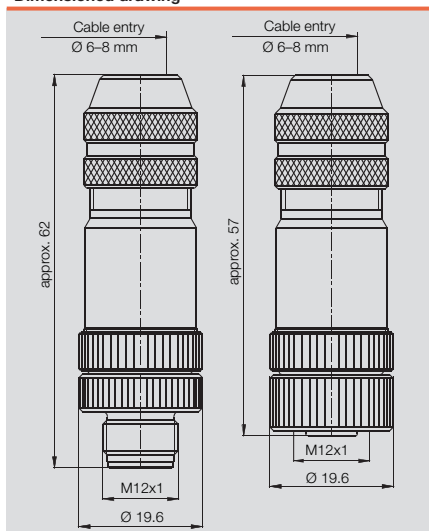

## Dimensioned drawing

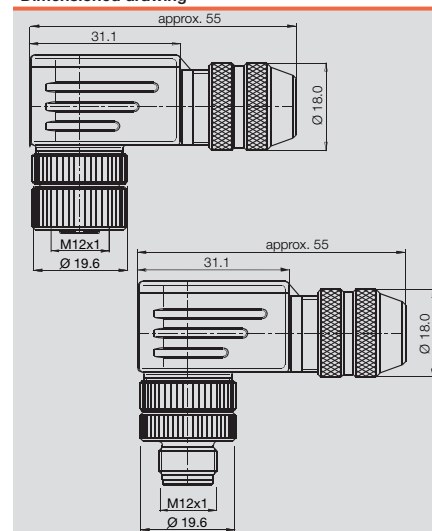

Customisable connectors

Tension clamp connection M12  
A-coded

SAIS-ZF

straight



D

Ordering data

Male	5-pole, PG 7
Socket	5-pole, PG 7
Note	


Type	Qty.	Order No.
SAIS-5/7-ZF	1	1906390000
SAIB-5/7-ZF	1	1924970000

Technical data

Type of connection	Tension clamp connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Type of connection	Tension clamp connection
Housing main material	PA
Contact tube diameter	M12
Cable diameter	4...6 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

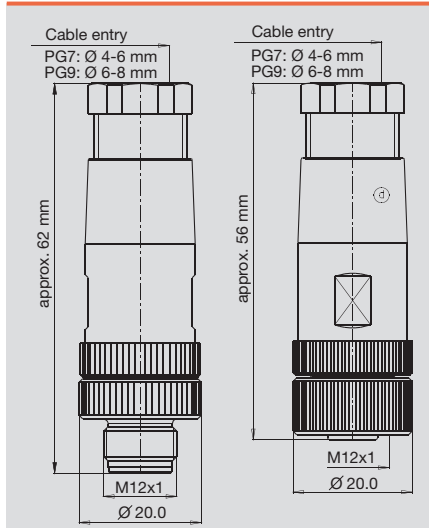

M8 screw connection

SAIS / SAIB

straight



Ordering data

Male	
	3-pole
	4-pole
Socket	
	3-pole
	4-pole
Note	


Type	Qty.	Order No.
SAIS-M8-3P	1	1803860000
SAIS-M8-4P	1	1803850000
SAIB-M8-3P	1	1803870000
SAIB-M8-4P	1	1803880000
Other versions on request		

Technical data

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M8
Cable diameter	3.5...5 mm
Cross-section for connected wire	0.14 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Type of connection	Screw connection
Housing main material	PA
Contact tube diameter	M8
Cable diameter	3.5...5 mm
Cross-section for connected wire	0.14 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

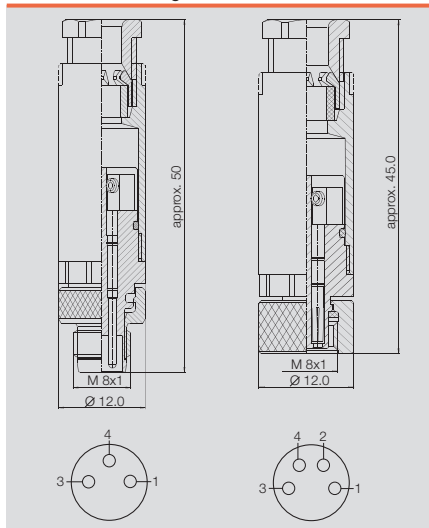



## Customisable connectors

Solder connection M8, shielded  
screw connection M8, shielded

### SAISM / SAIBM

straight



### SAISM / SAIBM

straight



Plug in connector and protective caps

D

#### Ordering data

Male	
	3-pole
	4-pole
Socket	
	3-pole
	4-pole
Note	

Type	Qty.	Order No.
SAISM-M8-3P(TL)	1	1921030000
SAISM-M8-4P(TL)	1	1921040000
SAIBM-M8-3P(TL)	1	1921010000
SAIBM-M8-4P(TL)	1	1921020000

Type	Qty.	Order No.
SAISM-M8-3P-(IF)	1	1010060000
SAISM-M8-4P-(IF)	1	1010070000
SAIBM-M8-3P-(IF)	1	1010080000
SAIBM-M8-4P-(IF)	1	1010090000


#### Technical data

Type of connection	Solder connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.5...5.5 mm
Cross-section for connected wire	0.25 - 0.25 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	


Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.5...5 mm
Cross-section for connected wire	0.14 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	
IF = Iris-type spring	

Type of connection	Screw connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.5...5 mm
Cross-section for connected wire	0.14 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
Note	
IF = Iris-type spring	

#### Dimensioned drawing

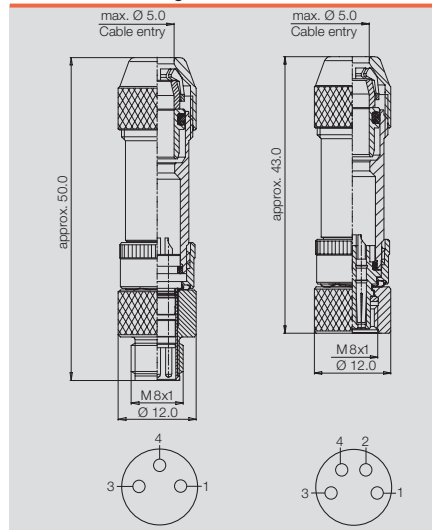

#### Dimensioned drawing

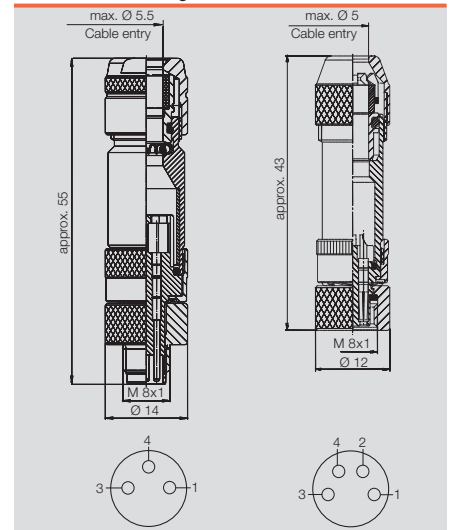

Solder connection M8

SAISW / SAIBW

angled



Ordering data

<b>Male</b>	3-pole
	4-pole
<b>Socket</b>	3-pole
	4-pole
<b>Note</b>	


Type	Qty.	Order No.
SAISW-M8-3P(TL)	1	1920990000
SAISW-M8-4P(TL)	1	1921000000
SAIBW-M8-3P(TL)	1	1920970000
SAIBW-M8-4P(TL)	1	1920980000

Technical data

Type of connection	Solder connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.5...5.5 mm
Cross-section for connected wire	0.25 - 0.25 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

Type of connection	Solder connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.5...5.5 mm
Cross-section for connected wire	0.25 - 0.25 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	gold-plated
<b>Note</b>	

Dimensioned drawing

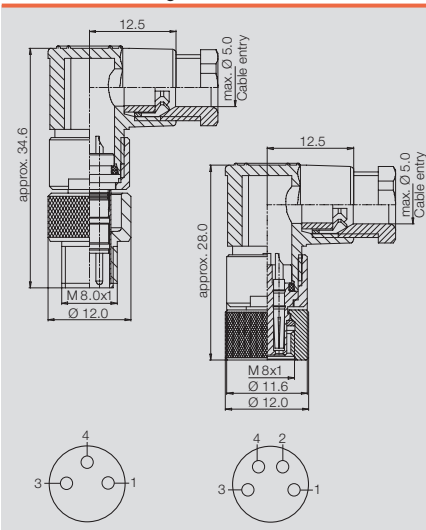

# IDC coding systems

## SAI-M/SAI-F

### IDC



#### 3-pole

Pole	Colour code	Assignment
●	brown	+ 24 V DC
●●	white	input/output
●●●	blue	0 V DC

### D



#### 4-pole

Pole	Colour code	Assignment
1	brown	+ 24 V DC
2	uncoloured	input/output 2
3	blue	0 V DC
4	black	input/output 1

## IDC insulation displacement connections

The insulation displacement connection on Weidmüller SAI distributors is presently the smallest and most robust IDC connection on the market. The connection element is available in 3 and 4 pole versions. The connection system enables you to perform individual fabrication of sensor/actuator cables quickly and reliably on the spot. Conductor cross sections are from 0.25 mm<sup>2</sup> to 0.5 mm<sup>2</sup>.

### IDC connection elements

#### Ordering data

Type	Qty.	Order No.
SAI-SA-3-IDC	1	9457720000
SAI-SA-4-IDC	1	1766810000
SAI-SA-3-IDC (1Set)	1*	1896740000

\*) One set contains 100 pieces.



# M8 and M12 insulation displacement connection (IDC)

## M8



The assembly of round plugs is very time consuming.

The cable has to be stripped and possibly also fitted with a wire end ferrule.

But the IDC plug in connector system enable Weidmüller to offer a quick fit connection system that saves users working time and hard cash.

The IDC quick fit quick connection system is available for M12 and M8.

## M12



## Screwty



This is the perfect tool for all common cable glands on sensor and actuator cables.

The Screwty fits M12 and M8 round plugs. Both types can be used for plugs and sockets on custom cables.

The handle of every Screwty has a conventional 1/4 inch fitting and can be used for all sizes. Simply turn the tool to tighten or release a round plug.

Of course, the Screwty is also available with a torque fitting. This adjustable attachment can be used for all sizes.

The torque can be infinitely adjusted between 0.5 and 1.7 Nm.

D

Customisable connectors

Insulation displacement connection  
M12  
A-coded

SAIS IDC / SAIB IDC

straight



SAISW IDC / SAIBW IDC

angled



D

Ordering data

Male	4-pole
Socket	4-pole
Note	

Type	Qty.	Order No.
SAIS-4-IDC M12 small	1	1781550001
SAIB-4-IDC-M12 small	1	1781540001
Other versions on request		

Type	Qty.	Order No.
SAISW-4-IDC M12	1	1812870000
SAIBW-4-IDC M12	1	1812890000
Other versions on request		


Technical data

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	4...5.1 mm
Cross-section for connected wire	0.14 - 0.34 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	


Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	4...5.1 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	4...5.1 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	

Dimensioned drawing

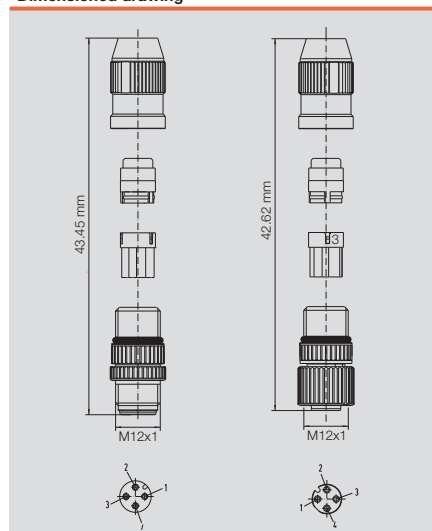

Dimensioned drawing

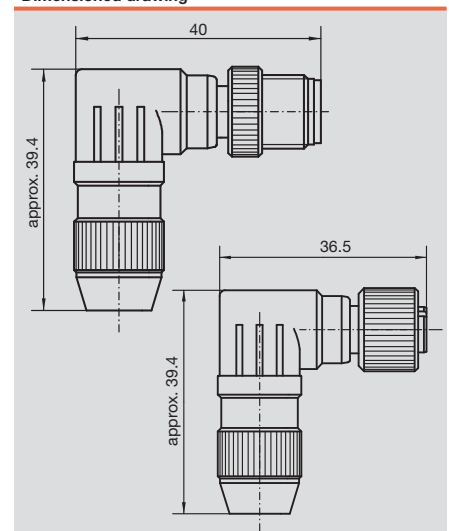

**Insulation displacement connection  
M12 (0.75)  
A-coded**

**SAIS IDC / SAIB IDC (0.75)**

straight



**Ordering data**

Male	
	3-pole
	4-pole
Socket	
	3-pole
	4-pole
Note	


Type	Qty.	Order No.
SAIS-3-IDC (0,75) M12	1	1852720000
SAIS-4-IDC (0,75) M12	1	1852740000
SAIB-3-IDC (0,75) M12	1	1852730000
SAIB-4-IDC (0,75) M12	1	1852750000
Other versions on request		

**Technical data**

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	5.5...8 mm
Cross-section for connected wire	0.34 - 0.75 mm²
Rated current	6 A
Rated voltage	50 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M12
Cable diameter	5.5...8 mm
Cross-section for connected wire	0.34 - 0.75 mm²
Rated current	6 A
Rated voltage	50 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
Note	

**Dimensioned drawing**

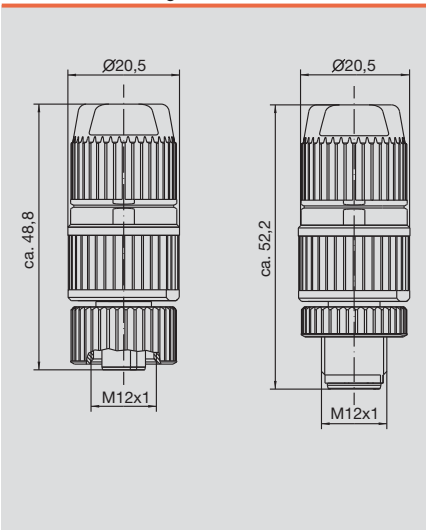

Customisable connectors

Insulation displacement connection  
M8

SAIS IDC / SAIB IDC

straight



D

Ordering data

<b>Male</b>	3-pole
	4-pole
<b>Socket</b>	3-pole
	4-pole
<b>Note</b>	


Type	Qty.	Order No.
SAIS-3-IDC M8 small	1	1784040001
SAIS-4-IDC M8 small	1	1784060001
SAIB-3-IDC-M8 small	1	1784030001
SAIB-4-IDC-M8 small	1	1784050001
Other versions on request		

Technical data

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.2...5.4 mm
Cross-section for connected wire	0.14 - 0.34 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
<b>Note</b>	

Type of connection	Insulation displacement connection
Housing main material	CuZn
Contact tube diameter	M8
Cable diameter	3.2...5.4 mm
Cross-section for connected wire	0.14 - 0.34 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Temperature range of housing	-25...+85 °C
Protection class	IP 67
Contact surface	tinned
<b>Note</b>	


Dimensioned drawing

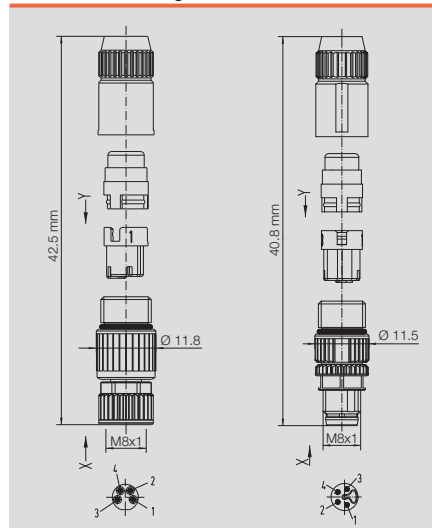

# T distributor

## M12/M12

Mounting screw M3

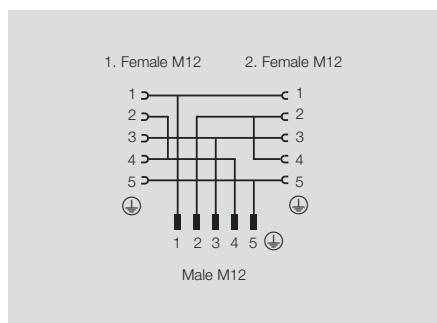


### Ordering data

Type	Qty.	Order No.
Distribution, pin 2 + 4 bridged		
SAI-Y-5S B2-4 M12/M12	1	1783410000

## M12/M12

Mounting screw M3

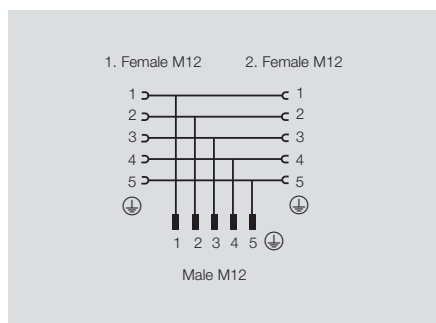


### Ordering data

Type	Qty.	Order No.
Parallel distribution		
SAI-Y-5S PARA M12/M12	1	1783430000

## M12/M12

Mounting screw M3

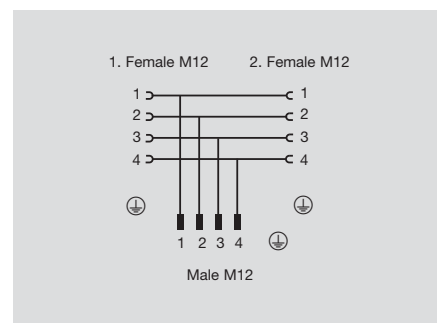


### Ordering data

Type	Qty.	Order No.
SAI-Y-4S-M12/M12	1	1060730000

## M12/M12

Mounting screw M3

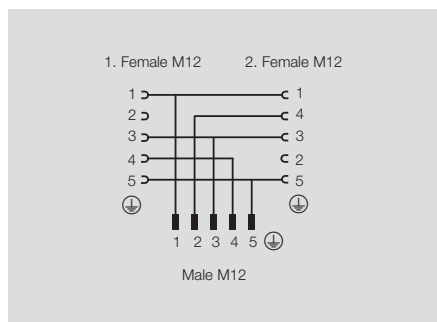


### Ordering data

Type	Qty.	Order No.
Individual distribution		
SAI-Y-5S-M12/M12	1	1826880000

## M12/M8


Mounting screw M3

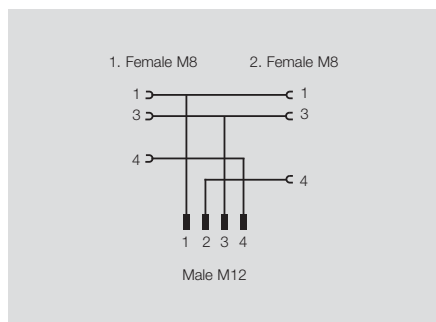

### Ordering data

Type	Qty.	Order No.
Individual distribution		
SAI-Y-4-4/2-4 M12/M8	1	1783420000

## M8/M8

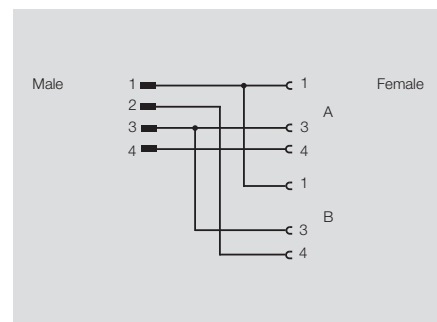

### Ordering data

Type	Qty.	Order No.
SAI-Y-4S M8/M8	1	1805660000



# Twin plugs and wall bushings



## Miniature twin plugs

Purpose built machines often require individual cable lengths for the initiator cables. In some cases, two cables have to be of different lengths even when going to the same connector position.

To resolve this difficulty, we offer male and female connectors with two cable outlets that you can fabricate as you wish. The miniature twin plug is available with a 90° outlet and a straight outgoing cable direction. The 90° version can be twisted as you wish in steps of 90°.

### Ordering data

Type	Qty.	Order No.
SAIS-ZW-5 (straight)	1	9457540000
SAIS-ZWW (90°)	1	1837560000




## Wall bushing

In general machine building, it is common to have cables passing through the walls of control cabinets. To meet the need for a wall penetration with M12 plug in connectors, the M12 bushing is included in the range. The wall bushings is available as 5 pole.

In addition, a bushing for PROFIBUS plug in connectors (PB) is available


### Ordering data

Type	Länge	Codierung	Qty.	Order No.
SAI-WDF-5P M12 60 mm	60 mm	A	1	1819450000
SAI-WDF-5PB M12 60 mm	60 mm	B	1	1820690000

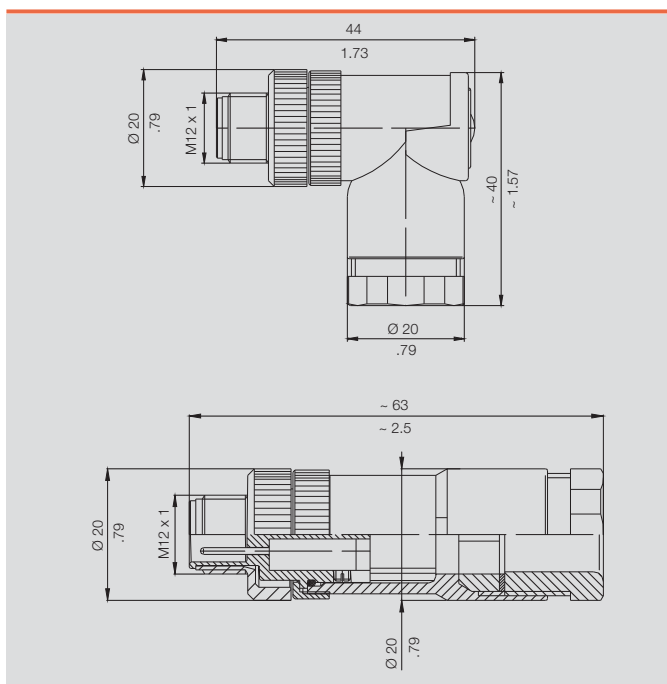

## M12/M12

### Mounting screw M4



### Ordering data

Type	Qty.	Order No.
SAI-Y-5S M12/M12 2 BO	1	1881710000

# Protective caps for SAI distributors

## Protective cap M5

Protects against external effects when the I/O is not in use. For SAI M5 distributors.



### Ordering data

Type	Qty.	Order No.
SAI-SK-M5	50	1855310000

## Protective cap M8

Protects against external effects when connector positions are not in use. For SAI M8 distributors.



### Ordering data

Type	Qty.	Order No.
SAI-SK-M8	50	1802760000

## Protective cap M12

Protects against external effects when connector positions are not in use. For SAI M12 distributors.



### Ordering data

Type	Qty.	Order No.
SAI-SK-M12	30	9456050000

## Protective cap M12

Protects against external effects when connector positions are not in use. For SAI metal distributors.



### Ordering data

Type	Qty.	Order No.
SAI-SK-M12-M	30	1802750000

## Protective cap M12 IDC

Protects against external effects when connector positions are not in use. For SAI distributors with IDC connection.



### Ordering data

Type	Qty.	Order No.
SAI-SK IDC	10	1794850000

## Protective cap M12 Universal

Protects against external effects when connector positions are not in use. For SAI M12 Universal distributors.



### Ordering data

Type	Qty.	Order No.
SAI-SK-M12-UNI	20	2330260000

Hand operation possible. Screwty compatible.

## Protective cap M12 connector

Protection from external influences. For open plugs. For attaching to cable.



### Ordering data

Type	Qty.	Order No.
SAI-SK-M12 BU	1	8425960000

## Protective cap M12 connector

Protects against external effects. For open plugs or sockets.



### Ordering data

Type	Qty.	Order No.
Protective cap connector (yellow)	50	1781520000



## M12, M8, M5 built in plugs

For connection of cables to sensors and actuators, different built in connectors are needed at the device end.

### M12

---



M12 plug in connectors are available with the following numbers of poles: 4 to 5-pole and 8-pole. Built in connectors for M12 connections are all A-coded and have individual leads of 0.5 m. Fixing of the FP version is achieved with the supplied locknut. Also available are built in connectors that can be screwed in from the front.

### M8

---



M8 connector requirements are covered by the 3 and 4 pole built in male and female connectors. Like the M12 built in connectors, these have a locknut for fastening into a housing wall. These connectors too have 0.5 m long leads attached.

### M5

---



Of course, Weidmüller also offers corresponding built-in connectors for the smallest plug in connectors, M5. The M5 built in connector is available in 3 and 4 pole versions. This plug in connector too has a locknut. The individual lead length with M5 built in connectors is 0.2 m.

The cross sections of the individually attached leads are available from the technical data of the various families of plug in connectors.

M12 (M16)

SAIE-M12 FP



M12 (M16)

SAIE-M12 PG



Ordering data

Male	
4-pole	
5-pole	
8-pole	
Socket	
4-pole	
5-pole	
8-pole	
Note	

Type	Qty.	Order No.
SAIE-M12S-4-0.5U-FP-M16	1	1861160000
SAIE-M12S-5-0.5U-FP-M16	1	1861170000
SAIE-M12S-8-0.5U-FP-M16	1	1861180000
SAIE-M12B-4-0.5U-FP-M16	1	1861190000
SAIE-M12B-5-0.5U-FP-M16	1	1856110000
SAIE-M12B-8-0.5U-FP-M16	1	1861210000
FP with M16 cable gland FP = can be positioned as required		

Type	Qty.	Order No.
SAIE-M12S-4-0.5U-M16	1	1861090000
SAIE-M12S-5-0.5U-M16	1	1861230000
SAIE-M12S-8-0.5U-M16	1	1861110000
SAIE-M12B-4-0.5U-M16	1	1861120000
SAIE-M12B-5-0.5U-M16	1	1836910000
SAIE-M12B-8-0.5U-M16	1	1861140000
with PG cable gland		


Technical data

Cable gland	M16
Housing main material	CuZn, nickel-plated
Contact tube diameter	M12
Core cross-section	0.25 mm <sup>2</sup>
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-30...+90 °C
Protection class	IP 67
Contact surface	gold-plated
Note	


Cable gland	M16
Housing main material	CuZn, nickel-plated
Contact tube diameter	M12
Core cross-section	0.34 mm <sup>2</sup>
Rated current	4 A
Rated voltage	60 V
Temperature range of housing	-30...+90 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Cable gland	M16
Housing main material	CuZn, nickel-plated
Contact tube diameter	M12
Core cross-section	0.34 mm <sup>2</sup>
Rated current	4 A
Rated voltage	60 V
Temperature range of housing	-30...+90 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

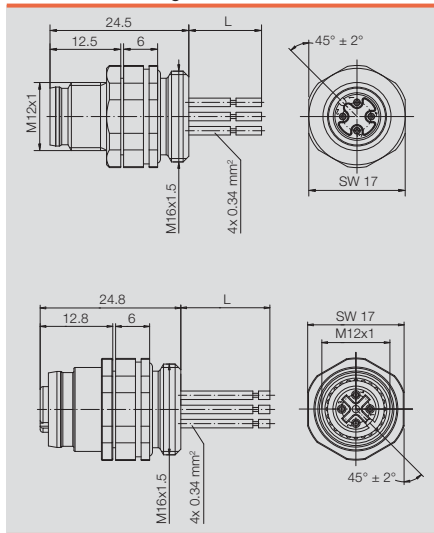

Dimensioned drawing

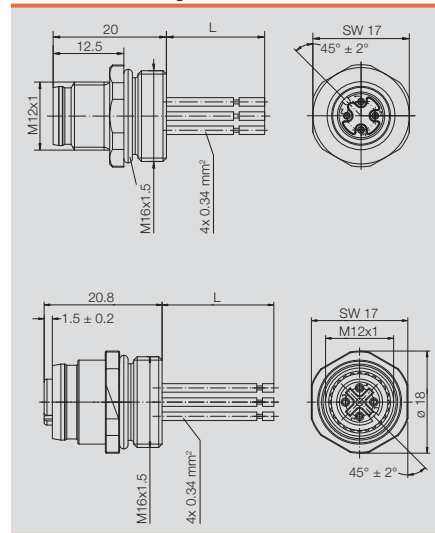

Built in plugs

M12 (PG 9)

SAIE-M12 PG



D

Ordering data

Male	
	4-pole
	5-pole
	8-pole
Socket	
	4-pole
	5-pole
	8-pole
Note	


Type	Qty.	Order No.
SAIE-M12S-4-0.5U-PG9	1	1861220000
SAIE-M12S-5-0.5U-PG9	1	1856120000
SAIE-M12S-8-0.5U-PG9	1	1861240000
<hr/>		
SAIE-M12B-4-0.5U-PG9	1	1861250000
SAIE-M12B-5-0.5U-PG9	1	1814890000
SAIE-M12B-8-0.5U-PG9	1	1861270000
with PG cable gland		

Technical data

Cable gland	PG 9
Housing main material	CuZn, nickel-plated
Contact tube diameter	M12
Core cross-section	0.34 (4- and 5-pole) / 0.25 (8-pole)
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-30...+90 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Cable gland	PG 9
Housing main material	CuZn, nickel-plated
Contact tube diameter	M12
Core cross-section	0.34 (4- and 5-pole) / 0.25 (8-pole)
Rated current	4 A
Rated voltage	30 V
Temperature range of housing	-30...+90 °C
Protection class	IP 67
Contact surface	gold-plated
Note	

Dimensioned drawing

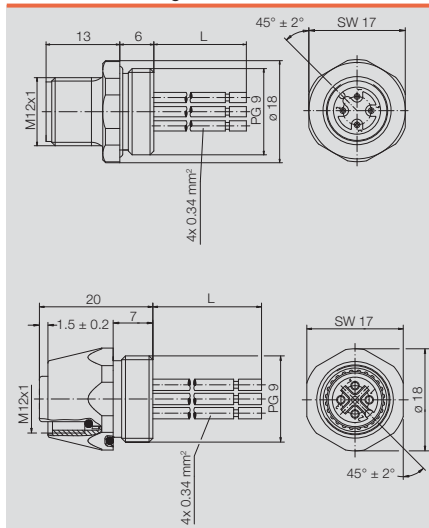

**M8**

**SAIE-M8 FP**



**M5**

**SAIE-M5**



**Ordering data**

Male	
	3-pole
	4-pole
Socket	
	3-pole
	4-pole
female - snap-on interlock	
	3-pole
	4-pole
Note	

Type	Qty.	Order No.
SAIE-M8S-3-0.5U-FP-M8	1	1078730000
SAIE-M8S-4-0.5U-FP-M8	1	1078720000
SAIE-M8B-3-0.5U-FP-M8	1	1856130000
SAIE-M8B-4-0.5U-FP-M8	1	1856140000
SAIE-M8R-3-0.5U-FP-M8	1	1861280000
SAIE-M8R-4-0.5U-FP-M8	1	1861290000
Fixing nut included FP = can be positioned as required		

Type	Qty.	Order No.
SAIE-M5S-3-0.2U	1	1873050000
SAIE-M5S-4-0.2U	1	1873030000
SAIE-M5B-3-0.2U	1	1873060000
SAIE-M5B-4-0.2U	1	1873040000
Fixing nut included		


**Technical data**

Cable gland	
Housing main material	
Contact tube diameter	
Core cross-section	
Rated current	
Rated voltage	
Temperature range of housing	
Protection class	
Contact surface	
Note	


M 8	
CuZn, nickel-plated	
M8	
0.25 mm <sup>2</sup>	
4 A	
30 V	
-30...+90 °C	
IP 67	
gold-plated	
Note	

M 5	
CuZn, nickel-plated	
M5	
0.14 mm <sup>2</sup>	
1 A	
60 V	
-25...+80 °C	
IP 67	
gold-plated	
Note	

**Dimensioned drawing**

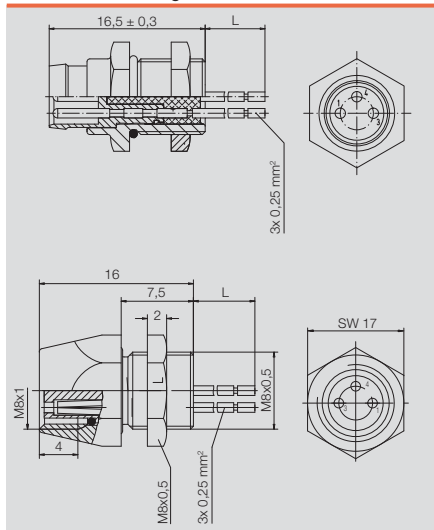

**Dimensioned drawing**

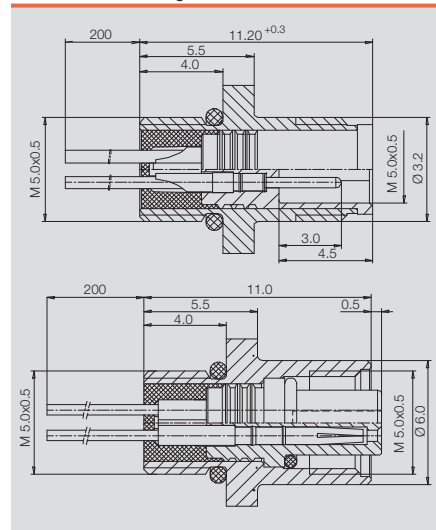

# Introduction



Valve plugs for custom cables are often incorporated when designing special machines. Such plugs are used to connect solenoid valves.

Weidmüller valve plugs are available in all customary forms. The range includes form A, form B to industry standards and to DIN, and form C to industry standards and to DIN.

These valve plugs are available without circuitry in 3 pole and 4 pole versions. A flat gasket seal is included which, when screwed on, guarantees IP65 protection.

## Ordering data

Type	(Qty.=1)	Order No.
<b>Type A</b>		
SAIB-VSA-3P/250/9-OB		1873070000
SAIB-VSA-4P/250/9-OB		1873080000
SAIB-VSA-3P/250/11-OB		1873090000
SAIB-VSA-4P/250/11-OB		1873100000
SAIB-VSA-3P/230/9/LD		1873110000
SAIB-VSA-3P/24/9/LD		1873120000
SAIB-VSA-3P/230/9-H/OB		1873130000
SAIB-VSA-4P/230/9-H/OB		1873140000
SAIB-VSA-3P/230/11-H/OB		1873150000
SAIB-VSA-4P/230/11-H/OB		1873160000
<b>Type B</b>		
SAIB-VSB-3P/250/9-OB		1873170000
SAIB-VSB-3P/24/9/LD		1873180000
SAIB-VSBD-3P/250/9-OB		1873190000
<b>Type C</b>		
SAIB-VSC-3P/250/7-OB		1873200000
SAIB-VSC-4P/250/7-OB		1873210000
SAIB-VSCD-3P/250/7-OB		1873220000
SAIB-VSCD-4P/250/7-OB		1873230000
All types supplied complete with seal.		


## Legend

Designation code	
VS-	valve plug
OB-	without cables
3P, 4P-	No. of poles
7, 9, 11-	cable entry (PG)
H	high form
T	Transparent housing
3P	2 + PE
4P	3 + PE


  

Type of valve plug	Contact gap
A	18.0 mm
B	11.0 mm to industry standard
BD	10.0 mm to DIN
C	9.4 mm to industry standard
CD	8.0 mm to DIN


**Plug in connector Type A**  
to DIN EN 175301-803

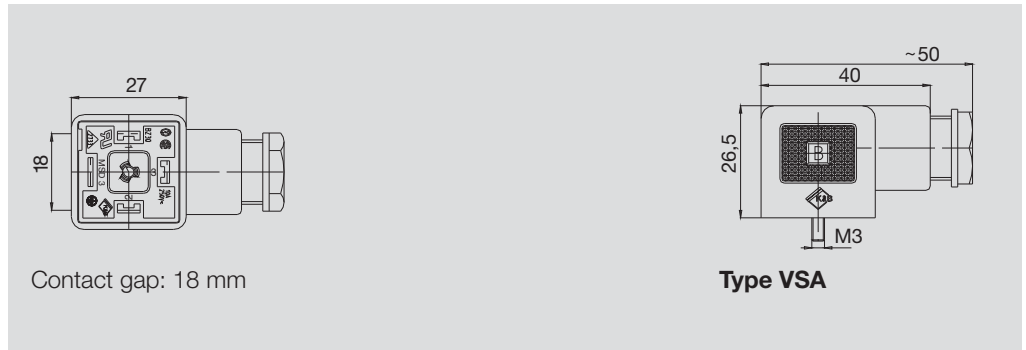

**Plug in connector Type B**

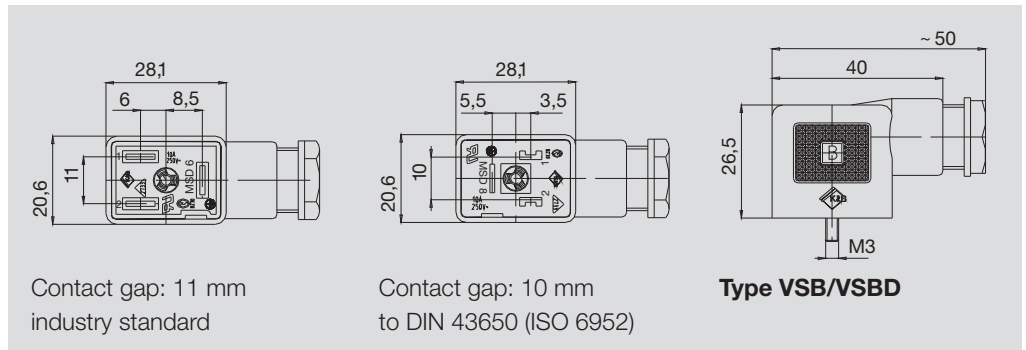

**Plug in connector Type C**

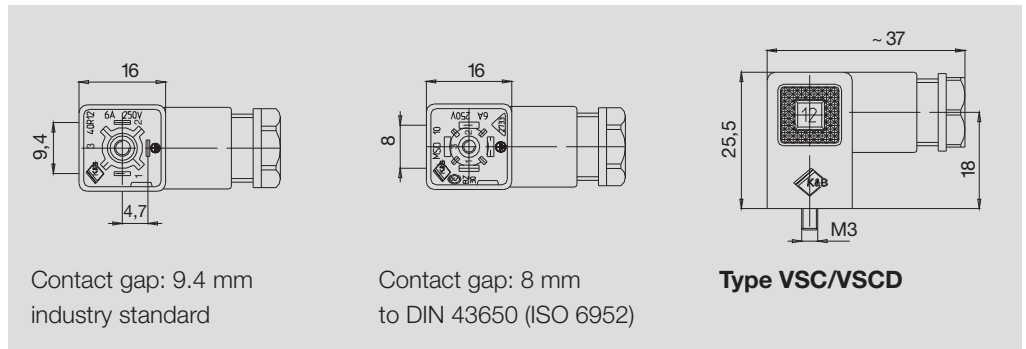

D



# Protective sleeve adapter



In machine construction, it is very common for cables to be run in the open air. To be able to protect cables from damage through a wide range of causes such as rodents, it is sometimes necessary to protect the cable with a protective sleeve.

To fasten the protective sleeve to a plug in connector designed for custom assembly, Weidmüller offers a protective sleeve adapter. This adapter is used instead of the PG7 cable gland. The protective sleeve is quick to fit, protecting the cable straight away.

D

## Ordering data

Type	Qty.	Order No.
SAI-SSA-PG7	10	1938300000

## Fitting a protective sleeve adapter



1. Unscrewing the PG7 cable gland



2. Screwing on the protective sleeve adapter



3. Fitting a PG7 protective sleeve



4. Finished sleeve

## Connection of protective sleeve adapter to other plug connectors



1. Connect the protective tubing to the tube union



2. Finished

The protective sleeve is also suitable for protecting cables with valve plugs. A corresponding connecting piece is already present on valve plugs with moulded seal.

# IP67 Remote I/O system SAI Active

<b>IP67 Remote I/O system SAI Active</b>	
Introduction	E.2
Quick select – SAI Active	E.4
SAI Active Universal - Overview	E.6
SAI Active Universal - PROFIBUS-DP	E.8
SAI Active Universal - CANopen	E.12
SAI Active Universal - DeviceNet™	E.16
SAI Active Universal - EtherNet/IP™	E.20
SAI Active Universal - Modbus TCP	E.24
SAI Active Universal Pro - Overview	E.28
SAI Active Universal Pro	E.30
SAI Active Universal Wireless - Overview	E.42
SAI Active Universal Wireless	E.44

# Sensor Actuator Interface (SAI Active)

## Decentralised Remote I/O system with IP67 protection

Industrial automation solutions are becoming more and more decentralised. The Weidmüller sensor-actuator distributor SAI Active provides a fieldbus interface for digital communication. It is capable of merging all types of signals from the field and transmitting them without interference to the central controller unit. The SAI Active Remote I/O system is available in several variants to support different applications. A wide range of products for industrial automation are available to the user: the basic “SAI-AU” version provides a quick and simple, entry level solution for decentralisation; the professional “SAI-AU Pro” version has versatile extension options and functional modules; and the “SAI-AU Wireless” system provides a radio based solution.

The SAI Active Remote I/O system features IP67 protection. It provides users with the opportunity to add input and/or output units to the process in a decentralised manner directly on location. The wiring is uncomplicated with pre-assembled cables and standardised M8 and M12 connectors. This simplifies the installation process and reduces the risk of cabling errors. There is no need for complex parallel wiring of the sensors and actuators. Nor do you need to merge the cables together at a central location or electrical cabinet. The IP67 modules have a sturdy construction and provide excellent reliability under adverse conditions involving dust, moisture, acids, high temperatures or vibrations.



In comparison to traditional passive solutions which require a separate line from the point of measurement to the controller for each signal, the active modules stand out because they need only one line to digitally transmit all the signals of a standard fieldbus system. The measurement signal is transmitted to the controller unit precisely (i.e., with no drift). Thus there is no need for manual calibration.

The SAI Active Remote I/O system is available for industrial fieldbus protocols (PROFIBUS-DP, DeviceNet, CANopen, Modbus ASCII) and Ethernet protocols (Modbus TCP and Ethernet/IP). Standardised device drivers are available. They allow you to carry out a vendor-neutral integration into your engineering system without the use of any proprietary software. The drivers can also be used with a wide range of controller units. The diagnostic capabilities of the SAI Active system (available in part using a web browser) make troubleshooting simple. They also significantly reduce the time required for initial commissioning and maintenance. Each module provides a continual specific diagnostic function for each individual channel. When a sensor, actuator or module error is detected, an easily recognised signal is displayed with an arrow icon on the corresponding module. An alert is simultaneously sent on the fieldbus or directly to the controller unit. This allows the application to react quickly so that prompt system analysis can be carried out.



The SAI Active system offers many benefits including less expensive installation and maintenance. It also makes optimal use of space with its compact modules.

This system includes all purpose compact modules and modular subbus components – providing users with decentralised automation that they can profit from as a long term solution.

Weidmüller offers users a wide line of active and passive sensor-actuator distributors for designing a single vendor system. The distributors are versatile enough to be used for practically all industrial automation applications. Our product line is being constantly improved, expanded and adapted to meet future needs.

Use the following table for quickly finding the proper product. Plenty of documentation and software is available to support you during the project planning and initial commissioning phases. All software programs and corresponding product documentation can be downloaded free of charge from the Weidmüller web site.



Selection table

Order No.	Product designation	Connection system		Communication							
		M8	M12	PROFIBUS DP	CANopen	DeviceNet	Modbus ASCII (RS 232 / USB)	Modbus TCP	Ethernet/IP	Subbus	Wireless
<b>SAI Active Universal</b>											
1906550000	SAI-AU M8 PB 16DI	X		X							
1906640000	SAI-AU M8 PB 16DI/8DO	X		X							
1975450000	SAI-AU M8 PB 8DI8DO 2A	X		X							
1890020000	SAI-AU M12 PB 16DI		X	X							
1890010000	SAI-AU M12 PB 16DI/8DO		X	X							
1968220000	SAI-AU M12 PB 8DI8DO 2A		X	X							
1890000000	SAI-AU M12 PB AI/AO/DI		X	X							
1906680000	SAI-AU M8 CAN 16DI	X			X						
1906690000	SAI-AU M8 CAN 16DI/8DO	X			X						
1906650000	SAI-AU M12 CAN 16DI		X		X						
1906660000	SAI AU M12 CAN 16DI/8DO		X		X						
1906670000	SAI-AU M12 CAN AI/AO/DI		X		X						
1906730000	SAI-AU M8 DN 16DI	X				X					
1906740000	SAI AU M8 DN 16DI/8DO	X				X					
1906700000	SAI-AU M12 DN 16DI		X			X					
1906710000	SAI AU M12 DN 16DI/8DO		X			X					
1906720000	SAI-AU M12 DN AI/AO/DI		X			X					
1906880000	SAI-AU M8 IE 16DI	X						X			
1906890000	SAI-AU M8 IE 16DI/8DO	X						X			
1906850000	SAI-AU M12 IE 16DI		X					X			
1906860000	SAI-AU M12 IE 16DI/8DO		X					X			
1906870000	SAI-AU M12 IE AI/AO/DI		X					X			
1906930000	SAI-AU M8 EIP 16DI	X							X		
1906940000	SAI-AU M8 EIP 16DI/8DO	X							X		
1906900000	SAI-AU M12 EIP 16DI		X						X		
1906910000	SAI-AU M12 EIP 16DI/8DO		X						X		
1906920000	SAI-AU M12 EIP AI/AO/DI		X						X		
<b>SAI Active Universal Pro</b>											
1024310000	SAI-AU M8 PB GW 16DI	X		X						X	
1938550000	SAI-AU M12 PB GW 16DI		X	X						X	
1938570000	SAI-AU M12 DN GW 16DI		X			X				X	
1962240000	SAI-AU M12 USB GW 8I8O		X				X			X	
1938580000	SAI-AU M12 IE GW 16DI		X					X		X	
1019490000	SAI-AU M12 EIP GW 16DI		X						X	X	
1938600000	SAI-AU M8 SB 8DI	X								X	
1938660000	SAI-AU M8 SB 8DO 2A	X								X	
1938630000	SAI-AU M8 SB 8DIO	X								X	
1938610000	SAI-AU M12 SB 8DI		X							X	
1938668000	SAI-AU M12 SB 8DO 2A		X							X	
1938640000	SAI-AU M12 SB 8DIO		X							X	
1938690000	SAI-AU M12 SB 4AI		X							X	
1938700000	SAI-AU M12 SB 4AO		X							X	
1938730000	SAI-AU M12 SB 2Counter		X							X	
1938720000	SAI-AU M12 SB 4Thermo		X							X	
1938710000	SAI-AU M12 SB 4PT100		X							X	
<b>SAI Active Universal Wireless</b>											
1006980000	SAI-AU M12 GW PB/BT 12I		X	X							X
1006940000	SAI-AU M12 BT 16DI		X								X
1006930000	SAI-AU M12 BT 16DI/8DO		X								X
1006920000	SAI-AU M12 BT4AI2AO2DIO		X								X

Inputs						Outputs				Supply voltage feed circuits	Special characteristics	Page
Digital	Analogue	Counter	TC	RTD	Digital	Output current	Analogue	Output range				
16										2		E.8
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.8
8						8	2 A			4	- Max. total current, output = 8 A	E.8
16										2		E.8
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			1	- Max. I/O channels = 16	E.8
8						8	2 A			2	- Max. total current, output = 8 A	E.8
4	4								-10...+10 V, 0...+10 V, 0...20 mA, 4...20 mA	2		E.9
16										2		E.12
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.12
16										2		E.12
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.12
4	4							2		2		E.13
16										2		E.16
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.16
16										2		E.16
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.16
4	4							2		2		E.17
16										2		E.24
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.24
16										2		E.24
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.24
4	4							2		2		E.25
16										2		E.20
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.20
16										2		E.20
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)				4	- Max. I/O channels = 16	E.20
4	4							2		2		E.21
16										2		E.30
16										2		E.30
16										2		E.32
8						8	0.5 A			2		E.34
16										2		E.34
16										2		E.32
8												E.36
						8	2 A			2	- Max. total current, output = 8 A	E.36
Max. 8, min. 0 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			2	- Max. I/O channels = 8 - Max. total current, output = 4 A	E.36
8						8	2 A			2	- Max. I/O channels = 8 - Max. total current, output = 4 A	E.36
Max. 8, min. 0 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			2	- Max. I/O channels = 8	E.36
	4											E.37
								4				E.37
			2							2		E.38
				4								E.39
					4							E.40
12										2		E.44
16										2		E.45
Max. 16, min. 8 (can be configured)						Max. 8, min. 0 (can be configured)	0.5 A			4	- Max. I/O channels = 16	E.45
Max. 4, min. 2 (can be configured)	4					Max. 2, min. 0 (can be configured)	0.5 A	2		2	- Max. I/O channels = 10	E.46

# SAI Active Universal

## Compact, basic versions of the Remote I/O system with IP67 protection

The SAI Active Universal consists of basic, compact designed variants that include a variety of modules for digital and analogue inputs and outputs. The housing has a sturdy construction in compliance with strict industrial requirements. It is resistant against aggressive materials, vibration, shock, temperature, water and dust.

The high quality connection system uses conventional, standardised M8 and M12 connectors with standard compliant coding. They ensure a reliable wiring process with less risk of errors. Two M12 connections for the fieldbus allow for a continuous bus installation without any additional T-distributor. The functional earth connection is automatically created when installing on a metallic earthed base.

E








#### 4 independent voltage circuits

The modules can be supplied with up to four different voltage potentials. The module voltage can be simultaneously used for the inputs. In addition, up to three feed points are available for outputs; these can be switched off individually depending on the application requirements. Plug in cross connectors can be used to merge voltage potentials on the module.




#### Efficient diagnostics and status alerts

The status of the I/Os is shown directly on the module using arrow icons. The arrows point to the label and the plug in position. Up to seven status LEDs are available for displaying additional information about the power supply, fieldbus status and group diagnostics. The information is simultaneously transmitted to the controller unit via the bus system.



#### Freedom of choice

Total compliance with many industrial fieldbus standards: this permits integration with all conventional controllers so that the modules can be used in practically all applications. SAI Active Universal supports PROFIBUS-DP, CANopen, DeviceNet, Modbus TCP and Ethernet/IP communication protocols.



#### A wide variety of variants

All SAI Active modules with digital inputs or digital outputs are optionally available with standard M8 or M12 connection systems. For modules in the 16DI/8DO series, the configuration can be customised to fit the application so that anywhere between 16DI to 8DI/8DO can be used. Output cables with up to 2 A per channel are used to connect almost any load. Analogue modules can be configured flexibly for current or voltage outputs.



SAI Active Universal - PROFIBUS-DP

PROFIBUS-DP  
Remote I/O for digital  
signal processing



SAI-AU



SAI-AU



Ordering data

Module variants
16 Digital In; 16 Digital In / 8 Digital Out
16 Digital In; 16 Digital In / 8 Digital Out 8 Digital In / 8 Digital Out
8 Digital In / 8 Digital Out

Note

Type	Qty.	Order No.
SAI-AU M8 PB 16DI	1	1906550000
SAI-AU M12 PB 16DI	1	1890020000

Type	Qty.	Order No.
SAI-AU M8 PB 16DI/8DO	1	1906640000
SAI-AU M12 PB 16DI/8DO	1	1890010000
SAI-AU M8 PB 8DI8DO 2A	1	1975450000
SAI-AU M12 PB 8DI8DO 2A	1	1968220000

Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Digital outputs
max. current-carrying capacity per output signal
Switching frequency load (resistive / inductive / inrush)
Short-circuit-proof
Output voltage, low
Output voltage, high
Max. total current of outputs
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

1x M12 plug 5-pole, B-coded
1x M12 female 5-pole, B-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
16x M8 female 3-pole / 8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
10 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
Profibus-DP
Max. 12 Mbit/s (automatic detection)
Via rotary coding switch (1 – 126)
GSD file (Device-specific for each module)
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus

1x M12 plug 5-pole, B-coded
1x M12 female 5-pole, B-coded
2x M12 plug 5-pole, A-coded
16x M8 female 3-pole / 8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
10 A
-30 V to +30 V (protected against polarity reversal)
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
0.5 A, 2 A
max. 100 Hz / max. 1 Hz / max. 8 Hz
Yes, cut-off for short circuit and error message
0 V DC
Supply voltage less 0.7 V DC
7 A, 8 A (1975450000, 1968220000)
Profibus-DP
Max. 12 Mbit/s (automatic detection)
Via rotary coding switch (1 – 126)
GSD file (Device-specific for each module)
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus

Note

**PROFIBUS-DP**

Remote I/O for digital and analogue signal processing

**SAI-AU****Ordering data**

Module variants
4 Analogue In / 2 Analogue Out / 4 Digital In
Note

Type	Qty.	Order No.
SAI-AU M12 PB AI/AO/DI	1	1890000000

**Technical data**

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Analogue inputs
Measurement range
Maximum input voltage in relation to GND
Input resistance (load)
Max. input current (differential)
Short-circuit-proof
Resolution / Accuracy
Analogue outputs
Measurement range
Output interval
Short-circuit-proof
Resolution / Accuracy
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

1x M12 plug 5-pole, B-coded
1x M12 female 5-pole, B-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
10 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
35 V
<125 Ohm
-50 mA to +50 mA (protected against polarity reversal)
Yes
12-bit / < 0.2 %
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
5 ms to 250 ms (can be configured)
Yes
12-bit / < 0.2 %
Profibus-DP
Max. 12 Mbit/s (automatic detection)
Via rotary coding switch (1 – 126)
GSD file (Device-specific for each module)
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus

Note
------

Note
------



# Engineering tables for PROFIBUS

When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## PROFIBUS modules



## PROFIBUS accessories



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Typee	Qty.	Order No.
<b>PROFIBUS modules</b>			
16 Digital In	SAI-AU M12 PB 16DI	1	1890020000
16 Digital In / 8 Digital Out	SAI-AU M12 PB 16DI/8DO	1	1890010000
4 Analogue In / 2 Analogue Out / 4 Digital In	SAI-AU M12 PB AI/AO/DI	1	1890000000
8 Digital In / 8 Digital Out	SAI-AU M12 PB 8DI/8DO 2A	1	1968220000
16 Digital In	SAI-AU M8 PB 16DI	1	1906550000
16 Digital In / 8 Digital Out	SAI-AU M8 PB 16DI/8DO	1	1906640000
8 Digital In / 8 Digital Out	SAI-AU M8 PB 8DI/8DO 2A	1	1975450000
<b>PROFIBUS accessories</b>			
PROFIBUS cables with female plug and male plug			Chapter C
PROFIBUS cables with female plug and other side open			Chapter C
PROFIBUS cables with male plug and other side open			Chapter C
PROFIBUS plug-in connector			Chapter C
PROFIBUS terminating resistor	SAIEND PB M12 5P B-COD	1	1784770000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000



## CANopen

### Remote I/O for digital signal processing



### Ordering data

Module variants
16 Digital In; 16 Digital In / 8 Digital Out
16 Digital In; 16 Digital In / 8 Digital Out

Note

### Technical data

#### Connections

Fieldbus (BUS-IN)  
Fieldbus (BUS-OUT)  
Supply voltage (AUX-IN)  
Supply voltage (AUX-OUT)  
I/O connections

#### Voltage supply

Operating voltage  
Contact load  
Max. total current module

#### Digital inputs

Permitted input voltage  
Input voltage, low  
Input voltage, high  
Input current, low  
Input current, high  
Input filter

#### Digital outputs

max. current-carrying capacity per output signal  
Switching frequency load (resistive / inductive / inrush)  
Short-circuit-proof  
Output voltage, low  
Output voltage, high  
Max. total current outputs

#### Fieldbus

Bus system  
Transmission rate  
Addressing  
System integration

#### General data

L x W x H  
Earth  
Protection class  
operating temperature  
Storage temperature  
Housing main material / Flammability class UL 94  
Certificate

### SAI-AU



Type	Qty.	Order No.
SAI-AU M8 CAN 16DI	1	1906680000
SAI-AU M12 CAN 16DI	1	1906650000

Note

#### Connections

1x M12 plug 5-pole, A-coded  
1x M12 female 5-pole, A-coded  
1x M12 plug 5-pole, A-coded  
1x M12 female 5-pole, A-coded  
16x M8 female 3-pole / 8 x M12 female 5-pole, A-coded

#### Voltage supply

24 V (18 V DC ... 30 V DC)  
Per PIN max. 4 A  
8 A

#### Digital inputs

-30 V to +30 V (protected against polarity reversal)  
<5 V in accordance with EN 61131-2 Typ 1  
>15 V in accordance with EN 61131-2 Typ 1  
< 15 mA in accordance with EN 61131-2 Type 1  
2 mA to 15 mA in accordance with EN 61131-2 Type 1  
3 ms

#### Digital outputs

0.5 A, 2 A  
max. 100 Hz / max. 1 Hz / max. 8 Hz  
Yes, cut-off for short circuit and error message  
0 V DC  
Supply voltage less 0.7 V DC  
7 A

#### Fieldbus

CANopen  
Max. 1 Mbit/s (automatic detection)  
Via rotary coding switch (1 – 127)  
EDS file (Device-specific for each module)

#### General data

210 mm / 54 mm / 32 mm  
< 400 g  
IP 67  
0 °C...+60 °C  
-25 °C...+85 °C  
Pocan, PBT / V-0  
CE, cULus (planned for 4Q/2010)

### SAI-AU



Type	Qty.	Order No.
SAI-AU M8 CAN 16DI/8DO	1	1906690000
SAI-AU M12 CAN 16DI/8DO	1	1906660000

Note

#### Connections

1x M12 plug 5-pole, A-coded  
1x M12 female 5-pole, A-coded  
2x M12 plug 5-pole, A-coded

#### Voltage supply

16x M8 female 3-pole / 8 x M12 female 5-pole, A-coded  
24 V (18 V DC ... 30 V DC)  
Per PIN max. 4 A  
8 A

#### Digital inputs

-30 V to +30 V (protected against polarity reversal)  
<5 V in accordance with EN 61131-2 Typ 1  
>15 V in accordance with EN 61131-2 Typ 1  
< 15 mA in accordance with EN 61131-2 Type 1  
2 mA to 15 mA in accordance with EN 61131-2 Type 1  
3 ms

#### Digital outputs

0.5 A, 2 A  
max. 100 Hz / max. 1 Hz / max. 8 Hz  
Yes, cut-off for short circuit and error message  
0 V DC  
Supply voltage less 0.7 V DC  
7 A

#### Fieldbus

CANopen  
Max. 1 Mbit/s (automatic detection)  
Via rotary coding switch (1 – 127)  
EDS file (Device-specific for each module)

#### General data

210 mm / 54 mm / 32 mm  
< 400 g  
IP 67  
0 °C...+60 °C  
-25 °C...+85 °C  
Pocan, PBT / V-0  
CE, cULus (planned for 4Q/2010)

Note

Note

Note

## CANopen

### Remote I/O for digital and analogue signal processing



## SAI-AU



### Ordering data

Module variants
4 Analogue In / 2 Analogue Out / 4 Digital In
Note

Type	Qty.	Order No.
SAI-AU M12 CAN AI/AO/DI	1	1906670000

### Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Analogue inputs
Measurement range
Maximum input voltage in relation to GND
Input resistance (load)
Max. input current (differential)
Short-circuit-proof
Resolution / Accuracy
Analogue outputs
Measurement range
Output interval
Short-circuit-proof
Resolution / Accuracy
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
8 x M12 female 5-pole, A-coded
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
35 V
<125 Ohm
-50 mA to +50 mA (protected against polarity reversal)
Yes
12-bit / < 0.2 %
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
5 ms to 250 ms (can be configured)
Yes
12-bit / < 0.2 %
CANopen
Max. 1 Mbit/s (automatic detection)
Via rotary coding switch (1 – 127)
EDS file (Device-specific for each module)
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Note

Note

# Engineering tables for CANopen



When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## CANopen modules



## CANopen accessories



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>CANopen modules</b>			
16 Digital In	SAI-AU M12 CAN 16DI	1	1906650000
16 Digital In / 8 Digital Out	SAI-AU M12 CAN 16DI/8DO	1	1906660000
4 Analogue In / 2 Analogue Out / 4 Digital In	SAI-AU M12 CAN AI/AO/DI	1	1906670000
16 Digital In	SAI-AU M8 CAN 16DI	1	1906680000
16 Digital In / 8 Digital Out	SAI-AU M8 CAN 16DI/8DO	1	1906690000
<b>CANopen accessories</b>			
CANopen cables with female plug and male plug			Chapter C
CANopen cables with female plug and other side open			Chapter C
CANopen cables with male plug and other side open			Chapter C
CANopen plug-in connector			Chapter C
CANopen terminating resistor	SAIEND CAN-M12 5P A-COD	1	1784760000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000





**DeviceNet™**  
Remote I/O for digital  
signal processing



**SAI-AU**



**SAI-AU**



**Ordering data**

Module variants
16 Digital In; 16 Digital In / 8 Digital Out
16 Digital In; 16 Digital In / 8 Digital Out

**Technical data**

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Digital outputs
max. current-carrying capacity per output signal
Switching frequency load (resistive / inductive / inrush)
Short-circuit-proof
Output voltage, low
Output voltage, high
Max. total current outputs
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

Type	Qty.	Order No.
SAI-AU M8 DN 16DI	1	1906730000
SAI-AU M12 DN 16DI	1	1906700000

1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
16x M8 female 3-pole / 8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
DeviceNet
Max. 500 kBit/s (automatic detection)
Via rotary coding switch (0 – 63)
EDS file (Device-specific for each module)
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Type	Qty.	Order No.
SAI-AU M8 DN 16DI/8DO	1	1906740000
SAI-AU M12 DN 16DI/8DO	1	1906710000

1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
2x M12 plug 5-pole, A-coded
16x M8 female 3-pole / 8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
0.5 A, 2 A
max. 100 Hz / max. 1 Hz / max. 8 Hz
Yes, cut-off for short circuit and error message
0 V DC
Supply voltage less 0.7 V DC
7 A
DeviceNet
Max. 500 kBit/s (automatic detection)
Via rotary coding switch (0 – 63)
EDS file (Device-specific for each module)
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Note

## DeviceNet™

### Remote I/O for digital and analogue signal processing



## SAI-AU



### Ordering data

Module variants
4 Analogue In / 2 Analogue Out / 4 Digital In
Note

### Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Analogue inputs
Measurement range
Maximum input voltage in relation to GND
Input resistance (load)
Max. input current (differential)
Short-circuit-proof
Resolution / Accuracy
Analogue outputs
Measurement range
Output interval
Short-circuit-proof
Resolution / Accuracy
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

Type	Qty.	Order No.
SAI-AU M12 DN AI/AO/DI	1	1906720000
Connections	1x M12 plug 5-pole, A-coded	
1x M12 female 5-pole, A-coded		
1x M12 plug 5-pole, A-coded		
1x M12 female 5-pole, A-coded		
8 x M12 female 5-pole, A-coded		
Voltage supply	24 V (18 V DC ... 30 V DC)	
Per PIN max. 4 A		
8 A		
Digital inputs	-30 V to +30 V (protected against polarity reversal)	
<5 V in accordance with EN 61131-2 Typ 1		
>15 V in accordance with EN 61131-2 Typ 1		
< 15 mA in accordance with EN 61131-2 Type 1		
2 mA to 15 mA in accordance with EN 61131-2 Type 1		
3 ms		
Analogue inputs	-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA	
35 V		
<125 Ohm		
-50 mA to +50 mA (protected against polarity reversal)		
Yes		
12-bit / < 0.2 %		
Analogue outputs	-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA	
5 ms to 250 ms (can be configured)		
Yes		
12-bit / < 0.2 %		
Fieldbus	DeviceNet	
Max. 500 kBit/s (automatic detection)		
Via rotary coding switch (0 – 63)		
EDS file (Device-specific for each module)		
General data	210 mm / 54 mm / 32 mm	
< 400 g		
IP 67		
0 °C...+60 °C		
-25 °C...+85 °C		
Pocan, PBT / V-0		
CE, cULus (planned for 4Q/2010)		
Note		

# Engineering tables for DeviceNet™

When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## DeviceNet™ modules



## DeviceNet™ accessories



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>DeviceNet™ modules</b>			
16 Digital In	SAI-AU M12 DN 16DI	1	1906700000
16 Digital In / 8 Digital Out	SAI-AU M12 DN 16DI/8DO	1	1906710000
4 Analogue In / 2 Analogue Out / 4 Digital In	SAI-AU M12 DN AI/AO/DI	1	1906720000
16 Digital In	SAI-AU M8 DN 16DI	1	1906730000
16 Digital In / 8 Digital Out	SAI-AU M8 DN 16DI/8DO	1	1906740000
<b>DeviceNet™ accessories</b>			
DeviceNet™ cables with female plug and male plug			Chapter C
DeviceNet™ cables with female plug and other side open			Chapter C
DeviceNet™ cables with male plug and other side open			Chapter C
DeviceNet™ plug-in connector			Chapter C
DeviceNet™ terminating resistor	SAIEND CAN-M12 5P A-COD	1	1784760000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000



## EtherNet/IP™

## Remote I/O for digital signal processing



## SAI-AU



## SAI-AU



## Ordering data

Module variants
16 Digital In; 16 Digital In / 8 Digital Out
16 Digital In; 16 Digital In / 8 Digital Out

Note

## Technical data

## Connections

Fieldbus (BUS-IN)  
Supply voltage (AUX-IN)  
Supply voltage (AUX-OUT)  
I/O connections

## Voltage supply

Operating voltage  
Contact load  
Max. total current module

## Digital inputs

Permitted input voltage  
Input voltage, low  
Input voltage, high  
Input current, low  
Input current, high  
Input filter

## Digital outputs

max. current-carrying capacity per output signal  
Switching frequency load (resistive / inductive / inrush)  
Short-circuit-proof  
Output voltage, low  
Output voltage, high  
Max. total current outputs

## Fieldbus

Bus system  
Transmission rate  
Addressing  
System integration

## General data

L x W x H  
Earth  
Protection class  
operating temperature  
Storage temperature  
Housing main material / Flammability class UL 94  
Certificate

Type	Qty.	Order No.
SAI-AU M8 EIP 16DI	1	1906930000
SAI-AU M12 EIP 16DI	1	1906900000

Note

1x M12 female 4-pole, D-coded  
1x M12 plug 5-pole, A-coded  
1x M12 female 5-pole, A-coded  
16x M8 female 3-pole

24 V (18 V DC ... 30 V DC)  
Per PIN max. 4 A  
8 A

-30 V to +30 V (protected against polarity reversal)  
<5 V in accordance with EN 61131-2 Typ 1  
>15 V in accordance with EN 61131-2 Typ 1  
< 15 mA in accordance with EN 61131-2 Type 1  
2 mA to 15 mA in accordance with EN 61131-2 Type 1  
3 ms

0.5 A, 2 A
max. 100 Hz / max. 1 Hz / max. 8 Hz
Yes, cut-off for short circuit and error message
0 V DC
Supply voltage less 0.7 V DC
7 A

EtherNet/IP  
10/100 Mbit/s  
DHCP, BOOTP, Static  
EDS file, Web server

210 mm / 54 mm / 32 mm  
< 400 g  
IP 67  
0 °C...+60 °C  
-25 °C...+85 °C  
Pocan, PBT / V-0  
CE, cULus (planned for 4Q/2010)

Type	Qty.	Order No.
SAI-AU M8 EIP 16DI/8DO	1	1906940000
SAI-AU M12 EIP 16DI/8DO	1	1906910000

Note

1x M12 female 4-pole, D-coded  
2x M12 plug 5-pole, A-coded

16x M8 female 3-pole

24 V (18 V DC ... 30 V DC)  
Per PIN max. 4 A  
8 A

-30 V to +30 V (protected against polarity reversal)  
<5 V in accordance with EN 61131-2 Typ 1  
>15 V in accordance with EN 61131-2 Typ 1  
< 15 mA in accordance with EN 61131-2 Type 1  
2 mA to 15 mA in accordance with EN 61131-2 Type 1  
3 ms

0.5 A, 2 A  
max. 100 Hz / max. 1 Hz / max. 8 Hz  
Yes, cut-off for short circuit and error message  
0 V DC  
Supply voltage less 0.7 V DC  
7 A

EtherNet/IP  
10/100 Mbit/s  
DHCP, BOOTP, Static  
EDS file, Web server

210 mm / 54 mm / 32 mm  
< 400 g  
IP 67  
0 °C...+60 °C  
-25 °C...+85 °C  
Pocan, PBT / V-0  
CE, cULus (planned for 4Q/2010)

Note

## EtherNet/IP™

Remote I/O for digital and analogue signal processing



## SAI-AU



## Ordering data

Module variants
4 Analogue In / 2 Analogue Out / 4 Digital In
Note

Type	Qty.	Order No.
SAI-AU M12 EIP AI/AO/DI	1	1906920000

## Technical data

Connections
Fieldbus (BUS-IN)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Analogue inputs
Measurement range
Maximum input voltage in relation to GND
Input resistance (load)
Max. input current (differential)
Short-circuit-proof
Resolution / Accuracy
Analogue outputs
Measurement range
Output interval
Short-circuit-proof
Resolution / Accuracy
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94 Certificate

1x M12 female 4-pole, D-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
< 15 mA in accordance with EN 61131-2 Type 1
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
35 V
<125 Ohm
-50 mA to +50 mA (protected against polarity reversal)
Yes
12-bit / < 0.2 %
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
5 ms to 250 ms (can be configured)
Yes
12-bit / < 0.2 %
EtherNet/IP
10/100 Mbit/s
DHCP, BOOTP, Static
EDS file, Web server
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Note
------

Note
------







## Modbus TCP

### Remote I/O for digital signal processing



### Ordering data

Module variants
16 Digital In; 16 Digital In / 8 Digital Out
16 Digital In; 16 Digital In / 8 Digital Out

Note

### Technical data

#### Connections

Fieldbus (BUS-IN)  
Supply voltage (AUX-IN)  
Supply voltage (AUX-OUT)  
I/O connections

#### Voltage supply

Operating voltage  
Contact load  
Max. total current module

#### Digital inputs

Permitted input voltage  
Input voltage, low  
Input voltage, high  
Input current, low  
Input current, high  
Input filter

#### Digital outputs

max. current-carrying capacity per output signal  
Switching frequency load (resistive / inductive / inrush)  
Short-circuit-proof  
Output voltage, low  
Output voltage, high  
Max. total current outputs

#### Fieldbus

Bus system  
Transmission rate  
Addressing  
System integration

#### General data

L x W x H  
Earth  
Protection class  
operating temperature  
Storage temperature  
Housing main material / Flammability class UL 94  
Certificate

### SAI-AU



Type	Qty.	Order No.
SAI-AU M8 IE 16DI	1	1906880000
SAI-AU M12 IE 16DI	1	1906850000

Note

1x M12 female 4-pole, D-coded  
1x M12 plug 5-pole, A-coded  
1x M12 female 5-pole, A-coded  
16x M8 female 3-pole

24 V (18 V DC ... 30 V DC)  
Per PIN max. 4 A  
8 A

-30 V to +30 V (protected against polarity reversal)  
<5 V in accordance with EN 61131-2 Typ 1  
>15 V in accordance with EN 61131-2 Typ 1  
< 15 mA in accordance with EN 61131-2 Type 1  
2 mA to 15 mA in accordance with EN 61131-2 Type 1  
3 ms

0.5 A, 2 A  
max. 100 Hz / max. 1 Hz / max. 8 Hz  
Yes, cut-off for short circuit and error message  
0 V DC  
Supply voltage less 0.7 V DC  
7 A

Modbus TCP  
10/100 Mbit/s  
DHCP, BOOTP, Static  
Register, Webserver

210 mm / 54 mm / 32 mm  
< 400 g  
IP 67  
0 °C...+60 °C  
-25 °C...+85 °C  
Pocan, PBT / V-0  
CE, cULus (planned for 4Q/2010)

### SAI-AU



Type	Qty.	Order No.
SAI-AU M8 IE 16DI/8DO	1	1906890000
SAI-AU M12 IE 16DI/8DO	1	1906860000

Note

1x M12 female 4-pole, D-coded  
2x M12 plug 5-pole, A-coded

16x M8 female 3-pole

24 V (18 V DC ... 30 V DC)  
Per PIN max. 4 A  
8 A

-30 V to +30 V (protected against polarity reversal)  
<5 V in accordance with EN 61131-2 Typ 1  
>15 V in accordance with EN 61131-2 Typ 1  
< 15 mA in accordance with EN 61131-2 Type 1  
2 mA to 15 mA in accordance with EN 61131-2 Type 1  
3 ms

0.5 A, 2 A  
max. 100 Hz / max. 1 Hz / max. 8 Hz  
Yes, cut-off for short circuit and error message  
0 V DC  
Supply voltage less 0.7 V DC  
7 A

Modbus TCP  
10/100 Mbit/s  
DHCP, BOOTP, Static  
Register, Webserver

210 mm / 54 mm / 32 mm  
< 400 g  
IP 67  
0 °C...+60 °C  
-25 °C...+85 °C  
Pocan, PBT / V-0  
CE, cULus (planned for 4Q/2010)

Note

Note

Note

## Modbus TCP

### Remote I/O for digital and analogue signal processing

**Modbus-IDA**  
the architecture for distributed automation

## SAI-AU



### Ordering data

Module variants
4 Analogue In / 2 Analogue Out / 4 Digital In
Note

Type	Qty.	Order No.
SAI-AU M12 IE AI/AO/DI	1	1906870000

### Technical data

Connections
Fieldbus (BUS-IN)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Analogue inputs
Measurement range
Maximum input voltage in relation to GND
Input resistance (load)
Max. input current (differential)
Short-circuit-proof
Resolution / Accuracy
Analogue outputs
Measurement range
Output interval
Short-circuit-proof
Resolution / Accuracy
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94 Certificate

1x M12 female 4-pole, D-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
3 ms
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
35 V
<125 Ohm
-50 mA to +50 mA (protected against polarity reversal)
Yes
12-bit / < 0.2 %
-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
5 ms to 250 ms (can be configured)
Yes
12-bit / < 0.2 %
Modbus TCP
10/100 Mbit/s
DHCP, BOOTP, Static
Register, Webserver
210 mm / 54 mm / 32 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Note
------

Note
------

# Engineering tables for Modbus TCP

When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## Modbus TCP modules



E

## Modbus TCP accessories



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>Modbus TCP modules</b>			
16 Digital In	SAI-AU M12 IE 16DI	1	1906850000
16 Digital In / 8 Digital Out	SAI-AU M12 IE 16DI/8DO	1	1906860000
4 Analogue In / 2 Analogue Out / 4 Digital In	SAI-AU M12 IE AI/AO/DI	1	1906870000
16 Digital In	SAI-AU M8 IE 16DI	1	1906880000
16 Digital In / 8 Digital Out	SAI-AU M8 IE 16DI/8DO	1	1906890000
<b>Modbus TCP accessories</b>			
Modbus TCP cables and plugs (refer to Catalogue 9)			Chapter C
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000



# SAI Active Universal Pro

## Professional versions of the Remote I/O System featuring IP67 protection

The modules in the SAI Active Universal Pro systems provide additional I/O and functional modules for more versatile topologies. The extension modules come in a compact, space saving design. They can also be mounted on the side because of the additional drilled holes in the side of the housing. Up to 15 extension modules can be connected over a distance of 50 metres using a shielded, standard M8 sensor cable and the SAI fieldbus module.


In addition to the digital input and output modules, we also offer counter unit modules, thermal modules, RTD modules and analogue modules. The digital input and output modules are also available in M8 and M12 variants. The analogue modules and functional modules are available with M12 connections. Markers are included with every SAI Active module for labelling the I/O channels and the entire device. These markers can be printed on using the PrintJet system from Weidmüller.





### Cost-effective Subbus system

Subbus modules are wired up using conventional, shielded, standard M8 sensor cables. Thus there is no need for expensive custom cables. The extension modules enable versatile expansion and minimise the costs associated with the fieldbus interface. The modules do not, however, detract from the performance of the fieldbus system.




### Integration with an industrial PC

Weidmüller offers an SAI Active Universal Pro module with USB and RS232 interfaces especially for controllers or industrial PCs without any Fieldbus connection. A driver is used to set up the connection; communication is based on the standard Modbus ASCII format. All available extension modules can be used on these components and can be accessed via the controller.



### Simplified installation

The modules have a compact, space saving design with additional holes drilled on the side of the housing: this allows them to be installed in a quick and versatile manner. All SAI Active modules with digital inputs or digital outputs are optionally available with standard M8 or M12 connection systems. The outputs are short-circuit-proof and protected against polarity reversal.



### Efficient engineering

All Pro-System modules are described in the standardised fieldbus specific device description files. They can be integrated into any controller unit and corresponding engineering system regardless of the particular manufacturer. The configuration (whether for the input, DESINA input, or output) is carried out without any additional software. Any user can configure directly from the engineering system.

SAI-Active Universal Pro

Gateway modules with digital inputs



SAI-AU GW



SAI-AU GW



Ordering data

Module variants
16 Digital In
Note

Type	Qty.	Order No.
SAI-AU M12 PB GW 16DI	1	1938550000

Type	Qty.	Order No.
SAI-AU M8 PB GW 16DI	1	1024310000

Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Connection to Subbus (SUB-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

1x M12 plug 5-pole, B-coded
1x M12 female 5-pole, B-coded
1x M12 plug 5-pole, A-coded
1 x M8 female 4-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
Profibus-DP
Max. 12 Mbit/s (automatic detection)
Via rotary coding switch (1 – 126)
GSD file
210 mm / 54 mm / 32 mm
< 350 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus

1x M12 plug 5-pole, B-coded
1x M12 female 5-pole, B-coded
1x M12 plug 5-pole, A-coded
1 x M8 female 4-pole, A-coded
16x M8 female 3-pole
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
Profibus-DP
Max. 12 Mbit/s (automatic detection)
Via rotary coding switch (1 – 126)
GSD file
210 mm / 54 mm / 32 mm
< 350 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus

Note
------

Note
------

Note
------

# Engineering tables for PROFIBUS



When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## PROFIBUS modules



## PROFIBUS accessories



## Subbus cables / Terminating resistor



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>PROFIBUS modules</b>			
PROFIBUS Gateway M12	SAI-AU M12 PB GW 16DI	1	1938550000
PROFIBUS Gateway M8	SAI-AU M8 PB GW 16DI	1	1024310000
Subbus module	SAI-AU M12 SB 8DI	1	1938610000
Subbus module	SAI-AU M12 SB 8DI/8DO	1	1938640000
Subbus module	SAI-AU M8 SB 8DI	1	1938600000
Subbus module	SAI-AU M8 SB 8DI/8DO	1	1938630000
Subbus module	SAI-AU M12 SB AI	1	1938690000
Subbus module	SAI-AU M12 SB AO	1	1938700000
Subbus module	SAI-AU M12 SB PT100	1	1938710000
Subbus module	SAI-AU M12 SB Thermo	1	1938720000
Subbus module	SAI-AU M12 SB Zähler	1	1938730000
Subbus module	SAI-AU M8 SB 8DO 2A	1	1938660000
Subbus module	SAI-AU M12 SB 8DO 2A	1	1938680000
<b>PROFIBUS accessories</b>			
PROFIBUS cables with female plug and male plug			Chapter C
PROFIBUS cables with female plug and other side open			Chapter C
PROFIBUS cables with male plug and other side open			Chapter C
PROFIBUS plug-in connector			Chapter C
PROFIBUS terminating resistor	SAIEND PB M12 5P B-COD	1	1784770000
<b>Subbus cables / Terminating resistor</b>			
Subbus cables			Chapter C
Subbus terminating resistor	SAIEND CAN M8 4P	1	1955340000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000



SAI-Active Universal Pro

Gateway modules with digital inputs



Ordering data

Module variants
16 Digital In
Note

Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Connection to Subbus (SUB-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

SAI-AU GW



Type	Qty.	Order No.
SAI-AU M12 EIP GW 16DI	1	1019490000
Note		

1x M12 female 4-pole, D-coded
1x M12 plug 5-pole, A-coded
1 x M8 female 4-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
EtherNet/IP
10/100 Mbit/s
DHCP, BOOTP, Static
EDS file, Web server
210 mm / 54 mm / 32 mm
< 350 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

SAI-AU GW



Type	Qty.	Order No.
SAI-AU M12 DN GW 16DI	1	1938570000
Note		

1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
1x M12 plug 5-pole, A-coded
1 x M8 female 4-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
DeviceNet
Max. 500 kBit/s (automatic detection)
Via rotary coding switch (0 – 63)
EDS file
210 mm / 54 mm / 32 mm
< 350 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Note

Note

Note

# Engineering tables for DeviceNet™ and EtherNet/IP™



When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## DeviceNet™ and EtherNet/IP™ modules



## DeviceNet™ und EtherNet/IP™ accessories



## Subbus cables / Terminating resistor



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>DeviceNet™ and EtherNet/IP™ modules</b>			
DeviceNet™ Gateway	SAI-AU M12 DN GW 16DI	1	1938570000
EtherNet/IP™ Gateway	SAI-AU M12 EIP GW 16DI	1	1019490000
Subbus module	SAI-AU M12 SB 8DI	1	1938610000
Subbus module	SAI-AU M12 SB 8DI/8DO	1	1938640000
Subbus module	SAI-AU M8 SB 8DI	1	1938600000
Subbus module	SAI-AU M8 SB 8DI/8DO	1	1938630000
Subbus module	SAI-AU M12 SB AI	1	1938690000
Subbus module	SAI-AU M12 SB AO	1	1938700000
Subbus module	SAI-AU M12 SB PT100	1	1938710000
Subbus module	SAI-AU M12 SB Thermo	1	1938720000
Subbus module	SAI-AU M12 SB Zähler	1	1938730000
Subbus module	SAI-AU M8 SB 8DO 2A	1	1938660000
Subbus module	SAI-AU M12 SB 8DO 2A	1	1938680000
<b>DeviceNET™ and EthernetIP™ accessories</b>			
DeviceNet™ cables with female plug and male plug			Chapter C
DeviceNet™ cables with female plug and other side open			Chapter C
DeviceNet™ cables with male plug and other side open			Chapter C
DeviceNet™ plug-in connector			Chapter C
DeviceNet™ terminating resistor	SAIEND CAN-M12 5P A-COD	1	1784760000
EtherNet/IP™ cables and plugs (refer to Catalogue 9/Chapter C)			
<b>Subbus cables / Terminating resistor</b>			
Subbus cables			Chapter C
Subbus terminating resistor	SAIEND CAN M8 4P	1	1955340000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000

## Gateway modules with digital inputs/outputs



## Ordering data

Module variants
16 Digital In; 8 Digital In / 8 Digital Out
Note

## Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Connection to Subbus (SUB-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Digital outputs
max. current-carrying capacity per output signal
Switching frequency load (resistive / inductive / inrush)
Short-circuit-proof
Output voltage, low
Output voltage, high
Max. total current outputs
Fieldbus
Bus system
Transmission rate
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

## SAI-AU GW



Type	Qty.	Order No.
SAI-AU M12 IE GW 16DI	1	1938580000

1x M12 female 4-pole, D-coded
1x M12 plug 5-pole, A-coded
1 x M8 female 4-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
Modbus TCP
10/100 Mbit/s
DHCP, BOOTP, Static
Register, Webserver
210 mm / 54 mm / 32 mm
< 350 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

## SAI-AU GW



Type	Qty.	Order No.
SAI-AU M12 USB GW 8I8O	1	1962240000

1x M12 plug 5-pole, B-coded (BUS-USB)
1x M12 female 5-pole, B-coded (BUS-RS232)
1x M12 plug 5-pole, A-coded
1 x M8 female 4-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
0.5 A
max. 100 Hz / max. 1 Hz / max. 8 Hz
Yes, cut-off for short circuit and error message
0 V DC
Supply voltage less 0.7 V DC
4 A
Modbus ASCII (RS 232 / USB)
115.2 kBit/s
Static
Register
210 mm / 54 mm / 32 mm
< 350 g
IP 67
0 °C...+60 °C
-20 °C...
Pocan, PBT / V-0
CE, cULus (planned for 4Q/2010)

Note

# Engineering tables for Modbus TCP and USB

**Modbus-IDA**  
the architecture for distributed automation

**USB** 

When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## Modbus TCP and USB modules



## Modbus TCP and USB accessories



## Subbus cables / Terminating resistor



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>Modbus TCP and USB modules</b>			
USB Gateway	SAI-AU M12 USB GW 8I8O	1	1962240000
Modbus TCP Gateway	SAI-AU M12 IE GW 16DI	1	1938580000
Subbus module	SAI-AU M12 SB 8DI	1	1938610000
Subbus module	SAI-AU M12 SB 8DI/8DO	1	1938640000
Subbus module	SAI-AU M8 SB 8DI	1	1938600000
Subbus module	SAI-AU M8 SB 8DI/8DO	1	1938630000
Subbus module	SAI-AU M12 SB AI	1	1938690000
Subbus module	SAI-AU M12 SB AO	1	1938700000
Subbus module	SAI-AU M12 SB PT100	1	1938710000
Subbus module	SAI-AU M12 SB Thermo	1	1938720000
Subbus module	SAI-AU M12 SB Zähler	1	1938730000
Subbus module	SAI-AU M8 SB 8DO 2A	1	1938660000
Subbus module	SAI-AU M12 SB 8DO 2A	1	1938680000
<b>Modbus TCP and USB accessories</b>			
USB module plug-in connector			Chapter C
Modbus TCP cables and plugs (refer to Catalogue 9/Chapter C)			
<b>Subbus cables / Terminating resistor</b>			
Subbus cables			Chapter C
Subbus terminating resistor	SAIEND CAN M8 4P	1	1955340000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M8 Dust cap (Sensor connections)	SAI-SK M8	50	1802760000
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000





## SAI Active Universal Pro

### Subbus modules with functional inputs

### SAI-AU Counter



#### Ordering data

Module variants
2 counter inputs / 2 gate outputs
Note

Type	Qty.	Order No.
SAI-AU M12 SB 2Counter	1	1938730000

#### Technical data

Connections
Supply voltage (AUX-IN)
Connection to Subbus (SUB-IN)
Connection to Subbus (SUB-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Max. total current module
Functional inputs
Counting breadth
Switching frequency
No. Inputs
Fieldbus
Bus system
Addressing
System integration
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

1x M12 plug 5-pole, A-coded
1x M8 plug 4-pole, A-coded
1x M8 female 4-pole, A-coded
4 x M12 female, 5-pole A-coded
24 V (18 V DC ... 30 V DC)
Per PIN max. 4 A
8 A
32 Bit
100
2 x enables, 2 x counters, 2 x count directions
Subbus
automatic
automatic
180 mm / 30 mm / 32 mm
< 200 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / 5VA
CE, cULus

Note
------

Subbus modules with  
functional inputs

## SAI-AU Thermo



## Ordering data

Module variants
4 Thermo inputs
Note

Type	Qty.	Order No.
SAI-AU M12 SB 4Thermo	1	1938720000

## Technical data

Connections	
Connection to Subbus (SUB-IN)	1 x M8 plug 4-pole, A-coded
Connection to Subbus (SUB-OUT)	1 x M8 female 4-pole, A-coded
I/O connections	4 x M12 female, 5-pole A-coded
Voltage supply	
Operating voltage	24 V (18 V DC ... 30 V DC)
Functional inputs	
Sensor	Type J, K, L, B, E, N, R, S, T, U, mV measurement
Temperature range	Typical for sensor, Preset Type K, -100 °C to 1370 °C
Resolution	0.1 °C per digit
Conversion time	250 ms (can be configured to 70 ms)
Measurement error	< ± 0.5% (of measuring range limit)
Input filter	Configurable
cold junction compensation	External PT1000 connection on pins 1 and 3 (GND)
Fieldbus	
Bus system	Subbus
Addressing	automatic
System integration	automatic
General data	
L x W x H	155 mm / 30 mm32 mm
Earth	< 200 g
Protection class	IP 67
operating temperature	0 °C...+60 °C
Storage temperature	-25 °C...+85 °C
Housing main material / Flammability class UL 94	Pocan, PBT / 5VA
Certificate	CE, cULus

Note

Note



## SAI Active Universal Pro

### Subbus modules with functional inputs

#### SAI-AU PT100



#### Ordering data

Module variants	4 PT100 inputs
Note	

Type	Qty.	Order No.
SAI-AU M12 SB 4PT100	1	1938710000

#### Technical data

Connections	Connection to Subbus (SUB-IN) Connection to Subbus (SUB-OUT) I/O connections
Voltage supply	Operating voltage
Functional inputs	Sensor
Resolution	0.1 °C per digit
Conversion time	250 ms (can be configured to 65 ms)
Measurement error	< ± 1 °C
Input filter	Configurable
Measurement range for PT sensors	-200 °C ... + 850 °C
Measurement range for Ni sensors	-60 °C ... +250 °C
Resistance measurement	max. 4000 Ohm
Potentiometer	100 bis 4000 Ω (Three-conductor)
Measurement current	Typically 0.5 mA
Fieldbus	Subbus
Bus system	automatic
Addressing	automatic
System integration	automatic
General data	L x W x H
Earth	< 200 g
Protection class	IP 67
operating temperature	0 °C...+60 °C
Storage temperature	-25 °C...+85 °C
Housing main material / Flammability class UL 94	Pocan, PBT / 5VA
Certificate	CE, cULus

1 x M8 plug 4-pole, A-coded
1 x M8 female 4-pole, A-coded
4 x M12 female, 5-pole A-coded
24 V (18 V DC ... 30 V DC)
N100, N1000, N120, PT100, PT1000, PT200, PT300, PT500, *UNDEFINED TEXT*, Widerstandsmessung
0.1 °C per digit
250 ms (can be configured to 65 ms)
< ± 1 °C
Configurable
-200 °C ... + 850 °C
-60 °C ... +250 °C
max. 4000 Ohm
100 bis 4000 Ω (Three-conductor)
Typically 0.5 mA
Subbus
automatic
automatic
155 mm / 30 mm / 32 mm
< 200 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
Pocan, PBT / 5VA
CE, cULus

Note	
------	--

Note	
------	--



# SAI Active Universal Wireless

## Wireless versions of the Remote I/O System with IP67 protection

Weidmüller offers a remote wireless solution – the SAI Active Universal Wireless series – for providing radio based communication to movable facility units. The remote modules form a safe, wireless I/O communications network and thus completely replace drag lines containing bus cables or interference-prone slip-ring assemblies. Maintenance and servicing is reduced because no communication cables are needed. Potential sources of error, such as broken shielding in the communication cables, are eliminated all together. Thus the user benefits from a long-term cost savings. He requires neither new cables nor installation material for the new communication system. For the engineering system, the change to a wireless system is transparent; it behaves in an identical manner as the cable bound SAI Active Universal Pro System. No complex programming using proprietary software is required. Safe and reliable operations are ensured by the comprehensive diagnostics options on the module and through the higher-level controller.

All wireless modules feature integrated radio-wave antennae and IP67 protection. They may be used directly in surroundings containing hazardous substances or humidity. The wireless modules bring together the required inputs and outputs in a very compact size. This ensures that the robot arms are not weighted down with bulky modules, additional components or external antennae. The wireless fieldbus module is a master module responsible for establishing communication with the higher-level controller unit and with the wireless I/O (slave) modules. Various slave modules with digital and analogue inputs and outputs are available and enable exact adjustments to the requirements of a given application. The wireless connection between the modules is established automatically and remains invisible to other wireless devices. This ensures that there will be no interference on the connection. The output power and, thus, the range, can be set individually on the module.






#### Can be used instead of bus cables in drag line or slip chains

In non stationary applications, a wireless connection can be used instead of the error prone drag-line based bus cable or slip chain transmission. This helps to minimise facility downtimes and reduce costs for maintenance, installation and materials. The SAI wireless system has a similar handling method compared to cable bound systems so installation is simple and safe.

Bluetooth  
WLAN  
ZigBee


#### Coexistence with other wireless systems

The wireless modules transmit in the license free ISM frequency band. This allows them to be used throughout the world. Integrated wireless mechanisms ensure that the modules can be operated at the same time as other wireless systems from other vendors. This ensures communication with no interference and also allows the system to coexist alongside other wireless systems (such as WLAN, ZigBee or Bluetooth).



#### A maximum of 186 modules can be used simultaneously.

The SAI Active Universal Wireless System allows 31 wireless fieldbus modules to be operated simultaneously with six remote I/O modules each. This makes it possible to design an automation solution that can process up to 3348 digital signals. Standardised device description files are provided so that the modules can be integrated into other systems not manufactured by Weidmüller. No special proprietary software is required.



#### A wide variety of variants

The SAI Active Universal Wireless product line includes the wireless fieldbus module with its 12 integrated digital input channels. This product line also features additional wireless I/O modules with up to 16 digital inputs than can be optionally configured by the user as outputs. A mixed module with both digital and analogue inputs and outputs is also available. The outputs can be supplied with power separate from the input channels.

SAI-Active Universal Wireless

Wireless gateway with digital inputs



Wireless-Gateway



Ordering data

Module variants
12 Digital In
Note

Type	Qty.	Order No.
SAI-AU M12 GW PB/BT 12I	1	1006980000

Technical data

Connections
Fieldbus (BUS-IN)
Fieldbus (BUS-OUT)
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Fieldbus
Bus system
System integration
Range of coverage
Addressing
Communication coexistence
Properties of radio system
Frequency band / Channel usage
Transmit power
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

1x M12 plug 5-pole, B-coded
1x M12 female 5-pole, B-coded
1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
6x M12 female 5-pole
24 V DC (18 V DC ... 30 V DC)
Per PIN max. 4 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
Profibus-DP
GSD file / WIAU0A75.GSD
In accordance with the PROFIBUS specification
Via rotary coding switch (1 – 126)
Max. 31 wireless gateways
2.401 GHz – 2.480 GHz / 1 to 79 channels (can be configured)
0 dBm to 20 dBm / max 100 mW (can be configured)
210 mm / 54 mm / 52 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
PBT, Pocaan / V-0
CE, cULus (planned for 4Q/2010)

Note
------

Note
------

# Engineering tables for PROFIBUS



When planning the automation of a facility, you must have a wide variety of components available. These engineering tables list all the components required for wiring up the SAI Active modules.

## PROFIBUS modules



## PROFIBUS accessories



## Sensor/actuator accessories



## Markers



## Protective caps



## Ordering data

Description	Type	Qty.	Order No.
<b>PROFIBUS modules</b>			
Gateway module with 12 Digital In	SAI-AU M12 GW PB/BT 12I	1	1006980000
Subbus module with 16 Digital In	SAI-AU M12 BT 16DI	1	1006940000
Subbus module with 16 Digital In / 8 Digital Out	SAI-AU M12 BT 16DI/8DO	1	1006930000
Subbus module with 4 Analogue In / 2 Analogue Out / 2 Digital In / 2 Digital Out	SAI-AU M12 BT4AI2AO2DIO	1	1006920000
<b>PROFIBUS accessories</b>			
PROFIBUS cables with female plug and male plug			Chapter C
PROFIBUS cables with female plug and other side open			Chapter C
PROFIBUS cables with male plug and other side open			Chapter C
PROFIBUS plug-in connector			Chapter C
PROFIBUS terminating resistor	SAIEND PB M12 5P B-COD	1	1784770000
<b>Sensor/actuator accessories</b>			
Sensor-actuator cables			Chapter B
Sensor-actuator plugs			Chapter D
<b>Markers</b>			
Semi-transparent markers for PrintJet printing	ESG 8/13.5/43.3 SAI AU	5	1912130000
<b>Protective caps</b>			
M12 Dust cap (Sensor connections)	SAI-SK	30	9456050000
M12 Dust cap (Bus-in and power-in)	SAI-SK-M12-UNI	20	2330260000
M12 Dust cap (Bus-in and power-in)	SAI-SK plug M12	50	1781520000

SAI-Active Universal Wireless

Wireless slave modules for digital signal processing



Wireless-Slave



Wireless-Slave



Ordering data

Module variants
16 Digital In; 16 Digital In / 8 Digital Out
16 Digital In / 8 Digital Out

Technical data

Connections
Supply voltage (AUX-IN)
Supply voltage (AUX-OUT)
I/O connections
Voltage supply
Operating voltage
Contact load
Digital inputs
Permitted input voltage
Input voltage, low
Input voltage, high
Input current, low
Input current, high
Input filter
Fieldbus
Bus system
System integration
Range of coverage
Addressing
Communication coexistence
Properties of radio system
Frequency band / Channel usage
Transmit power
General data
L x W x H
Earth
Protection class
operating temperature
Storage temperature
Housing main material / Flammability class UL 94
Certificate

Type	Qty.	Order No.
SAI-AU M12 BT 16DI	1	1006940000

1x M12 plug 5-pole, A-coded
1x M12 female 5-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V DC (18 V DC ... 30 V DC)
Per PIN max. 4 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
Radio in ISM band
automatic
Max. 100 m (open air), Max. 50 m (industrial surroundings)
Via rotary coding switch
Max. 186 (for 31 wireless gateways each with 6 wireless slaves)
2.401 GHz – 2.480 GHz / 1 to 79 channels (can be configured)
0 dBm to 20 dBm / max 100 mW (can be configured)
210 mm / 54 mm / 52 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
PBT, Pocan / V-0
CE, cULus (planned for 4Q/2010)

Type	Qty.	Order No.
SAI-AU M12 BT 16DI/8DO		1006930000

2x M12 plug 5-pole, A-coded
8 x M12 female 5-pole, A-coded
24 V DC (18 V DC ... 30 V DC)
Per PIN max. 4 A
-30 V to +30 V (protected against polarity reversal)
<5 V in accordance with EN 61131-2 Typ 1
>15 V in accordance with EN 61131-2 Typ 1
< 15 mA in accordance with EN 61131-2 Type 1
2 mA to 15 mA in accordance with EN 61131-2 Type 1
1 ms, 3 ms, 5 ms, 10 ms, Configurable
Radio in ISM band
automatic
Max. 100 m (open air), Max. 50 m (industrial surroundings)
Via rotary coding switch
Max. 186 (for 31 wireless gateways each with 6 wireless slaves)
2.401 GHz – 2.480 GHz / 1 to 79 channels (can be configured)
0 dBm to 20 dBm / max 100 mW (can be configured)
210 mm / 54 mm / 52 mm
< 400 g
IP 67
0 °C...+60 °C
-25 °C...+85 °C
PBT, Pocan / V-0
CE, Gost R ME25, cULus (planned for 4Q/2010)

Note

Note

Note

## Wireless slave module for digital and analogue signal processing



### Wireless-Slave



#### Ordering data

Module variants
4 Analogue In / 2 Analogue Out / 2 Digital In / 2 Digital Out
Note

Type	Qty.	Order No.
SAI-AU M12 BT4AI2AO2DIO		1006920000

#### Technical data

Connections	
Supply voltage (AUX-IN)	1x M12 plug 5-pole, A-coded
Supply voltage (AUX-OUT)	1x M12 female 5-pole, A-coded
I/O connections	8 x M12 female 5-pole, A-coded
Voltage supply	
Operating voltage	24 V DC (18 V DC ... 30 V DC)
Contact load	Per PIN max. 4 A
Max. total current module	8 A
Digital inputs	
Permitted input voltage	-30 V to +30 V (protected against polarity reversal)
Input voltage, low	<5 V in accordance with EN 61131-2 Typ 1
Input voltage, high	>15 V in accordance with EN 61131-2 Typ 1
Input current, low	< 15 mA in accordance with EN 61131-2 Type 1
Input current, high	2 mA to 15 mA in accordance with EN 61131-2 Type 1
Input filter	1 ms, 3 ms, 5 ms, 10 ms, Configurable
Digital outputs	
max. current-carrying capacity per output signal	0.5 A
Switching frequency load (resistive / inductive / inrush)	max. 100 Hz / max. 1 Hz / max. 8 Hz
Short-circuit-proof	Yes, cut-off for short circuit and error message
Output voltage, low / Output voltage, high	0 V DC / Supply voltage less 0.7 V DC
Max. total current outputs	1 A
Analogue inputs	
Measurement range	-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
Maximum input voltage in relation to GND	35 V
Input resistance (load)	<125 Ohm
Max. input current (differential)	-50 mA to +50 mA (protected against polarity reversal)
Short-circuit-proof	Yes
Resolution / Accuracy	12-bit / < 0.2 %
Analogue outputs	
Measurement range	-10 V ... +10 V, 0 V ... 10V, 0 ... 20 mA, 4...20 mA
Output interval	20 ms to 250 ms (can be configured)
Short-circuit-proof	Yes
Resolution / Accuracy	12-bit / < 0.2 %
Fieldbus	
Bus system	Radio in ISM band
System integration	automatic
Range of coverage	Max. 100 m (open air), Max. 50 m (industrial surroundings)
Addressing	Via rotary coding switch
Communication coexistence	Max. 186 (for 31 wireless gateways each with 6 wireless slaves)
Properties of radio system	
Frequency band / Channel usage	2.401 GHz – 2.480 GHz / 1 to 79 channels (can be configured)
Transmit power	0 dBm to 20 dBm / max 100 mW (can be configured)
General data	
L x W x H	210 mm / 54 mm / 52 mm
Earth	< 400 g
Protection class	IP 67
operating temperature	0 °C...+60 °C
Storage temperature	-25 °C...+85 °C
Housing main material / Flammability class UL 94	Pocan, PBT / V-0
Certificate	CE, Gost R ME25, cULus (planned for 4Q/2010)

Note

Note





# JACKPAC® (IP67)

<b>JACKPAC® (IP67)</b>	JACKPAC® – overview	F.2
	JACKPAC® relay module	F.3
	JACKPAC® timer	F.4
	JACKPAC® signal inverter	F.5
	JACKPAC® test	F.6
	JACKPAC® – General Data and Accessories	F.7
	Empty housing SAI JACKPAC® for custom built in components	F.8

# The Concept

## The IP20 Solution

Until now, all signal conditioning tasks were carried out by modules designed to IP20. For their own protection, these need to be installed in central switchgear cabinets.

However, decentralised solutions that do not require large switchgear cabinets are increasingly being sought for use in modern industrial automation technology.

It is true that shielded signals can be fed to the machinery via powerful fieldbus systems; but in each case, however, there remains an interconnecting cable between the subdistribution boards and the sensors/actuators that is susceptible to interference from surrounding operations.

**F** As has always been the case, signals are still influenced by over-voltages and earth loops; interference pulses are superimposed on sensor signals and malfunctions can be initiated.

The result is that signal conditioning modules sealed to IP20 require terminal boxes, such as switchgear cabinets, or even cost intensive special solutions (for example, sensor-actuator distributors with integrated signal conditioning functions providing as many functionalities as possible, even when these are surplus to requirements).


## The JACKPAC® Solution

By introducing **JACKPAC®**, the new M12 Signal Box with the high IP67 ingress protection. Weidmüller can now provide a modular and versatile concept that makes it possible to condition signals in an industrial environment. Requiring no additional enclosure, these modules can be installed directly on the machine, in the production plant, conveyor system or within a process.

The M12 connector, which is standardised all over the world, makes it possible to integrate the **JACKPAC®** at any point in the sensor-actuator cabling. The fixed pin assignment means it is easy to install and is protected against polarity reversal.

This versatility really comes into its own when an installation needs to be altered or modernised, simply because no additional enclosures or cabling are required.

By providing this high degree of protection and versatility, **JACKPAC®** renders possible innovative automation concepts based on decentralised applications (without large control cabinets or small distribution boards) for consistent, transparent, efficient and cost-efficient installations.

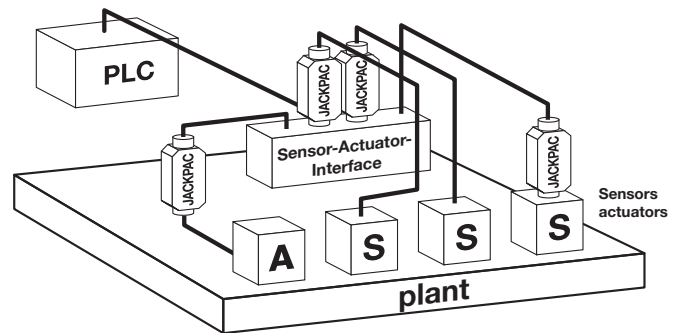


- Easy 'Plug and Play' installation
- Universal and versatile usage
- No additional enclosure required
- Saves time and costs
- Ideal for decentralised concepts and plant modernisation (retrofitting)


**Switching amplifier**

- The switching amplifiers are simply built into the actuator system controls.
- For example, switching outputs can be amplified from 24 V DC / 0.5 A to 24 V DC / 2 A.
- Optionally with galvanic isolation for insulating between the input and output circuits, which prevents conducted interference on the switching output.
- Switched voltage feed at output via T-distributor.

**JPR 24 V DC 1CO M12**

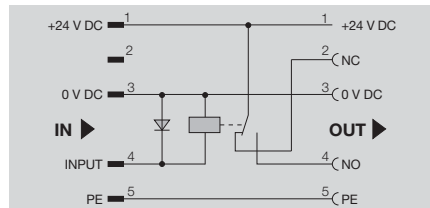

**JPR 24 V DC ISO 1CO M12**

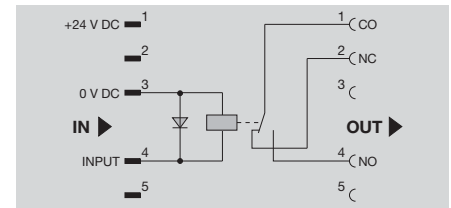

**Technical data**

Input	
Rated control voltage	24 V DC ±20 %
Rated current DC	8 mA
Power rating	200 mW
DC Response/dropout Volt	16.8 V / 1.2 V
DC pickup/dropout current	5 mA / 1 mA
Free-wheel diode	Yes
Output	
max. switching capacity	24 V / 2 A
min. switching capacity	12 V / 10 mA
Contact material	AgSnO
Mechanical service life	10 <sup>7</sup> ·10 <sup>6</sup> switching cycles
Max. switching frequency at rated load	0.1 Hz
Sparkover time / Drop-out time	ca. 5 ms
Insulation coordination (EN 50 178)	
Rated voltage	300
Overvoltage category	III
Pollution severity	2
Protective separation acc. to VDE 0106 part 101	No
General data	
operating temperature	-25 °C...+70 °C
Storage temperature	-25 °C...+70 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

Input	
Rated control voltage	24 V DC ±20 %
Rated current DC	8 mA
Power rating	200 mW
DC Response/dropout Volt	16.8 V / 1.2 V
DC pickup/dropout current	5 mA / 1 mA
Free-wheel diode	Yes
Output	
max. switching capacity	24 V / 2 A
min. switching capacity	12 V / 10 mA
Contact material	AgSnO
Mechanical service life	10 <sup>7</sup> ·10 <sup>6</sup> switching cycles
Max. switching frequency at rated load	0.1 Hz
Sparkover time / Drop-out time	ca. 5 ms
Insulation coordination (EN 50 178)	
Rated voltage	300
Overvoltage category	III
Pollution severity	2
Protective separation acc. to VDE 0106 part 101	No
General data	
operating temperature	-25 °C...+70 °C
Storage temperature	-25 °C...+70 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

Input	
Rated control voltage	24 V DC ±20 %
Rated current DC	8 mA
Power rating	200 mW
DC Response/dropout Volt	16.8 V / 1.2 V
DC pickup/dropout current	5 mA / 1 mA
Free-wheel diode	Yes
Output	
max. switching capacity	24 V / 2 A
min. switching capacity	12 V / 10 mA
Contact material	AgSnO
Mechanical service life	10 <sup>7</sup> ·10 <sup>6</sup> switching cycles
Max. switching frequency at rated load	0.1 Hz
Sparkover time / Drop-out time	ca. 5 ms
Insulation coordination (EN 50 178)	
Rated voltage	300
Overvoltage category	III
Pollution severity	2
Protective separation acc. to VDE 0106 part 101	Yes
General data	
operating temperature	-25 °C...+70 °C
Storage temperature	-25 °C...+70 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

Dimensions	
Clamping range (nominal / min. / max.)	mm <sup>2</sup>
Length x width x height	mm
83 / 36 / 14.4	
Note	
Details for TU = 20°C	

Dimensions	
Clamping range (nominal / min. / max.)	mm <sup>2</sup>
Length x width x height	mm
83 / 36 / 14.4	
Note	
Details for TU = 20°C	

Dimensions	
Clamping range (nominal / min. / max.)	mm <sup>2</sup>
Length x width x height	mm
83 / 36 / 14.4	
Note	
Details for TU = 20°C	

**Ordering data**

Connection system	
-------------------	--

Type	Qty.	Order No.
JPR 24VDC 1CO M12	1	8771420000

Type	Qty.	Order No.
JPR 24VDC ISO 1CO M12	1	8771430000

Note	
------	--

Note	
------	--

Note	
------	--

**Accessories**

Retaining clip JP CLIP M: 8778490000
---

Retaining clip JP CLIP M: 8778490000
---


Retaining clip JP CLIP M: 8778490000
---

**JACKPAC® timer**


**Timer relay**

Signal extenders can be simply connected on the cable between the sensor and the input modules. They extend the pulse length from 1 ms. to 50 or 100 ms. Short sensor signals can also this enables short sensor signals to also be reliably recognized and evaluated by the controller.

**JPTA 50 MS 24VDC PNP M12**

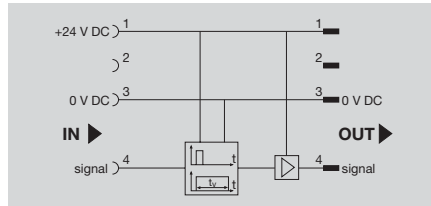

**JPTA 100 MS 24VDC PNP M12**

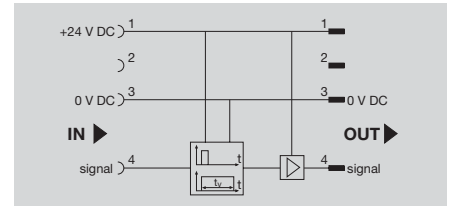

**Technical data**

**Input**

Rated control voltage  
Rated current DC  
Switch-off delay

**Output**

Switching voltage DC, max.  
Max. switching current

**Insulation coordination (EN 50 178)**

Rated voltage  
Impulse withstand voltage  
Overvoltage category  
Pollution severity

**General data**

operating temperature  
Storage temperature  
Conductor connection system  
Approvals

Rated control voltage	18...24...30 V DC
Rated current DC	3,5...7,0...10,0 mA
Switch-off delay	50 ms
Switching voltage DC, max.	30 V
Max. switching current	400 mA
Rated voltage	32 V
Impulse withstand voltage	330 V
Overvoltage category	I
Pollution severity	2
operating temperature	0 °C...+60 °C
Storage temperature	-20 °C...+85 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

Rated control voltage	18...24...30 V DC
Rated current DC	3,5...7,0...10,0 mA
Switch-off delay	100 ms
Switching voltage DC, max.	30 V
Max. switching current	400 mA
Rated voltage	32 V
Impulse withstand voltage	330 V
Overvoltage category	I
Pollution severity	2
operating temperature	0 °C...+60 °C
Storage temperature	-20 °C...+85 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

**Dimensions**

Clamping range (nominal / min. / max.) mm<sup>2</sup>  
Length x width x height mm

**Note**

Clamping range (nominal / min. / max.) mm <sup>2</sup>	
Length x width x height mm	83 / 36 / 14.4

Clamping range (nominal / min. / max.) mm <sup>2</sup>	
Length x width x height mm	83 / 36 / 14.4

**Ordering data**

**Connection system**

Type	Qty.	Order No.
JPTA 50MS 24VDC PNP M12	1	8771440000

Type	Qty.	Order No.
JPTA100MS 24VDC PNP M12	1	8836630000

**Note**

**Accessories**


Retaining clip  
JP CLIP M: 8778490000

Retaining clip  
JP CLIP M: 8778490000


**Signal inverter**

Signal inverters convert PNP sensor signals to NPN signals and NPN signals back to PNP. Thus, existing circuits require no complex adaptation and the existing inputs on the I/O cards can be put to best use. This is particularly well suited for the Asian and North American markets.

**JPP NPN PNP 24 V DC**

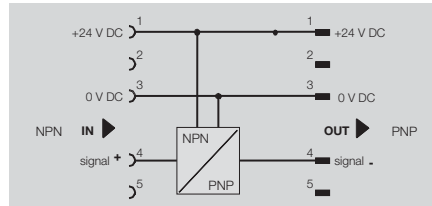

**JPP PNP NPN 24 V DC**

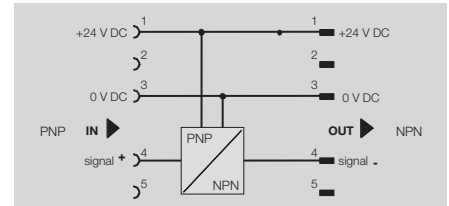

**Technical data**

<b>Input</b>	
Sensor	2-/ 3-Conductor Sensor NPN-type
Rated control voltage	18...24...30 V DC
Input current for sensor	< 200 mA
Type of contact	NO contact
<b>Output</b>	
Solid-state type	Solid state relay
Rated switching voltage	18...30 V DC
Rated switching current	400 mA
Voltage drop at max. load	≤ 1 V
<b>Insulation coordination (EN 50 178)</b>	
Rated voltage	32 V
Impulse withstand voltage	330 V
Overtoltage category	I
Pollution severity	2
<b>General data</b>	
operating temperature	0 °C...+60 °C
Storage temperature	-20 °C...+85 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

<b>Input</b>	
Sensor	2-/ 3-Conductor Sensor PNP-Type
Rated control voltage	18...24...30 V DC
Input current for sensor	< 200 mA
Type of contact	NO contact
<b>Output</b>	
Solid-state type	Solid state relay
Rated switching voltage	18...30 V DC
Rated switching current	400 mA
Voltage drop at max. load	≤ 1 V
<b>Insulation coordination (EN 50 178)</b>	
Rated voltage	32 V
Impulse withstand voltage	330 V
Overtoltage category	I
Pollution severity	2
<b>General data</b>	
operating temperature	0 °C...+60 °C
Storage temperature	-20 °C...+85 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

<b>Input</b>	
Sensor	2-/ 3-Conductor Sensor PNP-Type
Rated control voltage	18...24...30 V DC
Input current for sensor	< 200 mA
Type of contact	NO contact
<b>Output</b>	
Solid-state type	Solid state relay
Rated switching voltage	18...30 V DC
Rated switching current	400 mA
Voltage drop at max. load	≤ 1 V
<b>Insulation coordination (EN 50 178)</b>	
Rated voltage	32 V
Impulse withstand voltage	330 V
Overtoltage category	I
Pollution severity	2
<b>General data</b>	
operating temperature	0 °C...+60 °C
Storage temperature	-20 °C...+85 °C
Conductor connection system	M12 plug / socket, A-coded
Approvals	cULus; CE

<b>Dimensions</b>	
Clamping range (nominal / min. / max.)	mm <sup>2</sup>
Length x width x height	mm

<b>Dimensions</b>	
Clamping range (nominal / min. / max.)	mm <sup>2</sup>
Length x width x height	mm

<b>Dimensions</b>	
Clamping range (nominal / min. / max.)	mm <sup>2</sup>
Length x width x height	mm

**Ordering data**

<b>Connection system</b>	
--------------------------	--

Type	Qty.	Order No.
JPP NPN PNP 24VDC	1	8852350000

Type	Qty.	Order No.
JPP PNP NPN 24VDC	1	8857030000

<b>Note</b>	
-------------	--

<b>Note</b>	
-------------	--

<b>Note</b>	
-------------	--

**Accessories**

--	--

Retaining clip JP CLIP M: 8778490000	
---	--


Retaining clip JP CLIP M: 8778490000	
---	--

**JACKPAC® test**

**Test adapter**

The new JACKPAC® test adapter now provides a simple way of intervening in an M12 network. It can be integrated at any point and enables quick and easy connection of a testing device via the 5 PUSH IN connections. Status indicators show the status of the 2 signal channels as well as the 24 VDC auxiliary voltage.

**JP TEST**

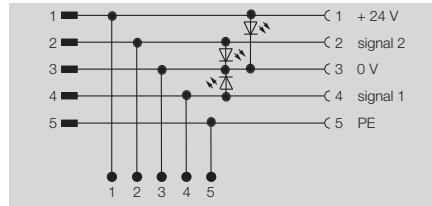

**Technical data**

**Input**

Rated control voltage  
Rated current DC  
Status indicator

18...24...30 V DC  
2.2 mA (LED)  
Green LED

**Output**

Continuous current  
power

2 A

**General data**

operating temperature  
Storage temperature  
Conductor connection system

0 °C...+55 °C  
-25 °C...+70 °C  
M12 plug / socket, A-coded

**Dimensions**

Clamping range (nominal / min. / max.) mm<sup>2</sup>  
Length x width x height mm

83 / 36 / 14.4

**Note**

**Ordering data**

**Connection system**

Type	Qty.	Order No.
JP TEST	1	8794120000


**Note**

**Accessories**

Retaining clip  
JP CLIP M: 8778490000


**General data**

Ingress protection class	IP67
Housing material	PBT, RAL 7032 (grey)
Flammability class	V0 to UL94
Screw socket	M12, CuZn, nickel plated, A-coded
Rated torque	0.8 ... 1 Nm

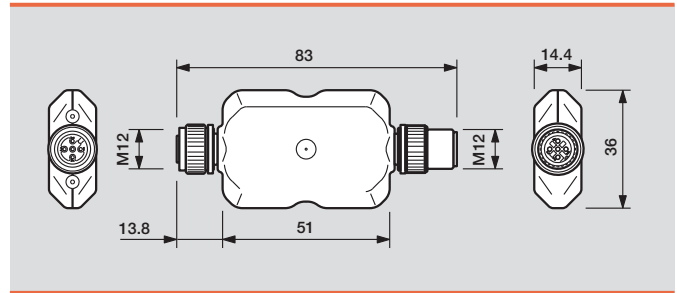

**Contact assignment (socket)**

Pole	Assignment
1	+24 V DC
2	Input / output 2
3	0 V DC
4	Input / output 1
5	PE / Earth

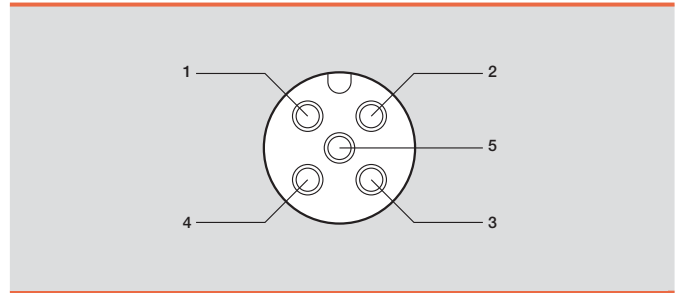

**Accessories**

**Retaining clip**



Version	Type	Qty.	Order No.
Stainless steel	JP CLIP M	1	8778490000

**Twin plug**



Type	Qty.	Order No.
5-pole	1	1783430000

**Screwy M12**



Type	Qty.	Order No.
With torque	1	1900001000

**Sensor cables**



Type	Qty.	Order No.
4-pole, length 0.3 m	1	9457150000
4-pole, length 0.6 m	1	9457160000
4-pole, length 1.5 m	1	9457170000
5-pole, length 0.3 m	1	9457340030
5-pole, length 0.6 m	1	9457340060
5-pole, length 1.5 m	1	9457340150


Additional accessories can be found in the Sensor Actuator Interface catalogue.



Empty housing SAI JACKPAC® for custom built-in components

Empty housing SAI JACKPAC® for custom built-in components

SAI JP

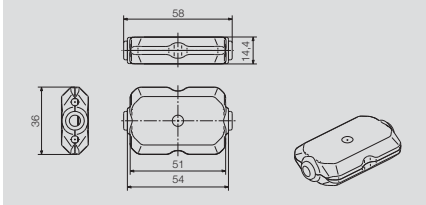

Technical data


General data

Temperature range  
 Connection system  
 Contact base material  
 Surface finish


-25 °C ... +70 °C  
 M12 plug/socket, A-coded  
 AgSnO  
 Au

F

Dimensioned drawing SAI JP

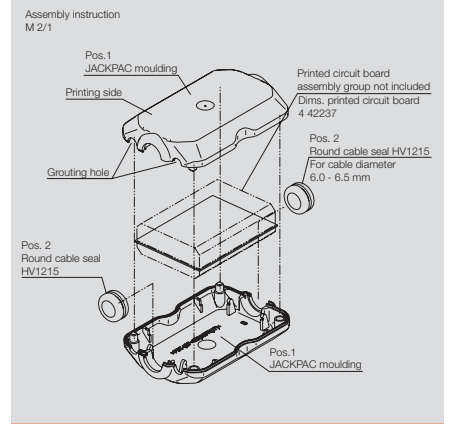

Dimensioned drawing, PCBs

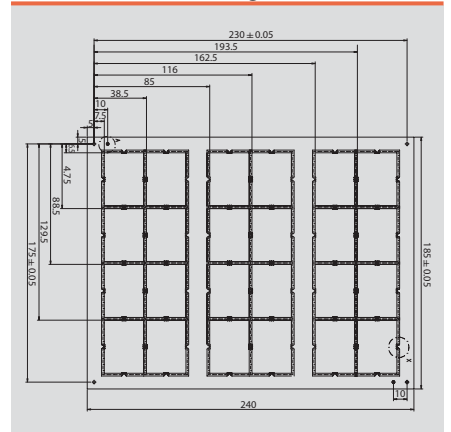

Dimensions

Length x width x height mm

83 x 36 x 14.4

Note

Ordering data

Housing with M12 connectors

Contents	1 piece
	1 piece
	100 pieces
	100 pieces

Note

Type	No. of poles	Qty.	Order No.
SAI JP 4P LG	4	1	1915220000
SAI JP 5P LG	5	1	1918520000
SAI JP 4P LG 100	4	1	8794090000
SAI JP 5P LG 100	5	1	8794080000
Housing without M12 connectors SAI JP FC SET 1933680000			

Accessories


# Passive distributors

<b>Passive distributors</b>	Introduction	G.2
	M12 distributors	G.4
	ECO modules	G.14
	M12 Push-Pull	G.16
	M12 IDC	G.24
	M12 VA stainless steel	G.28
	M12 metal distributors	G.30
	M12 distributors 1:1 Passive	G.36
	M12 Combi distributor	G.37
	M12 distributor for NPN and PNP sensors	G.38
	M12 wall bushing	G.39
	Solutions to customer specification	G.42
	M8 distributors	G.44
	M5 distributors	G.54
	M12 Ex i distributors	G.58

## SAI Passive

SAI Passive products are built with premium materials using the highest quality production methods. The fully encapsulated distributors are designed to meet harsh industrial requirements. Naturally they have also been designed so that they are easy to handle. The self assembled connectors in the hooded version, for example, are joined into a single part so that the entire block is available for the connection. This is a unique solution for distributors that has no equal anywhere. Nothing can break off, get mixed up or wired up incorrectly.

The distributors are equipped by default with threaded metal rings. This ensures a very reliable screw-on connection. The nut is completely threaded without any interruptions. This eliminates the possibility of it getting stuck or jammed. The IDC versions are especially noteworthy. Sensor cables of the proper lengths can be connected directly here.

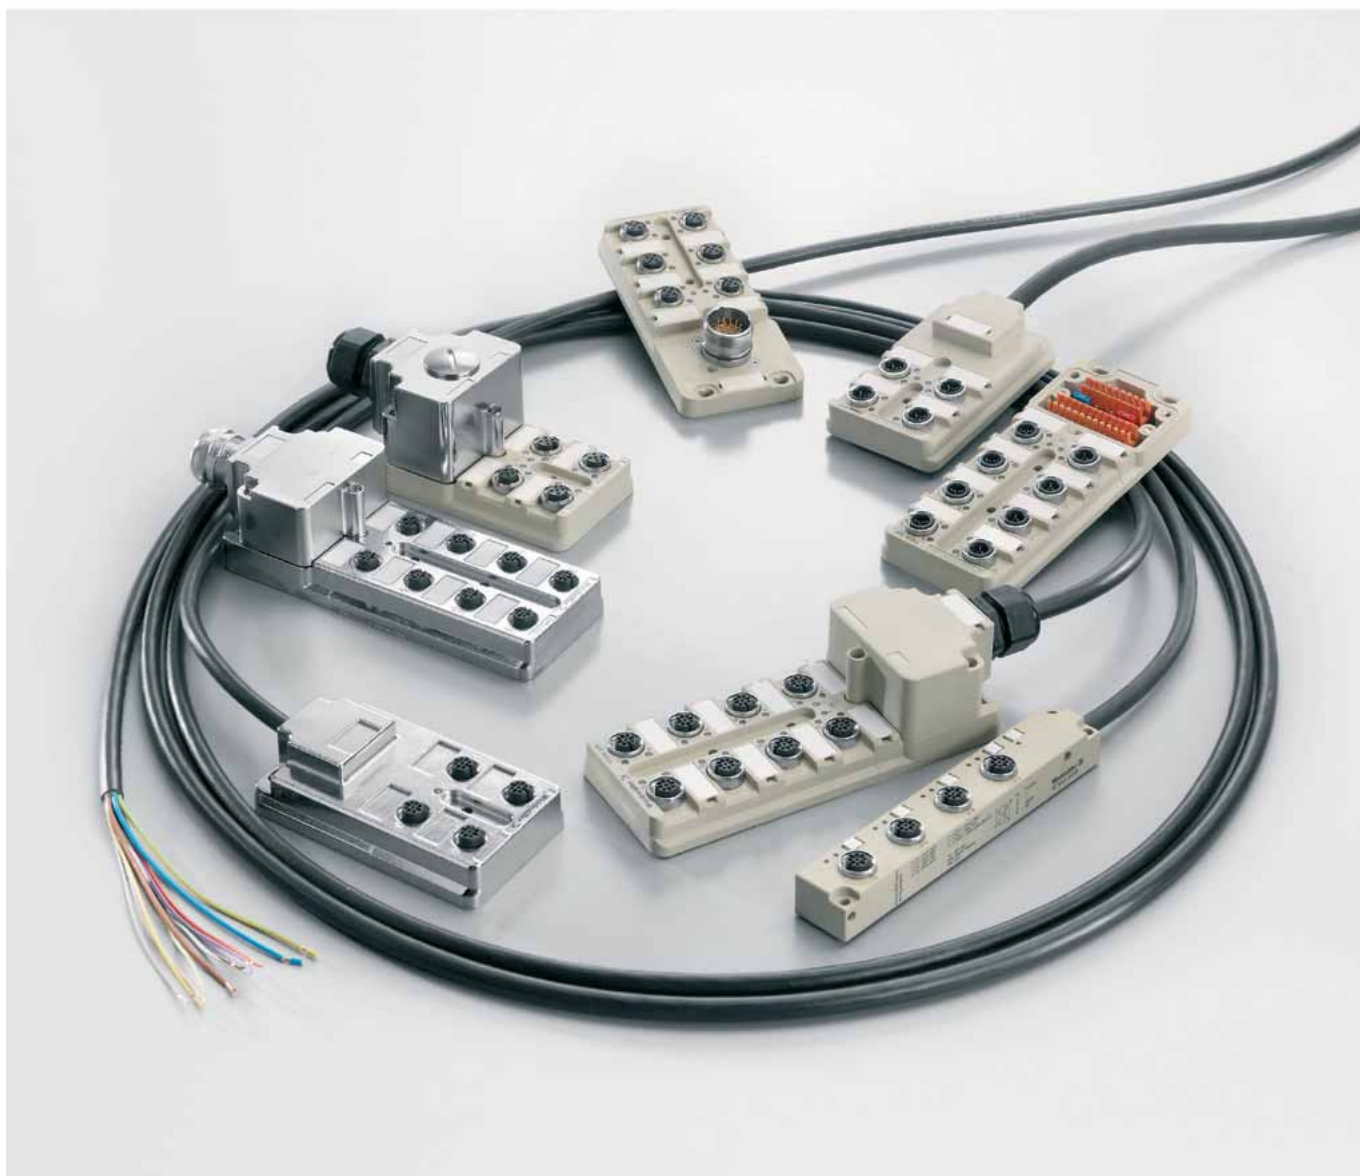



### Compact

The connection block is a single piece.



### Small

Extremely small M12 distributor



### Fast

Insulation displacement connection can be used to directly connect the sensor cables



### Robust

Threaded metal ring without cut outs for reliable, safe handling



M12 distributor standard



M12 distributor with  
DIP switch coding



M12 distributor with  
stainless steel housing



M12 distributor for Zone 1 and  
Zone 22

## SAI distributor with plug in connection hood: SAI-M



- Integrated plug in connector in connection hood
- M12 robust metal thread for sensor/actuator connection, now also available with plastic thread as an alternative
- Quick replacement of bus cables
- Bus cable can be supplied pre assembled
- Two connection systems for bus cable: screw or tension clamp
- Very flat connection hood: no higher than smallest 90° M12 round plug
- Distributor and connection hood can be supplied separately
- Connection hood compatible with 4 and 8 channel SAI distributors (upgrades only entail changing the base module)
- IP 68 Ingress protection class (IDC IP 67),
- Housing made from Pocan (PBT):
  - high dimensional stability
  - good electrical and mechanical properties
  - flame retardant without dioxin or furan formers
  - resistant to coolants and lubricants
- UL/CSA approvals for M12 SAI distributor
- SAI distributor available in pollution severity class 3
- Cable exit on top
- Weidmüller SAI distributors have the largest storage capacity in the connection hood
- Female connectors integrated into the metal plate for fast and reliable connections
- Wide range of M8 and M12 cables and plug-in connectors
- Various cable length's available
- Metal hoods and housings also available
- Plug-in connection module for bus cables increases flexibility on site
- Integral, plug in electrical isolation for two separate electric circuits (e.g. for emergency stop)
- Simple and vibration resistant connections on site
- Captive metric screws (grade 8.8 steel) have a +/- head
- M12 and IDC connections
- 1:1 arrangement available

# Overview of M12 Distributors



## Fixed cable version

- Pre assembled bus cable minimises installation time and reduces wiring errors
- Cable carrier compatible versions are available with polyurethane (PUR) sheathing



## M12 Push-Pull quick-fit connection system

M12 Push-Pull is the new connection system for sensors and actuators. It is downward compatible to the existing M12 system, which means that both old M12 and new M12 Push-Pull lines can be used together on these SAIs. M12 Push-Pull decreases installation time and increases installation safety by means of colour coding and provides an audible click on locking for added reassurance.



## SAI ECO – the cost-effective alternative

Weidmüller SAI distributors with hood have long since been standard fittings in machines and installations.

### Why plastic threaded rings?

There were some applications, however, that called for a further version. In some applications it is necessary to avoid all metal parts, unless these are made from stainless steel. In such cases stainless steel is then used for screws and nuts only, but the M12 threaded rings can also be made from plastic. Such modules can now be supplied on request.

The use of plastic rings therefore results in a cheaper alternative. Although the service life and resistance are reduced when compared to metal, this is acceptable for some applications.

## M12 distributors

## Overview of SAI

## M12 plastic

	Hood	M23	5 m	10 m	15 m	20 m
4-way, 4-pole	1705920000	9456000000	9456190000	9456200000	9456210000	9456230000
4-way, 5-pole	1701230000	9456000001	9456330000	9456340000	9456350000	9456370000
6-way, 4-pole	1705930000	9456010000	9456470000	9456480000	9456490000	9456510000
6-way, 5-pole	1701240000	9456010001	9456610000	9456620000	9456630000	9456650000
8-way, 4-pole	1705940000	9456020000	9456750000	9456760000	9456770000	9456790000
8-way, 5-pole	1701250000	1795470000	9456890000	9456900000	9456910000	9456930000

## M12 metal

	Hood without shield connection	Hood with shield connection	5 m	10 m		
4-way, 4-pole		1783540000	9456190002	9456200002		
4-way, 5-pole	1783500000	1783520000				
8-way, 4-pole		1783530000	9456750002	9456760002		
8-way, 5-pole	1783490000	1783510000				

## M8 line


	M12 group outlet	Solder version for PCB	5 m	10 m		
4-way, 3-pole	1828740000		1828720000	1828710000		
4-way, 4-pole			1849680000	1849690000		
6-way, 3-pole	1828730000	1057720000	1828700000	1828690000		
6-way, 4-pole			1849700000	1849670000		
8-way, 3-pole	1871680000		1828680000	1828670000		
8-way, 4-pole			1828620000	1828610000		
10-way, 3-pole	1877950000		1828660000	1828650000		
12-way, 3-pole			1828640000	1828630000		





## M12 distributor

## Hood version

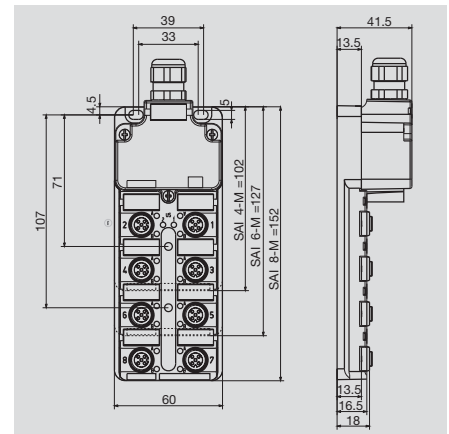

## Ordering data

Complete modules	
	4 channel
	6 channel
	8 channel
Without initiator-LED, for analogue signals	4 channel
Without initiator-LED, for analogue signals	8 channel
Tension clamp connection	4 plug-in slots
Tension clamp connection	8 channel
Base unit	
	4 channel
	6 channel
	8 channel
Mounting hood	
	Tension clamp connection
	Tension clamp connection
	Screw connection
	Screw connection
Complete modules, NPN-switched	8 channel
Note	

## SAI-4/6/8-M

## 4-pole

Type	Qty.	Order No.
SAI-4-M 4P M12	1	1705920000
SAI-6-M 4P M12	1	1705930000
SAI-8-M 4P M12	1	1705940000
SAI-4 M 4P M12 UT	2	1705921000
SAI-6-M 4P M12 UT	2	1705931000
SAI-8-M 4P M12 UT	2	1705941000
SAI-4/6/8-MH BLZF3.5	1	1752080000
SAI-4/6/8-MH BLZF3.5 SV	50	1752080050
SAI-4/6/8-MH BL3.5	1	1724750000
SAI-4/6/8-MH BL3.5 SV	50	1724750050
Other versions on request		


## SAI-4/6/8-M

Type	Qty.	Order No.
SAI-4-M 5P M12	1	1701230000
SAI-6-M 5P M12	1	1701240000
SAI-8-M 5P M12	1	1701250000
SAI-4-M 5P M12 OL	1	1800000000
SAI-8-M 5P M12 OL2	1	1816610000
SAI-4-M 5P M12 ZF	1	1854000000
SAI-8-M 5P M12 ZF III	1	1767880000
SAI-4-M 5P M12 UT	2	1701231000
SAI-6-M 5P M12 UT	2	1701241000
SAI-8-M 5P M12 UT	2	1701251000
SAI-4/6/8-MH BLZF3.5	1	1752080000
SAI-4/6/8-MH BLZF3.5 SV	50	1752080050
SAI-4/6/8-MH BL3.5	1	1724750000
SAI-4/6/8-MH BL3.5 SV	50	1724750050
SAI-8-M 5P M12 NPN	1	1781060000
Other versions on request		


## Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	
With dual power supply: 2x8 = 16A total current	
Clamping range up to 2.5 mm <sup>2</sup> with screw connection	



## Wiring diagram

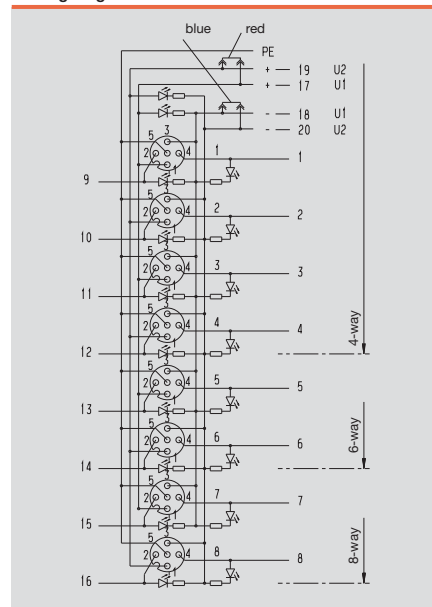

## Wiring diagram

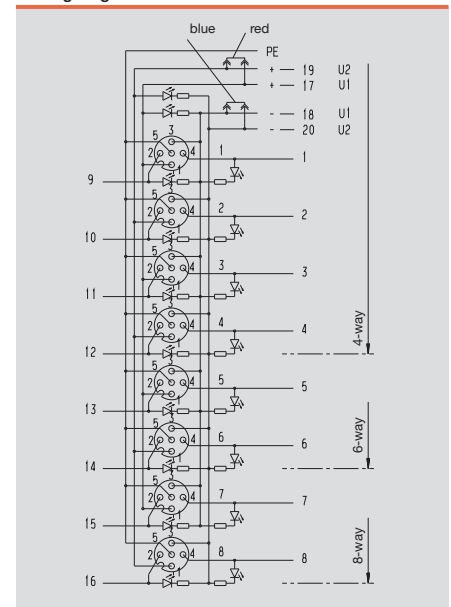

Fixed cable version

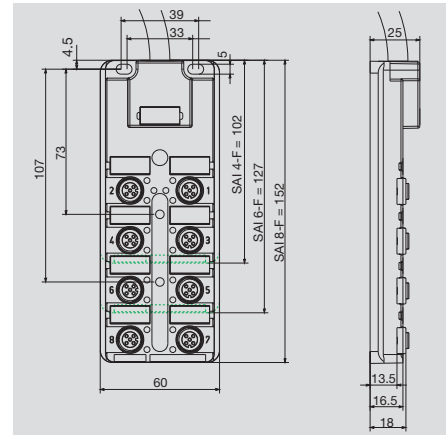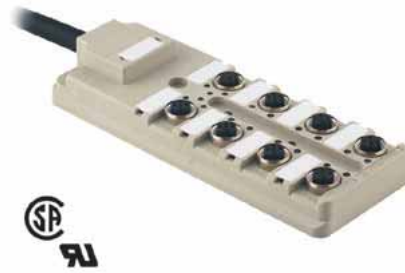

Ordering data

4 channel	
Cable length 3 m	SAI-4-F 4P PUR 3M
Cable length 5 m	SAI-4-F 4P PUR 5M
Cable length 10 m	SAI-4-F 4P PUR 10M
Cable length 15 m	SAI-4-F 4P PUR 15M
Cable length 20 m	SAI-4-F 4P PUR 20M
6 channel	
Cable length 3 m	SAI-6-F 4P PUR 3M
Cable length 5 m	SAI-6-F 4P PUR 5M
Cable length 10 m	SAI-6-F 4P PUR 10M
Cable length 15 m	SAI-6-F 4P PUR 15M
Cable length 20 m	SAI-6-F 4P PUR 20M
8 channel	
Cable length 3 m	SAI-8-F 4P PUR 3M
Cable length 5 m	SAI-8-F 4P PUR 5M
Cable length 10 m	SAI-8-F 4P PUR 10M
Cable length 15 m	SAI-8-F 4P PUR 15M
Cable length 20 m	SAI-8-F 4P PUR 20M
8 channel with reinforced fixed cable*	
Cable length 2 m	
Cable length 5 m	
Cable length 10 m	
Cable length 15 m	
Cable length 20 m	
Note	

SAI-4/6/8-F		4-pole	
Type	Qty.	Order No.	
SAI-4-F 4P PUR 3M	1	9456180000	
SAI-4-F 4P PUR 5M	1	9456190000	
SAI-4-F 4P PUR 10M	1	9456200000	
SAI-4-F 4P PUR 15M	1	9456210000	
SAI-4-F 4P PUR 20M	1	9456230000	
SAI-6-F 4P PUR 3M	1	9456460000	
SAI-6-F 4P PUR 5M	1	9456470000	
SAI-6-F 4P PUR 10M	1	9456480000	
SAI-6-F 4P PUR 15M	1	9456490000	
SAI-6-F 4P PUR 20M	1	9456510000	
SAI-8-F 4P PUR 3M	1	9456740000	
SAI-8-F 4P PUR 5M	1	9456750000	
SAI-8-F 4P PUR 10M	1	9456760000	
SAI-8-F 4P PUR 15M	1	9456770000	
SAI-8-F 4P PUR 20M	1	9456790000	
Other versions on request			


SAI-4/6/8-F		5-pole	
Type	Qty.	Order No.	
SAI-4-F 5P PUR 3M	1	9456320000	
SAI-4-F 5P PUR 5M	1	9456330000	
SAI-4-F 5P PUR 10M	1	9456340000	
SAI-4-F 5P PUR 15M	1	9456350000	
SAI-4-F 5P PUR 20M	1	9456370000	
SAI-6-F 5P PUR 3M	1	9456600000	
SAI-6-F 5P PUR 5M	1	9456610000	
SAI-6-F 5P PUR 10M	1	9456620000	
SAI-6-F 5P PUR 15M	1	9456630000	
SAI-6-F 5P PUR 20M	1	9456650000	
SAI-8-F 5P PUR 3M	1	9456880000	
SAI-8-F 5P PUR 5M	1	9456890000	
SAI-8-F 5P PUR 10M	1	9456900000	
SAI-8-F 5P PUR 15M	1	9456910000	
SAI-8-F 5P PUR 20M	1	9456930000	
SAI-8-F 5P 2M 0.5/1.0U	1	7915030000	
SAI-8-F 5P 5M 0.5/1.0U	1	9457590000	
SAI-8-F 5P 10M 0.5/1.0U	1	9457600000	
SAI-8-F 5P 15M 0.5/1.0U	1	1784510000	
SAI-8-F 5P 20M 0.5/1.0U	1	1784500000	
Other versions on request			

Technical data


Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	9 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes


\* 3x1mm² und 16x0.5mm² total current 12A

Wiring diagram

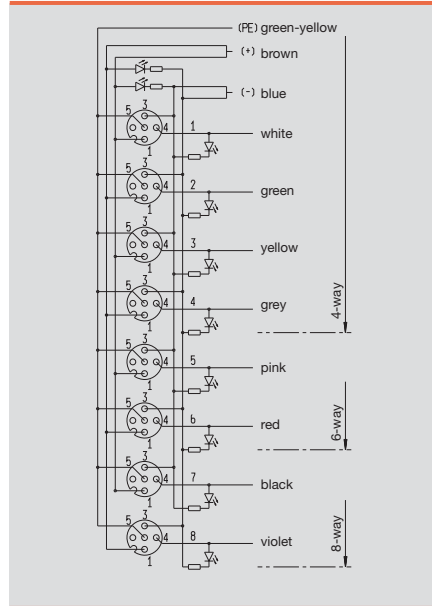

Wiring diagram

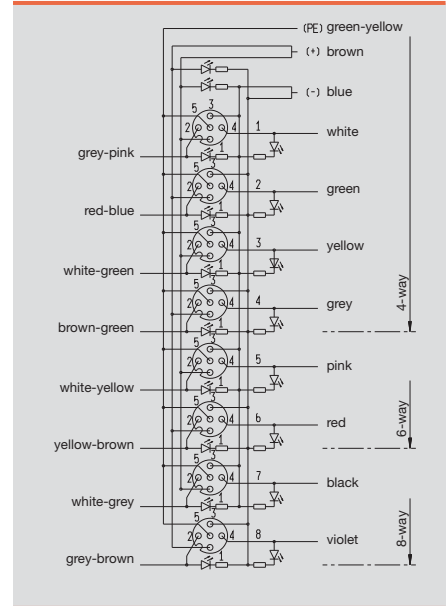

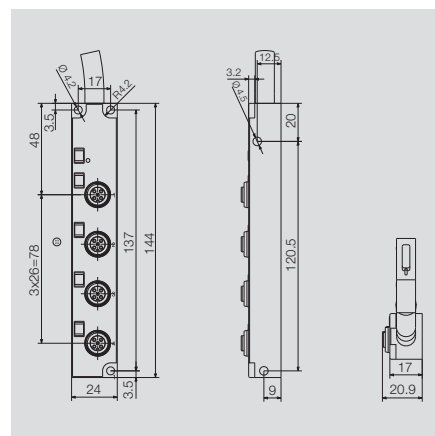**M12 distributor**
**Fixed-cable version  
thin design**

**Ordering data**

4 channel	
	Cable length 5 m
	Cable length 10 m
Note	

**SAI-4-F M12 L**
**4-pole**



Type	Qty.	Order No.
SAI-4-F 4P M12 L 5M	1	1070650000
SAI-4-F 4P M12 L 10M	1	1070660000
Other versions on request		

**SAI-4-F M12 L**
**5-pole**


Type	Qty.	Order No.
SAI-4-F 5P M12 L 5M	1	1070630000
SAI-4-F 5P M12 L 10M	1	1070640000
Other versions on request		

**Technical data**

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	9 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickel- gold-plated
screw socket	CuZn, nickel- plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

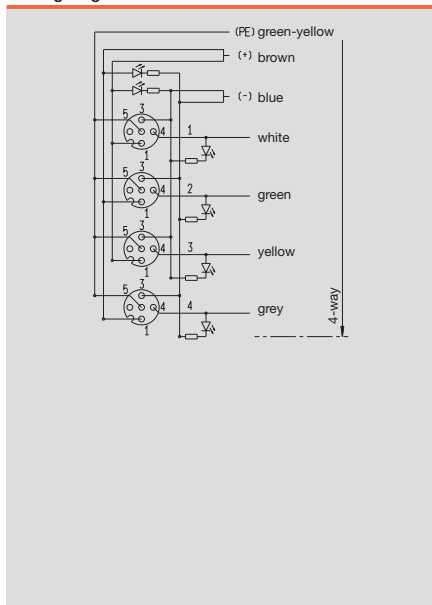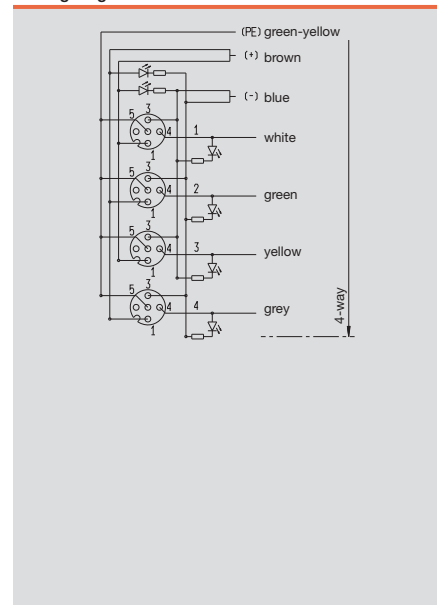**Wiring diagram**

**Wiring diagram**

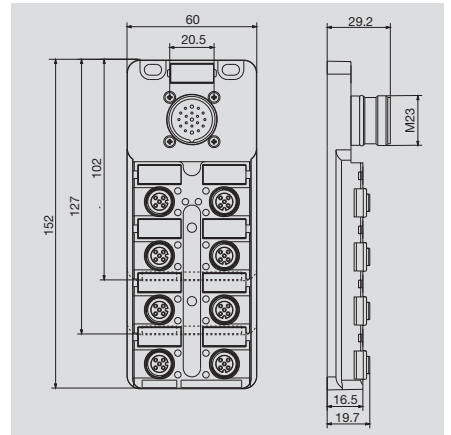
with M23 outlet



Ordering data

Complete modules	
	4 channel
	6 channel
	8 channel
Note	


SAI-4/6/8-S		4-pole	
Type	Qty.	Order No.	
SAI-4-S 4P M12	1	9456000000	
SAI-6-S 4P M12	1	9456010000	
SAI-8-S 4P M12	1	9456020000	
Other versions on request			

SAI-4/6/8-S		5-pole	
Type	Qty.	Order No.	
SAI-4-S 5P M12	1	9456000001	
SAI-6-S 5P M12	1	9456010001	
SAI-8-S 5P M12	1	1795470000	
Other versions on request			


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickel- gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

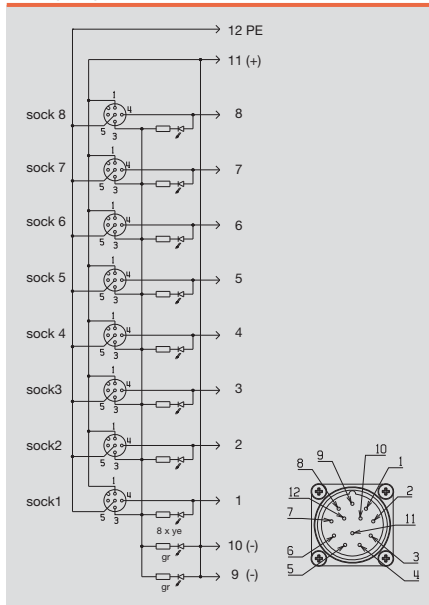


Wiring diagram

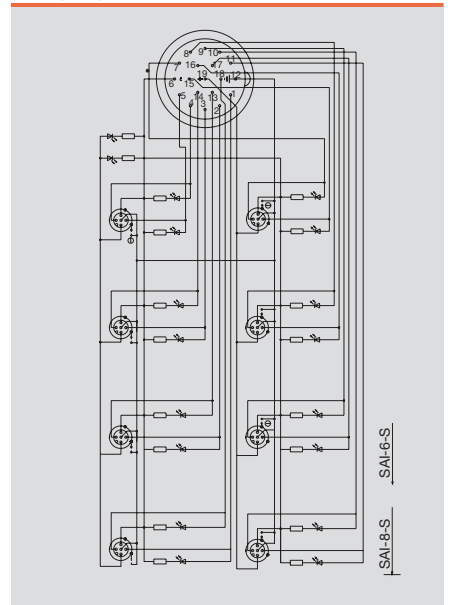

**M12 distributor**

with M16 outlet

**SAI-8-M16**

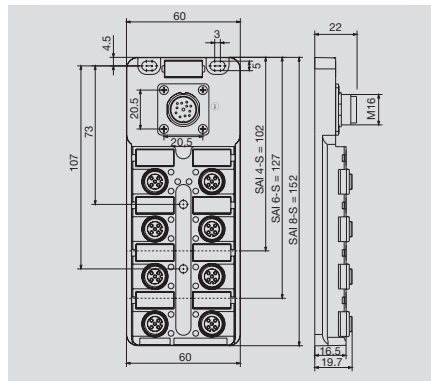

**Ordering data**


<b>Complete modules</b>	8 channel
<b>Note</b>	

<b>SAI-8-M16</b>	<b>4-pole</b>	
<b>Type</b>	<b>Qty.</b>	<b>Order No.</b>
SAI-8-M16 4P M12	1	1831020000
Other versions on request		

**Technical data**


Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	6 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

**Wiring diagram**

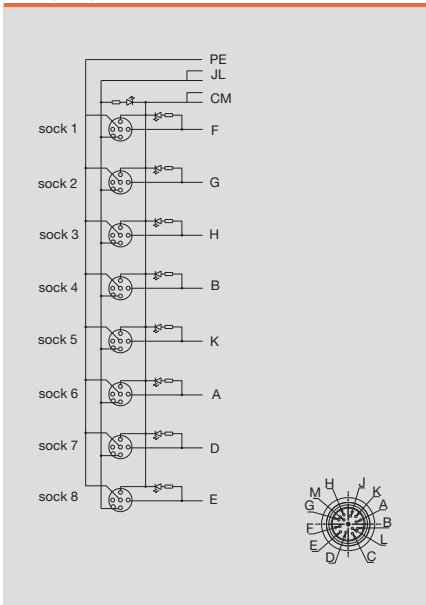

**Hood version  
with DIP-switch coding**

**SAI-8-M M12 DIP**

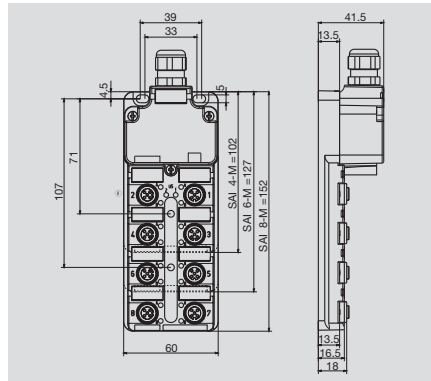

**Ordering data**


<b>Complete modules</b>	8 channel
<b>Note</b>	

SAI-8-M M12 DIP		4-pole
Type	Qty.	Order No.
SAI-8-M-4P M12 DIP	1	1059430000
Other versions on request		

**Technical data**

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	8 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	

**Wiring diagram**

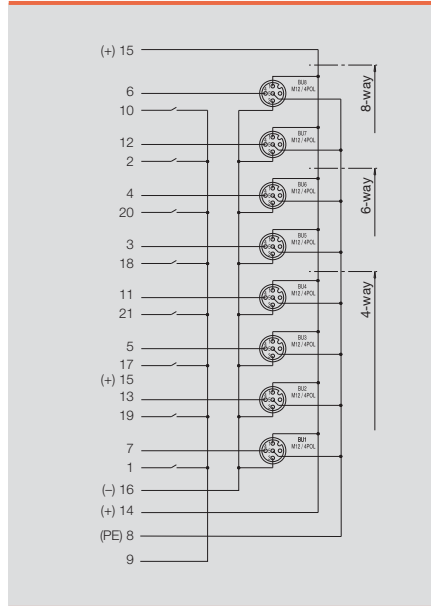

# SAI ECO

## SAI ECO – the cost-effective alternative

The Weidmüller SAI distributors with hoods have long since been standard fittings in machines and installations.

### Why plastic threaded rings?

There were some applications, however, that called for a further version. In some applications it is necessary to avoid all metal parts. In such cases stainless steel is then used for screws and nuts only, but the M12 threaded rings can also be made from plastic. Such modules can now be supplied on request.

The use of plastic rings therefore results in a cheaper alternative. Although the service life and resistance are reduced when compared to metal, this is acceptable for some applications.

## Cost-effective alternative

The ECO modules were developed to optimise costs. Many details of these modules were adapted in such a way that they can still be used wherever standard modules were used in the past, but the individual solutions have now become simpler:

- One way disconnecter: Up until now it was usual to achieve electrical isolation devised by Weidmüller by way of jumpers. To reduce costs, these jumpers have been replaced by solder bridges. These are simply cut to provide electrical isolation.
- No protective caps: Normally, Weidmüller M12 distributors are always supplied with two protective caps. These were not always required and so they have been omitted.
- Standard cable gland: The vibration resistant black screw cable gland has been replaced by a standard IP 68 cable gland.

These cost-cutting measures result in yet more applications for Weidmüller SAI distributors.

## Greater reliability than with comparable systems

Plastic threaded rings are nothing new. However, the problem in the past was that the threaded rings formed part of the housing and were therefore made from the same plastic.

Weidmüller has once again pioneered a new and better solution. Weidmüller plastic rings are manufactured separately, which means that a more suitable, more durable material can be chosen. The Weidmüller production method is also patented.



Special threaded ring increases durability





# M12 Push-Pull: SAI distributors and cables, with rapid-connection technology

## SAI distributors with M12 Push-Pull plug



Whereas the standard M12 system requires the sleeves to be laboriously screwed on and that operation is hindered by the vibration guard, M12 Push-Pull works with one click, just like those well-known garden hose systems. The audible locking function guarantees a safe and reliable connection as well as a good seal.

M12 Push-Pull is currently supplied by Weidmüller and five other international companies

M12 Push-Pull connections provide sufficient space for using T-pieces. The SAI module is slimmer and now only 54 mm wide.

The new SAI M12 Push-Pull distributors can be used with M12 plug-in connectors but also with the new M12 Push-Pull plug-in connectors.

The SAI distributors are available in fixed cable, hood, bayonet connection and M23 versions.

M12 Push-Pull speeds up installation and increases installation reliability thanks to the colour coding and the audible click when locking it into place.

## M12 Push-Pull M23 versions




## M12 Push-Pull hood version



## M12 Push-Pull with bayonet connection



Fixed cable version

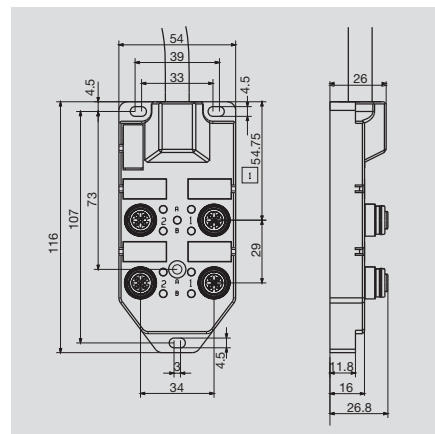

Ordering data

4 channel	
	Cable length 2 m
	Cable length 5 m
	Cable length 10 m
8 channel	
	Cable length 2 m
	Cable length 5 m
	Cable length 10 m
Note	


SAI-4/8-F		4-pole	
Type	Qty.	Order No.	
SAI-4-F 4P FC 2M	1	1848080000	
SAI-4-F 4P FC 5M	1	1848060000	
SAI-4-F 4P FC 10M	1	1848050000	
Other versions on request			

SAI-4/8-F		5-pole	
Type	Qty.	Order No.	
SAI-4-F 5P FC 2M	1	1847940000	
SAI-4-F 5P FC 5M	1	1847950000	
SAI-4-F 5P FC 10M	1	1847930000	
Other versions on request			


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	10 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes
Master trunk cable 3x1mm <sup>2</sup> x n x 0.34mm <sup>2</sup> ; Hallogen	

Wiring diagram

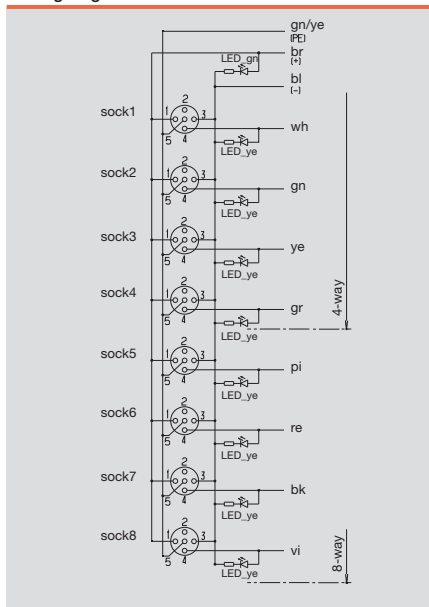


Wiring diagram

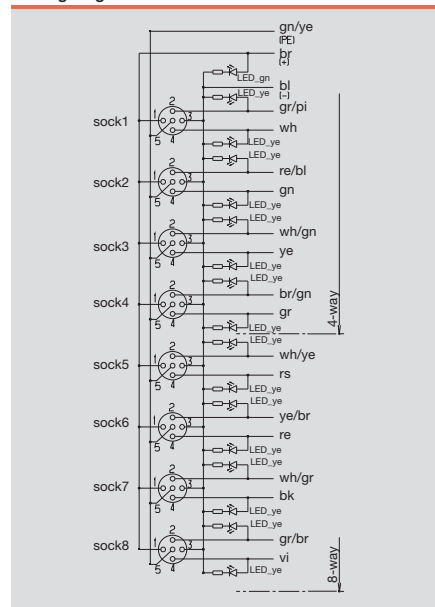

M12 Push-Pull

with M23 outlet

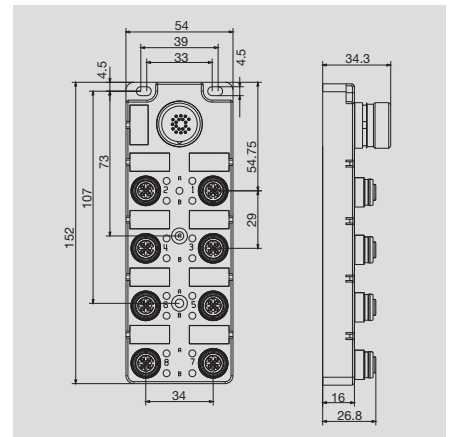

Ordering data

Complete modules	
	4 channel
	8 channel
Note	

SAI-4/8-S

4-pole

Type	Qty.	Order No.
SAI-4-S 4P FC	1	1847960000
SAI-8-S 4P FC	1	1847920000
Other versions on request		

SAI-4/8-S


5-pole

Type	Qty.	Order No.
SAI-4-S 5P FC	1	1847970000
SAI-8-S 5P FC	1	1848040000
Other versions on request		


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	9 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	


Wiring diagram

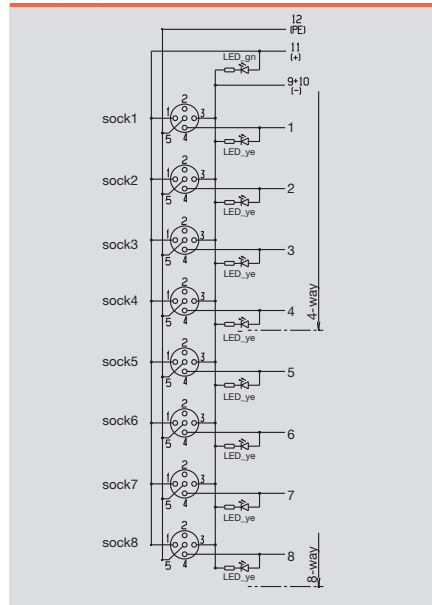

Wiring diagram

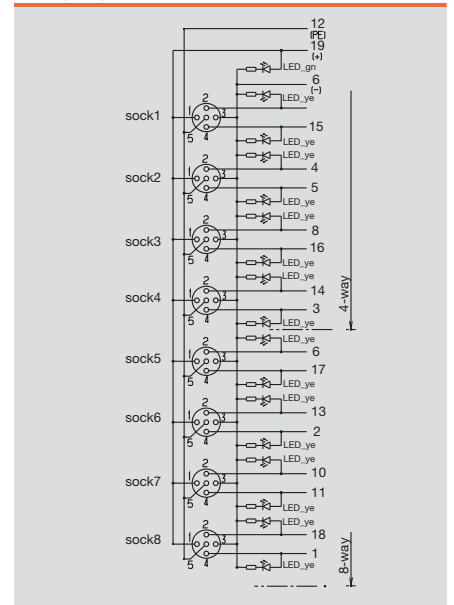

with M23 outlet on front

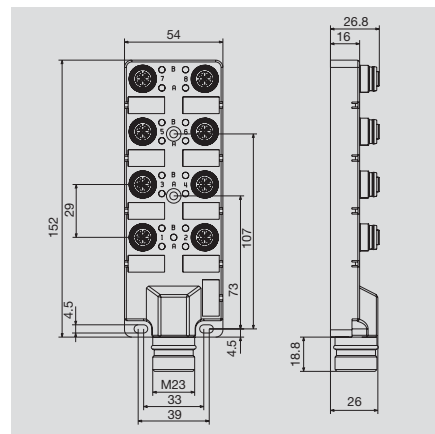

Ordering data

Complete modules	
	4 channel
	8 channel
Note	

SAI-4/8-SH

4-pole

Type	Qty.	Order No.
SAI-4-SH 4P FC	1	1859110000
SAI-8-SH 4P FC	1	1859120000

SAI-4/8-SH


5-pole

Type	Qty.	Order No.
SAI-4-SH 5P FC	1	1859130000
SAI-8-SH 5P FC	1	1859140000


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	9 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

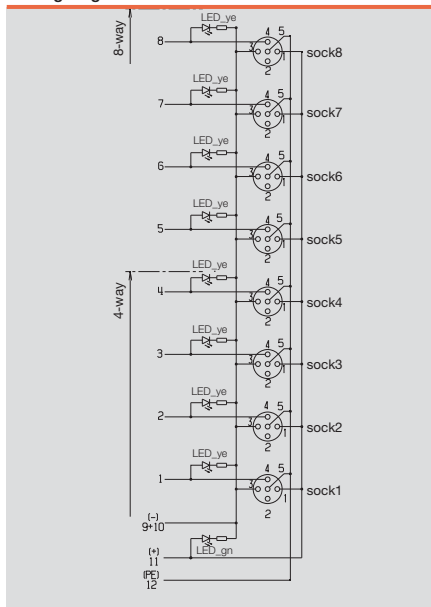


Wiring diagram

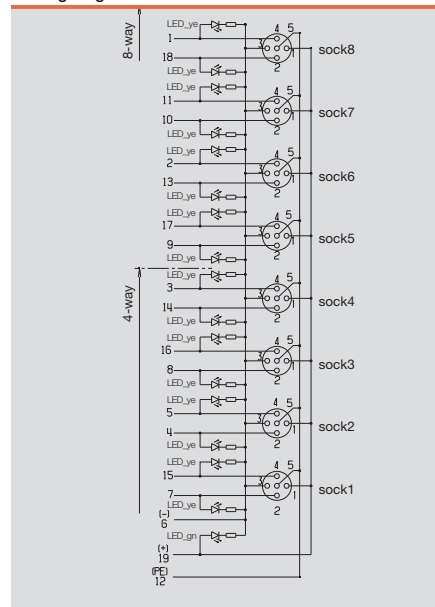

M12 Push-Pull

Hood version

SAI-8-M

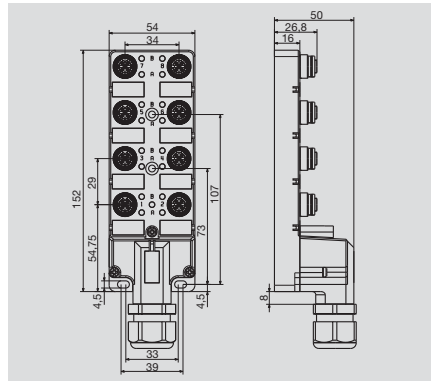

Ordering data


<b>Complete modules</b>	8 channel
<b>Note</b>	

SAI-8-M		5-pole
Type	Qty.	Order No.
SAI-8-M 5P FC	1	1848070000
Other versions on request		

Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	
Master trunk cable 3x1mm <sup>2</sup> x n x 0.34mm <sup>2</sup> ; halogen-free	

Wiring diagram


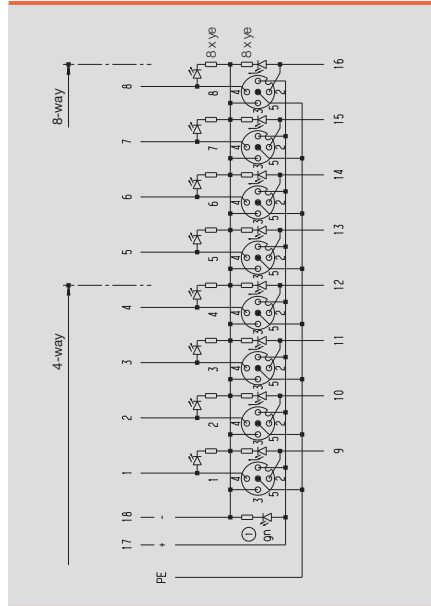


Terminal	Slot M12	Contact	Colour
1	1	4	white
2	2	4	green
3	3	4	yellow
4	4	4	grey
5	5	4	pink
6	6	4	red
7	7	4	black
8	8	4	violet
9	1	2	grey/pink
10	2	2	red/blue
11	3	2	white/green
12	4	2	brown/green
13	5	2	white/yellow
14	6	2	yellow/brown
15	7	2	white/grey
16	8	2	grey/brown
17	1-8	1	brown (+)
18	1-8	3	blue (-)
PE	1-8	5	green/yellow (PE)

CNOMO

SAI-4/8-S

SAI-4/8-F

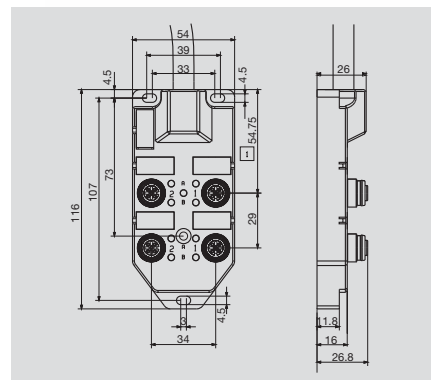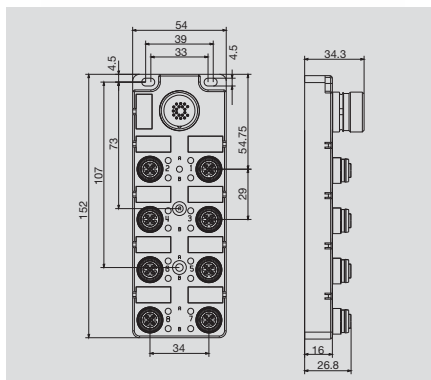

Ordering data

<b>4 channel</b>	Cable length 5 m Cable length 10 m
<b>8 channel</b>	Cable length 5 m Cable length 10 m
<b>M23</b>	4 channel 8 channel
<b>Note</b>	

SAI-4/8-S		5-pole	
Type	Qty.	Order No.	
SAI-4-S 5P CNOMO	1	1861540000	
SAI-8-S 5P CNOMO	1	1861580000	


SAI-4/8-F		5-pole	
Type	Qty.	Order No.	
SAI-4-F 5P CNOMO 5M	1	1861570000	
SAI-4-F 5P CNOMO 10M	1	1861560000	
SAI-8-F 5P CNOMO 5M	1	1861550000	
SAI-8-F 5P CNOMO 10M	1	1861590000	

Technical data


Operating voltage	10...50 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	8 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

Max. total current with 4-channel distributor is 8A. And with 8-channel distributor is 12A

Wiring diagram

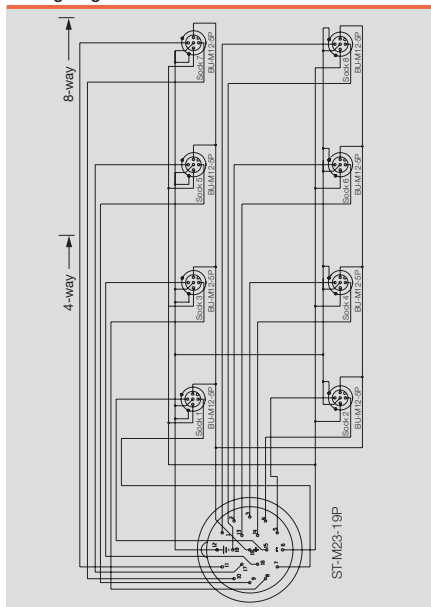


Wiring diagram

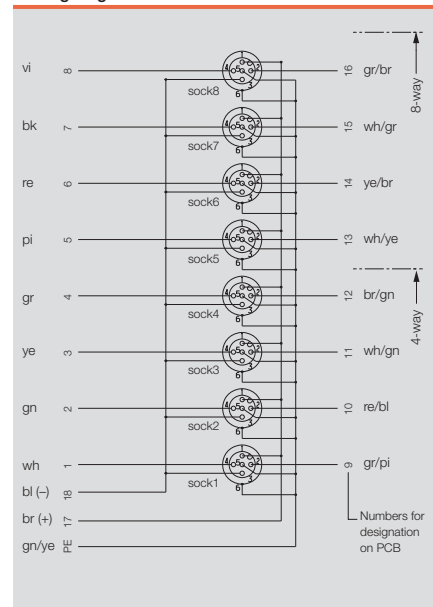

**M12 Push-Pull**

**Bayonet joint**

**SAI-8-SHB**

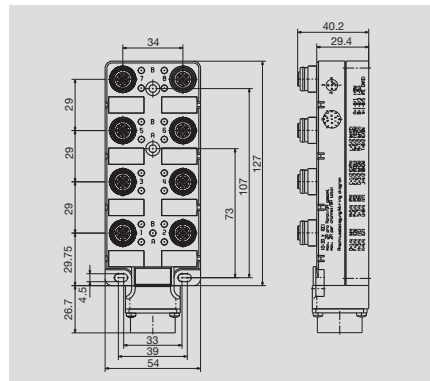

**Ordering data**


<b>Complete modules</b>	8 channel
<b>Note</b>	

SAI-8-SHB		5-pole
Type	Qty.	Order No.
SAI-8-SHB 5P FC	1	1872440000
Other versions on request		

**Technical data**


Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	9 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickel- plated
screw socket	CuZn, nickel- plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

**Wiring diagram**

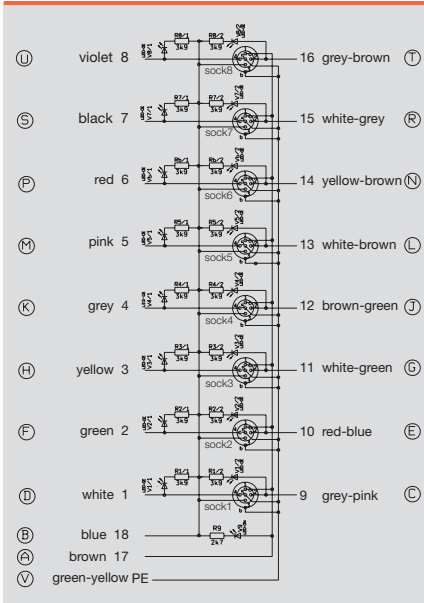

Bayonet joint with socket connector on reverse

SAI-8-SHB

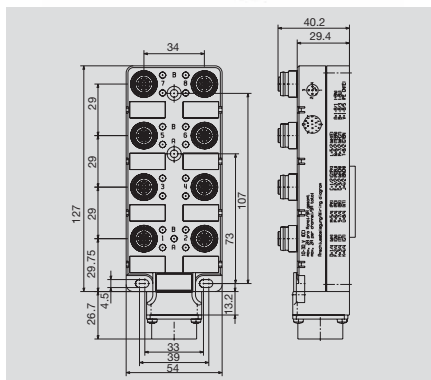

Ordering data

<b>Complete modules</b>	8 channel
<b>Note</b>	

SAI-8-SHB


5-pole

Type	Qty.	Order No.
SAI-8-SHB 5P F13 FC	1	1872460000
Other versions on request		

Technical data


Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	9 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

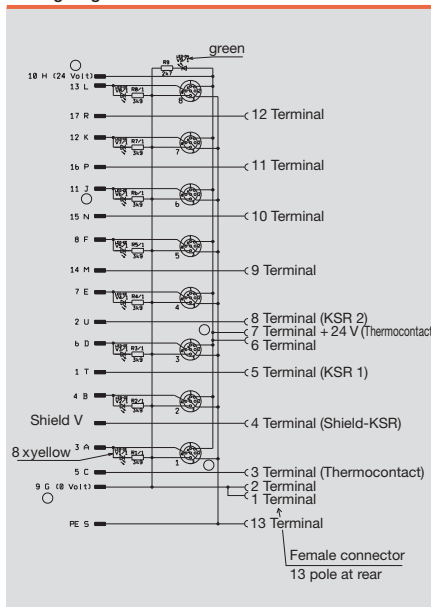




# IDC – the quick connection



Factory setting  
(see wiring diagram)  
Current bridged



Current isolated

## Hood version

- Compact IDC connection cuts production, commissioning and maintenance work
- Robust, knurled metal nut, safe handling requiring little force
- The dimensions of the IDC distributor correspond to and are compatible with the standard SAI distributor.
- Plug-in connection module for bus cables enhances on-site flexibility
- Three sizes for 4, 6 and 8 channels
- 3-pole version with one I/O signal per channel, 4-pole version with two I/O signals per channel
- Individual on site assembly of sensor/actuator lines
- Fast, reliable connection with IDC connection element
- IP 67 Ingress protection classification.

## SAI fixed cable version

- Pre-assembled bus cables minimise installation work and avoid wiring errors
- 3 sizes for 4, 6 and 8 channels
- Highly flexible, cable carrier compatible bus cables with polyurethane (PUR/PVC) sheathing
  - 3 x 0.75 mm<sup>2</sup>
  - n x 0.34 mm<sup>2</sup>,
- 3-pole version with one I/O signal per channel, 4-pole version with two I/O signals per channel



## IDC connection element

### Ordering data

Type	Qty.	Order No.
SAI-SA-3-IDC	1	9457720000
SAI-SA-4-IDC	1	1766810000



#### The significant advantages of Weidmüller tools:

- Easy handling
- Very small, ideal for confined assembly conditions
- Patented solution
- Metal Connectors

Insulation displacement connections on Weidmüller SAI distributors are currently the smallest but also the most robust connection elements on the market. Thanks to their extremely small dimensions, corresponding distributors are available with the same dimensions in M12 or IDC versions.

For large series, e.g. where more than 100 modules are used every year, we recommend using a special tool to simplify the handling of the connected lines even further. However, this tool is not always necessary because all connection elements can be readily tightened by hand.

#### IDC tool



#### Ordering data

Type	Qty.	Order No.
SAI-IDC-Tool	1	1795020000

#### Screwty®

The IDC elements can also be tightened with the Weidmüller Screwty®.



#### Ordering data

Type	Qty.	Order No.
Screwty M12	1	1900001000

#### Protective cap M12 for IDC




#### Ordering data

Type	Qty.	Order No.
SAI-SK-M12 IDC	10	1794850000

M12 IDC

Hood version

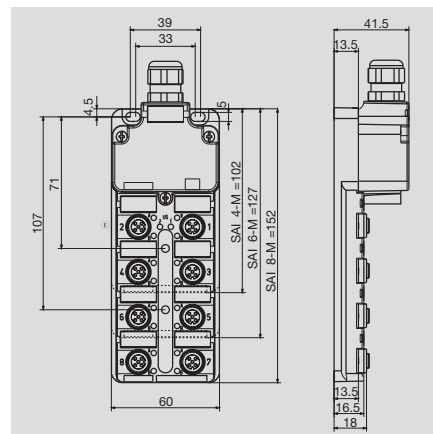

Ordering data

Complete modules	
	4 channel
	6 channel
	8 channel
Base unit	
	4 channel
	6 channel
	8 channel
Mounting hood	
	Tension clamp connection
	Tension clamp connection
	Screw connection
	Screw connection
Note	


SAI-4/6/8-M IDC		4-pole	
Type	Qty.	Order No.	
SAI-4-M 3P IDC	1	1760040000	
SAI-6-M 3P IDC	1	1760050000	
SAI-8-M 3P IDC	1	1760060000	
SAI-4-M 3P IDC UT	2	1760041000	
SAI-6-M 3P IDC UT	2	1760051000	
SAI-8-M 3P IDC UT	2	1760061000	
SAI-4/6/8-MH BLZF3.5	1	1752080000	
SAI-4/6/8-MH BLZF3.5 SV	50	1752080050	
SAI-4/6/8-MH BL3.5	1	1724750000	
SAI-4/6/8-MH BL3.5 SV	50	1724750050	
Other versions on request			

SAI-4/6/8-M IDC		4-pole	
Type	Qty.	Order No.	
SAI-4-M 4P IDC	1	1766780000	
SAI-6-M 4P IDC	1	1766790000	
SAI-8-M 4P IDC	1	1766800000	
SAI-4-M 4P IDC UT	2	1766781000	
SAI-6-M 4P IDC UT	2	1766791000	
SAI-8-M 4P IDC UT	2	1766801000	
SAI-4/6/8-MH BLZF3.5	1	1752080000	
SAI-4/6/8-MH BLZF3.5 SV	50	1752080050	
SAI-4/6/8-MH BL3.5	1	1724750000	
SAI-4/6/8-MH BL3.5 SV	50	1724750050	
Other versions on request			


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	
With dual power supply: 2x8 = 16A total current	
Clamping range up to 2.5 mm <sup>2</sup> with screw connection	


Wiring diagram

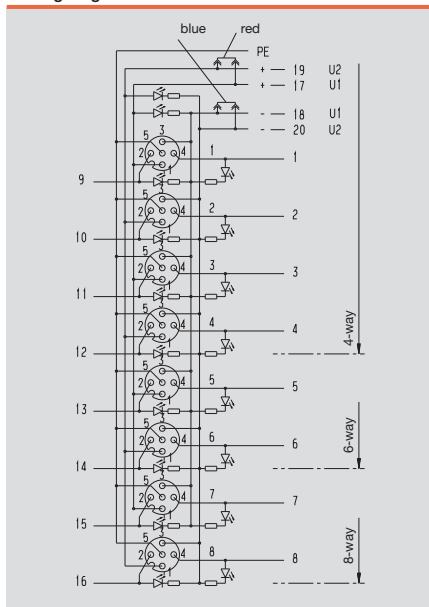

Wiring diagram

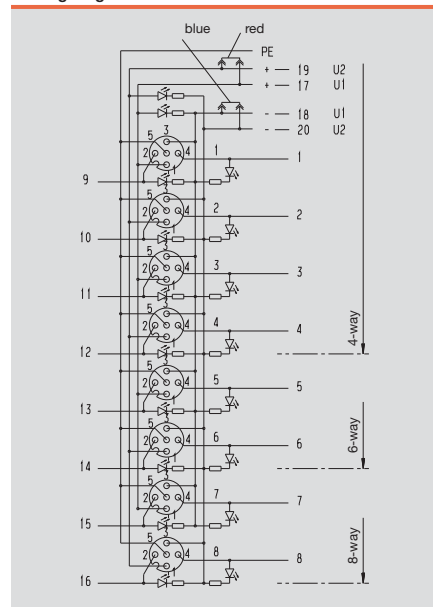

Fixed cable version

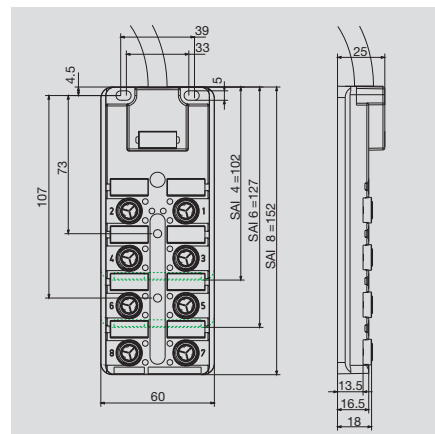

Ordering data

4 channel	
	Cable length 5 m
	Cable length 10 m
6 channel	
	Cable length 5 m
	Cable length 10 m
8 channel	
	Cable length 5 m
	Cable length 10 m
Note	

SAI-4/6/8-F IDC

3-pole

Type	Qty.	Order No.
SAI-4-F 3P IDC PUR 5M	1	1766720000
SAI-4-F 3P IDC PUR 10M	1	1766730000
SAI-6-F 3P IDC PUR 5M	4	1766740000
SAI-6-F 3P IDC PUR 10M	1	1766750000
SAI-8-F 3P IDC PUR 5M	1	1766760000
SAI-8-F 3P IDC PUR 10M	1	1766770000
Other versions on request		

SAI-4/6/8-F IDC


4-pole

Type	Qty.	Order No.
SAI-4-F 4P IDC PUR 5M	1	1766660000
SAI-4-F 4P IDC PUR 10M	1	1766670000
SAI-6-F 4P IDC PUR 5M	1	1766680000
SAI-6-F 4P IDC PUR 10M	1	1766690000
SAI-8-F 4P IDC PUR 5M	1	1766700000
SAI-8-F 4P IDC PUR 10M	1	1766710000
Other versions on request		


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	9 A
Pollution severity	2
Protection class	IP 67
Ambient temperature range	-20...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

Wiring diagram

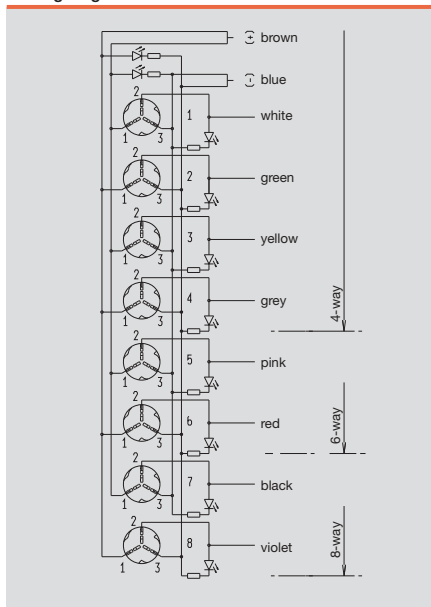

Wiring diagram

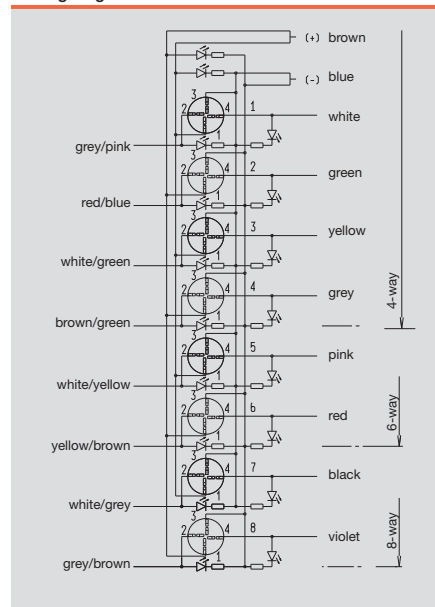


## M12 VA stainless steel

### Fixed cable version

- 5-pole, 2 signals per socket
- green LED operating indicator and yellow LED function indicator
- with stainless steel housing and cable glands

Ideal for machinery within the Food and Beverage Industries

### SAI-8-F 5P M12 5M VA

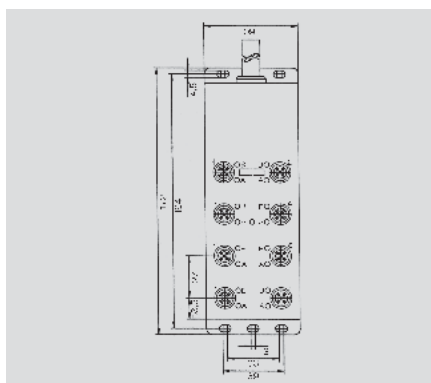

### Ordering data


<b>Male plug</b>	
	M12 connectors in stainless steel
<b>Note</b>	

SAI-8-F 5P M12 5M VA		5-pole
Type	Qty.	Order No.
SAI-8-F 5P M12 5M VA	1	1865310000
SAIS-5/9-VA	1	1920700000

### Technical data

Temperature range	0 °C/+ 60 °C
<b>Materials:</b>	
Housing	stainless steel 1.4404/316L
Contact carrier	PVC
Contact	CuZn, pre-nickel & 0.8 µm gold platin
Threaded bush	stainless steel 1.4404/316L
O-ring	EPDM
<b>Mechanical data:</b>	
Ingress protection class	IP69K only in screwed condition with associated mating pieces
<b>Electrical data:</b>	
Contact resistance	≤ 5mΩ
Current-carrying capacity	4 A per channel 12 A max. total
Operating voltage	10-30 V DC
Rated voltage	32 V AC eff
Pollution severity	2 to VDE 0110
<b>Accessories (included)</b>	4 protective caps for channels not assigned

### Wiring diagram

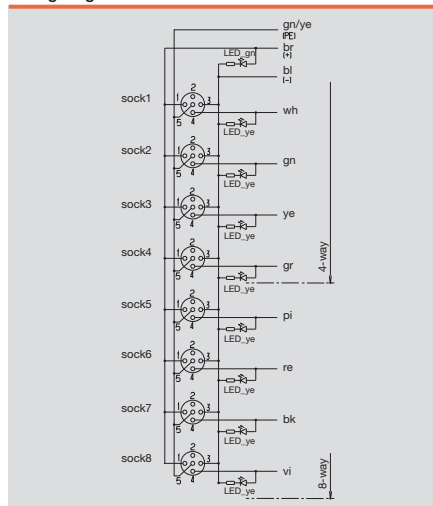

Tension-clamp connection M12, stainless steel

SAIS / SAIB VA

straight



Ordering data

<b>Male</b>	5-pole, PG 9
	5-pole, PG 9
<b>Socket</b>	5-pole, PG 9
	5-pole, PG 9
<b>Note</b>	


Type	Qty.	Order No.
SAIS 5/9-VA	1	1920700000
SAIS 5/9-VA-B-COD	1	1920720000
SAIB 5/9-VA	1	1920710000
SAIB 5/9-VA-B-COD	1	1920730000

Technical data

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
<b>Note</b>	PB = PROFIBUS (B-COD)

Type of connection	Tension clamp connection
Housing main material	1.4404/316L
Contact tube diameter	M12
Cable diameter	6...8 mm
Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Rated current	4 A
Rated voltage	125 V
Temperature range of housing	-25...+85 °C
Protection class	IP 69 k
Contact surface	gold-plated
<b>Note</b>	PB = PROFIBUS (B-COD)

Dimensioned drawing

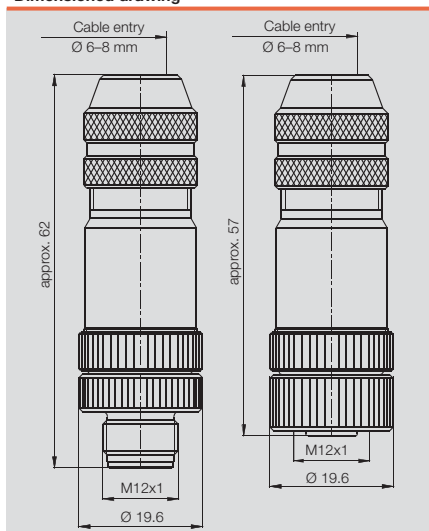

PB = PROFIBUS (B-COD)

# Sensor-actuator distributors for special applications

## All-metal

### SAI-4/8-FMM M12



## Shielded cable, e.g. for analogue initiators

Some applications need full shielding from sensor to control. This is possible with the all metal SAI distributors. The distributors are supplied with an EMC cable gland. Initiator LEDs are omitted.

## Especially thick trunk cable

It is sometimes advisable to use the machine manufacturer's standard trunk cable. This cable will usually have a relatively large outside diameter and will therefore require plenty of space (SAI-4/6/8 MHD).

## All-metal fixed cable distributors

Weidmüller metal distributors have proved their worth in many situations. They are available as 4 and 8 channel M12 versions with cable lengths of 5 or 10 m. Metal distributors are also necessary when ESD requirements must be complied with. The conductive metal surface provides low surface resistance.

## Advantages:

- no ESD/EMC problems
- high resistance to chemicals or mechanical loads
- standard mounting dimensions

## SAI-M with metal hood

### SAI-4/6/8 MMS SAI-4/6/8 MM

MMS: **M**odular, **M**etal, **S**hield

MM: **M**odular, **M**etal



### SAI-4/6/8 MH

MH: **M**odular, **H**igh



### SAI-4/6/8 MHD

MHD: **M**odular, **H**igh, sealed

(for especially thick cables)



## SAI-4/6/8 MMS with EMC cable gland in metal housing

Especially tough conditions where plastic is totally unsuitable. In certain cases it makes sense to avoid the use of plastics altogether. In such cases a distributor made completely from metal is required that can be connected to others using metal cable glands, without additional connections for the shielding.

## Cable gland: M20

For cables with outside insulation diameter from 10 mm to 14 mm. Listed below are just some of the cable sizes that are suitable for the SAI distributor with M20 cable gland:

- 14 x 0.50 mm<sup>2</sup> bis 16 x 0.50 mm<sup>2</sup>
- 8 x 0.75 mm<sup>2</sup> bis 15 x 0.75 mm<sup>2</sup>
- 8 x 1.00 mm<sup>2</sup> bis 10 x 1.00 mm<sup>2</sup>
- 5 x 1.50 mm<sup>2</sup> bis 7 x 1.50 mm<sup>2</sup>

## Cable gland: M25

For cables with outside insulation diameter from 13 mm to 18 mm. Listed below are just some of the cable sizes that are suitable for the SAI distributor with M25 cable gland:

- 21 x 0.50 mm<sup>2</sup>
- 18 x 0.75 mm<sup>2</sup> bis 21 x 0.75 mm<sup>2</sup>
- 14 x 1.00 mm<sup>2</sup> bis 20 x 1.00 mm<sup>2</sup>
- 8 x 1.50 mm<sup>2</sup> bis 16 x 1.50 mm<sup>2</sup>

## Overview of metal distributors

Type	SAI-UT	Sockets	M12	Poles-Hood	Form	Cable gland	Cable gland	Length	Order No.
SAI-4-MH-4P M12	PBT	4	4	Zn-G	high	M20	plastic		1705922000
SAI-6-MH-4P M12	PBT	6	4	Zn-G	high	M20	plastic		1705932000
SAI-8-MH-4P M12	PBT	8	4	Zn-G	high	M20	plastic		1705942000
SAI-4-MH-5P M12	PBT	4	5	Zn-G	high	M20	plastic		1701232000
SAI-6-MH-5P M12	PBT	6	5	Zn-G	high	M20	plastic		1701242000
SAI-8-MH-5P M12	PBT	8	5	Zn-G	high	M20	plastic		1701252000
SAI-4-MHD-5P M12	PBT	4	5	Zn-G	high	M25	plastic		1701233000
SAI-6-MHD-5P M12	PBT	6	5	Zn-G	high	M25	plastic		1701243000
SAI-8-MHD-5P M12	PBT	8	5	Zn-G	high	M25	plastic		1701253000
SAI-4-MHD-4P M12	PBT	4	4	Zn-G	high	M25	plastic		1705923000
SAI-6-MHD-4P M12	PBT	6	4	Zn-G	high	M25	plastic		1705933000
SAI-8-MHD-4P M12	PBT	8	4	Zn-G	high	M25	plastic		1705943000
SAI-4-MMS-4P M12	Zn-G	4	4	Zn-G	low	M20	EMC		1783540000
SAI-8-MMS-4P M12	Zn-G	8	4	Zn-G	low	M20	EMC		1783530000
SAI-4-MMS-5P M12	Zn-G	4	5	Zn-G	low	M20	EMC		1783520000
SAI-8-MMS-5P M12	Zn-G	8	5	Zn-G	low	M20	EMC		1783510000
SAI-4-MM-5P M12	Zn-G	4	5	Zn-G	low	M20	brass		1783500000
SAI-8-MM-5P M12	Zn-G	8	5	Zn-G	low	M20	brass		1783490000
SAI-4/6/8 MH-MH BL 3.5				Zn-G	high	M20	plastic		1724752000
SAI-4/6/8 MH-MHD BL 3.5				Zn-G	high	M25	plastic		1724753000
SAI-8-MH-5P M12 ZF III	PBT	8	5	Zn-G	high	M20	plastic		1782760000
SAI-8-MMS-5P M12 ZF III	Zn-G	8	5	Zn-G	high	M20	plastic		1782740000
SAI-4/6/8 MH-MH BL-ZF 3.5				Zn-G	high	M20	plastic		1782750000
SAI-4-FMM-4P M12 5M	Zn-G	4	4					5 m	9456190002
SAI-4-FMM-4P M12 10M	Zn-G	4	4					10 m	9456200002
SAI-8-FMM-4P M12 5M	Zn-G	8	4					5 m	9456750002
SAI-8-FMM-4P M12 10M	Zn-G	8	4					10 m	9456760002


**Note:** The cable outside diameter can vary from manufacturer to manufacturer. It is therefore possible that the cable glands hold other cables firmly despite a different strand lay-up. In each case, it is best to first measure the cable diameter and then choose an appropriate distributor.



## M12 metal distributors

## Fixed cable version

## SAI-4-FMM

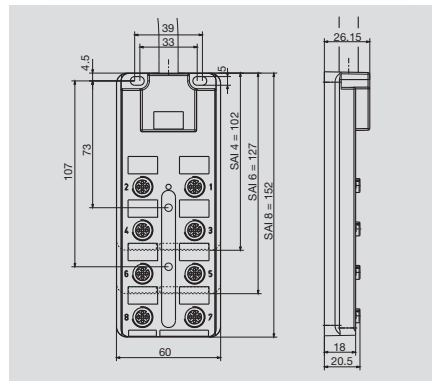

## Ordering data

4 channel	
	Cable length 5 m
	Cable length 10 m
8 channel	
	Cable length 5 m
	Cable length 10 m
Note	

## SAI-4-FMM

## 4-pole


Type	Qty.	Order No.
SAI-4-FMM-4P M12 5M	4	9456190002
SAI-4-FMM-4P M12 10M	3	9456200002
SAI-8-FMM-4P M12 5M	1	9456750002
SAI-8-FMM-4P M12 10M	3	9456760002

Additional variants on request  
Bus cable is not shielded


## Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	9 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	CuZn, nickel-plated
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	silver
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

## Wiring diagram

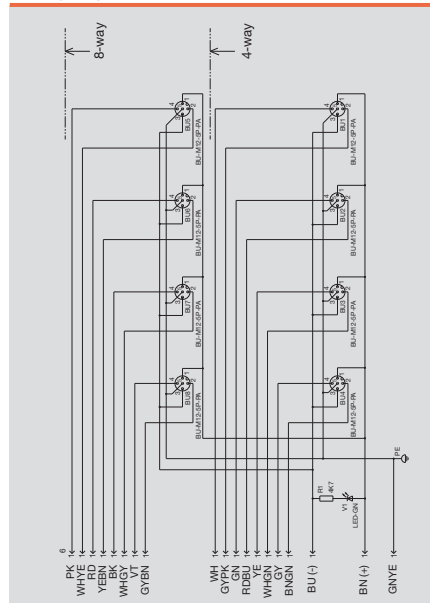

Hood version

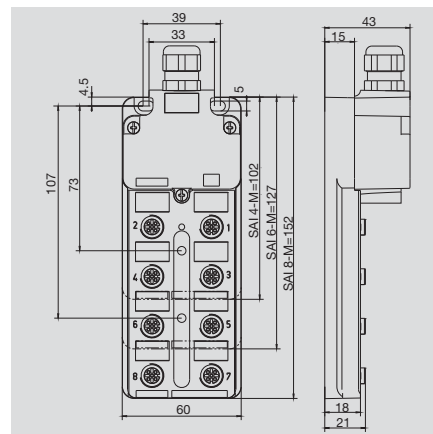

Ordering data

Complete modules,4-pole	
	4 channel
	8 channel
Complete modules,5-pole	
	4 channel
	8 channel
Tension-clamp connection,high cover	
	8 channel
Base unit	
	8 channel
Mounting hood	
	Screw connection
Note	

SAI-4/6/8-MMS

Type	Qty.	M12	Order No.
SAI-4-MMS 4P M12	1		1783540000
SAI-8-MMS 4P M12	1		1783530000
SAI-4-MMS 5P M12	1		1783520000
SAI-8-MMS 5P M12	1		1783510000
SAI-4/6/8 MH-MM BL 3.5	1		1724754000
With EMC cable gland			


SAI-4/6/8-MM

Type	Qty.	M12	Order No.
SAI-4-MM 5P M12	1		1783500000
SAI-8-MM 5P M12	1		1783490000
SAI-8-MMH 5P M12 ZF	1		1782740000
SAI-8-MM 5P M12 UT	2		1783491000
SAI-4/6/8 MH-MM BL 3.5	1		1724754000
MM without initiator LED and with standard metal cable gland			


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	CuZn, nickel-plated
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	silver
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

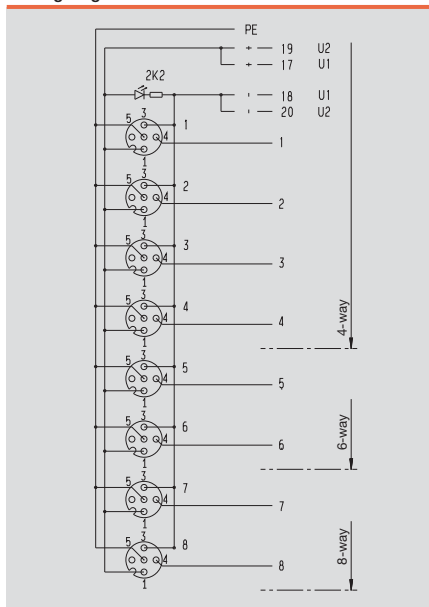


Wiring diagram

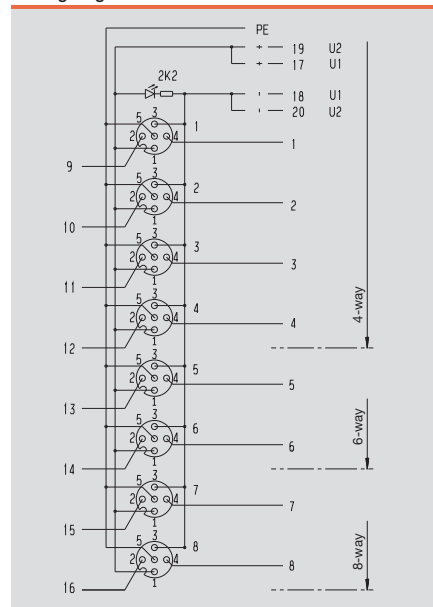

## M12 metal distributors

### Hood version with M20 outlet

For cables with 10-14 mm outer diameter

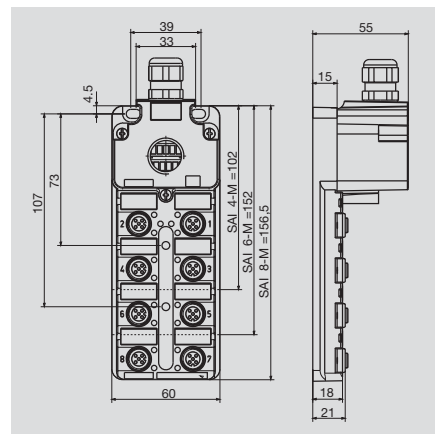

### Ordering data

Complete modules	
	4 channel
	6 channel
	8 channel
Tension clamp connection	8 channel
Mounting hood	
	Tension clamp connection
	Screw connection
Note	

### SAI-4/6/8-MH

### 4-pole

Type	Qty.	Order No.
SAI-4-MH-4P M12	1	1705922000
SAI-6-MH-4P M12	1	1705932000
SAI-8-MH-4P M12	1	1705942000
SAI-4/6/8 MH MH BLZF3,5	1	1782750000
SAI-4/6/8 MH-MH BL 3.5	1	1724752000
Other versions on request		

### SAI-4/6/8-MH


### 5-pole

Type	Qty.	Order No.
SAI-4-MH-5P M12	1	1701232000
SAI-6-MH-5P M12	1	1701242000
SAI-8-MH-5P M12	1	1701252000
SAI-8-MH-5P M12 ZF III	1	1782760000
SAI-4/6/8 MH MH BLZF3,5	1	1782750000
SAI-4/6/8 MH-MH BL 3.5	1	1724752000
Other versions on request		


### Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	CuZn, nickel-plated
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	silver
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	
With dual power supply: 2x8 = 16A total current	
Clamping range up to 2.5 mm <sup>2</sup> with screw connection	

### Wiring diagram

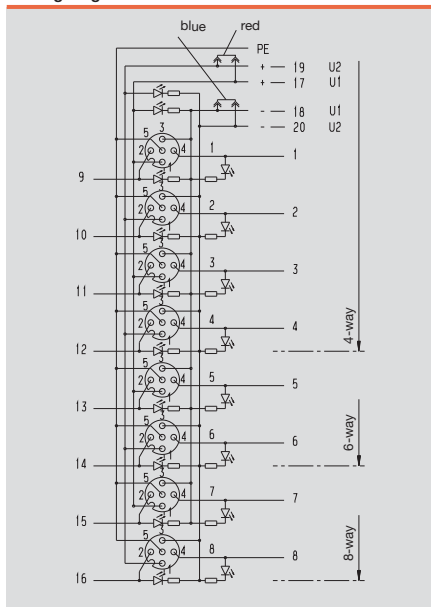


### Wiring diagram

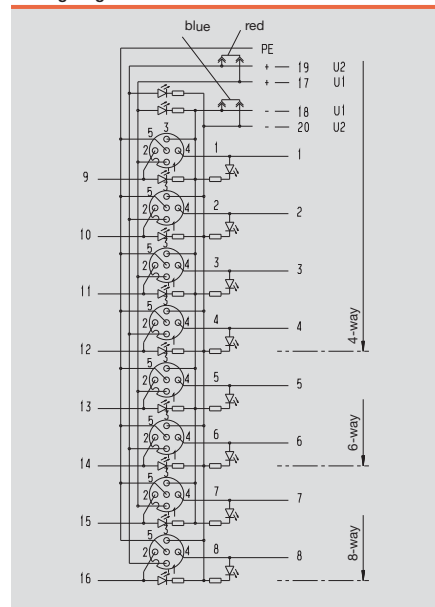

**Hood version with M25 outlet**

For cables with 13-18 mm outer diameter

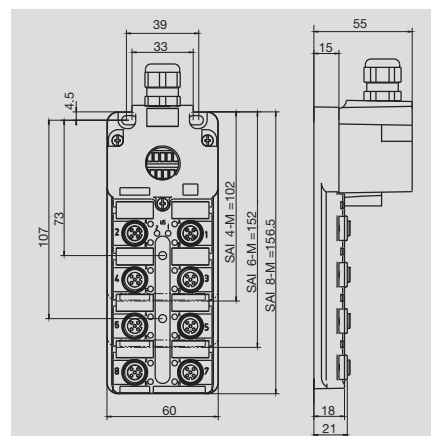

**Ordering data**

Complete modules	
	4 channel
	6 channel
	8 channel
Mounting hood	
	Screw connection
Note	


SAI-4/6/8-MHD		4-pole	
Type	Qty.	Order No.	
SAI-4-MHD-4P M12	1	1705923000	
SAI-6-MHD-4P M12	1	1705933000	
SAI-8-MHD-4P M12	1	1705943000	
SAI-4/6/8 MH-MHD BL 3.5			
Other versions on request			

SAI-4/6/8-MHD		5-pole	
Type	Qty.	Order No.	
SAI-4-MHD-5P M12	1	1701233000	
SAI-6-MHD-5P M12	1	1701243000	
SAI-8-MHD-5P M12	1	1701253000	
SAI-4/6/8 MH-MHD BL 3.5			
Other versions on request			


**Technical data**

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	CuZn, nickel-plated
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	silver
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	
With dual power supply: 2x8 = 16A total current	
Clamping range up to 2.5 mm <sup>2</sup> with screw connection	

Wiring diagram

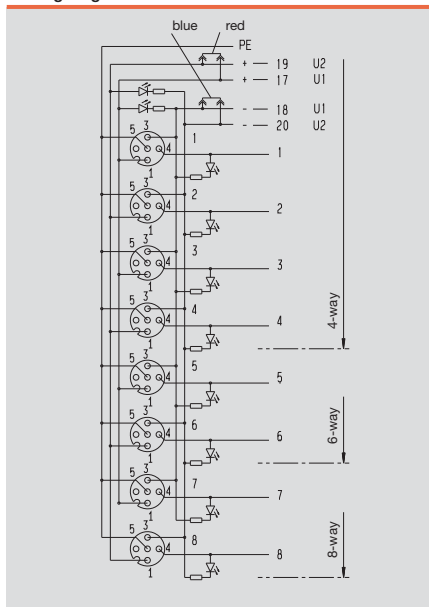

Wiring diagram

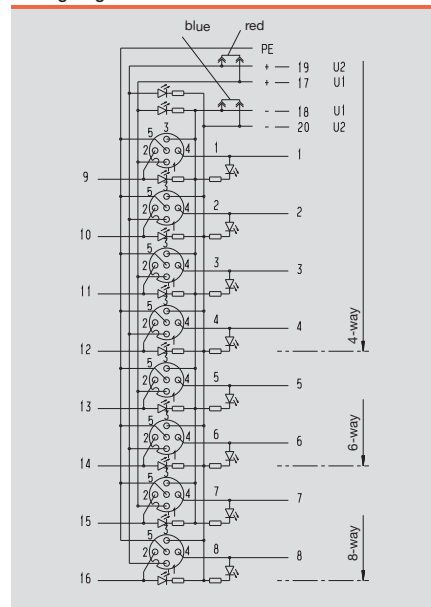

# For switching with five no-voltage contacts in an M12 without LED

## with hood



## Emergency stop wiring

Sometimes a machine builder will need more than two floating contacts in one M12 plug-in connector. This is the case, for example, in the wiring for some “emergency stop” circuits. It was for this application that Weidmüller developed the 1:1 SAI distributor.

This SAI distributor has four M12 plug-in connectors with five floating contacts in one socket connector. The distributor is supplied complete with hood.

When connecting PT100 3- and 4-conductor initiators, we recommend the new shielded metal version. If you need other circuit configurations, simply contact us.

**Note:** This distributor should not be used as base module for active bus distributors.

## base element



## Wiring diagram

Socket	Contact	BL 3.5 contact
1	1	1
1	2	2
1	3	3
1	4	4
1	5	5
2	1	6
2	2	7
2	3	8
2	4	9
2	5	10
3	1	11
3	2	12
3	3	13
3	4	14
3	5	15
4	1	16
4	2	17
4	3	18
4	4	19
4	5	20
-	-	21

## metal




## Technical data

Current per channel	2A
Total current	8A
LEDs	No LEDs are integrated at any point.

## Ordering data

Type	Qty.	Order No.
SAI-4-M 5P M12 1:1 (plastic hood)	1	1806010000
Base element (plastic)	1	1806011000
SAI-4-MMS 5P M12 1:1 (Metal hood)	1	1897680000

## SAI distributor with 8 poles per M12

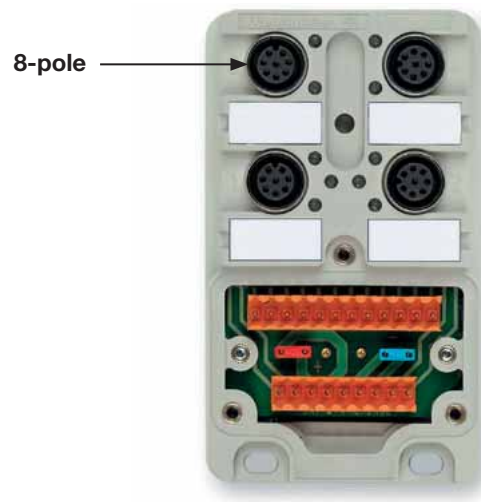

## Applications

This distributor can be used both as a base module for satellite solutions (SAI-Combi) and for connecting sensors/units with more than two contacts.

## SAI-Combi

A sub-distribution board can be connected to every M12 with the help of the SAI-4-M 8P in conjunction with the SAI Active bus hood. This SAI should then be a 4-channel distributor with one channel per socket. The SAI-4-M 4P M12 is particularly suitable.

Part No. **1705920000**.

## Sensors, units with more than two signals in one line

As one socket in this module contains four signal paths and, in addition, two +, two – and one PE, components with more than two signal lines can be connected to this module. Eight-pole connecting cables are available on request.

## Wiring

M12 socket	M12 contact	BL 3.5 connection	PLC input	Supply
1	1	1	E0.0	
1	2	3	E0.1	
1	3	5	E0.2	
1	4	7	E0.3	
2	1	2	E0.4	
2	2	4	E0.5	
2	3	6	E0.6	
2	4	8	E0.7	
3	1	9	E1.0	
3	2	11	E1.1	
3	3	13	E1.2	
3	4	15	E1.3	
4	1	10	E1.4	
4	2	12	E1.5	
4	3	14	E1.6	
4	4	16	E1.7	
1/3	5	17		24 V
2/4	5	19		24 V
1/3	6/7	18		0 V
2/4	6/7	20		0 V
1/2/3/4	8	PE		PE

The jumpers in the distributor enable the potentials of 17 and 19 or 18 and 20 to be bridged. Contacts 6 and 7 are bridged in the 8-pole M12 in order to increase the current-carrying capacity, total current per M12: 2 A, signal current per pin: 1 A

## Ordering data

Type	Qty.	Order No.
Complete module: SAI-4-M 8P M12	1	<b>1807640000</b>
Base separate: SAI-4-M M12 UT	1	<b>1807641000</b>
Matching hood passive: SAI-4/6/8-MH-BL3.5	1	<b>1724750000</b>

**Technical information:** The distributor does not include any signalling LEDs. Supply LEDs and electrical isolation are provided.

# Fixed cable version

## Fixed cable version




This distributor includes the option of attaching either a PNP sensor or an NPN sensor with 2 or 3 conductor connection to an M12 socket.

Eight inputs are available in total. In the case of a switched sensor, a + signal on the corresponding wire is connected through and the appropriate LED is illuminated.

The upper LED "N" is illuminated for NPN sensors and the lower LED "P" for PNP sensors. Do not connect a T-piece to the M12 socket.

The existing M12 plug-in connectors are wired in such a manner that the PNP sensor can be connected to pin 4 and the NPN sensor to pin 2.

The distributor has eight channels and 5 m of cable. Other versions are also available.

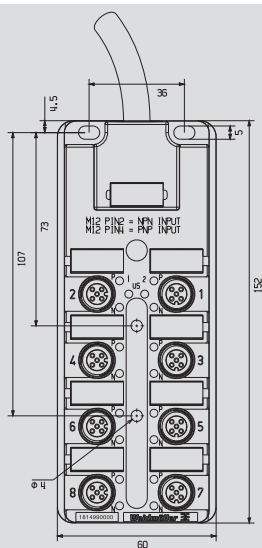


### Pin assignment


M12 socket	Pin	Function	Pin	Function	Output	Wire colour	Wire size
1	4	PNP	2	NPN	1	white	0.34 mm <sup>2</sup>
2	4	PNP	2	NPN	2	green	0.34 mm <sup>2</sup>
3	4	PNP	2	NPN	3	yellow	0.34 mm <sup>2</sup>
4	4	PNP	2	NPN	4	grey	0.34 mm <sup>2</sup>
5	4	PNP	2	NPN	5	pink	0.34 mm <sup>2</sup>
6	4	PNP	2	NPN	6	red	0.34 mm <sup>2</sup>
7	4	PNP	2	NPN	7	black	0.34 mm <sup>2</sup>
8	4	PNP	2	NPN	8	violet	0.34 mm <sup>2</sup>
all	1	24 V DC				brown	0.75 mm <sup>2</sup>
all	3	0 V DC				blue	0.75 mm <sup>2</sup>
all	5	PE				green/yellow	0.75 mm <sup>2</sup>

### M12 sockets

- Pin 1 = +24 V DC
- Pin 2 = NPN input
- Pin 3 = 0 V DC
- Pin 4 = PNP input
- Pin 5 = PE



### Wiring diagram (schematic)

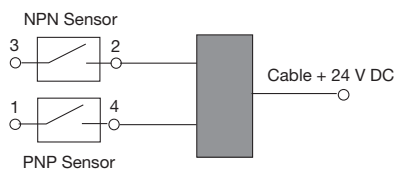

### Technical data


Operating voltage	24 V DC ±20 %
Operation temperature	0...80 °C
Storage temperature	-25...80 °C
Ingress protection class	IP68
PUR cable	5 m
Max. no-load current for 2-wire NPN sensors	2 mA DC

### Ordering data

Type	Qty.	Order No.
SAI-8-F 5P NPN-PNP 5M	1	181499000

Wall bushing

SAI-8-B 5P M12 SL

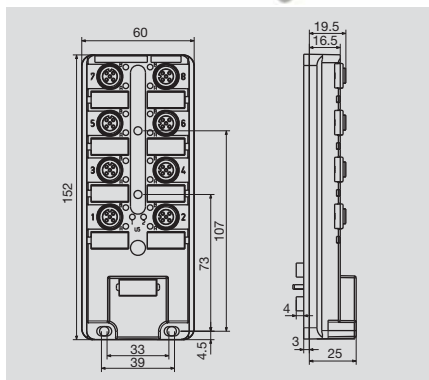

Ordering data

<b>Note</b>

SAI-8-B 5P M12 SL



5-pole

Type	Qty.	Order No.
SAI-8-B 5P M12 SL	1	1847560000
BL 3.5 connector included in delivery		

Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	3 A
Total current	10 A
Pollution severity	3
Protection class	IP 65
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

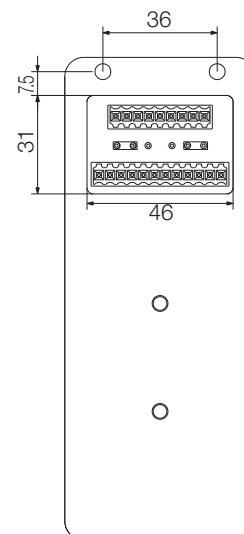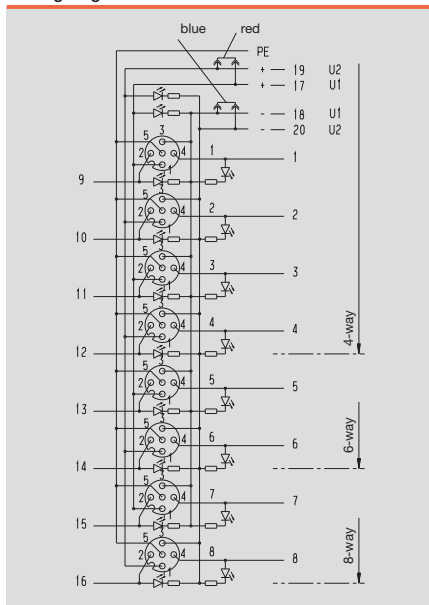



# Overview

## Distributors for system cabling


On site distribution is becoming more important. For example, in some places the IP 20 I/O module has to be mounted in housings directly on the machine. This is where a simplified form of wiring is essential.

## Weidmüller now offers two simple solutions


- A distributor equipped at the rear with a standardised ribbon cable connector, which is compatible with the Weidmüller PLC system interface.
- Weidmüller also offers a unique solution for feeding bus cables through panels that can be plugged in from both sides.

## Advantages

- Sensors and actuators can be plugged in from outside
- Through-panel version can be mounted in cut outs in steel panels
- Standardised ribbon cable connector inside
- Plus: M12 through-panel feed that can be plugged in from both sides

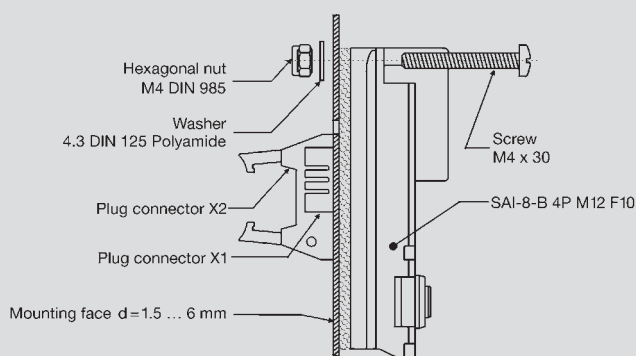

## Drilling template

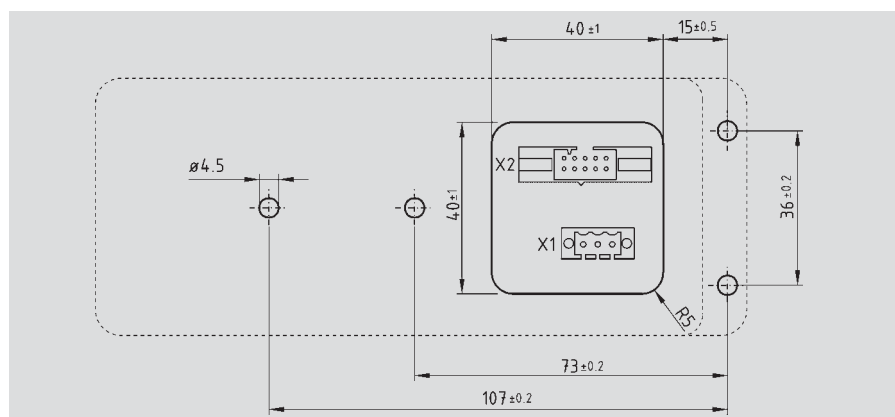

**Advantages of system cabling**

**Fast**

- Time saving installation
- Reduces commissioning and troubleshooting times
- On site wiring cuts wiring costs

**Safe**

- Reduces installation errors
- Using system cables instead of individual wires improves clarity in control cabinets
- Direct marking corresponding to the PLC

**Variability**


- Additional I/O modules available
- Cable length options
- Easy replacement of I/O interfaces provides flexibility

**Contact assignment**


**Male connector X1**

M12 socket		Male connector X1
1 ... 8	Pin 1	U +
1 ... 8	Pin 3	U -
1 ... 8	Pin 5	PE

**Male connector X1**



**M12 socket**




**Contact assignment**

**Male connector X2**

M12 socket		Male connector X2
1	Pin 4	1
2	Pin 4	2
3	Pin 4	3
4	Pin 4	4
5	Pin 4	5
6	Pin 4	6
7	Pin 4	7
8	Pin 4	8
1 - 8	Pin 1	9
1 - 8	Pin 3	10

**Male connector X2**



**Note:**

You will find further products for Interface units and PLC solutions in the Electronic catalogue 4.5.

**Technical data**

Operating voltage	
Outputs	
Inputs	
<b>Mounting conditions</b>	
Mounting surface	
Surface temperature	
Ingress protection class	
Fixings	
<b>Note:</b>	

10 - 30 V (DC)
max. 1 A per channel / max. 8 A in total
max. 1 A in total
sheet steel, flat, min. 1.5 mm thick, or panels with at least equivalent stability, max. 6 mm thick
max. 40 °C
IP67/IP68 only in conjunction with control cabinets with equivalent class of protection
4 screws + washers + nuts / torque: 0.8 Nm
Connect the male connector 3.5 (X1) when using actuators

**Ordering data**

Type	Qty.	Order No.
SAI-8-B 4P M12 F10	1	1812170000
BL 3.50/07/180 SN DKGX BX	50	1606550000

Distributor	
Male connector X1	

# Pre-assembled hood version

In some instances it is helpful to order the hoods pre-assembled.



## SAI distributor with pre-assembled hood Colour-coded cable

Ordering data		4-pole
Type	Length	Order No.
8-channel		
SAI-8-MF 4P PUR 5M	5 m	1799960000
SAI-8-MF 4P PUR 10M	10 m	1789190000

Ordering data		5-pole
Type	Length	Order No.
4-channel		
SAI-4-MF 5P PUR 5M	5 m	1804600000
SAI-4-MF 5P PUR 10M	10 m	1804580000
8-channel		
SAI-8-MF 5P PUR 5M	5 m	1804590000
SAI-8-MF 5P PUR 10M	10 m	9457430000
8-channel, without initiator LED		
SAI-8-MF 5P PUR 5M OL	5 m	9457350000

## Pre-assembled hood Colour-coded cable

Ordering data		4-pole
Type	Length	Order No.
SAI-4/6/8-MHF 4P PUR 4M	4 m	1791450400
SAI-4/6/8-MHF 4P PUR 6M	6 m	1791450600
SAI-4/6/8-MHF 4P PUR 9M	9 m	1791450900
SAI-4/6/8-MHF 4P PUR14M	14 m	1791451400
SAI-4/6/8-MHF 4P PUR20M	20 m	1791452000
SAI-4/6/8-MHF 4P PUR28M	28 m	1791452800
SAI-4/6/8-MHF 4P PUR34M	34 m	1791453400

## Matching base module

Type	Qty.	Order No.
SAI-4-M-4PM12UT	1	1705921000
SAI-6-M-4PM12UT	1	1705931000
SAI-8-M-4PM12UT	1	1705941000

## Pre-assembled hood

Ordering data		5-pole
Type	Length	Order No.
SAI-4/6/8-MHF 5P PUR 4M	4 m	1791460400
SAI-4/6/8-MHF 5P PUR 6M	6 m	1791460600
SAI-4/6/8-MHF 5P PUR 9M	9 m	1791460900
SAI-4/6/8-MHF 5P PUR14M	14 m	1791461400
SAI-4/6/8-MHF 5P PUR16M	16 m	1791461600
SAI-4/6/8-MHF 5P PUR20M	20 m	1791462000
SAI-4/6/8-MHF 5P PUR28M	28 m	1791462800
SAI-4/6/8-MHF 5P PUR34M	34 m	1791463400
SAI-4/6/8-MHF 5P PUR40M	40 m	1791464000
SAI-4/6/8-MHF 5P PUR50M	50 m	1791465000
SAI-4/6/8-MHF 5P PUR55M	55 m	1791465500

## Matching base module

Type	Qty.	Order No.
SAI-4-M-5PM12UT	1	1701231000
SAI-6-M-5PM12UT	1	1701241000
SAI-8-M-5PM12UT	1	1701251000



## SAI M8

Weidmüller offers two different series for the M8 range. Both of these series offer key advantages: while one is optimised for size, the other has a patented shape and protected design that make it easy to handle. The SAI M8 product line is available with up to 12 plug in slots (as a fixed-cable version) and with up to 10 plug-in slots (as a pluggable version). The housings can be screwed on from the side or from the top which makes them more versatile. They are durable and well-sealed with a sturdy, fully encapsulated construction. These single row distributors

are easy to handle; their compact shape makes them one of the smallest product solutions available on the market. The hooded distributor is a favourite from the line or ergonomic distributors (also knick named the hedgehog distributor). The cable outlet is customisable and can exit from the top or from the back. These distributors are of course also fully encapsulated.



**Easily accessible**

The side-mounted M8 connector ensures very convenient handling

**Directly on the PCB**

Custom versions are also available. This is the PCB connection module.

**Space-saving**

The line version has a very small size.

# Overview

## Fixed cable version



### Compact dimensions, readily accessible M8 connections, eye-catching design

The unconventional design of this generation of SAI M8 distributors catches the eye immediately. Their shape is helpful because in this patented design the sockets are no longer arranged in simple rows. Instead, some are on 45° bevelled surfaces. That considerably improves the accessibility of the screw connections for the sensor and actuator cables. Ease of use, compact dimensions and the eye catching design are the obvious advantages of this M8 generation.

The following variations are available:

- SAI M8 distributor with removable connection hood; the bus cable can be connected either vertically or horizontally
- SAI M8 distributor with permanently attached, pre-assembled bus cable, 5 or 10 m long; this version is particularly slim and is therefore ideal for mounting in confined spaces
- SAI M8 distributor with metal plated M23 thread

## Hood version



## M23 version



# SAI-M8-Line

## M8 distributor with M12 outlet



## M8 distributor line / fixed-cable version



## M8 distributor with solder pins



n

## Extra-narrow M8 distributor for confined spaces

Single-row M8 distributors are the smallest sensor-actuator modules currently available with this thread size and it is precisely their size that is decisive for applications. Therefore, this form has become very popular. It is important to maintain the widest possible range of options. The SAI-M8-Line products can provide many interesting solutions:

- 4 and 6 channel modules with 8 pole M12 bus connection
- 8 and 10 channel modules with 12 pole bus connection
- 4, 10 and 12 channel distributors with fixed cable connection, the 4 and 8 channel modules also with 4 poles

It is important to note that the distributors can be labelled with the same markers as the Weidmüller 5 mm modular terminals. Therefore, no new tags had to be introduced. The modules can also be mounted sideways and are completely encapsulated.

Consequently, Weidmüller SAI distributors represent stability, robustness, flexibility and compactness in one unit.

## PCB version of a complete SAI distributor

During the design of PCBs, it is often necessary to plug in different external data lines. There are a variety of connectors available for this purpose. For machine construction, the M8 and M12 connectors have become established as the standard solutions for sensor and actuator wiring. When attempting to mount these PCB-type connectors to the PCB, there is a significant risk that they will not be firmly attached to the board. Now, the SL version of the SAI distributor series solves this problem. The distributor can be completely mounted onto a PCB. It features soldering pins for the electrical connection to the PCB. The distributor itself should be slightly raised up during assembly by means of washers. This provides some clearance under the box. Naturally, the power supply channels are bridged in the distributor. This saves space on the PCB since there is no need for holes on any assembly surface. Thus the reverse side can be used for other purposes.


G




## M8 distributors

### Hooded/fixed cable version

#### SAI-4/8-M

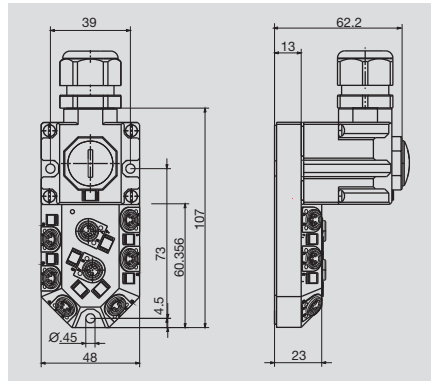

#### SAI-4/8-F

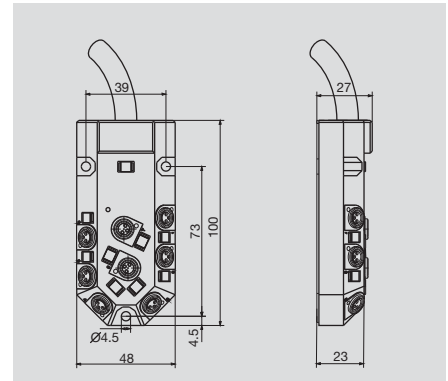

### Ordering data

3-pole	
Cable length 5 m (with fixed cable version)	4 channel 8 channel
Cable length 10 m (with fixed cable version)	4 channel 8 channel
4-pole	
Cable length 5 m (with fixed cable version)	4 channel 8 channel
Cable length 10 m (with fixed cable version)	4 channel 8 channel
<b>Note</b>	


SAI-4/8-M	M8	
Type	Qty.	Order No.
SAI-4-M 3P M8	1	1784680000
SAI-8-M 3P M8	1	1784670000
SAI-4-M 4P M8	1	1784700000
SAI-8-M 4P M8	1	1784690000
Other versions on request		

SAI-4/8-F	M8	
Type	Qty.	Order No.
SAI-4-F 3P M8 PUR 5M	1	1784640000
SAI-8-F 3P M8 PUR 5M	1	1784620000
SAI-4-F 3P M8 PUR 10M	1	1784630000
SAI-8-F 3P M8 PUR 10M	1	1784610000
SAI-4-F 4P M8 PUR 5M	1	1784600000
SAI-8-F 4P M8 PUR 5M	1	1784580000
SAI-4-F 4P M8 PUR 10M	1	1784590000
SAI-8-F 4P M8 PUR 10M	1	1784570000
Other versions on request		


### Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	2 A
Total current	8 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickel- gold-plated
screw socket	CuZn, nickel- plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.08...1 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	Yes

### Wiring diagram

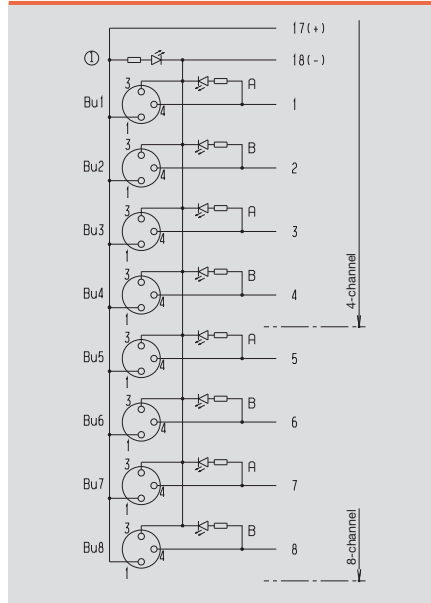



### Wiring diagram

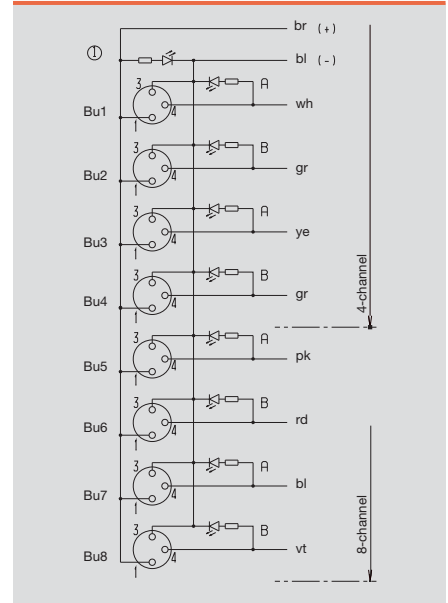

With M23/ M16 outlet

SAI-4/8-M23

SAI-8-M16

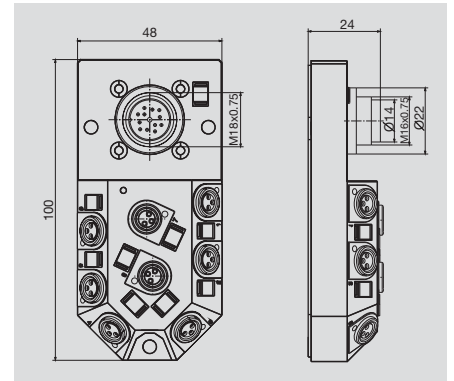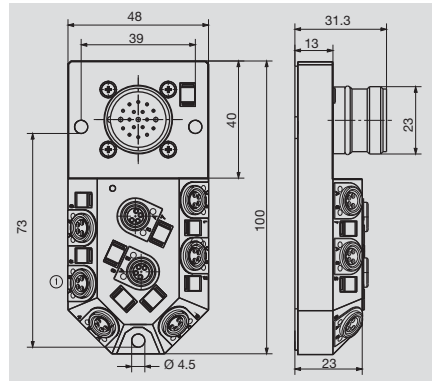

Ordering data

3-pole	8 channel
4-pole	4 channel
	8 channel
<b>Note</b>	

SAI-4/8-M23

M23

Type	Qty.	Order No.
SAI-4-M23 4P M8	1	1784660000
SAI-8-M23 4P M8	1	1784650000
Other versions on request		

SAI-8-M16


M16

Type	Qty.	Order No.
SAI-8-M16 3P M8	1	1795900000
Other versions on request		


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	2 A
Total current	8 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

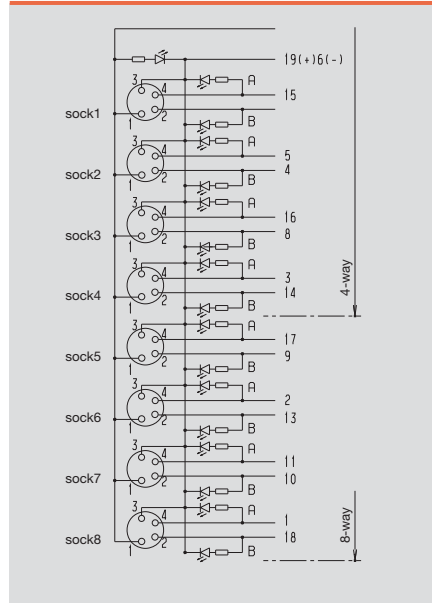

Wiring diagram


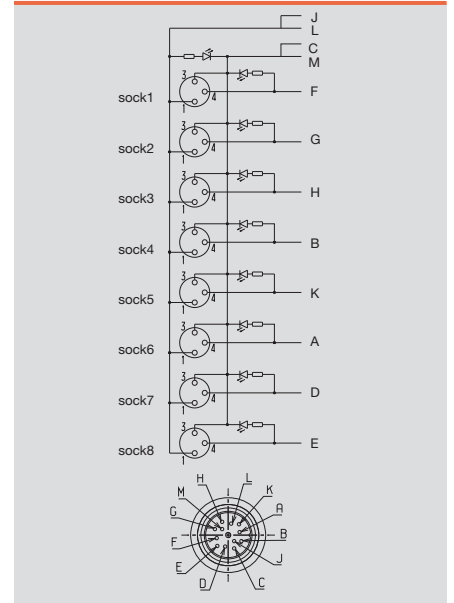


## M8 distributors

### Line

#### SAI-4/6-S

#### SAI-5/8-S

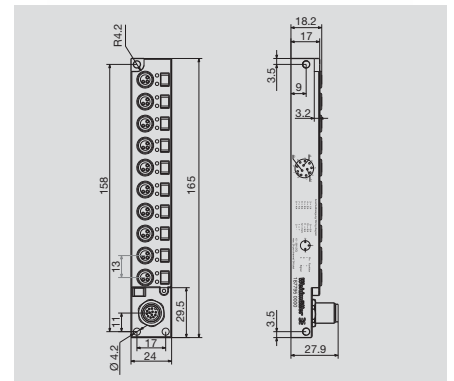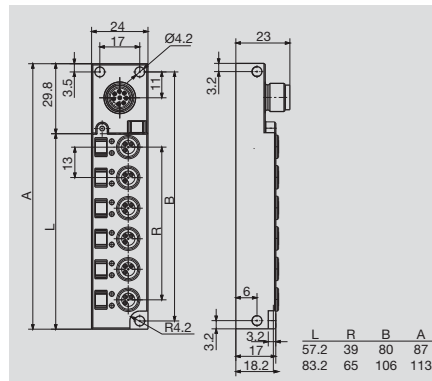

### Ordering data

3-pole	
4 channel	
6 channel	
8 channel	
10 channel	
3-pole without LED	
4 channel	
6 channel	

**Note**

#### SAI-4/6-S

#### M12

Type	Qty.	Order No.
SAI-4-S 3P M8 L	1	1828740000
SAI-6-S 3P M8 L	1	1828730000
SAI-4-S 3P M8 L OL	1	1051760000
SAI-6-S 3P M8 L OL	1	1932380000
Other versions on request		

#### SAI-5/8-S


#### M12

Type	Qty.	Order No.
SAI-8-S12 3P M8 L	1	1871680000
SAI-10-S12 3P M8 L	1	1877950000


### Technical data

Operating voltage	10...30 V
Current of continuous busbars	1 A
max. current-carrying capacity per slot	2 A
Total current	6 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-25...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

### Wiring diagram

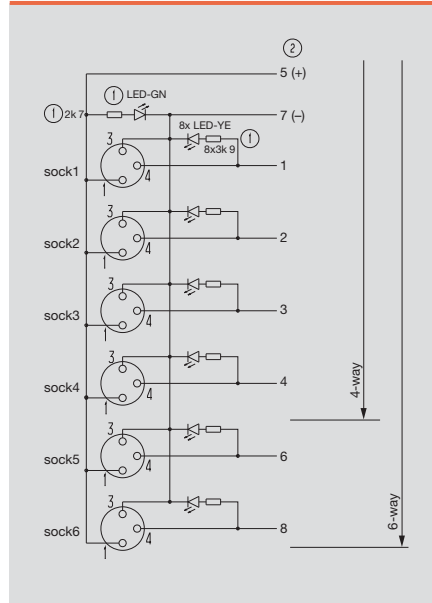


### Wiring diagram

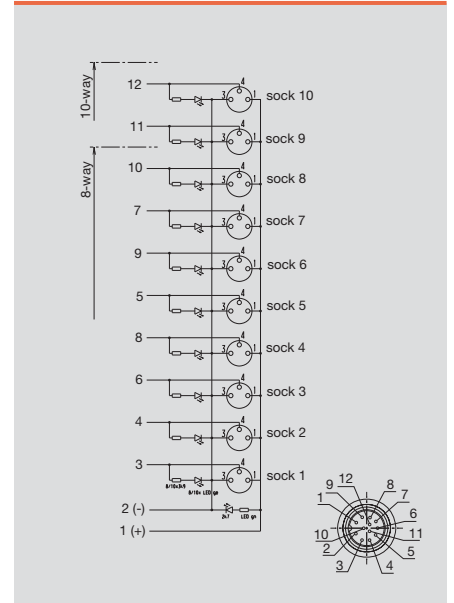

Line  
PCB version

SAI-6-S M8 L SL

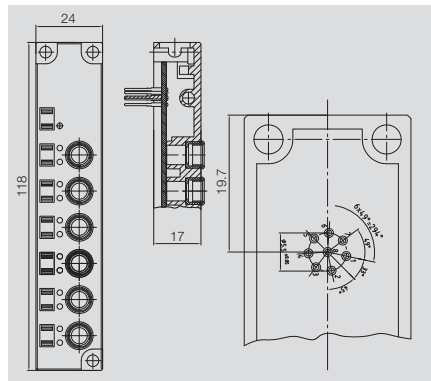

Ordering data

<b>3-pole</b>	6 channel
<b>Note</b>	

SAI-6-S M8 L SL


3-pole

Type	Qty.	Order No.
SAI-6-S 3P M8 L SL	1	1057720000
Other versions on request		

Technical data


Operating voltage	10...30 V
Current of continuous busbars	1 A
max. current-carrying capacity per slot	2 A
Total current	6 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-25...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

Wiring diagram

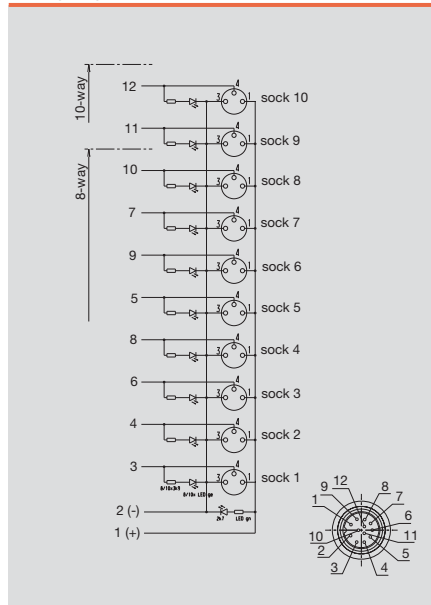

## M8 distributors

### Line / Fixed cable version

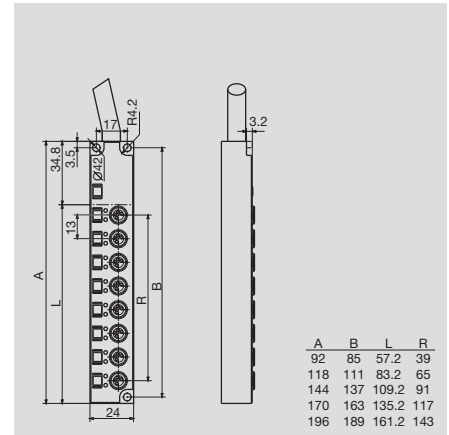

### Ordering data

Cable length 5 m (with fixed cable version)	
4 channel	SAI-4-F 3P M8 L 5M
6 channel	SAI-6-F 3P M8 L 5M
8 channel	SAI-8-F 3P M8 L 5M
10 channel	SAI-10-F 3P M8 L 5M
12 channel	SAI-12-F 3P M8 L 5M
Cable length 10 m (with fixed cable version)	
4 channel	SAI-4-F 3P M8 L 10M
6 channel	SAI-6-F 3P M8 L 10M
8 channel	SAI-8-F 3P M8 L 10M
10 channel	SAI-10-F 3P M8 L 10M
12 channel	SAI-12-F 3P M8 L 10M

**Note**


SAI-4/6/8/10/12-L		3-pole	
Type	Qty.	Order No.	
SAI-4-F 3P M8 L 5M	1	1828720000	
SAI-6-F 3P M8 L 5M	1	1828700000	
SAI-8-F 3P M8 L 5M	1	1828680000	
SAI-10-F 3P M8 L 5M	1	1828660000	
SAI-12-F 3P M8 L 5M	1	1828640000	
SAI-4-F 3P M8 L 10M	1	1828710000	
SAI-6-F 3P M8 L 10M	1	1828690000	
SAI-8-F 3P M8 L 10M	1	1828670000	
SAI-10-F 3P M8 L 10M	1	1828650000	
SAI-12-F 3P M8 L 10M	1	1828630000	

SAI-4/6/8/10/12-L		4-pole	
Type	Qty.	Order No.	
SAI-4-F 4P M8 L 5M	1	1849680000	
SAI-6-F 4P M8 L 5M	1	1849700000	
SAI-8-F 4P M8 L 5M	1	1828620000	
SAI-4-F 4P M8 L 10M	1	1849690000	
SAI-6-F 4P M8 L 10M	1	1849670000	
SAI-8-F 4P M8 L 10M	1	1828610000	


### Technical data

Operating voltage	10...30 V
Current of continuous busbars	1 A
max. current-carrying capacity per slot	2 A
Total current	6 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-25...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

### Wiring diagram

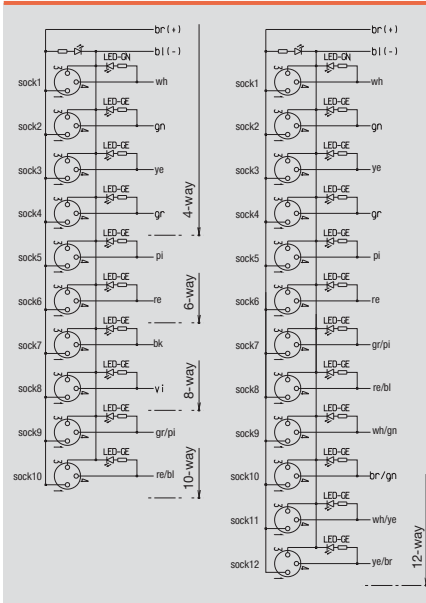

### Wiring diagram

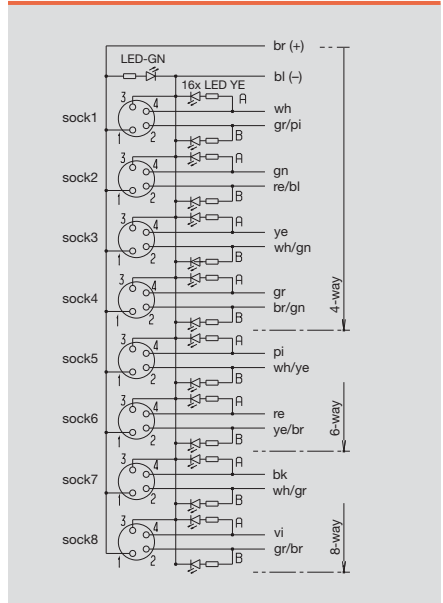



# Overview

## M5-Line with M12 outlet



### The Weidmüller SAI-M5 distributors are currently the smallest SAI distributors in the world

Whether mobile phones or computers as the functionality increases so the size of the components decreases! Today, machine designers face the same problem. Space is at a premium here as well, even in large machines, particularly where the sensor components are located. In the past the M8 distributor solved these problems. However, these units are now considered to be too large. The first move was to make the sensors smaller. Then it was the turn of the cables and distributors.

These extremely small units are surprisingly easy to handle. M5 plug in connectors have three or four poles and are thus equivalent to M8 plug-in connectors.

## Fixed cable version



But in contrast to the M8 plug in connectors, the different pole numbers here are compatible with each other. The advantage is obvious: 4 pole units which are required, for example, for antivalent sensors can now be plugged into one and the same distributor with standard NOC applications. In the M8 system special adapters are required. Besides their actual size, in some applications module weight is critical too.

For example, the speed of a handling machine is influenced by the weight of the moving parts. Here again, the M5 system offers outstanding advantages, with its almost unrivalled small size and light weight.

## M5-Line with M16 outlet



There is no version for custom bus cable assembly for this SAI distributor, which is delivered with a plug in connection and a fixed cable connection. A compact 12 pole M12 plug in connector has been developed as a plug in connection specifically for this distributor.

This ratio of surface area to number of connections is reminiscent of the computer industry. The M16 bus connection is also integrated in the module as an option, so the SAI M5 can be used as a combined SAI system as well. A Y-configuration is possible in conjunction with the M16 splitter.

The fixed cable version is particularly suitable for standard applications where the distributor is permanently installed and the electrical installation does not have to be disconnected after installation. The bus cable is reduced in cross section to save weight here too.

**M5 distributors**



**Quality comes in little packages...**

This is the motto with which Weidmüller developed its distributor with M5 plug in connectors. The outstanding feature of these connectors is their size. Attention has also been given to stability and good conductivity.

For a comparison of sizes, take a look at the photos on the left.

These products are ideal for handling machines where light weight and small size are vital.

**Comparing the sizes**



**M12 M8 M5**



**M12 M8 M5**

**Marking**

Each channel is marked with the channel number. Each initiator LED can be exactly allocated with the letters A and B. In addition, the distributor and every channel can be marked.







## M5 distributors

### Line

### SAI-4/8-F

### SAI-4/8-S

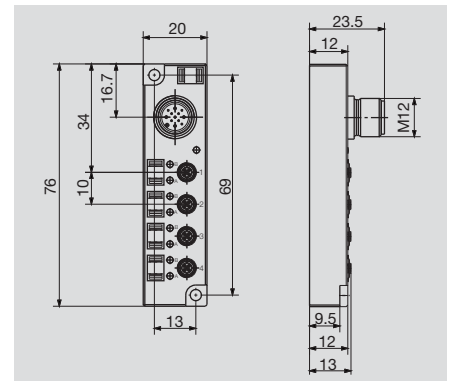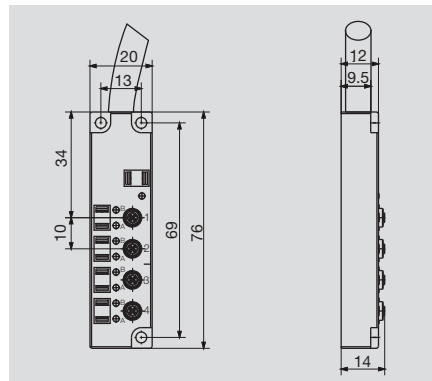

### Ordering data

3-pole	
Cable length 5 m (with fixed cable version)	4 channel
	8 channel
Cable length 10 m (with fixed cable version)	4 channel
	8 channel
4-pole	
Cable length 5 m (with fixed cable version)	4 channel
	8 channel
Cable length 10 m (with fixed cable version)	4 channel
	8 channel
Note	

### SAI-4/8-F

### M5

Type	Qty.	Order No.
SAI-4-F 3P M5 L5M	1	1851740000
SAI-8-F 3P M5 L5M	1	1851760000
SAI-4-F 3P M5 L10M	1	1845820000
SAI-8-F 3P M5 L10M	1	1845830000
SAI-4-F 4P M5 L5M	1	1851770000
SAI-8-F 4P M5 L5M	1	1851750000
SAI-4-F 4P M5 L10M	1	1845800000
SAI-8-F 4P M5 L10M	1	1845810000
Other versions on request		

### SAI-4/8-S


### M5

Type	Qty.	Order No.
SAI-8-S 3P M5	1	1845850000
SAI-4-S 4P M5	1	1845840000
Other versions on request		


### Technical data

Operating voltage	10...30 V
Current of continuous busbars	1 A
max. current-carrying capacity per slot	3 A
Total current	3 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	CuZn, nickel-plated
Base material of contacts	Au (Gold)
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	Yes

### Wiring diagram

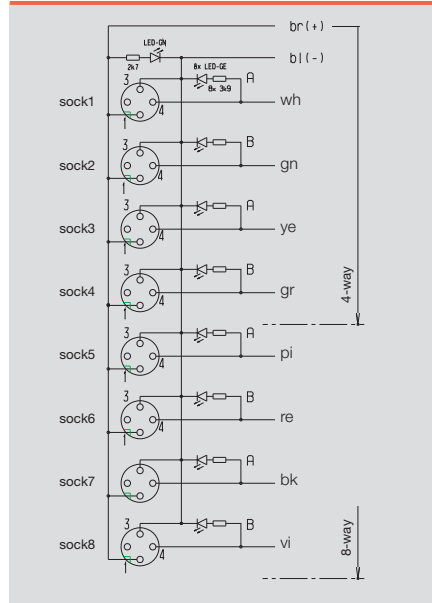


### Wiring diagram

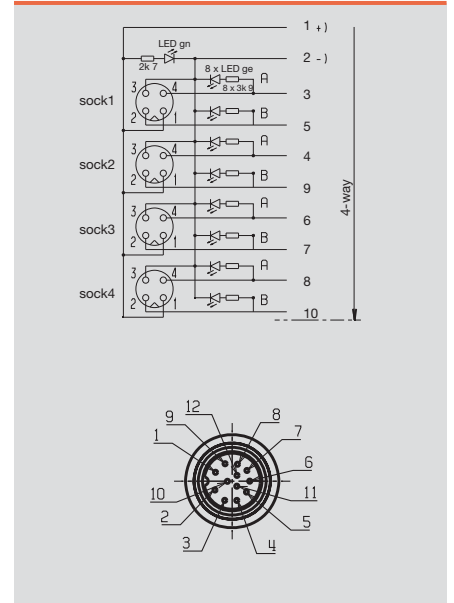

Line

SAI-4/8-S16

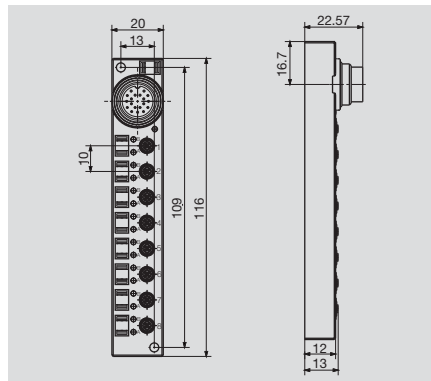

Ordering data


3-pole	4 channel
	8 channel
4-pole	4 channel
	8 channel
Note	

SAI-4/8-S16		M5
Type	Qty.	Order No.
SAI-4-S16 3P M5	1	1845890000
SAI-8-S16 3P M5	1	1845880000
SAI-4-S16 4P M5	1	1845870000
SAI-8-S16/19P 4P M5	1	1845860000
1845870000, 1845880000 and 1845890000 with M16 / 12-pole 1845860000 with M16 / 19-pole		

Technical data

Operating voltage	10...30 V
Current of continuous busbars	1 A
max. current-carrying capacity per slot	3 A
Total current	3 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	CuZn, nickel-plated
Base material of contacts	Au (Gold)
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

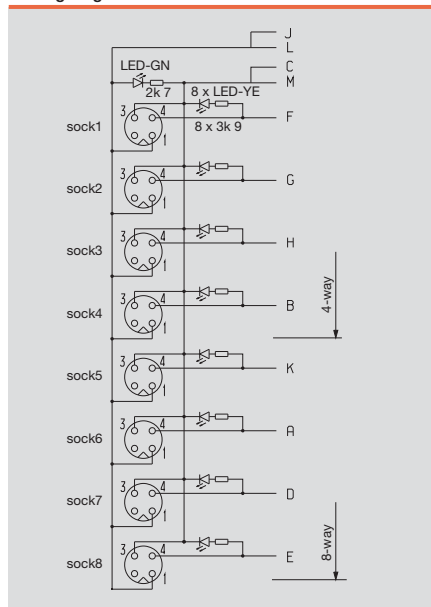

# SAI Ex i distributor for Ex i zone 1

## Hooded version with 4 plug-in slots



### SAI distributor for Ex i zone 1

Available for the first time: passive SAI distributors with M12 connection technology in IP 68 ingress protection classification for Ex i hazardous area applications.

SAI Ex i distributor certified for zone 1 of potentially explosive areas, even for G and D zones.

The SAI Ex i distributors are available with four or eight connections for simple connection of NAMUR sensors. Distribution boxes with costly certification are thus a thing of the past. These modules are suitable for process engineering, but also for “standard” machine applications. The versions are available with or without yellow LEDs.

## Hooded version with 8 plug-in slots



The distributors are provided with a removable connection hood. This detail also helps to reduce costs because only the defective bus cable needs to be replaced and not the entire distributor.

## SAI Ex i distributor for Ex i zone 22




### World first: SAI distributor for Ex i zone 22

In some areas of machine design only Ex i certified devices are permitted.

The wiring of these modules corresponds to that of standard SAI distributors. However, these components were specially developed, manufactured, checked and certified for zone 22 modules. All zone 22 modules are therefore provided with suitable printing.

**Hood version**

Zone 1

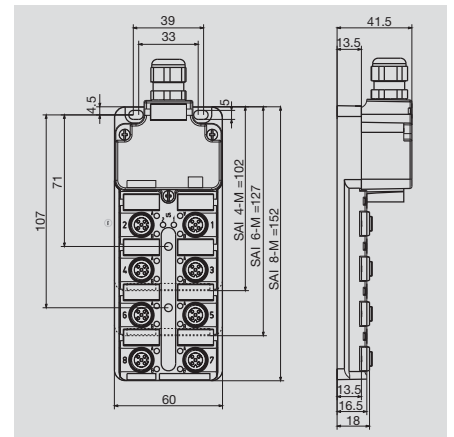

**Ordering data**

Complete modules	
	4 channel
	6 channel
	8 channel
Without initiator LED	4 channel
Without initiator LED	8 channel
<b>Note</b>	


SAI-4/8-M Ex i		4-pole	
Type	Qty.	Order No.	
SAI-4-M 4P Exi Z1 IL	1	1868360000	
SAI-8-M 4P Exi Z1 IL	1	1868370000	
SAI-4-M 4P Exi Z1 OL	1	1868350000	
SAI-8-M 4P Exi Z1 OL	1	1894380000	

SAI-4/8-M Ex ia		5-pole	
Type	Qty.	Order No.	
SAI-4-M 5P M12 Ex ia	1	1896050000	
SAI-6-M 5P M12 Ex ia	1	1896070000	
SAI-8-M 5P M12 Ex ia	1	1896090000	


**Technical data**

Operating voltage	10...30 V
Current of continuous busbars	100 mA
max. current-carrying capacity per slot	100 mA
Total current	2.3 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+40 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.1...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	

**Wiring diagram**

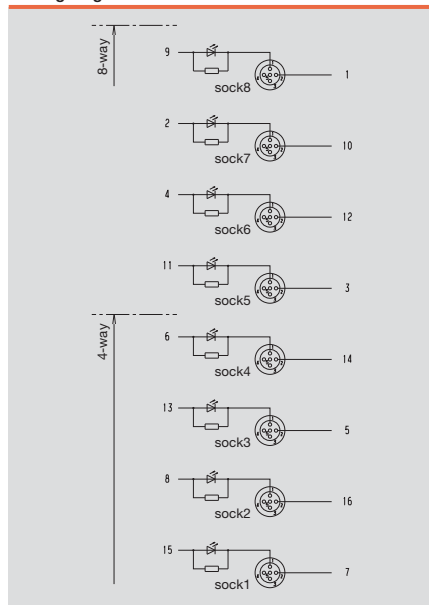


**Wiring diagram**

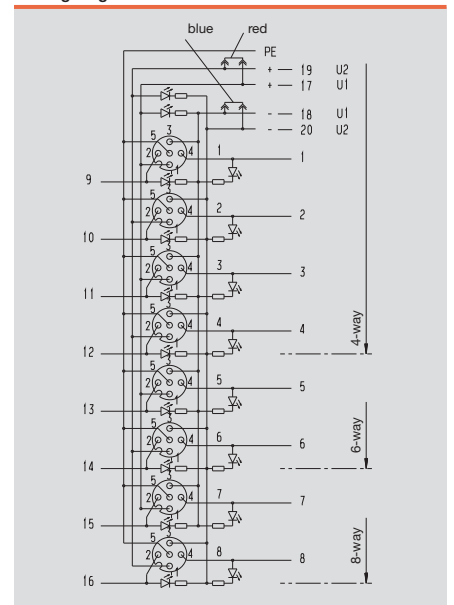

## M12 Ex i distributors

### Ex i distributor for the Ex i zone 22

### SAI-4/6/8-M

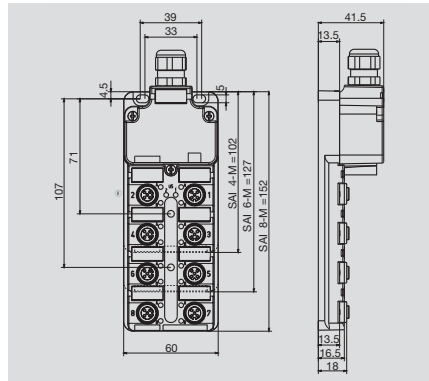

### Ordering data

Complete modules	
	4 channel
	6 channel
	8 channel
Note	


SAI-4/6/8-M		5-pole
Type	Qty.	Order No.
SAI-4-M 5P Ex Z22	1	1861850000
SAI-6-M 5P Ex Z22	1	1861840000
SAI-8-M 5P Ex Z22	1	1861530000

### Technical data

Operating voltage	10...30 V
Current of continuous busbars	100 mA
max. current-carrying capacity per slot	100 mA
Total current	2.3 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+80 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	0.1...1.5 mm <sup>2</sup>
Suitable for dragline cable (fixed cable connection)	

A higher current is allowed when using a lower voltage. A total capacity of 3W per plug-in station should not be exceeded.

### Wiring diagram

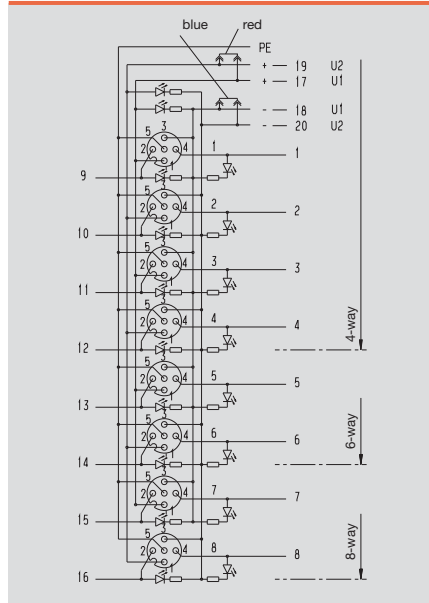

# M23 Connectors and cables

<b>M23 Connectors and cables</b>	Product Description: SAI M23 Connectors	H.2
	Contact assignment	H.7
	Technical data	H.8
	Overview	H.10
	M23 connector for signal transmission	H.12
	M23 connector for power transmission	H.18
	Moulded M23 cables	H.22
	SAI distributor M12 with M23	H.23
	SAI distributor M18 with M23	H.25
	Installation instructions – Signal connectors	H.26
	Installation instructions – Power connectors	H.31
	M23 connector	H.35

# SAI M23



## A comprehensive product line of connectors, distributors and cables

M23 connectors are mainly used for connecting electrical drives and servo-motors into industrial automation applications. The M23 connectors are very easy to handle and operate. In addition to the injection-moulded variants and the SAI distributors with M23 connectors, Weidmüller is now offering customisable versions and built in plugs.





**The M23 built in connector**

The M23 built in connector provides a custom fit solution for building directly into the device.



**M23 connectors for crimping**

M23 connectors are easy to handle and operate. This is supported by the type of crimping that is used.



**Robust metal housing**

The M23 connectors feature an extra robust design.



**Solutions for power and signals**

The extensive product line includes the key housing shapes, such as angled connectors, coupling connectors and device connectors.



**M23 connector for signal transmission**

Housings



**M23 connector for signal transmission**

Built in connector



**M23 connector for power transmission**

Housings



**M23 connector for power transmission**

Built-in connector



**Moulded M23 cables**



**SAI distributors**





# Product Description: SAI M23 Connectors

## Technology and requirements

The M23 connectors are mainly used for integrating electrical drives and servo motors into industrial automation facilities. The M23 designation is based on the thread diameter of the connector, as shown in Figures 1 and 2.

With their wide variety of inserts and housings, these connectors are equally suited for applications involving signal or power transmission. Applications set in harsh industrial environments place strict requirements on the connector. Much is demanded of the housing, the inner insert and the connector contact as well. Thermal loads, physical loads, and loads from the transmitted electrical power are commonplace. M23 connectors are capable of carrying a load of up to 250/630 V at 9/30 A.

The connectors must be resistant to the penetration of all particles and substances. They must also comply with the required class of IP protection. The material used for manufacture must be resistant to acid and alkaline solutions that may be used during cleaning or production processes. Also it must not be possible for residues to accumulate in the plug which could later contaminate the production flow. It must not be possible for the plug components to loosen due to vibration. In addition, the cable and connector must have EMC shielding for some applications. This keeps external interference from influencing the signals and it also prevents the transmitted signals in the cable from interfering with other cables or components. The standards and directives (such as the German or European standards) that are followed are basically only recommendations concerning the composition of the connector. A so-called "cold standard" exists for the M23 connectors.

## Variants and designs

The variants can be classified generally according to their outer design into either customisable types or plastic moulded connectors with pre connected cables. Both variants are available in male or female versions, and in straight or angled design. Different designs and inserts can be combined to fit the particular application so that an almost limitless variety of combinations is possible. The connector inserts are available in a variety of different pole counts and as either male or female versions. The pole counts also vary in that some contacts in the mating profile may have a larger cross-section than the others. Other types include the device connector variants which are used for contacting and connecting housings. These also come in a variety of designs. The metal alloy in use may differ depending on the particular type of application. For example, stainless steel is used for those variants that will be used in the food processing industry. Each connector is optionally available with EMC protection and a plastic surface.

## Customisable connectors

The customisable connectors are almost all manufactured from metal alloys. Variants with plastic housings or fitting nuts are rare and then used mostly for customer-specific solutions. Customisable connectors are made up of a housing, a plastic contact carrier, and the contacts themselves. The various housing types can be equipped with the corresponding contact carriers. The carriers differ in their number of poles and the arrangement of the poles. Different types of contacts may also be used within the contact carriers. The shape of the contacts is either male or female. There are also difference in the width, material, and connection system (such as soldered, crimped or screwed).

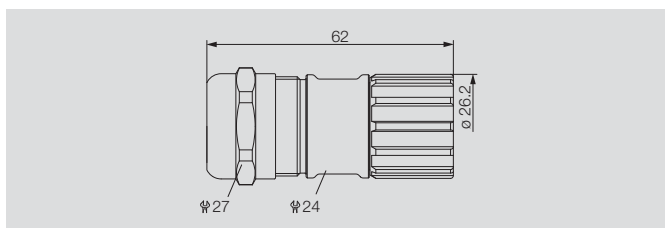


Figure 1: M23 cable connector

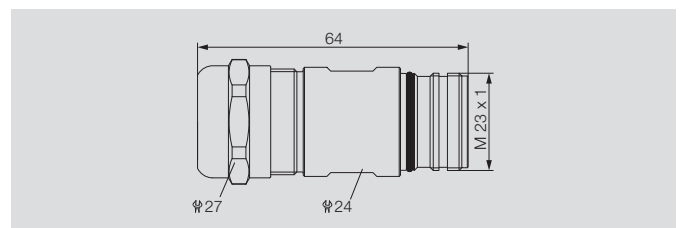


Figure 2: M23 coupling connector

This modular construction allows for a wide variety of combinations to fit any application type. Figure 3 shows the design and assembly of a M23 signal connector. Since the connector is usually put together in the field, the key requirement is that the connector is easy and reliable for the electrician to handle on-site. A good example of convenient handling is the integrated

EMC shielding. An improved shield connection results because the shielding can be connected in less steps and with fewer tools. The complete assembly process must be clear and concise, and should only take a few steps.

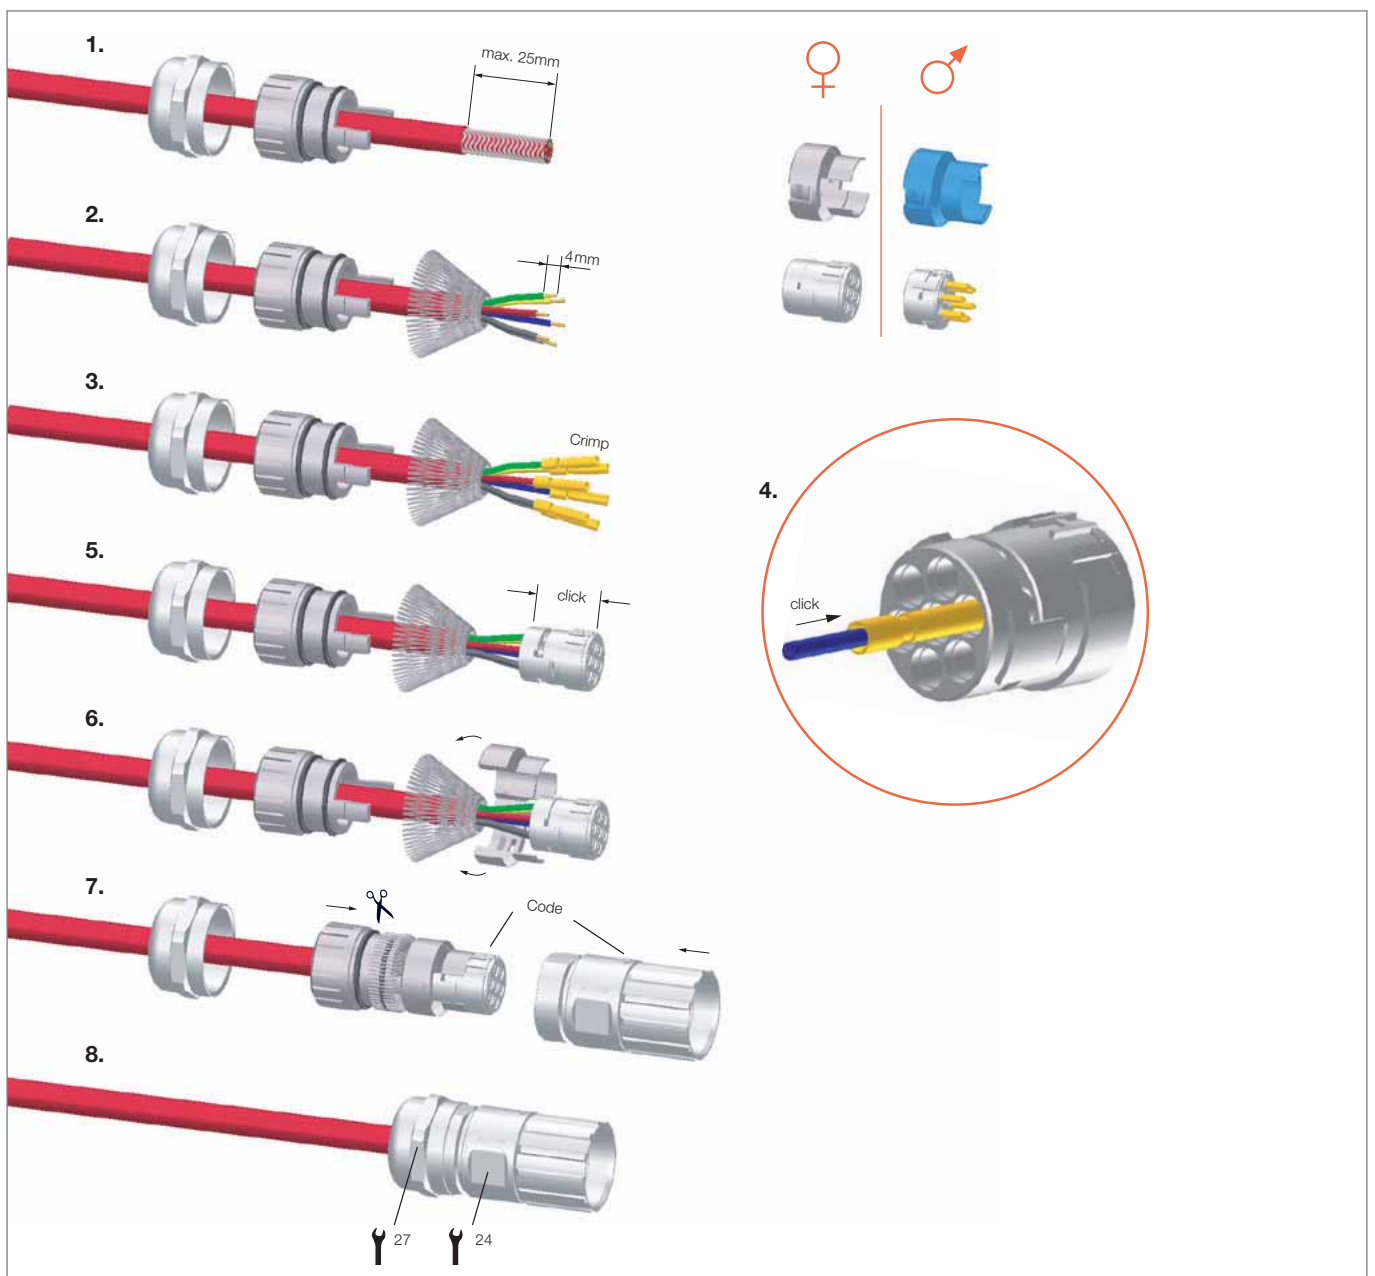


Figure 3: Design and assembly of an M23 connector

## Product Description: SAI M23 Connectors

### Plastic injection moulded connector with connected cable

The plastic injection moulded cables are cables that have already been fitted with connectors. First the cables are connected with the contacts and then these are mounted into the contact carrier. Next, plastic injection moulding is used to cover the cable and contact carrier with a plastic moulding. This ensures a highly stable and well sealed connector housing. The connector must be destroyed for it to be disconnected from its cable. The connector's outer form and material is arranged by a plastic processing tool.

The advantage of a moulded cable is that the connection between the cable and the connector has already been tested at



*Plastic injection-moulded M23 connector*

the production factory. The electrician need only adjust the length. Depending on the application, he may choose to use another connector on the open end or connect the individual cable wires directly (for example, to a terminal block). These advantages of this variant type includes the inexpensive assembly of large batches, the high degree of automation and minimal amount of material used. High reliability and an excellent seal are two additional advantages.

### Connector usage and application

M23 connectors are mainly used for integrating within machine and facility construction applications. These applications require connections with a long life span and high reliability. The failure of a single connector could lead to the failure of the entire production line. It's important to avoid facility outages caused by a connector malfunction, so the machine and facility construction industry relies on connectors with the advantages listed above. Both signals and power must be transferred in such applications. The connector and the cable must be able to withstand harsh industrial conditions. Cables may be under stress from constant motion, in particular for applications involving robotics or dragline chains. Special cables with a specific maximum

bending radius are used for such applications (for example, the bending radius may be 10d, i.e., ten times the cable diameter). When constructing a facility, a variety of connection scenarios are possible based on the particular conditions or adaptations on existing facilities. The length or configuration of the cable must be adapted to fit these conditions. If space is constricted, for instance, it may be necessary to replace a straight connector with an angled one.

Cables can be equipped with both a moulded (extruded) connector and a customizable connector. This ensures proper functionality while providing the flexibility to adapt to changing conditions on location. Safe connections can thus be established with any possible connector combination or at any protective class





*SAI distributor with M23 connector*

required. This gives the facility planner the safety he needs. And the electrician on-site can set up the facility properly because he has sufficient flexibility to adapt to uncertain conditions. For sensor systems, connectors with high pole counts are often used on SAI distributors. Individual sensors are connected to the distributors where the signals are then centralized. They are then transferred to the controller using a cable with an M23 connector. The most common use for transmitting power involves the connection of servo-motors in machines. M23 connectors are used for this purpose because of their sturdy and compact design and their high power-carrying capacities. Because of the size of the M23 connector, it can also be used in a hybrid version for transmitting both signals and power. The signal-carrying contacts are then shielded within the connector to ensure that the transmitted voltages do not interfere with the signals.

# Contact assignment SAI M23



## M23 12- and 19-pole, for SAI distributors and cables

### 12-pole



Pole	Colour code	Plug-in station	Contact M12
1	white	1	4
2	green	2	4
3	yellow	3	4
4	grey	4	4
5	pink	5	4
6	red	6	4
7	black	7	4
8	violet	8	4
9	blue (-)	1-8	3
10	blue (-)	1-8	3
11	brown (+)	1-8	1
12	green-yellow (PE)	1-8	5

### 19-pole



Pole	Colour code	Plug-in station	Contact M12
1	violet	8	4
2	red	6	4
3	grey	4	4
4	red/blue	2	2
5	green	2	4
7	grey/pink	1	2
8	white/green	3	2
9	white/yellow	5	2
10	white/grey	7	2
11	black	7	4
13	yellow/brown	6	2
14	brown/green	4	2
15	white	1	4
16	yellow	3	4
17	pink	5	4
18	grey/brown	8	2
6	blue (-)	1-8	3
12	green-yellow (PE)	1-8	5
19	brown (+)	1-8	1

### Description code

Housing	
G	Inner thread
K	Outer thread
W	angled
S	Signal connectors
L	Power connectors
7/12	Cable passage
Inserts	
BE	Female insert
SE	Male insert
4/4	Number of contacts, here for 4 sensor and 4 power contacts
Contacts	
KBC	Female contact
Wire cross-section	
0.08/0.56	0.08 mm <sup>2</sup> – 0.56 mm <sup>2</sup>
0.25/1.0	0.25 mm <sup>2</sup> – 1.0 mm <sup>2</sup>
0.75/2.5	0.75 mm <sup>2</sup> – 2.5 mm <sup>2</sup>
Moulded M23 cables	
SAIS	Cable with male plug
SAIB	Cable with female plug
12p	12-pole
19p	19-pole
AN	angled
ST	straight
...M	Length in metres

### Contact partitioning

Signal connectors			
Type	1 mm contact	1.5 mm contact	2 mm contact
6-pole			6
7-pole			7
9-pole	8		1
12-pole	12		
16-pole	16		
17-pole	17		
19-pole	16	3	
Power connectors			
Type	1 mm contact	1.5 mm contact	2 mm contact
6-pole			6
4+4-pole	4		4

Contacts for signal plugs cannot be used in inserts for power plugs and vice versa.

## Technical data


## Signal connectors

## Technical data

Mechanical data										
Housing		Copper-Zinc alloy Die Casting								
Housing surface		Nickel plated brass other surface upon request								
Inserts (for contacts)		Thermoplastic Polyamid PA 6 (Nylon 6/6), PBT / Fire protection class V-0								
Contacts		Brass Alloy								
Contact surface at point of contact		Nickel and gold plated (0.25 µm Au)								
Minimum mating cycles		> 1000								
Seals / O-Rings		Buna-N standard optional Viton® (Viton is a registered trademark of DuPont)								
Temperature range		-40 °C – 125 °C								
Type of contacts		Crimp, solder, dip-solder (PCB)								
Protection		IP 67 / IP 69 K per EN 60 529 (connected)								
Cable diameter range		3 – 17 mm								
Electrical Data										
Number of positions		6	7	9	12	16	17	19		
Number of contacts		6	7	8	1	12	16	17	16	3
Contact-Ø	mm	2	2	1	2	1	1	1	1	1.5
Nominal current	A	20	20	8	20	8	8	8	8	10
Nominal voltage at pollution degree 2	V~	630	630	500	500	400	400	400	320	
Nominal voltage at pollution degree 3	V~	300	300	200	200	160	160	160	100	
Test voltage	V~	2500	2500	2500	2500	1500	1500	1500	1500	
Insulation resistance	MΩ	> 10 <sup>10</sup>	> 10 <sup>10</sup>	> 10 <sup>10</sup>	> 10 <sup>10</sup>	> 10 <sup>6</sup>	> 10 <sup>6</sup>	> 10 <sup>6</sup>	> 10 <sup>6</sup>	
Max. contact resistance	mΩ	3	3	3	3	3	3	3	3	

## Derating curve

Straight Connectors male + female M 23, 12-pole,  
wires 12 x AWG17

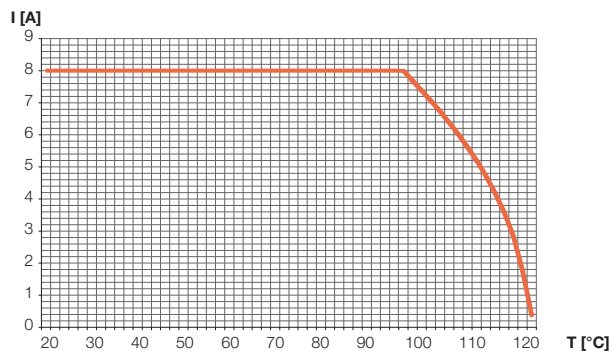

# Power connectors


## Technical data

Mechanical data	
Housing	Copper-Zinc alloy Die Casting
Housing surface	Nickel plated brass other surface upon request
Inserts (for contacts)	Thermoplastic Polyamid PA 6 (Nylon 6/6), PBT / Fire protection class V-0
Contacts	Brass Alloy
Contact surface at point of contact	Nickel and gold plated (0.25 µm Au)
Minimum mating cycles	> 1000
Seals / O-Rings	Buna-N standard optional Viton® (Viton is a registered trademark of DuPont)
Temperature range	-40 °C – 125 °C
Type of contacts	Crimp
Protection	IP 67 / IP 69 K per EN 60 529 (connected)
Cable diameter range	7 – 17 mm

Electrical Data			
		5 + PE	4/4
Number of positions		5 + PE	4/4
Number of contacts		6	4      4
Contact-Ø	mm	2	1      2
Nominal current	A	28	8      28
Nominal voltage at pollution degree 2	V~	800	300      800
Nominal voltage at pollution degree 3	V~	600	300      600
Test voltage	V~	4000	2500      4000
Insulation resistance	MΩ	> 10 <sup>13</sup>	> 10 <sup>13</sup>
Max. Max. contact resistance	mΩ	3	3

## Derating curve



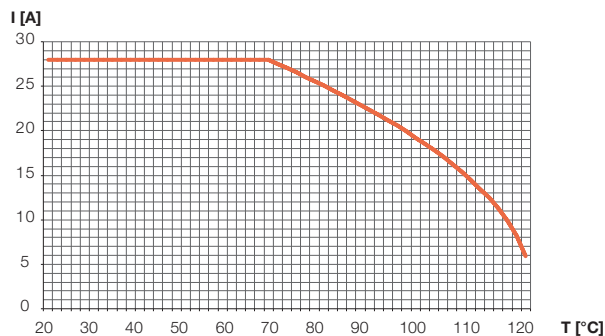























Straight connectors male + female M 23, 5 + PE, wires 5 x AWG12






















## Overview

# M23 connector for signal transmission

All customizable connectors can also be assembled together with shielded cables.

Housing	Contact inserts*	Contacts
Cable connector 	6-pole 	Crimp pin 1 mm rotated 0.08 – 0.56 mm <sup>2</sup> 
Coupling connector 	7-pole 	Crimp pin 1 mm rotated 0.14 – 1.00 mm <sup>2</sup> 
Angled connector 	9-pole 	Crimp pin 1 mm rotated 1.00 – 1.50 mm <sup>2</sup> 
Angled connector (coupling) 	12-pole 	Crimp socket 1 mm rotated 0.08 – 0.56 mm <sup>2</sup> 
Device connector (front panel) 	16-pole 	Crimp socket 1 mm rotated 0.14 – 1.00 mm <sup>2</sup> 
Device connector with knurled nut 	17-pole 	Crimp socket 1 mm rotated 1.00 – 1.50 mm <sup>2</sup> 
Device connector (single-hole mount) 	19-pole 	Crimp pin 2 mm rotated 0.14 – 0.56 mm <sup>2</sup> 
Device connector (angled) 		Crimp socket 2 mm rotated 0.56 – 1.00 mm <sup>2</sup> 
Device connector (back panel) 		Crimp pin 2 mm rotated 0.75 – 2.50 mm <sup>2</sup> 
		Crimp socket 2 mm rotated 0.75 – 2.50 mm <sup>2</sup> 
	* Solder and crimp inserts	

# M23 connector for power transmission

Housing	Contact inserts*	Contacts
Cable connector 	6 x Male 2 mm 	Crimp pin 1 mm turned 0.25 – 1.00 mm <sup>2</sup> 
Coupling connector 	6 x Socket 2 mm 	Crimp socket 1 mm turned 0.25 – 1.00 mm <sup>2</sup> 
Angled connector 	4 x Male 1 mm 4 x Male 2 mm 	Crimp pin 2 mm turned 0.75 – 2.50 mm <sup>2</sup> 
Angled connector (coupling) 	4 x Socket 1 mm 4 x Socket 2 mm 	Crimp pin 2 mm turned 2.50 – 4.00 mm <sup>2</sup> 
Device connector (front panel) 		Crimp socket 2 mm turned 0.75 – 2.50 mm <sup>2</sup> 
Device connector with knurled nut 		Crimp socket 2 mm turned 2.50 – 4.00 mm <sup>2</sup> 
Device connector (back panel) 		
Device connector (back panel) 		
Device connector (angled) 		
	* Crimp inserts	

## Moulded M23 cables

Housing
Cable connector
Coupling connector
Angled connector
Angled connector (coupling)






**M23 connector for signal transmission**


**Housing**

For cables with outer diameter of: 7–12 mm

**Cable connector**

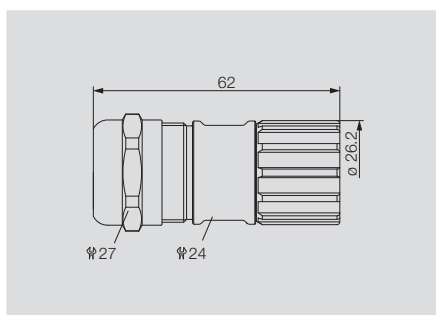

**Coupling connector**

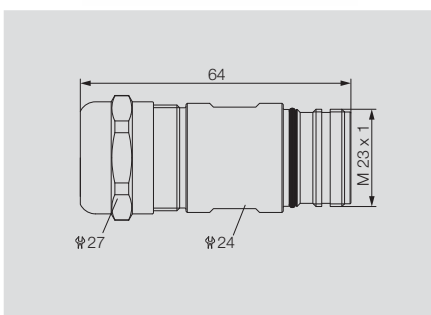


**Ordering data**

Type	Qty.	Order No.
SAI-M23-GS-7/12	1	1995840000

**Ordering data**

Type	Qty.	Order No.
SAI-M23-KS-7/12	1	1169900000


**Angled connector**

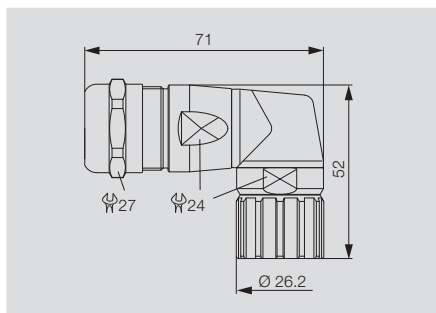

**Ordering data**

Type	Qty.	Order No.
SAIL-M23-GS-S-7/12	1	1169920000

**Angled connector (coupling)**

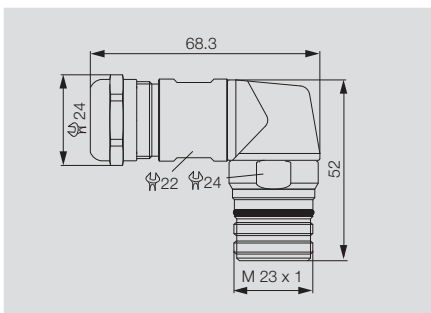


**Ordering data**

Type	Qty.	Order No.
SAIL-M23-KSW-7/12	1	1169930000

**Built-in connector**

With 3.2-mm mounting holes


**Device connector (front panel)**

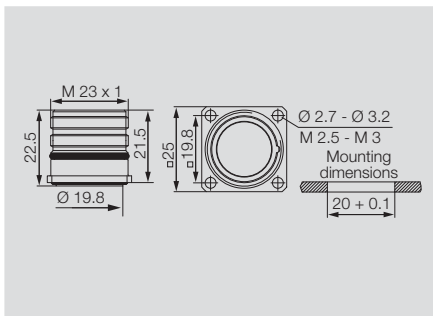

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-S-VW	1	1169940000


**Device connector with knurled nut**

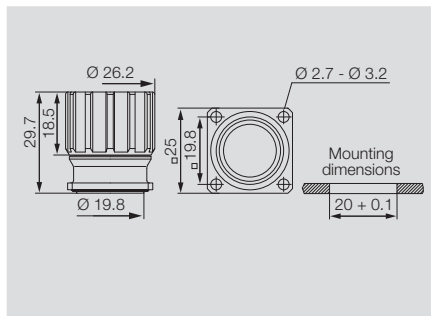

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-S-RM	1	1169950000

**Device connector (single-hole mount)**

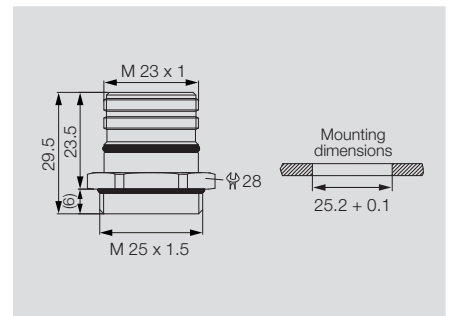


**Ordering data**

Type	Qty.	Order No.
SAIE-M23-S-EM	1	1169970000

H


**Device connector (angled)**

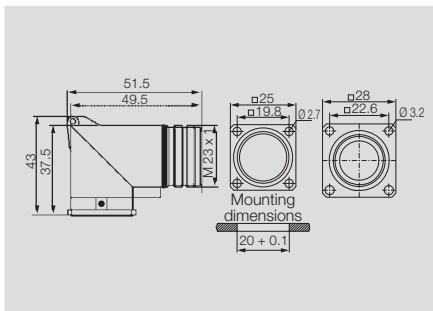

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-S-W	1	1169980000

**Device connector (back panel)**

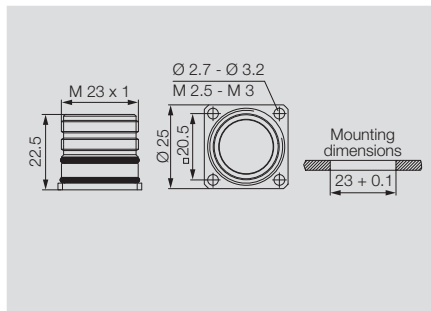



**Ordering data**

Type	Qty.	Order No.
SAIE-M23-S-HW	1	1169990000


M23 connector for signal transmission

Inserts

6-pole

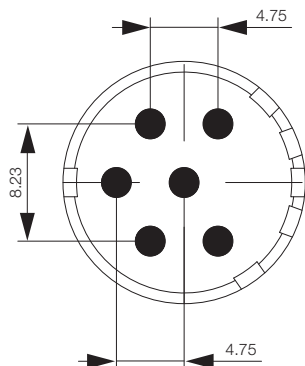

Male insert on plug side





Female insert on plug side


Ordering data

	Type	Qty.	Order No.
Insert 6-pole male	SAI-M23-SE-6	1	1170000000
Insert 6-pole socket	SAI-M23-BE-6	1	1170020000

9-pole

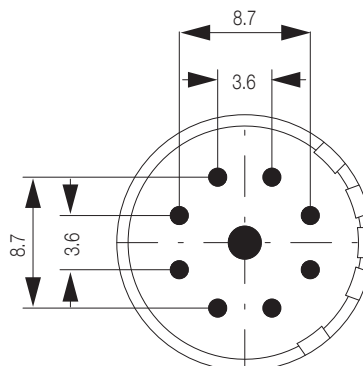

Male insert on plug side





Female insert on plug side


Ordering data

	Type	Qty.	Order No.
Insert 9-pole male	SAI-M23-SE-9	1	1170050000
Insert 9-pole socket	SAI-M23-BE-9	1	1170060000

7-pole

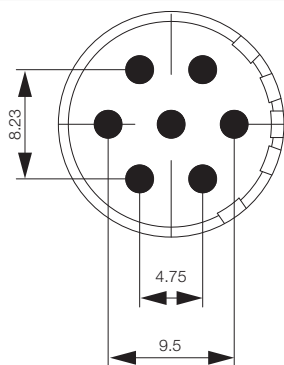

Male insert on plug side





Female insert on plug side


Ordering data

	Type	Qty.	Order No.
Insert 7-pole male	SAI-M23-SE-7	1	1170030000
Insert 7-pole socket	SAI-M23-BE-7	1	1170040000

12-pole

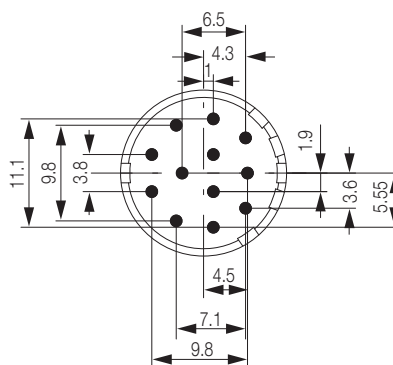

Male insert on plug side





Female insert on plug side


Ordering data

	Type	Qty.	Order No.
Insert 12-pole male	SAI-M23-SE-12	1	1170070000
Insert 12-pole socket	SAI-M23-BE-12	1	1995850000

16-pole

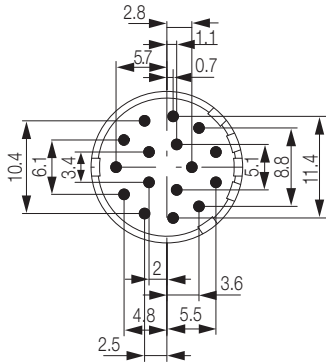

Male insert on plug side





Female insert on plug side


Ordering data

	Type	Qty.	Order No.
Insert 16-pole male	SAI-M23-SE-16	1	1170080000
Insert 16-pole socket	SAI-M23-BE-16	1	1170090000

19-pole

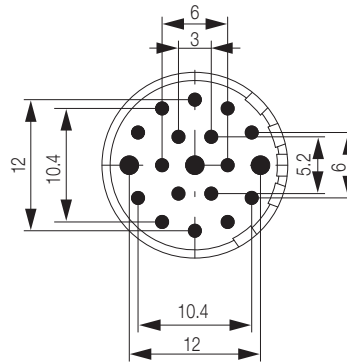

Male insert on plug side





Female insert on plug side


Ordering data

	Type	Qty.	Order No.
Insert 19-pole male	SAI-M23-SE-19	1	1170120000
Insert 19-pole socket	SAI-M23-BE-19	1	1170130000

17-pole

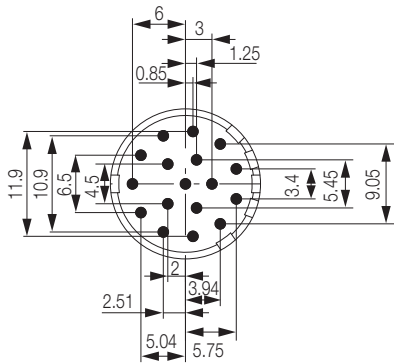

Male insert on plug side



Female insert on plug side

Ordering data


	Type	Qty.	Order No.
Insert 17-pole male	SAI-M23-SE-17	1	1170100000
Insert 17-pole socket	SAI-M23-BE-17	1	1170110000

## M23 connector for signal transmission


## Contacts

## Male, 1 mm

0.08-0.56



0.14-1.00




1.00-1.50



## Female, 1 mm


0.08-0.56



0.34-1.00




1.00-1.50



## Male, 1.5 mm

0.14-1.00




## Female, 1.5 mm

0.14-0.56



0.56-1.00



## Ordering data

	Type	Qty.	Order No.
1.0 mm Male (0.08-0.56)	SAI-M23-KSC-0.08/0.56	50	1170140000
1.0 mm Male (0.14-1.00)	SAI-M23-KSC-0.14/1.00	50	1170150000
1.0 mm Male (1.00-1.50)	SAI-M23-KSC-1.00-1.5	50	1170170000

## Ordering data

	Type	Qty.	Order No.
1.0 mm Socket (0.08-0.56)	SAI-M23-KBC-0.08/0.56	50	1995860000
1.0 mm Socket (0.34-1.00)	SAI-M23-KBC-0.34/1.00	50	1170180000
1.0 mm Male (1.00-1.50)	SAI-M23-KBC-1.00-1.5	50	1170210000

## Ordering data


	Type	Qty.	Order No.
1.5 mm Male (0.14-1.00)	SAI-M23-KSC-1.5-0.14-1	50	1170220000

## Ordering data

	Type	Qty.	Order No.
1.5 mm Socket (0.14-0.56)	SAI-M23-KBC-1.5-.14-.56	50	1170230000
1.5 mm Socket (0.56-1.00)	SAI-M23-KBC-1.5-.56-1.0	50	1170240000

**Male, 2 mm**

0.75-2.00




**Ordering data**

	Type	Qty.	Order No.
2.0 mm Male (0.75-2.00)	SAI-M23-KSC-2-0.75-2.00	50	1170250000

**Female, 2 mm**

0.75-2.00



**Ordering data**

	Type	Qty.	Order No.
2.0 mm Socket (0.75-2.00)	SAI-M23-KBC-2-0.75-2.00	50	1170260000

**Technical data**


Number of positions	6	7	9	12	16	17	19			
Number of contacts	6	7	8	1	12	16	17	16	3	
Contact-Ø	mm	2	2	1	2	1	1	1	1	1.5

## M23 connector for power transmission


### Housing

For cables with outer diameter of: 7–12 mm

#### Cable connector

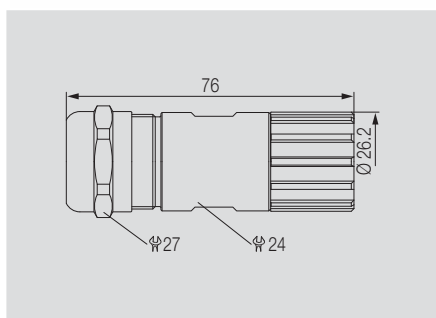

#### Coupling connector

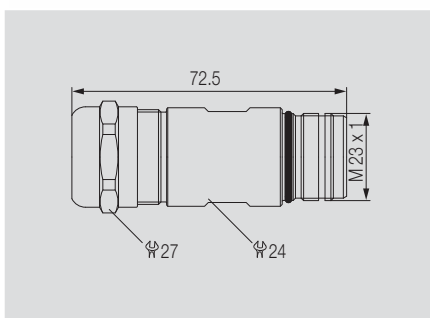


#### Ordering data

Type	Qty.	Order No.
SAI-M23-GS-L-7/12	1	1995800000

#### Ordering data

Type	Qty.	Order No.
SAI-M23-KS-L-7/12	1	1170270000


#### Angled connector

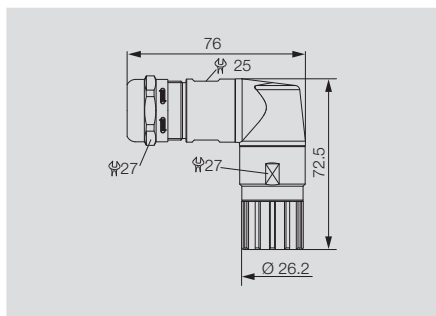

#### Ordering data

Type	Qty.	Order No.
SAIL-M23-GSW-L-7/12	1	1170280000

#### Angled connector (coupling)

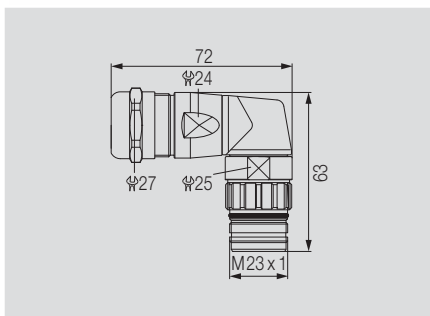


#### Ordering data

Type	Qty.	Order No.
SAIL-M23-KSW-L-7/12	1	1170290000

**Built-in connector**

With 3.2-mm mounting holes


**Device connector (front panel)**

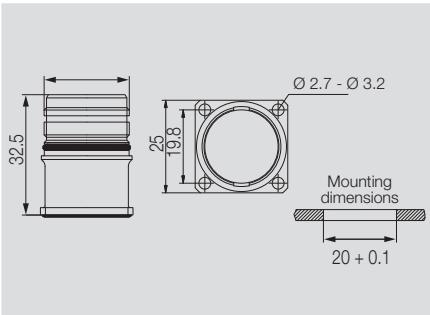

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-L-VW	1	1170300000


**Device connector with knurled nut**

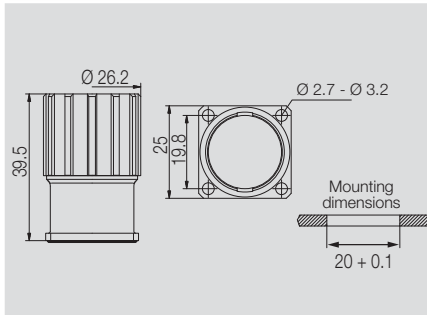

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-L-RM	1	1170310000


**Device connector (single-hole mount)**

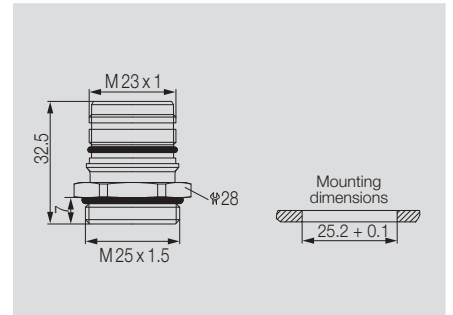

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-L-EM	1	1170320000


**Device connector (angled)**

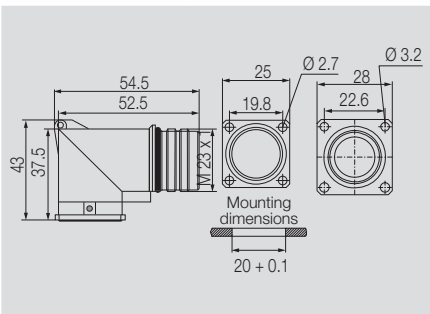

**Ordering data**

Type	Qty.	Order No.
SAIE-M23-L-W	1	1170330000

**Device connector (back panel)**

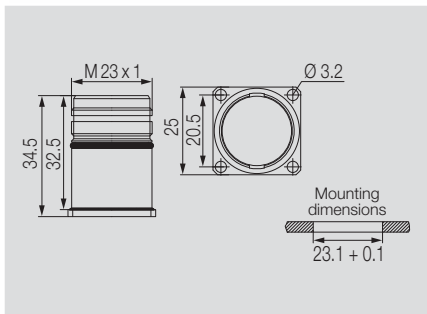

**Ordering data**



Type	Qty.	Order No.
SAIE-M23-L-HW	1	1170340000




M23 connector for power transmission

Inserts

5 + PE

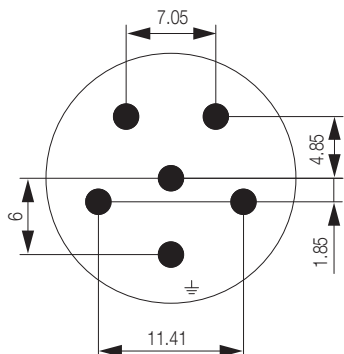

6 times male, 2 mm





6 times female, 2 mm


Ordering data

	Type	Qty.	Order No.
6 times male, 2 mm	SAI-M23-SE-L-6	1	1170350000
6 times female, 2 mm	SAI-M23-BE-L-6	1	1170370000

4/4

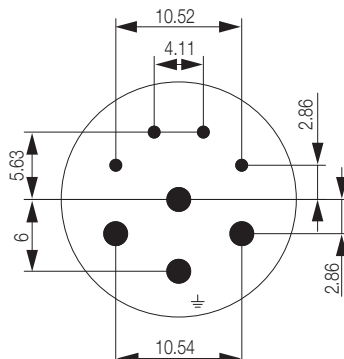

4 times 1-mm male and 4 times 2-mm male



4 times 1-mm female and 4 times 2-mm female

Ordering data

	Type	Qty.	Order No.
4 times 1-mm male and 4 times 2-mm male	SAI-M23-SE-L-4/4	1	1170380000
4 times 1-mm female and 4 times 2-mm female	SAI-M23-BE-L-4/4	1	1995810000

Contacts

Male, 1 mm

0.25 - 1.00




Ordering data

	Type	Qty.	Order No.
1 mm Male (0.25-1.00)	SAI-M23-KSC-0,25-1.0	50	1170390000

Female, 1 mm

0.25 - 1.00




Ordering data

	Type	Qty.	Order No.
1 mm Socket (0.25-1.00)	SAI-M23-KBC-0,25-1.0	50	1995830000

Male, 2 mm


0.75 - 2.5



Ordering data

	Type	Qty.	Order No.
2 mm Male (0.75-2.5)	SAI-M23-KSC-L-0,75-2.5	50	1170400000


2.5 - 4.00



2 mm Male (2.5-4.00)	SAI-M23-KSC-L-2,5-4.0	50	1170410000
----------------------	-----------------------	----	------------

Female, 2 mm


0.75 - 2.5



Ordering data

	Type	Qty.	Order No.
2 mm Socket (0.75-2.5)	SAI-M23-KBC-L-0,75-2.5	50	1995820000

2.5 - 4.00





2 mm Socket (2.5-4.00)	SAI-M23-KBC-L-2,5-4.0	50	1170420000
------------------------	-----------------------	----	------------

Technical data

Number of positions	5 + PE	4/4	
Number of contacts	6	4	4
Contact-Ø	mm	2	2

Moulded M23 cables

M23 cables

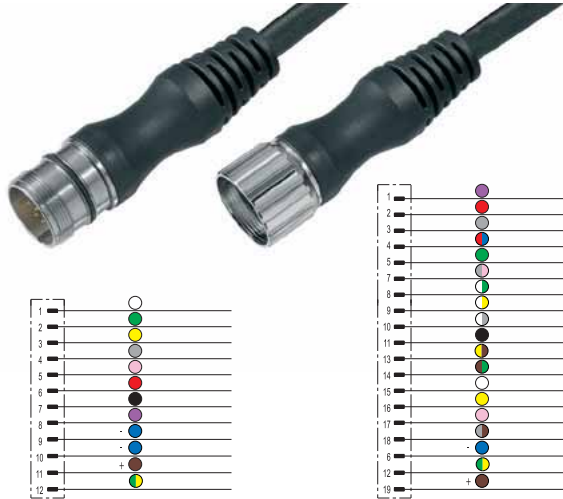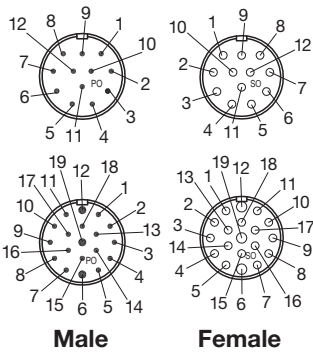

Ordering data

<b>Male, straight</b>	1 m
<b>Male, angled</b>	1 m
<b>Female, straight</b>	1 m
<b>Female, angled</b>	1 m
<b>Note</b>	

12-pole

Type	Order No.
SAIS-M23-12P-AN-1,0M	1906290100
SAIS-M23-12P-ST-1,0M	1906280100
SAIB-M23-12P-AN-1,0M	1877440100
SAIB-M23-12P-ST-1,0M	1886440100

ST = straight  
AN = 90° elbow

19-pole

Type	Order No.
SAIS-M23-19P-AN-1,0M	1818090100
SAIS-M23-19P-ST-1,0M	1818160100
SAIB-M23-19P-AN-1,0M	1818140100
SAIB-M23-19P-ST-1,0M	1818180100

Other versions on request

Standard cable lengths


All cables listed under the ordering data have a length of 1.5 metres. The last four ordering digits must be changed when ordering other standard cable lengths.	1.5 m	xxxxxx0150
	3.0 m	xxxxxx0300
	5.0 m	xxxxxx0500
	10.0 m	xxxxxx1000

Technical data


Rated current	8 A
Protection class	IP 67
Core cross-section	0.75 mm <sup>2</sup>
Contact surface	gold-plated
Temperature range of housing	-25...+85 °C
Rated voltage	150 V
(acc. to VDE standard 0110 ISO group C)	

Chapter W includes additional technical specifications for the cable

Dimensioned drawing

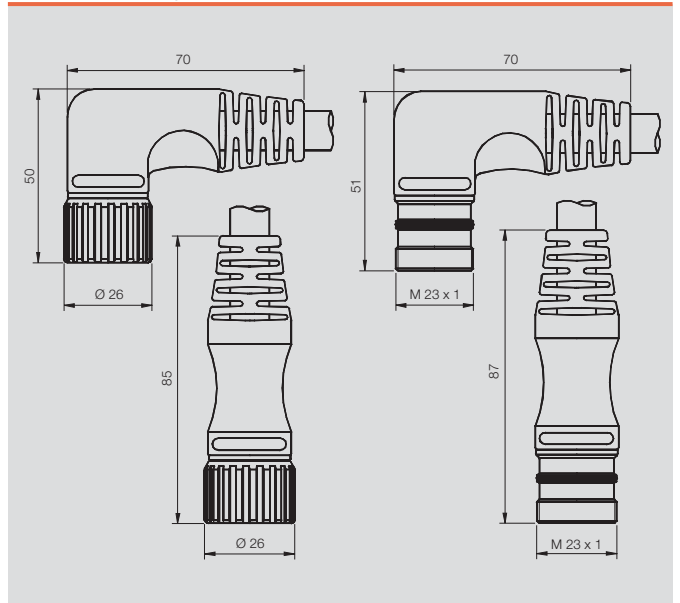

with M23 outlet

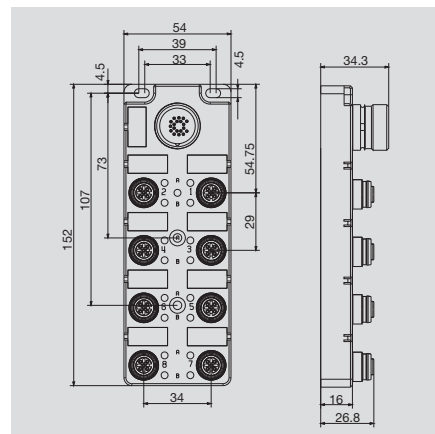

Ordering data

Complete modules	
	4 channel
	8 channel
Note	

SAI-4/8-S

4-pole

Type	Qty.	Order No.
SAI-4-S 4P FC	1	1847960000
SAI-8-S 4P FC	1	1847920000
Other versions on request		

SAI-4/8-S


5-pole

Type	Qty.	Order No.
SAI-4-S 5P FC	1	1847970000
SAI-8-S 5P FC	1	1848040000
Other versions on request		


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	9 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickel- gold-plated
screw socket	CuZn, nickel- plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

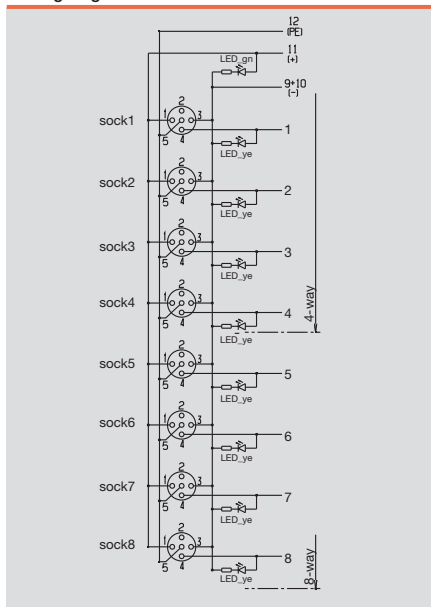


Wiring diagram

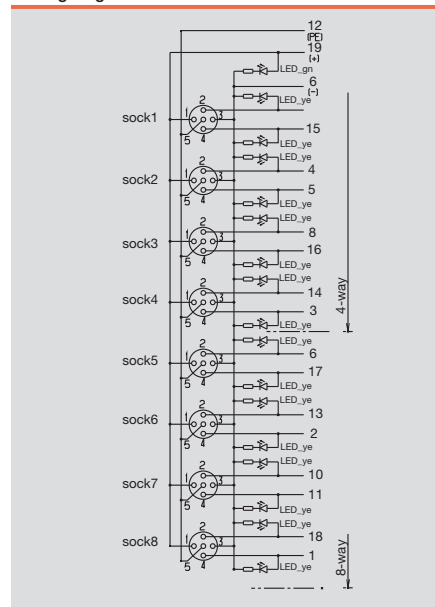

SAI distributor M12 with M23

with M23 outlet on front

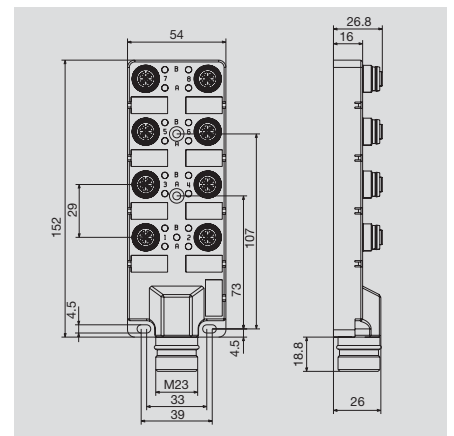

Ordering data

Complete modules	
	4 channel
	8 channel
Note	

SAI-4/8-SH

4-pole

Type	Qty.	Order No.
SAI-4-SH 4P FC	1	1859110000
SAI-8-SH 4P FC	1	1859120000

SAI-4/8-SH


5-pole

Type	Qty.	Order No.
SAI-4-SH 5P FC	1	1859130000
SAI-8-SH 5P FC	1	1859140000


Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	4 A
Total current	9 A
Pollution severity	3
Protection class	IP 67
Ambient temperature range	-25...+80 °C
Housing main material	PA 6 GF
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickel- plated
screw socket	CuZn, nickel- plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	

Wiring diagram

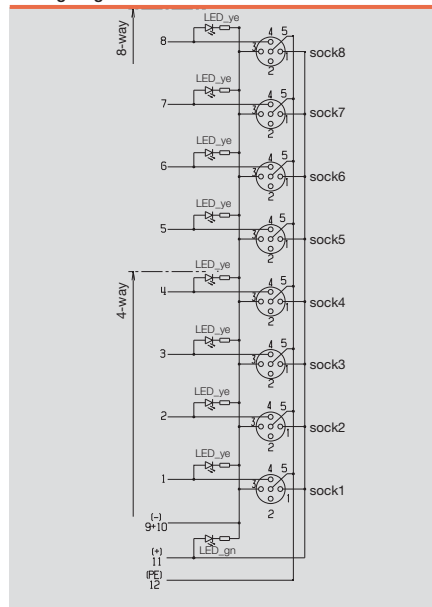


Wiring diagram

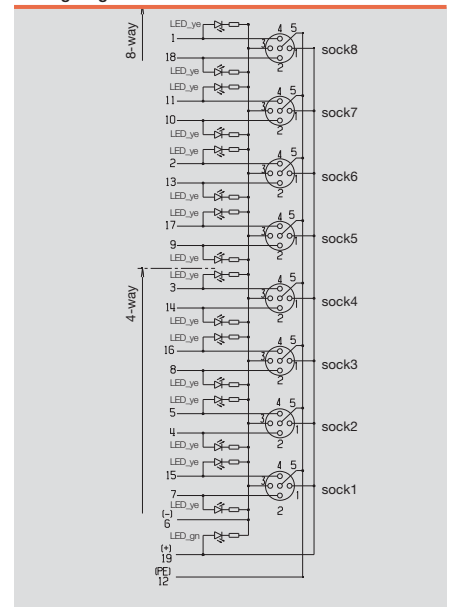

With M23/ M16 outlet

## SAI-4/8-M23

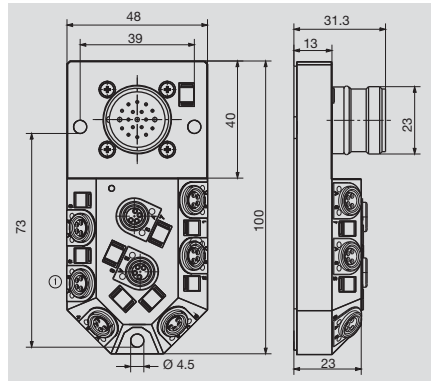

## Ordering data

3-pole	8 channel
4-pole	4 channel
	8 channel
<b>Note</b>	

## SAI-4/8-M23


## M23

Type	Qty.	Order No.
SAI-4-M23 4P M8	1	1784660000
SAI-8-M23 4P M8	1	1784650000
Other versions on request		


## Technical data

Operating voltage	10...30 V
Current of continuous busbars	2 A
max. current-carrying capacity per slot	2 A
Total current	8 A
Pollution severity	3
Protection class	IP 68
Ambient temperature range	-20...+90 °C
Housing main material	Pocan
Contact carrier material	PBT UL 94 V0
Base material of contacts	CuZn, pre-nickeled, gold-plated
screw socket	CuZn, nickel-plated
Housing colour	grey, RAL 7032
Flammability class UL 94	V-0
Clamping range of hood-version	
Suitable for dragline cable (fixed cable connection)	


## Wiring diagram

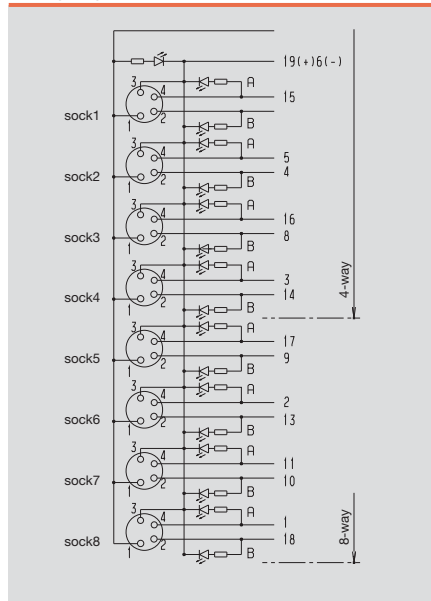

# Cable connector

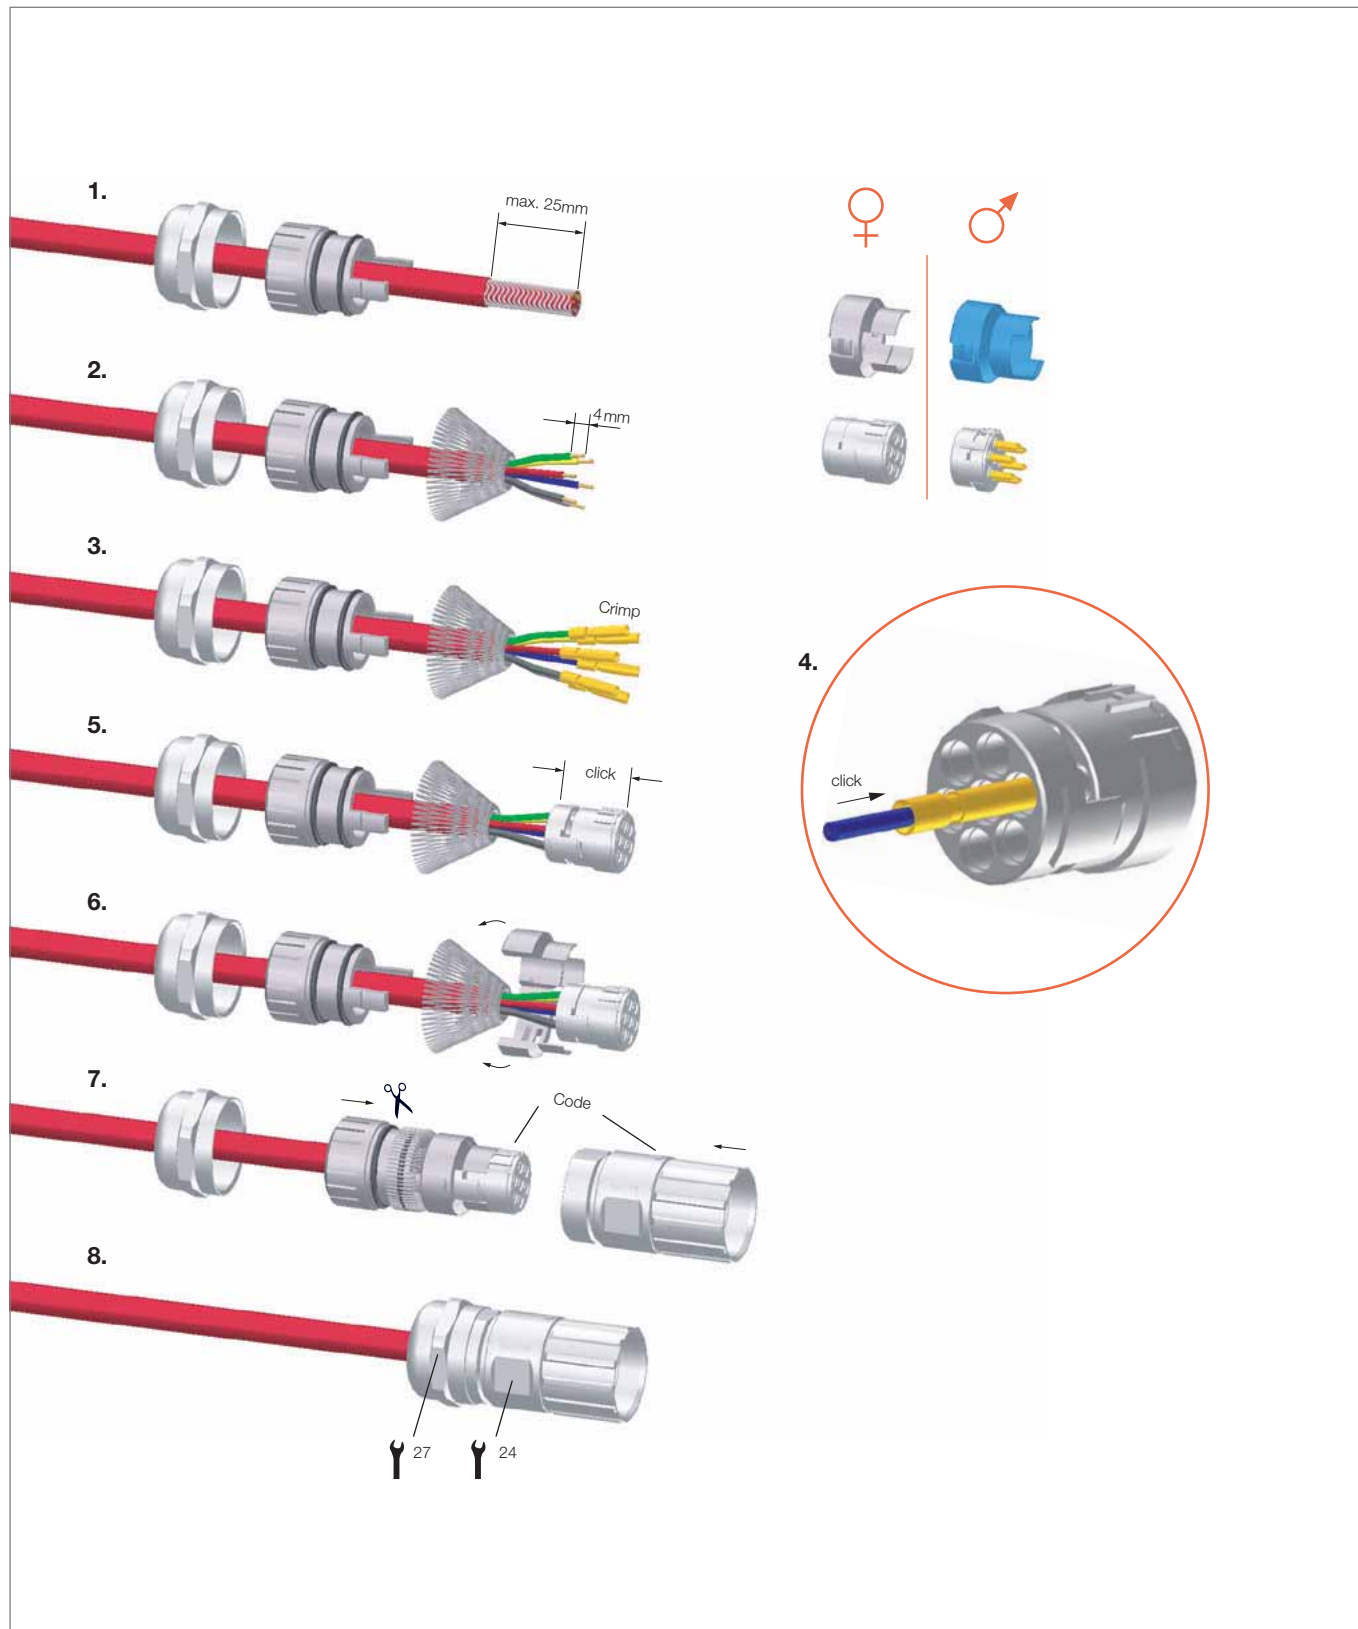


# Angled connector

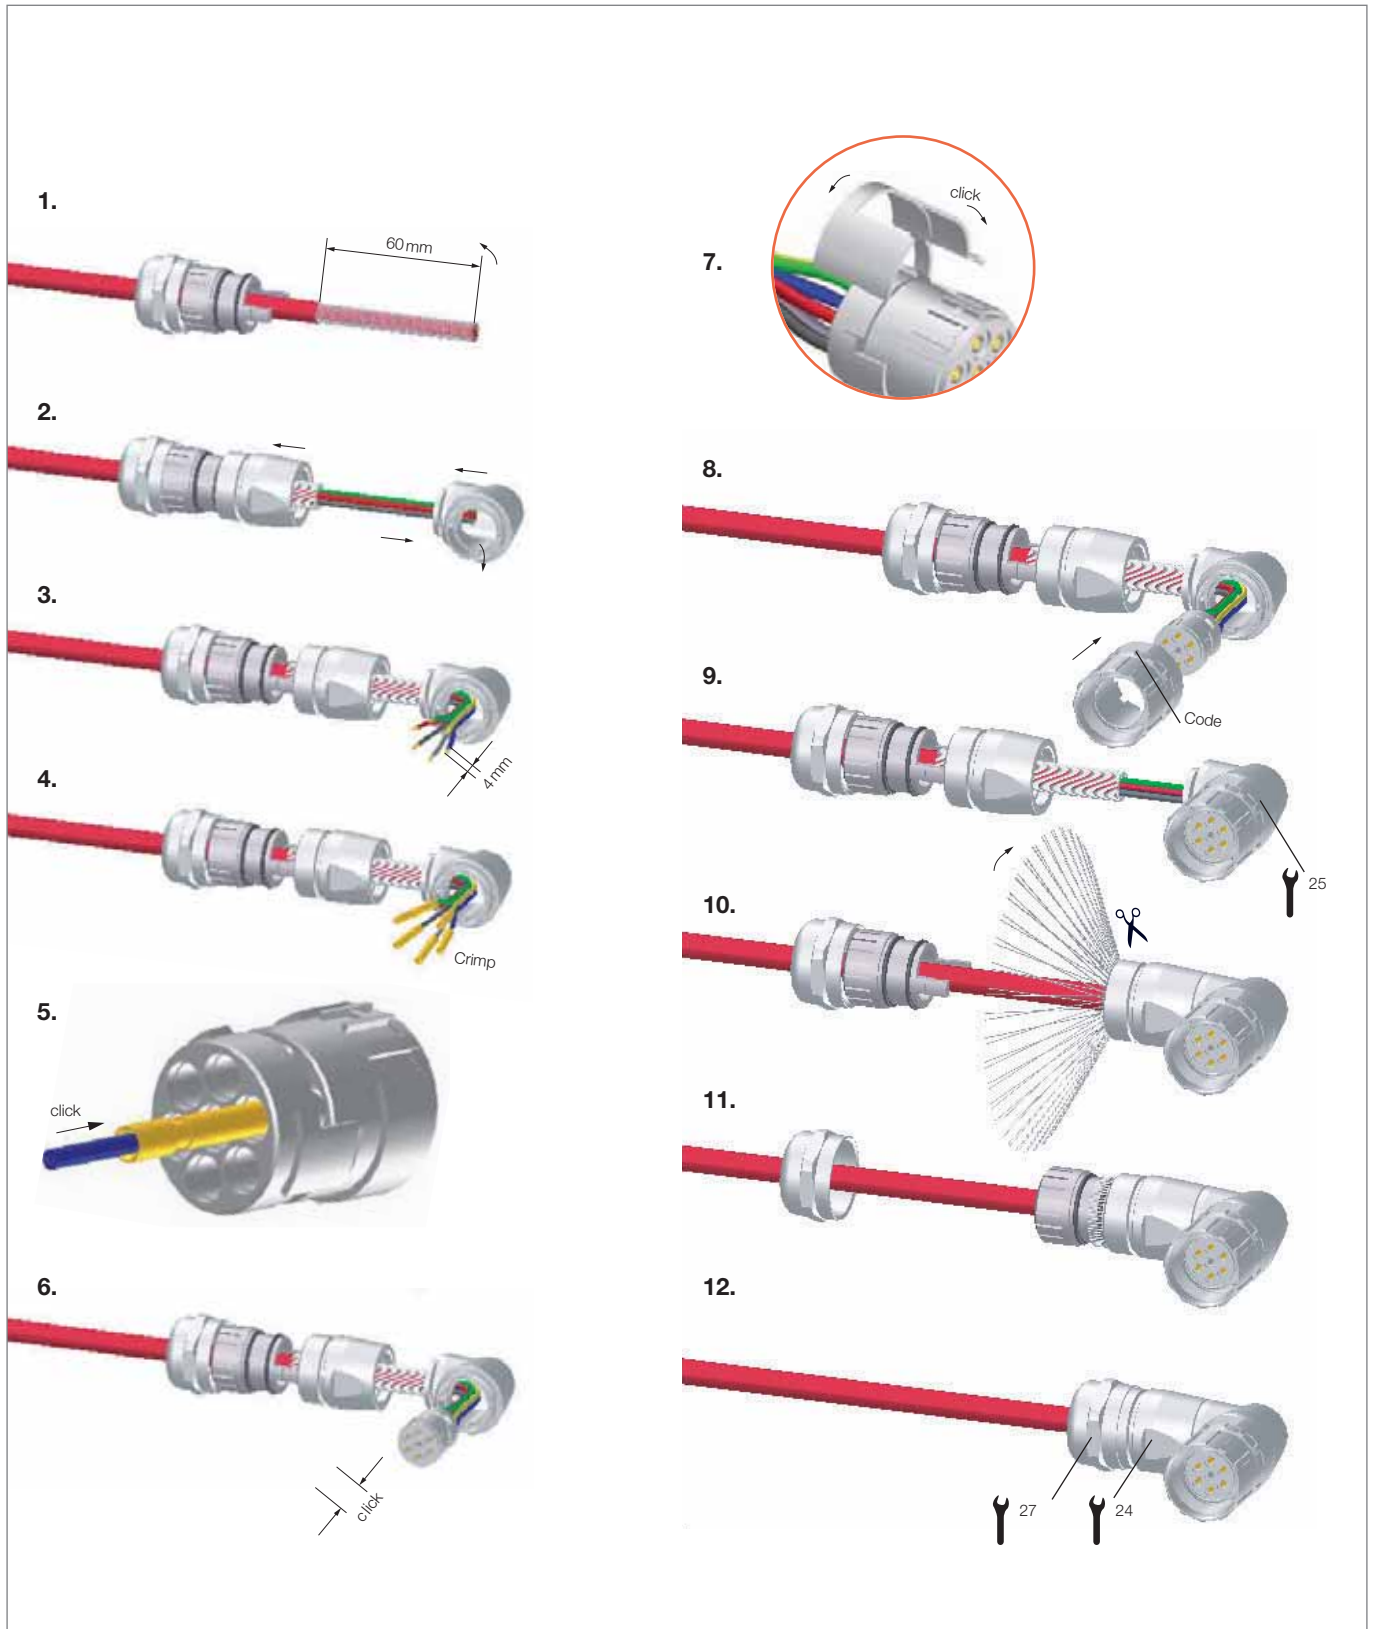


H




# Device connector with knurled nut

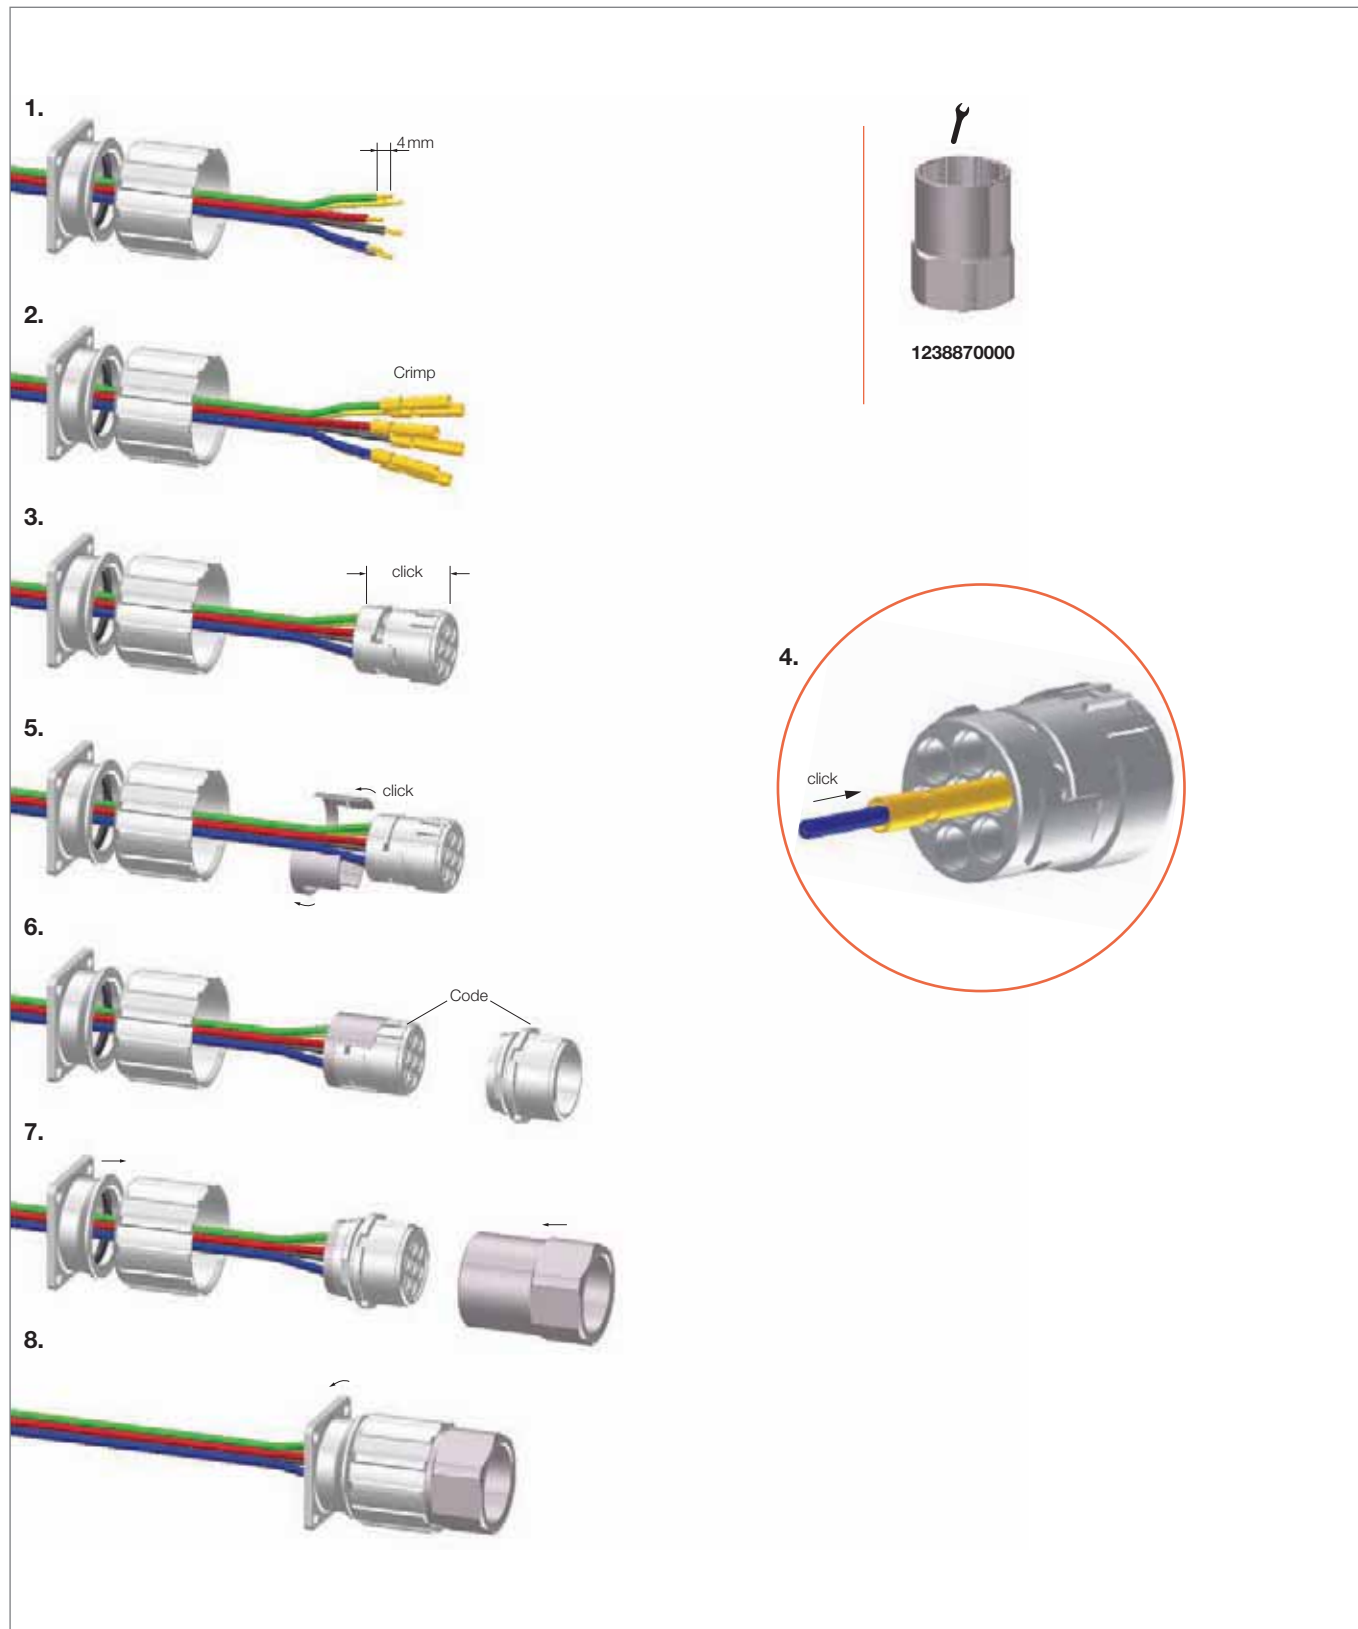


# Device connector, male

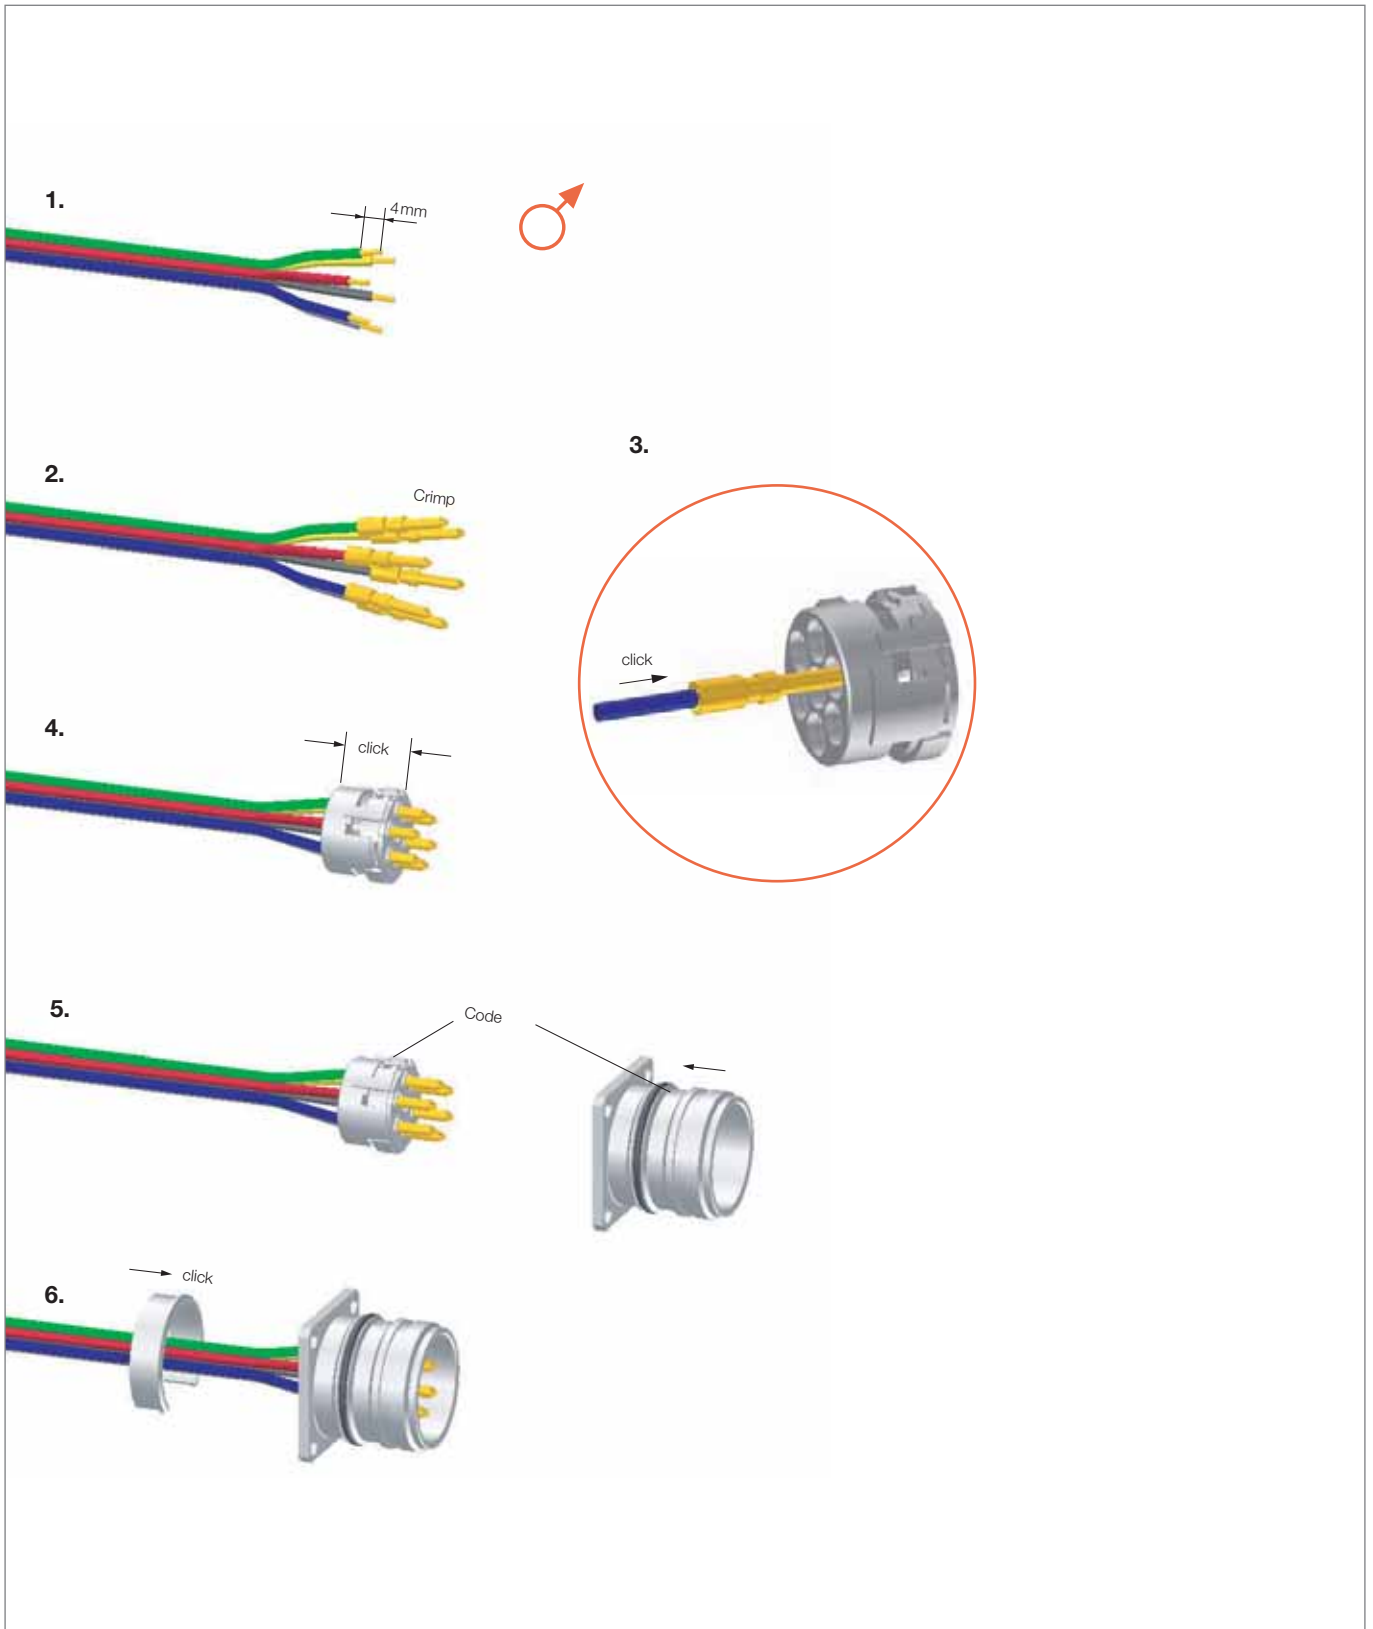

# Device connector, female

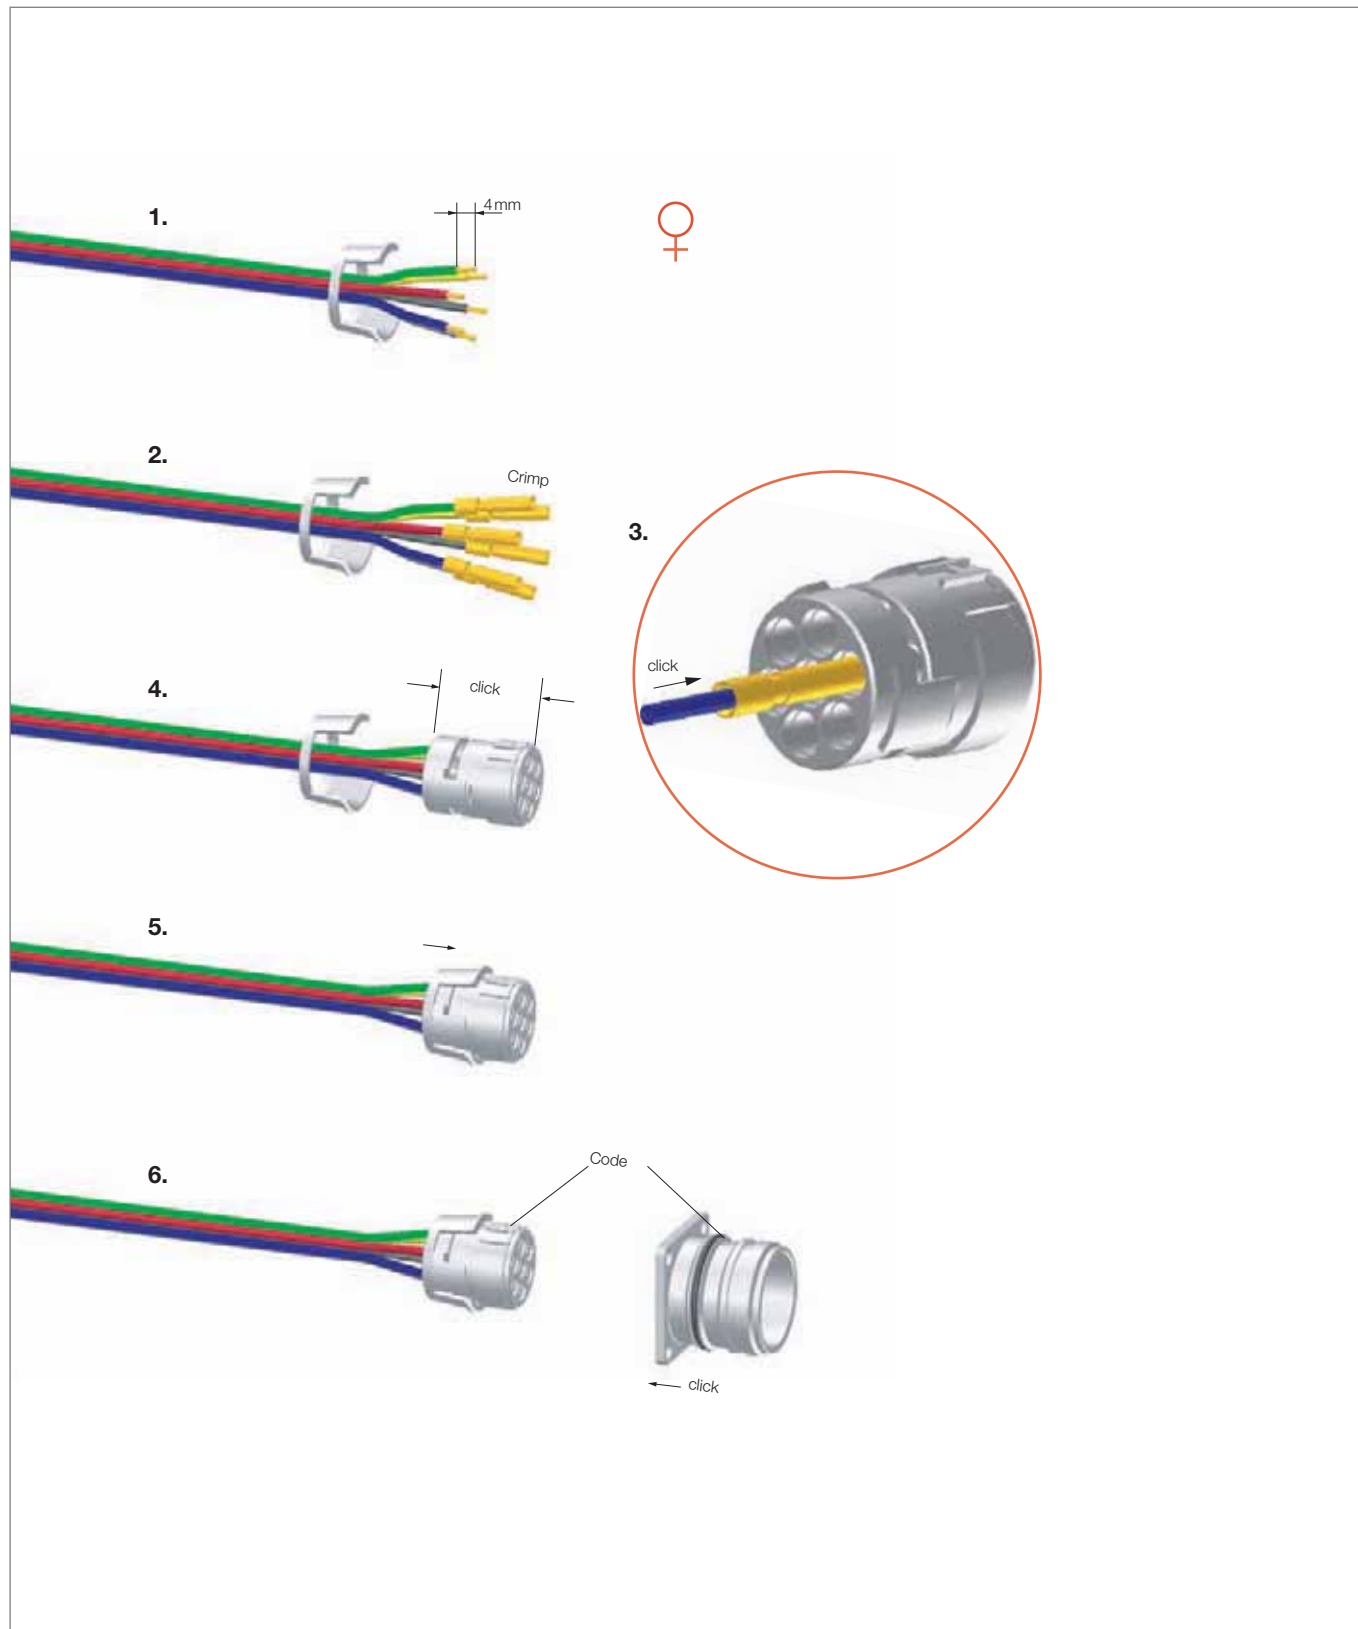


# Cable connector

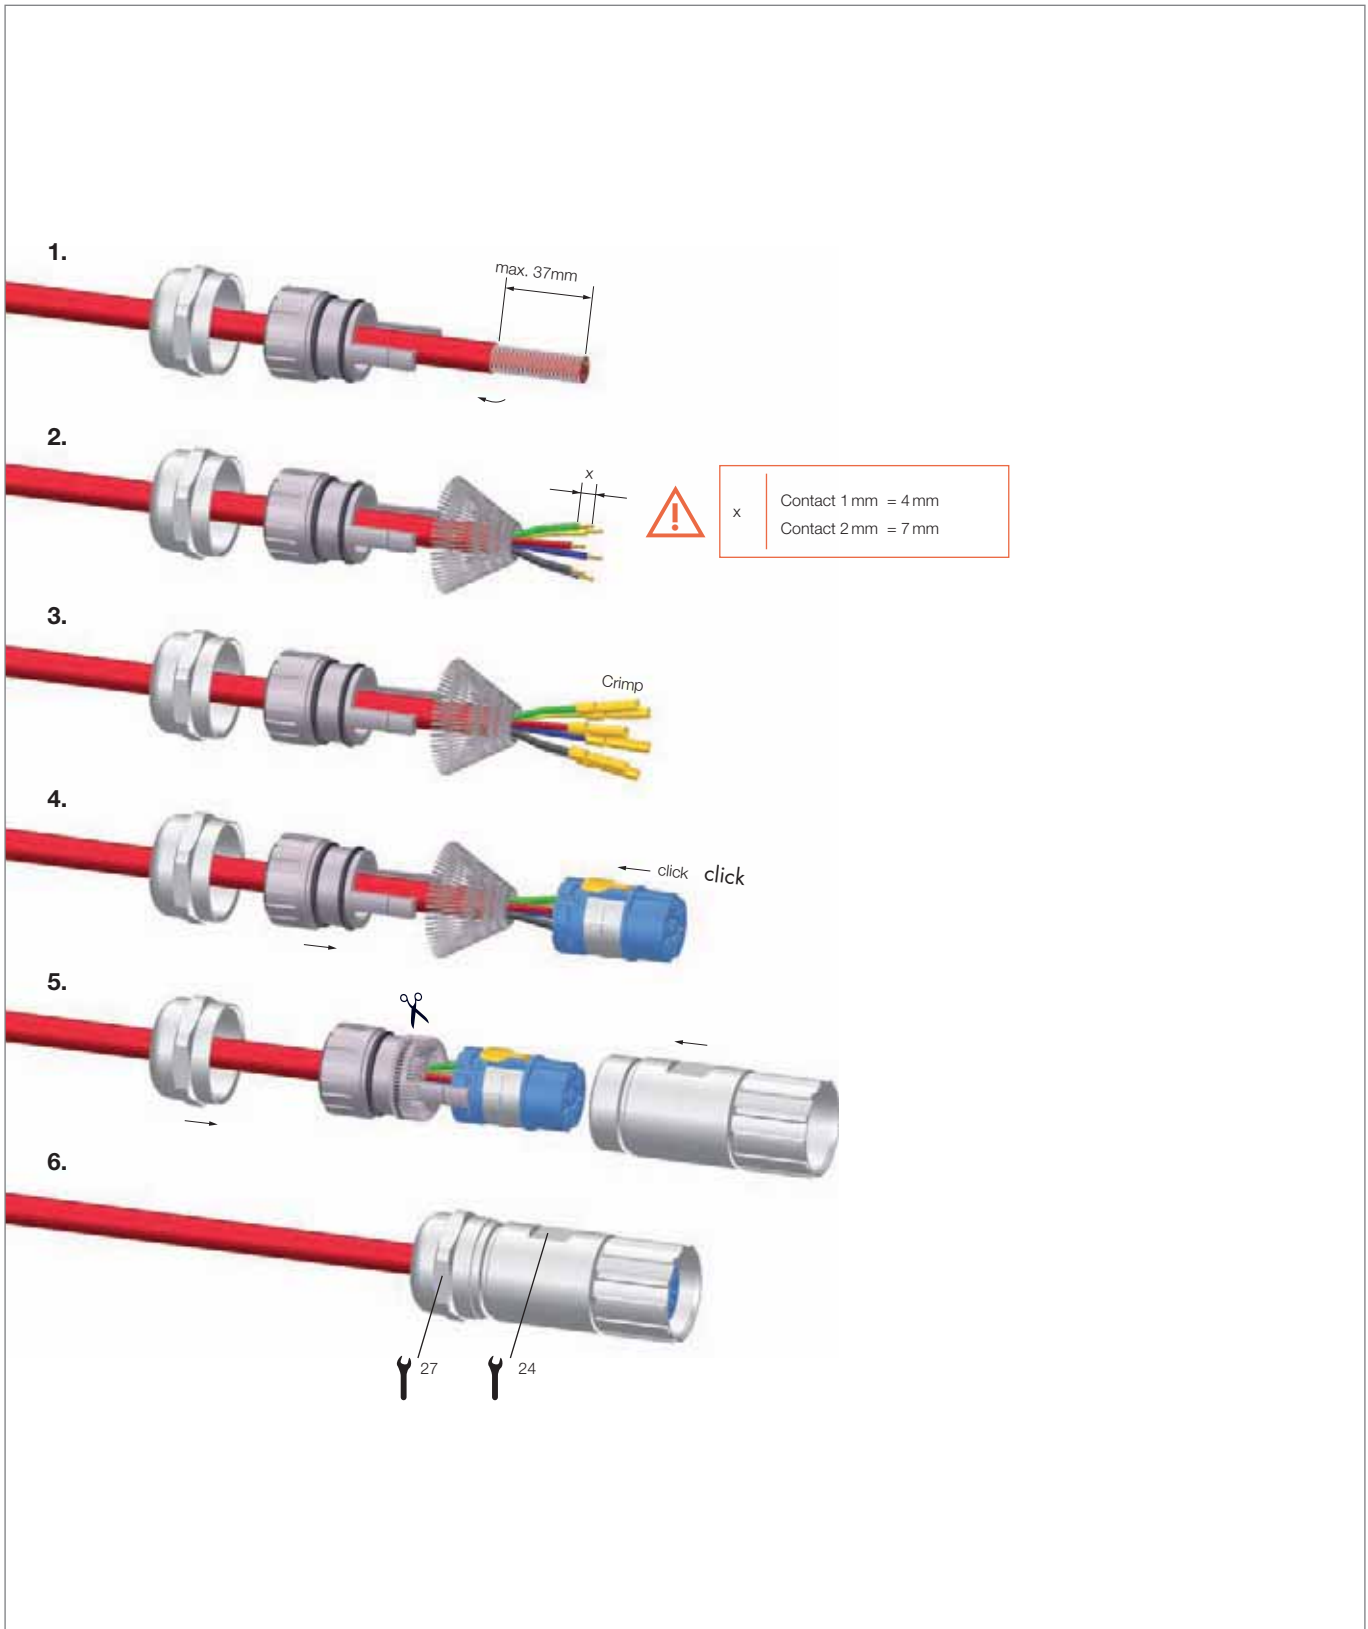


H


# Device connector

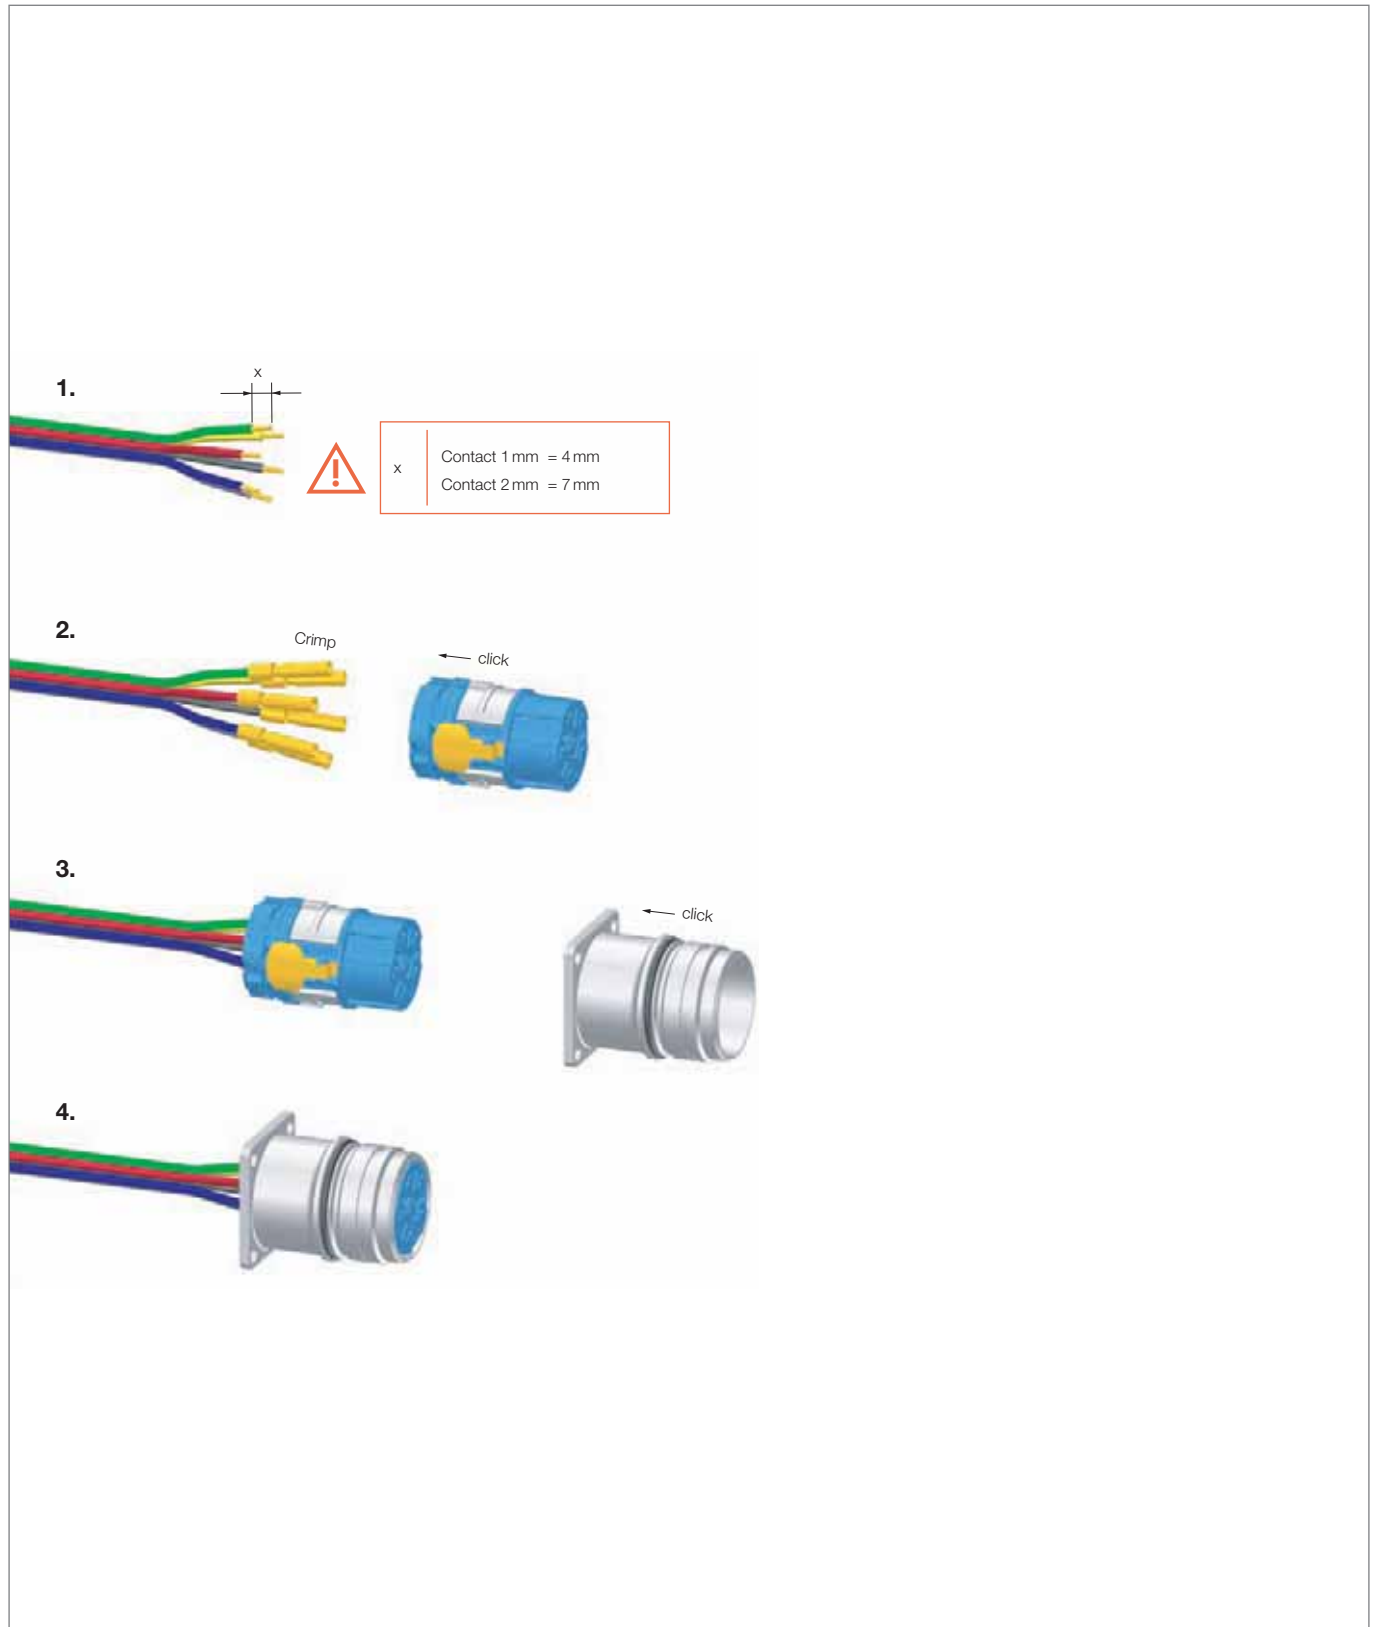

# Device connector

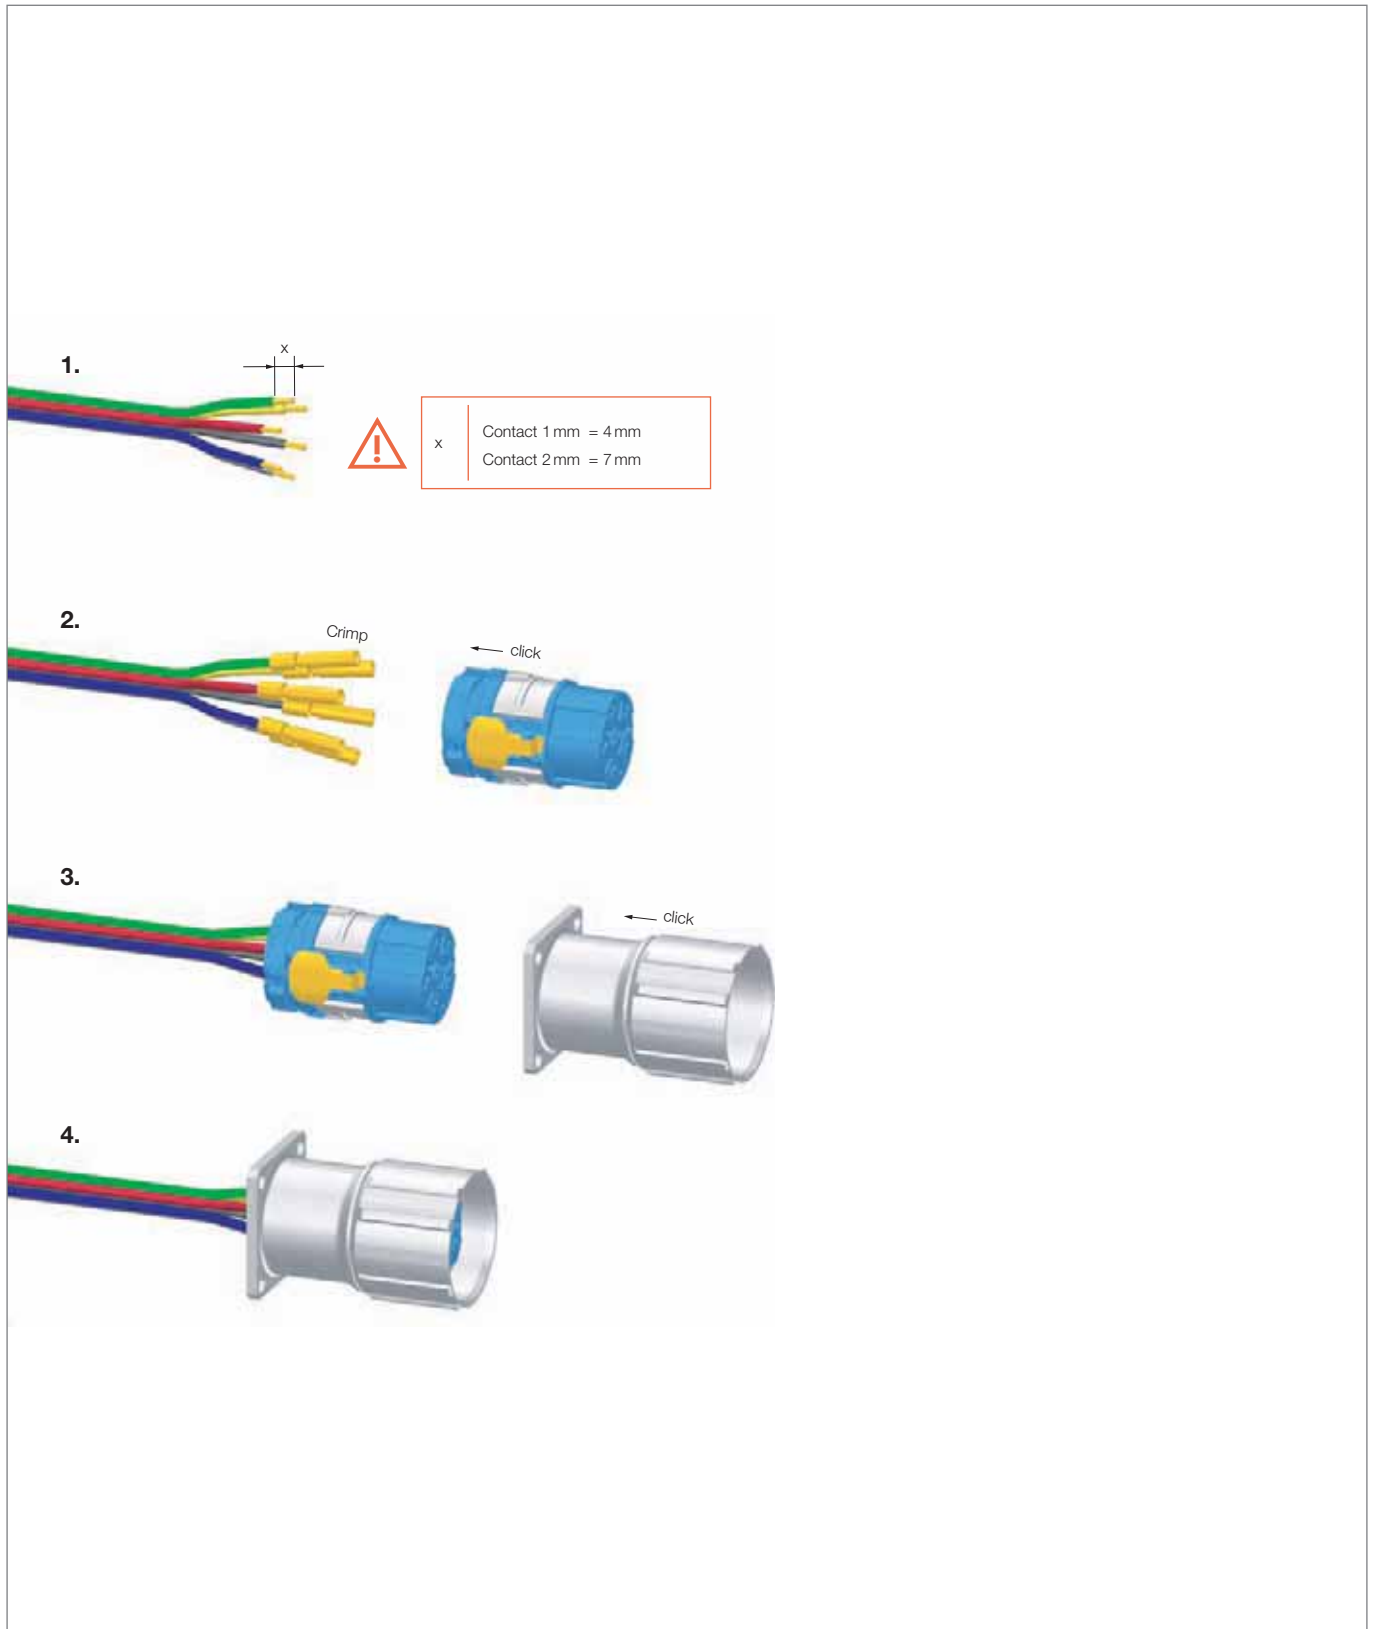

# Device connector, single-hole mount

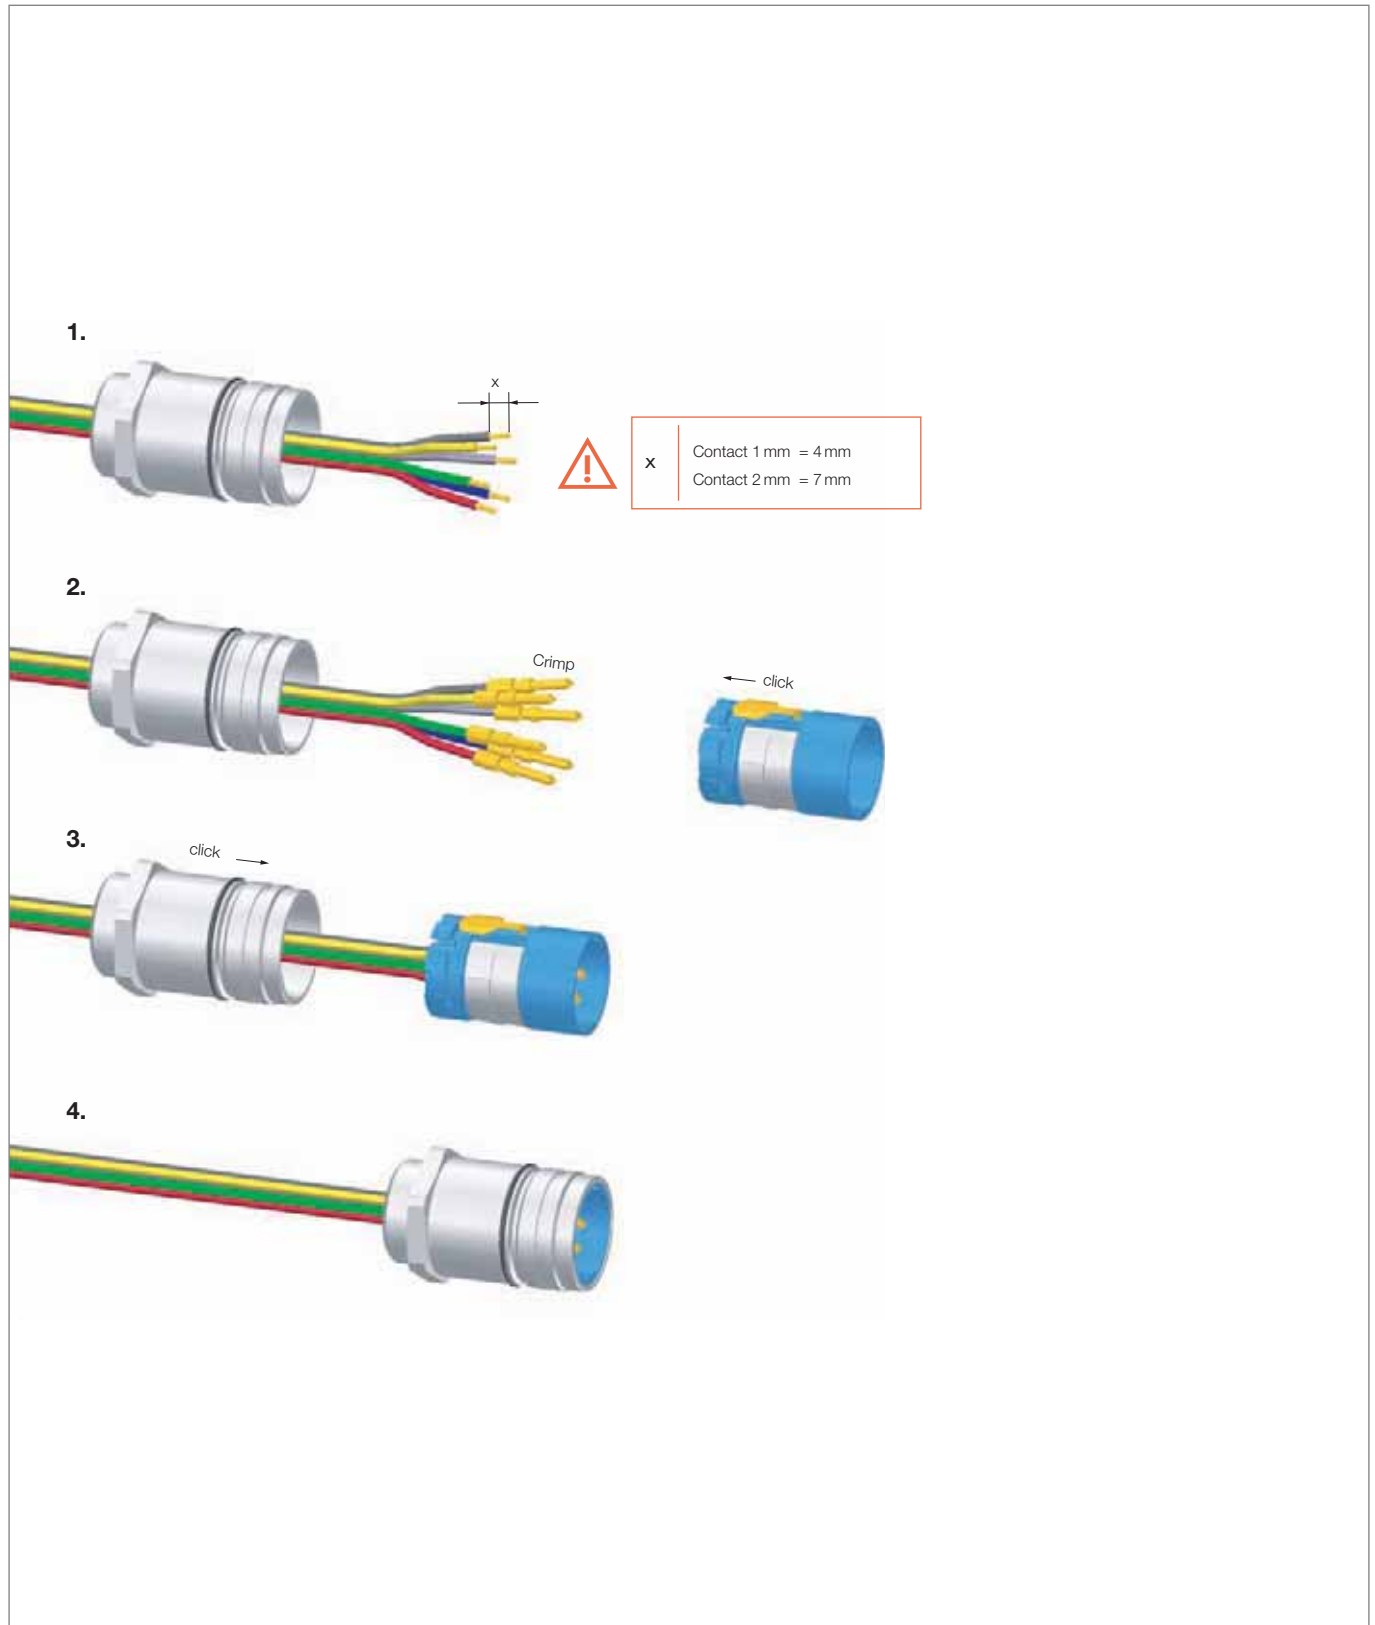

# M23 connector

## Easy to assemble

- An integrated approach for all plug sizes
- A patented assembly module consisting of terminal insert and insulating body
- Assembly and shield connection combined into one step
- Simple, quick and safe assembly in the housing



## Flexibility



Total modularity means flexibility. Male or female inserts can even be used with any of the housing types for the M23 power connectors.



The concise layout of this connector range and the reduced number of individual parts has clear benefits for the user – speedier assembly and easier installation.



The spacer sleeves are colour-coded for the male and female inserts.




Assembly and shield connection are combined into one step.



The snap-on terminal insert protects the cable outlet from getting twisted.



The variable shield connection ensures secure EMC protection for both light and heavy shielding braid.

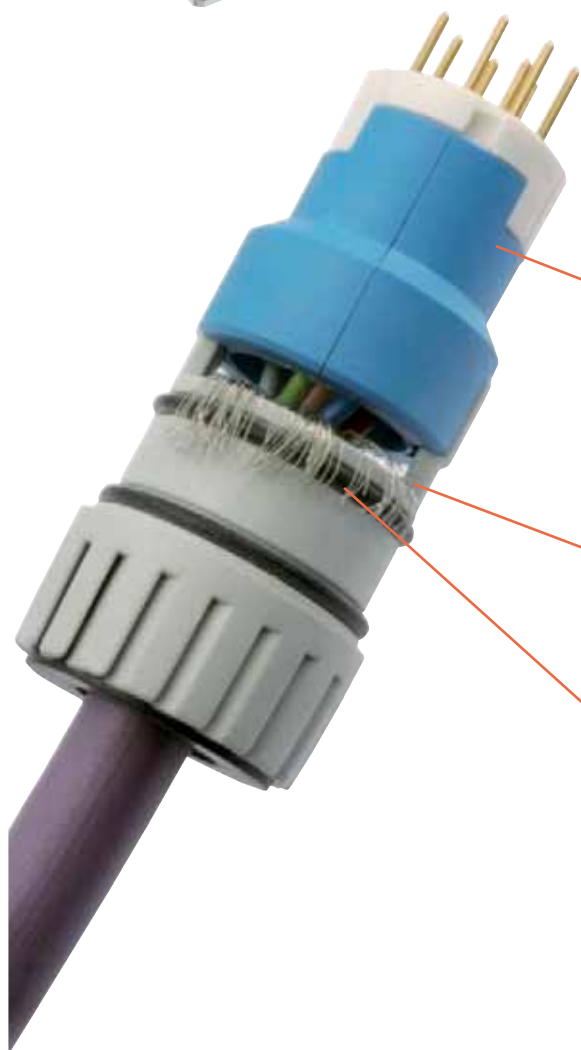




## M23 connector

### Secure contact with SLS® technology

The new, premium-grade contact – the spring-loaded socket (SLS®) system

- Integrated spring takes the pin contact and clasps it radially
- Outstanding electrical characteristics with the most secure contact
- Quick assembly: solder contacts already tin-plated

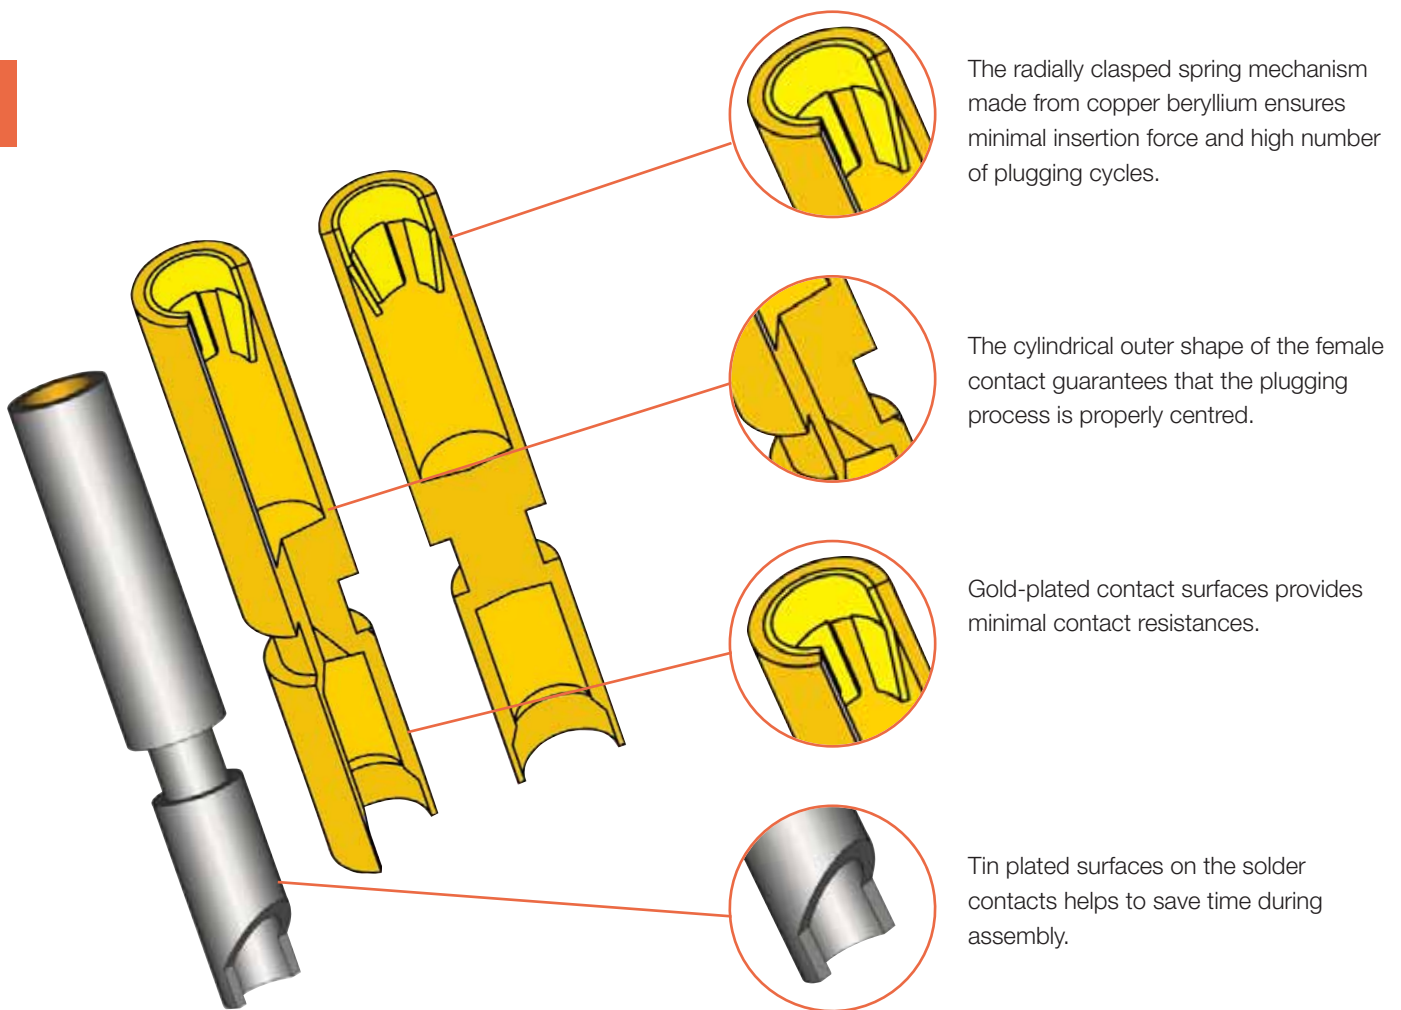


### Euro-Lock system® for a secure mount

Euro-Lock system® – the patented interlock system

- The integrated support clip locks the contacts into the insulating body
- Contacts are easy to install and remove
- No special tool is required

### High-quality cable gland

- Replaceable male or female inserts in each type of housing
- Integrated strain relief mechanism with patented HSK cable gland
- Internationally certified, with proven and established quality

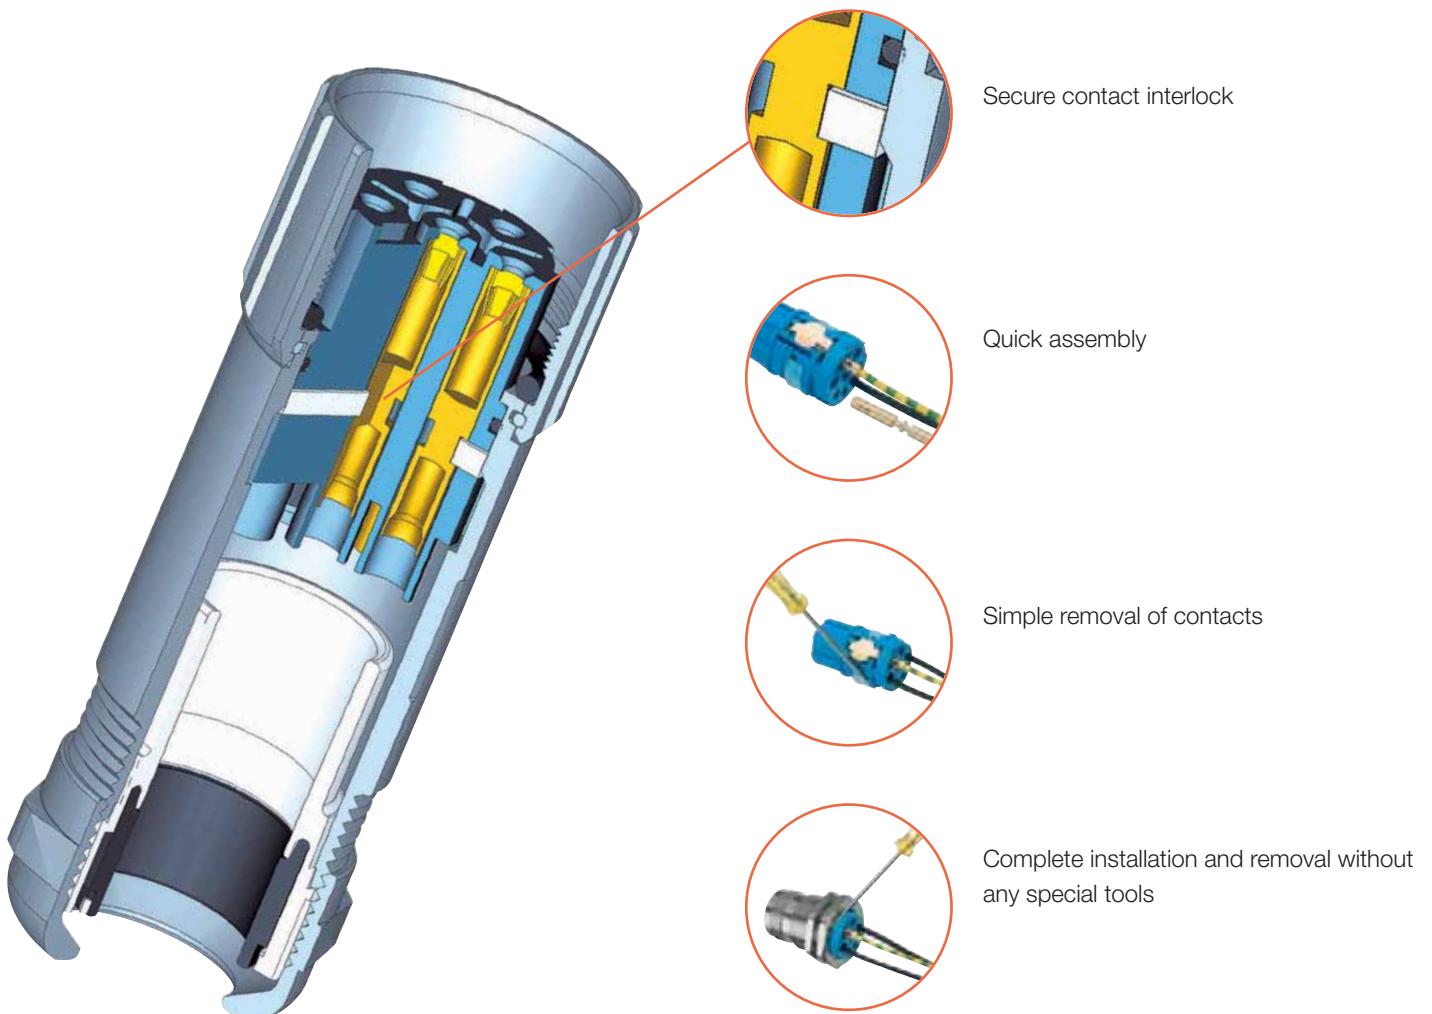



# Tools and markers

---

<b>Tools and markers</b>	Introduction	I.2
	Screwty®	I.4
	Cutting tools	I.7
	Sheathing and insulation stripping tools	I.8
	Stripping and cutting tools	I.9
	M23 crimping tools	I.12
	Identification systems	I.14

---

## SAI tools

The Screwty® is a state of the art tool that features a unique, patented retention method. The adjustable torque ensures that the connectors have actually been sealed tightly. The Screwty® attachment for M23 is also very important. The sealing method for the M8 and M12 connectors is comparable to the M23.

The fact that the Screwty® attachment slips back is also a major advantage of this system. This means that it does not have to be re-applied, as would be the case when using an open ended

wrench. There is also no risk that the screw can loosen when you turn the tool the wrong way since the Screwty® is only capable of exerting force in one direction.


It is also possible to put other tool attachments on the 1/4"-drive. This allows the use of torque spanner wrenches or torque screwdrivers. This is also available without torque for those who cannot fit a torque tool into their budgets.



The Screwty® can also be used to screw on M23 connectors.



The tool does not have to be re applied. During the follow-up it simply slips back.

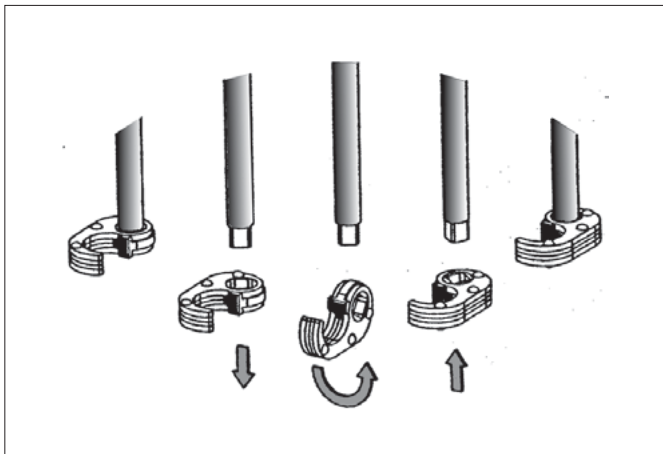

You can change the function from close to open by simply turning it around.



The Screwty® can also be purchased as a set with other suitable attachments.



### Screwty® torque

- Screw-on circular plug, safety sealed
- Easier work



### Cutting tools

- Cutting shape for various cable sizes
- Cutting without deformation of the conductor



### Sheathing and insulation stripping tools

- No need to adjust cutting depth
- No damage to inner conductors



### Stripping and cutting tool

- Special, self adjusting stripping blades do not damage the conductor



### Screwty®

Bolting tools



### Cutting tools



### Sheathing and insulation stripping tools



### Stripping and cutting tools



### SAI M23 crimping tool



### Identification systems

# Screwty® for M8/M12/M23



## The Torque Screwty®

- Easier work
- Screw on circular plug, safety sealed


## The perfect tool for all situations

Screwty® is the ideal, universal tool for tightening and releasing cable glands on all common sensor and actuator cables. The Screwty® can also reach those round plugs normally considered inaccessible! No great force is required, simply turn the tool to tighten or release the plug in connector as required.

The Screwty® also fits the majority (more than 90 %) of the cables and plug-in connectors of other suppliers and is therefore a unique tool useful throughout the world. The Screwty® consists of a handle with a conventional 1/4" fitting. This means it can be used for all sizes: for M12 and M8 round plugs, and the M12F and M8F types, also for plugs and sockets on custom cables.

The Screwty® is suitable for the following round plugs:

Size	M8	M8F	M12	M12F
	10 ±0.3 mm	11.9 ±0.3 mm	14.5 ±0.3 mm	19.8 ±0.3 mm
Thread	M8x1	M8x1	M12x1	M12x1

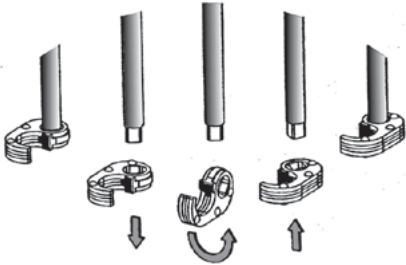

An adjustable torque fitting is also available for the Screwty®, for guaranteeing extra reliability during installation.

The torque can be infinitely adjusted between 0.5 and 1.7 Nm. This accurate setting enables all round plugs to be tightened precisely with a pre set torque.

Weidmüller specifies the following torques for its round plugs:

Size	M8	M8F	M12	M12F	M12 plastic
Torque	0.5-0.6 Nm	0.5-0.6 Nm	0.8-1.2 Nm	0.8-1.2 Nm	0.9-1.1 Nm
Thread	M8x1	M8x1	M12x1	M12x1	M12x1

Simply turn the ratchet to tighten or loosen the cable gland.

The Screwty® can also be fitted with other blades to create a torque screwdriver. You can find these blades in our catalogue "Tools".



Use of a M12 Screwty®

1. Position Screwty®,
2. tighten connector,
3. finished!



Use of a M23 Screwty®

### Screwty® standard



#### Ordering data

Type	Use	Qty.	Order No.
Screwty® M12	moulded M12 lines	1	1900000000
Screwty® M8	moulded M8 lines	1	1900110000
Screwty® M12 F	M12 plugs for custom assembly	1	1900020000
Screwty® M8 F	M8 plugs for custom assembly	1	1900030000

### Screwty® Set



#### Ordering data

Type	Qty.	Order No.
Screwty® Set	1	1910000000

Type	Contents
Screwty® Set	1 Screwty® standard handle + 1 M12, M8, M12 F, M8 F attachments

### Screwty® attachments



Screwty® M8 attachment    Screwty® M8 F attachment    Screwty® M12 attachment    Screwty® M12 F attachment    Screwty® M23 attachment

#### Ordering data

Type	Qty.	Order No.
Screwty® M12 KO o. SD	1	1900100000
Screwty® M8 KO o. SD	1	1900110000
Screwty® M12F KO o. SD	1	1900120000
Screwty® M8F KO o. SD	1	1900130000
Screwty® M23	1	1981560000

#### Legend:

F	for custom assemblies
DM	torque
KO or SD	ratchet only (attachment)
Screwty®	screwdriver
Screwty® DM	torque screwdriver, interchangeable blade
WK	interchangeable blade
LS	power plug

### Screwty® with torque fitting

Setting aid for Screwty® with torque fitting (included)




#### Ordering data

Type	Use	Qty.	Order No.
Screwty®-M12-DM	moulded M12 lines with torque requirement	1	1900001000
Screwty®-M8-DM	moulded M8 lines with torque requirement	1	1900011000
Screwty®-M12 F-DM	M12 plugs, custom assembly w. torque requirement	1	1900021000
Screwty®-M8 F-DM	M8 plugs, custom assembly with torque requirement	1	1900031000

Fittings	Contents
Screwty®-M12-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M12 attachment
Screwty®-M8-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M18 attachment
Screwty®-M12 F-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M12 F attachment
Screwty®-M8 F-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M18 F attachment

### Screwty® Set-DM

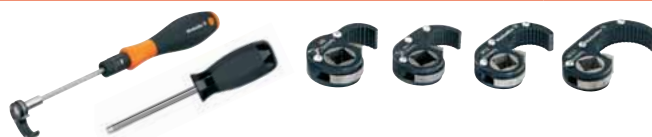

#### Ordering data

Type	Qty.	Order No.
Screwty® Set-DM	1	1920000000

Fittings	Contents
Screwty® Set-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 each of Screwty® M12, M8, M12 F, M8 F attachments

### Screwty® interchangeable handle/interchangeable bit



#### Ordering data

Type	Use	Qty.	Order No.
1/4" handle		1	4294820000
WK-1/4" (Screwty®)		1	1862200000





### Cutting tools

- Cutting formation for different cable sizes increases the quality of the cuts for smaller cross sections
- Not suitable for steel wires, steel armoured cables, aluminium alloys and hard drawn copper conductors!
- Cutting without deformation of the conductor



### KT 8



-  max. 8 mm
-  max. 16 mm<sup>2</sup>
-  max. 16 mm<sup>2</sup>
-  max. 16 mm<sup>2</sup>

### KT 12



-  max. 12 mm
-  max. 16 mm<sup>2</sup>
-  max. 25 mm<sup>2</sup>
-  max. 35 mm<sup>2</sup>

### Technical data

Max. cutting performance, copper cable	
Solid (max. conductor cross-section)	mm <sup>2</sup> / -
Stranded (max. conductor cross-section)	mm <sup>2</sup> / -
Flexible (max. conductor cross-section)	mm <sup>2</sup> / -
Flexible, stranded (max. conductor diameter)	mm
Max. cutting performance, aluminium cable	
Stranded (max. conductor cross-section)	mm <sup>2</sup> / -
Stranded (max. conductor diameter)	mm
solid	mm <sup>2</sup>
Data / telephone / control cable	
Max. outer diameter	mm
Tool data	
Length / Width / Height	mm
Weight	g
Note	

KT8		
16 / 6		
16 / 6		
16 / 6		
8		
16 / 6		
8		
16		
8		
165 / 65 / 25		
180		
Tool closed		

KT12		
16 / 6		
25 / 3		
35 / 2		
12		
25 / 6		
8		
25		
12		
215 / 66 / 28		
300		
Tool closed		

### Ordering data

Version
Note

Type	Qty	Order No.
KT 8	1	9002650000

Type	Qty	Order No.
KT 12	1	9002660000



### Stripping and cutting tools

- for flexible and solid conductors with PVC insulation
- Cable with double insulation in two processing steps without special adjustment
- Automatic opening of clamping jaws after stripping
- No play in self adjusting cutting unit
- Long-lasting
- No splicing of single conductors
- Optimised ergonomic design
- Stripping length adjustable via stop
- Adjustable for different insulation thicknesses
- Switchable partial stripping function
- Removable handle shells
- Fold-out cutting protection
- Custom marking with ESG device markers

### stripax®

0.08 - 10 mm<sup>2</sup>



- Stripping: PVC insulated flexible conductor, size 0.08...10 mm<sup>2</sup> (~AWG 28...7)
- Cutting: PVC insulated flexible conductor, size 0.08...6 mm<sup>2</sup> (~AWG 28...10)
- Conductors undamaged due to self adjusting stripping blades.
- Processing of multi-conductors, with thin flat ribbon cables and even multiple conductors in one operation



### Technical data

Max. stripping performance	
Cable type	
Conductor cross-section	mm <sup>2</sup>
Stripping length, max.	mm
Cutting performance	
Max. cutting performance	mm <sup>2</sup>
Tool data	
Length	mm
Weight	g
Note	

stripax®	
Flexible and solid conductors with PVC insulation	
0.08...10	
25	
6	
190	
175	
Note	

### Ordering data

Version
Note

Type	Qty.	Order No.
stripax®	1	9005000000
Note		

### Accessories

Type
Note

Type	Qty.	Order No.
Spare stripping blades	1	1119030000
Note		

## Stripping and cutting tools

### multi-stripax®

**Multifunctional stripping tool for use on a multitude of conductor insulation forms and configurations – even those not covered by the standard**

#### multi-stripax® – the troubleshooter


- Interchangeable stripping units
- Proper stripping of any conductor, round, flat or special profiles, thanks to the specially shaped stripping blades
- Incorporates cutting function for up to 2.5 mm<sup>2</sup> solid and 6 mm<sup>2</sup> fine
- Fatigueless operation thanks to ergonomic design
- No damage to conductor or remaining insulation
- Best stripping results for industrial applications
- Stripping results reproduced accurately time and time again
- A long lasting, reliable tool thanks to its robust design
- Plus, the customary Weidmüller repair service

#### Special stripping units – the answer to diverse stripping tasks


The multi-stripax® tool – distinguished by its robust design, was developed to handle all the stripping tasks met with in practice. Thanks to the interchangeable stripping units, a special solution can be found for every challenge in the marketplace.

The specially shaped stripping blades guarantee perfect stripping results. The guide plates ensure the correct positioning of the wire and therefore prevent damage to the remaining wire. The clamping jaws hold the conductor with just the right force during the stripping operation and are matched to the specific situation. This flexibility within the variables that affect the result of the stripping operation turns the multi-stripax® tool into a universal troubleshooter.


#### Cutting



#### Positioning

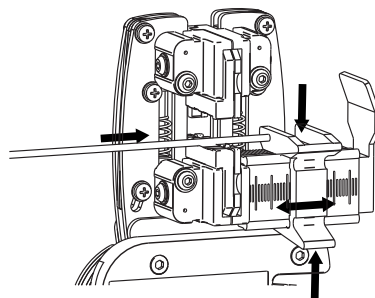

#### Stripping

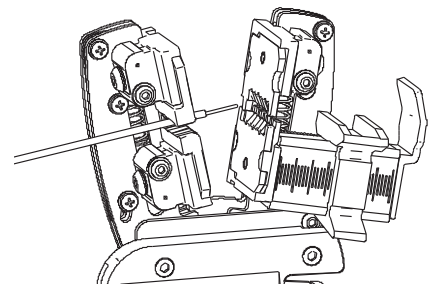

### multi-stripax®




#### Technical data

Cable type	PVC, Teflon, PTE, PUR, silicone, halogen-free
Conductor cross-section, min.	2 mm
Conductor cross-section, max.	no limit (in several steps)
max. cutting capacity, fine-strand	6 mm <sup>2</sup>
max. cutting capacity, solid	2.5 mm <sup>2</sup>
max. cutting capacity, ribbon	10.2 x 4 mm
Length/Width/Height	250 / 85 / 40 mm
Weight	250 g



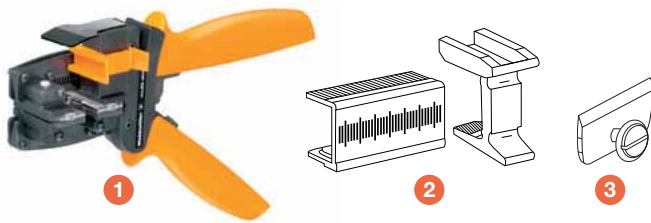


#### Information

multi-stripax® incl. stripping unit



- High quality stripping for industrial applications
- Specially shaped stripping blades enable stripping of special types of insulation and conductor configurations
- Adjustable stop for setting stripping lengths from 2.3 to 30 mm
- Highly flexible thanks to interchangeable stripping units
- Stripping results reproduced accurately time and time again
- No damage to the conductor or insulation
- A long lasting, reliable tool thanks to its robust design
- Integral cutting function for max. 2.5 mm<sup>2</sup> solid or 6 mm<sup>2</sup> flexible cables


Ordering data

Illustration	Type	Qty.	Order No.	Features
	multi-stripax® 6-16	1	9202210000	PVC-insulated cables; Cable cross-section 6 up to 16 mm <sup>2</sup> ; max. stripping lengths depends on cable design / cable type 1. station solid, stranded and flexible 6 mm <sup>2</sup> 2. station solid, stranded and flexible 10 mm <sup>2</sup> 3. station solid, stranded and flexible 16 mm <sup>2</sup> double stranded (flexible) Cutting function up to 6 mm <sup>2</sup>
	multi-stripax® ASI	1	9202250000	ASI Bus cables 2 x 1.5 mm <sup>2</sup> flexible for PTE, PUR and EPDM insulated cables Stripping of outer insulation and inner cable Cutting function up to 6 mm <sup>2</sup>
	multi-stripax® GKW LW	1	9205760000	Railway cable Radox GKW LW; Cable cross-section 1.0; 1.5 and 2.5 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type Cutting function up to 6 mm <sup>2</sup>
	ERAN multi-stripax®	1	9203100000	Length stop
	ERME multi-stripax®	1	9203070000	Cutting knife

Information

Stripping units for multi-stripax®

Stripping unit consists of:

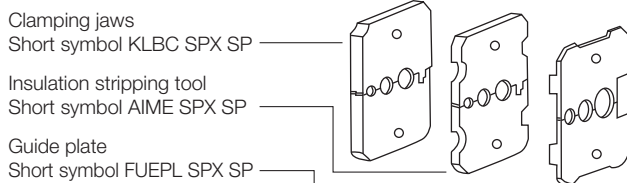

- High flexible thanks to interchangeable stripping units
- High quality stripping for industrial applications
- Specially shaped stripping blades enable stripping of special types of insulation and conductor configurations

Ordering data

Type	Qty.	Order No.	Features
AIE multi-stripax® 6-16	1	9202260000	PVC-insulated cables; Cable cross-section 6 up to 16 mm <sup>2</sup> ; max. stripping lengths depends on cable design / cable type 1. station solid, stranded and flexible 6 mm <sup>2</sup> 2. station solid, stranded and flexible 10 mm <sup>2</sup> 3. station solid, stranded and flexible 16 mm <sup>2</sup> double stranded (flexible)
AIE multi-stripax® ASI	1	9202300000	ASI Bus cables 2 x 1.5 mm <sup>2</sup> flexible for PTE, PUR and EPDM insulated cables Stripping of outer insulation and inner cable
AIE multi-stripax® GKW LW	1	9205770000	Railway cable Radox GKW LW; Cable cross-section 1.0; 1.5 and 2.5 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type

## M23 crimping tools

## SAI M23 crimping tool 1


n

**Adjusting the crimping dimensions**

The adjustment mechanism is used to set the crimping depth of the crimping mandrel as described below. The adjusting dial is used to prepare the feed; the dial can be turned clockwise (for decreasing the dimension) or counter-clockwise (for increasing the dimension).

**Adjustment precision**

- 1 division mark on the dial  $\cong$  1/100 mm adjustment
- 1 complete revolution of the dial  $\cong$  0,2 mm adjustment read from scale
- 5 revolutions of the dial  $\cong$  1 mm adjustment read from scale

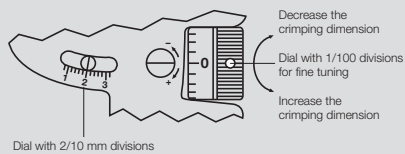**Verifying the crimping dimension**

The four-mandrel crimping tool is pre-set at the factory. The actual crimping size should still be checked periodically. It should be checked using the plug gauge ( $\varnothing$  2.0 mm) that is included with the crimping tool as described below. Use the dial on the stationary tool shank to set the size to 2.0 mm on the scale. Set to the zero-point tick mark on the dial and close the tool. (Refer to the diagram showing the crimping size adjustment.) At this setting, it should be possible to move the 2.00-mm- $\varnothing$  plug gauge without any play or extra room. If this is not possible, then the size deviation (+/-) can be determined using the dial's fine-adjustment mechanism. If this size check reveals that the tool is not within the tolerance range specified by the manufacturer of the contacts, then you should contact the manufacture of the tool for further inspection.

**Servicing and maintenance**

Before you start to use the hand crimping tool, it must be clean and in proper working condition. Crimp residue or fragments must be removed from the crimping jaws and locator. The joints should be regularly lubricated using machine oil to protect them from dirt. Make sure that all bolts are secured with locking rings.

**Technical data**

Crimp contact	Wire cross-section (mm <sup>2</sup> )	Crimping mandrel adjustment	Locator position	Order No.
Crimp male, signal 1 mm	0.14	0.75	11	1170150000
	0.25	0.82		
	0.34	0.90		
	0.50	1.00		
	0.75	1.08		
	1.00	1.20		
Crimp female, signal 1 mm (0.08 - 0.56 mm <sup>2</sup> )	0.14	0.75	12	1995860000
	0.25	0.80		
	0.35	0.87		
	0.50	0.97		
Crimp female, signal 1 mm (0.34 - 1.00 mm <sup>2</sup> )	0.50	0.95	12	1170180000
	0.75	4.00		
	1.00	1.05		
Crimp male, signal 1.5 mm	0.14	0.75	3	1170220000
	0.25	0.82		
	0.35	0.90		
	0.50	0.96		
	0.75	1.03		
	1.00	1.00		
Crimp female, signal 1.5 mm	0.14	0.75	4	1170230000
	0.25	0.80		
	0.35	0.87		
	0.50	0.97		
Crimp female, signal 1.5 mm (0.34 - 1.00 mm <sup>2</sup> )	0.50	0.95	4	1170240000
	0.75	1.00		
	1.00	1.05		
Crimp male, signal 2 mm	0.75	1.30	5	1170250000
	1.00	1.40		
	1.50	1.55		
	2.50	1.75		
Crimp female, signal 2 mm	0.75	1.30	6	1170260000
	1.00	1.40		
	1.50	1.55		
	2.50	1.75		
Crimp male, power 1 mm	0.14	0.75	1	1170390000
	0.25	0.80		
	0.35	0.85		
	0.50	1.03		
	0.75	1.08		
	1.00	1.13		
Crimp female, power 1 mm	0.14	0.75	2	1995830000
	0.25	0.80		
	0.35	0.85		
	0.50	0.89		
	0.75	0.95		
	1.00	1.02		
Crimp male, power 2 mm	0.75	1.20	7	1170400000
	1.00	1.40		
	1.50	1.55		
	2.50	1.70		
Crimp male, power 2 mm	2.50	1.47	7	1170410000
	4.00	1.60		
Crimp female, power 2 mm	0.75	1.20	8	1995820000
	1.00	1.40		
	1.50	1.55		
	2.50	1.70		
Crimp female, power 2 mm	2.50	1.47	8	1170420000
	4.00	1.60		

**Ordering data**

Type	Order No.
SAI M23 CRIMPING TOOL 1	1203840000



**Operation mode**

The following table specifies the locator positions and the crimping dimensions for various crimping contacts. The contact is inserted through the tool into the locator; this ensures the proper crimping position. The inserted contact is secured by closing gently (approximately to first snap-close level). Now the cable can be easily inserted and it is not possible for the contact to fall out. The tool must be pressed together until it reaches the end stop position in order to function properly. They are then able to open automatically which brings the crimping process to a close in the intended manner.

**SAI M23 crimping tool 2**




**Adjusting the crimping dimensions**

The adjustment mechanism is used to set the crimping depth of the crimping mandrel as described below. The adjusting dial is used to prepare the infeed; the dial can be turned clockwise (for decreasing the dimension) or counter-clockwise (for increasing the dimension).

**Adjustment precision**

- 1 division mark on the dial  $\approx$  1/100 mm adjustment
- 1 complete revolution of the dial  $\approx$  0,2 mm adjustment read from scale
- 5 revolutions of the dial  $\approx$  1 mm adjustment read from scale

**Verifying the crimping dimension**

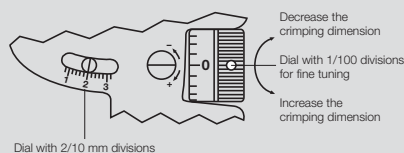

The four-mandrel crimping tool is pre-set at the factory. The actual crimping size should still be checked periodically. It should be checked using the plug gauge ( $\varnothing$  1.0 mm) that is included with the crimping tool as described below. Use the dial on the stationary tool shank to set the size to 1.0 mm on the scale. Set to the zero-point tick mark on the dial and close the tool. (Refer to the diagram showing the crimping size adjustment.) At this setting, it should be possible to move the 1.00-mm- $\varnothing$  plug gauge without any play or extra room. If this is not possible, then the size deviation (+/-) can be determined using the dial's fine-adjustment mechanism. If this size check reveals that the tool is not within the tolerance range specified by the manufacturer of the contacts, then you should contact the manufacture of the tool for further inspection.

**Servicing and maintenance**

Before you start to use the hand crimping tool, it must be clean and in proper working condition. Crimp residue or fragments must be removed from the crimping jaws and locator. The joints should be regularly lubricated using machine oil to protect them from dirt. Make sure that all bolts are secured with locking rings.

**Technical data**

Crimp contact	Wire cross-section (mm <sup>2</sup> )	Crimping mandrel adjustment	Locator position	Order No.
Crimp male 1 mm	0.14	0.86	1	1170150000
	0.25	0.90		
	0.34	0.95		
	0.56	0.98		
	0.75	1.03		
	1.00	1.08		
Crimp female 1 mm (0.08-0.56 mm <sup>2</sup> )	0.08	0.75	2	1995860000
	0.14	0.78		
	0.25	0.82		
	0.34	0.86		
	0.56	0.90		
	0.34-1.00 mm <sup>2</sup>	0.77		
0.56	0.82			
0.75	0.88			
1.00	0.95			
Crimp male 1.5 mm	0.14	0.65	3	1170220000
	0.25	0.68		
	0.34	0.72		
	0.56	0.81		
	0.75	0.95		
	1.00	1.07		
Crimp female 1.5 mm (0.14-0.75 mm <sup>2</sup> )	0.14	0.70		1170230000
	0.25	0.73		
	0.34	0.77		
	0.56	0.85		
	0.75	1.05		
Crimp female 1.5 mm (0.34-1.00 mm <sup>2</sup> )	0.34	0.88		1170240000
	0.56	0.95		
	0.75	1.05		
	1.00	1.13		
Crimp male 2.0 mm	0.75	1.20		1170250000
	1.00	1.35		
	1.50	1.45		
	2.50	1.60		
Crimp female 2.0 mm	0.75	1.25		1170260000
	1.00	1.35		
	1.50	1.45		
	2.50	1.60		

**Ordering data**


Type	Order No.
SAI M23 CRIMPING TOOL 2	1203960000



# SlimFix Clip

The SlimFix Clip combines two advantages in one: its unique closure mechanism offers the reliability of a closed marker with ease of attaching an open marker. The Clip closure mechanism also allows quick, no fuss attachment of the markers after the wires have been installed. SlimFix Clip markers are suitable for wires and cables with external diameters up to 5 mm. Long sequences of characters are possible on the large marking surface – up to 30 mm.


- Halogen free, flammability class V2 material
- Narrow markers with reliable attachment thanks to compensation feature
- Clip closure mechanism ensures permanent attachment following wire installation
- Rapid attachment without tools
- Three sizes for wire cross-sections from 0.5 – 10.0 mm<sup>2</sup>
- Available in lengths of 12, 21 and 30 mm
- Markers available in the proven MultiCard format
- Additional marking surface for precise assignment to projects
- Custom-printed markers supplied to your specifications

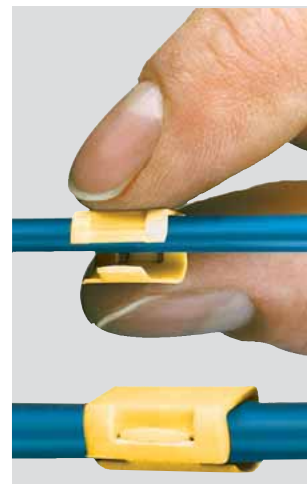

## Technical data

Material	Polyamide 66, halogen-free
UL 94 flammability rating	V2
Temperature range	-40 °C to 100 °C
Printing	black

## Ordering data

Type	Wire, ext. ø	Wire cross-section
SFC 0	1.5 - 2.5 mm	0.5 - 1.0 mm <sup>2</sup>
SFC 1	2.0 - 3.5 mm	0.75 - 2.5 mm <sup>2</sup>
SFC 2	2.5 - 5.0 mm	2.5 - 4.0 mm <sup>2</sup>
SFC 2,5 	4.0 - 6.0 mm	4.0 - 10.0 mm <sup>2</sup>
Colour	Other colours on request	

- brown
- orange
- green
- violet
- grey

Special printing Specify special printing and colours per diskette, Excel file or using the M-Print® PRO software.

Minimum order quantity 1 pack

**Note:** SlimFix Clip markers can be printed with PrintJet.



## SFC - blank

### Technical specification

Material	Polyamide
UL 94 flammability rating	V2
Min. temperature, continuous	-40 °C
Max. temperature, continuous	100 °C

## Ordering data

Type	Length	Qty.	Order No. white	Order No. yellow	Order No. blue	Order No. red	Custom printing
SFC 0/12	12	200	1813130000	1813160000	1813170000	1813150000	
SFC 1/12	12	200	1747320001	1747320004	1747320002	1747320003	
SFC 2/12	12	120	1758320001	1758320004	1758320002	1758320003	
SFC 2,5/12	12	120	1062000000	1062010000	1062030000	1062020000	1062040000
SFC 0/21	21	200	1813190000	1813210000	1813220000	1813200000	
SFC 1/21	21	200	1779080001	1779080004	1779080002	1779080003	
SFC 2/21	21	120	1805810000	1805780000	1805770000	1805790000	
SFC 2,5/21	21	120	1062050000	1062070000	1062090000	1062080000	1062110000
SFC 0/30	30	150	1813240000	1813260000	1813270000	1813250000	
SFC 1/30	30	150	1805760000	1805730000	1805720000	1805740000	
SFC 2/30	30	90	1805870000	1805830000	1805820000	1805850000	


# Marker tags for sensor cables

## Sleeves for marking sensor cables

To enable unique marking of sensor/actuator cables, these can be identified with a marker tag. Each cable has a sleeve that accepts a marker tag TM-I 18. Cables open at one end have one sleeve, connecting cables have two marker sleeves. The TM-I 18 is available in various colours.

### Ordering data

Type Sleeve	Colour	Order No.
TM 203/18 VO	transparent	1798480000
TM 4/18 HF/HB	transparent	1719850000
Marker		
TM-I 18 NEUTRAL WS	white	1718431044
TM-I 18 NEUTRAL GE	yellow	1718431687

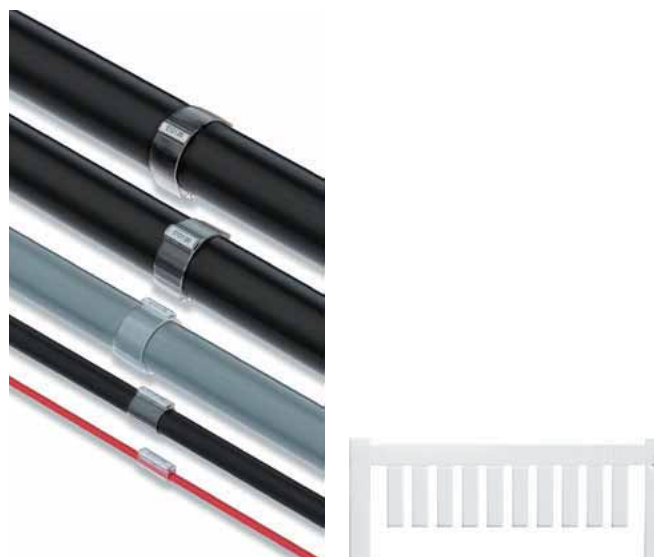

## The Weidmüller PrintJet marking system prints marker tags quickly, reliably and individually.

The **PrintJet PRO** inkjet printer prints markers for electric connectivity. These markers can be used for clear equipment identification on devices, cables and connectors. The labelling makes servicing, maintenance and troubleshooting much easier. Water-based ink is used for the spot colour printing. The print is crystal clear and resistant to environmental influences. The **PrintJet PRO** prints plastic markers in **MultiCard** format.

In combination with the user-friendly **M-Print® PRO** software and the attached loader, the printer becomes an essential part of the production. The inkjet process being used, the subsequent fusing, as well as the printer cartridge and ink have all been specially adapted by Weidmüller for industrial use. The printer has excellent long-term use capabilities, thanks to its integrated loader.

### Ordering data

### PrintJet PRO

Type		Order No.
PrintJet PRO 115V		1024050000
PrintJet PRO 230V		1001180001
Accessories		
PJ PRO TNTK INK SET COL	Ink tank starter set, colour	1027110000
PJ PRO TNTK INK K	● Ink tank Black	1027040000
PJ PRO TNTK INK C	● Ink tank Cyan	1027050000
PJ PRO TNTK INK M	● Ink tank Magenta	1027060000
PJ PRO TNTK INK Y	● Ink tank Yellow	1027070000
PJ PRO TNAW	Ink collecting tray	1024140000



# Marker tags for distributors

Marker tags can be affixed to distributors to ensure unique identification. For marking of our standard M12 products, ESG 9/20 tags are used, M8 and M5 distributors can be labelled with WS 10/5 and DEK 5 markers. For labelling metal distributors, self-adhesive ESG 9/17 must be used.

In the case of the SAI Active family, we differentiate between SAI Active Universal and SAI Active Line. For labelling of Active Universal, we offer ESG 8/13.5/43.3 SAI AU. For labelling of Active Line, the ESG 9/6 is used.

All of these markers are available in MultiCard format and can therefore also be printed using our innovative PrintJet PRO marking solutions.

## DEK for marking of M8 and M5 distributors



### DEK – Blank

Type	Colour	Width/Length	Qty.	Order No.
DEK 5/5 MC	white	5 mm/5 mm	1000	1609801044

### DEK – Custom printing

Type	Colour	Width/Length	Qty.	Order No.
DEK 5/5 MC	white	5 mm/5 mm	200	1609810000

## WS for marking of M8 and M5 distributors



### WS – Blank

Type	Colour	Width/Length	Qty.	Order No.
WS 10/5 MC	white	5 mm/10 mm	720	1635000000
WS 15/5 MC	white	5 mm/15 mm	480	1609880000

### WS – Custom printing

Type	Colour	Width/Length	Qty.	Order No.
WS 10/5 MC	white	5 mm/10 mm	144	1635010000
WS 15/5 MC	white	5 mm/15 mm	96	1609890000

## ESG for marking of M12 Universal distributors



### Ordering data

Type	Colour	Width/Length	Qty.	Order No.
ESG 9/20 MC NEUTRAL WS	white	20 mm/9 mm	200	1609940000

## ESG for marking of M12 Universal distributors



### Ordering data

Type	Colour	Width/Length	Qty.	Order No.
ESG 8/13.5/43.3 SAI AU	transparent	13,5 mm/43,3 mm/8 mm	5	1912130000

# Technical appendix

---

<b>Technical appendix</b>	Sensor Actuator Interface Passive – Overview	W.2
	Coding systems	W.4
	Sensor Actuator Interface Passive – Connection plan	W.9
	Overview of sensor cables	W.10
	Overview of bus cables	W.13
	Drilling templates	W.14
	Resistances table	W.24

---

# Sensor Actuator Interface Passive – Overview



## Technical data

Material data		M5	M8	M12
Insulating material	Housing	PA 6 GF	PBT (UL 94 V0)	PBT (UL 94 V0)
	Contact carrier	PA66	PBT (UL 94 V0)	PBT (UL 94 V0)
Base material	Contact	CuSn4	CuSn6	CuSn6
	Screw socket	CuZn, nickel-plated	CuZn, nickel-plated	CuZn, nickel-plated
Temperature range		-25 ...+90	-20...+90	-20...+90
Colour	Housing	grey, RAL 7032s	grey, RAL 7032	grey, RAL 7032
	PG & contact carrier		black	black
Cable sheathing		PUR	PUR	PUR
Cable type		PUR/PVC	halogen free	halogen free, UL
O-ring		Viton	Viton	Viton
Housing seal				foamed PUR
Type of connection, hood version			tension clamp	screw/tension clamp
Clamping range	mm <sup>2</sup>		0.08...1.0	0.08...1.5
AWG No.			28...18	22...14
Stripping length, hood version	mm		100	100
Stripping length, screw version	mm		–	7
Stripping length, tension clamp version	mm		7	10
Contact surface			tinned	tinned
BL3.5 / B2L				
Contact base material			Cu alloy	Cu alloy
BL3.5 / B2L				
Torques				
Hoods	Nm		0.8	0.8
Blanking plugs	Nm		0.5	0.5
<b>Mechanical data</b>				
Ingress Protection Class*	IP	67	68 (M16/M23 IP67)	68
Suitability for cable carrier	cycles at 15d	1 million 15d	1 million 15d	2 million 10d
<b>IDC connection</b>				
Max. connect. frequency of a cable with same cross-section				–
Stripping length	mm			–
Conductor cross-section (flexible)	mm <sup>2</sup>			–
Smallest strand diameter	mm			–
Conductor insulation material				–
Conductor outside diameter	mm			–
Cable outside diameter	mm			–
Pin assignment				–
<b>Electrical data to VDE 110 (Apr 97)</b>				
Operating voltage	V-	10 ... 30	10 ... 30	10 ... 30
Max. current carrying capacity per I/O signal	A	1	2 (Derating)	2 (Derating)
– total with single supply	A	3	8	10 (9 A for F-version)
– total with dual supply	A	–	–	2 x 8 = 16
Rated voltage	V <sub>eff</sub>	24	32	32
Test voltage	kV <sub>eff</sub>		1.0	1.0
Pollution severity			3	3
Insulation resistance	Ω		> 10 <sup>9</sup>	> 10 <sup>9</sup>
<b>Other data</b>				
Dimensions	see chapter G			
Fixing holes	see chapter G			
Function indicators				
for operating voltage		1 LED, green	1 LED, green	2 LEDs, green
for I/O function		1 LED, yellow (per function)	1 LED, yellow (per function)	1 LED, yellow (per function)
Current isolation (SAI-... -M)			–	via 2 jumper plugs
Cable strain relief (SAI-... -M)			M20	M20
Max. cable diameter (SAI-... -M)	mm		10–14	6–12

\* only when plugged in and secured



**Technical data**

Material data	
Insulating material	Housing Contact carrier
Base material	Contact Screw socket
Temperature range	°C
Colour	Housing PG & contact carrier
Cable sheathing	
Cable type	
O-ring	
Housing seal	
Type of connection, hood version	
Clamping range	mm <sup>2</sup>
AWG No.	
Stripping length, hood version	mm
Stripping length, screw version	mm
Stripping length, tension clamp version	mm
Contact surface	
BL3.5 / B2L	
Contact base material	
BL3.5 / B2L	
Torques	
Hoods	Nm
Blanking plugs	Nm
Mechanical data	
Ingress Protection Class*	IP
Suitability for cable carrier	cycles at 15d
IDC connection	
Max. connect. frequency of a cable with same cross-section	
Stripping length	mm
Conductor cross-section (flexible)	mm <sup>2</sup>
Smallest strand diameter	mm
Conductor insulation material	
Conductor outside diameter	mm
Cable outside diameter	mm
Pin assignment	
Electrical data to VDE 110 (Apr 97)	
Operating voltage	V-
Max. current carrying capacity per I/O signal	A
– total with single supply	A
– total with dual supply	A
Rated voltage	V <sub>eff</sub>
Test voltage	kV <sub>eff</sub>
Pollution severity	
Insulation resistance	Ω
Other data	
Dimensions	see chapter G
Fixing holes	see chapter G
Function indicators	
for operating voltage	
for I/O function	
Current isolation (SAI-... -M)	
Cable strain relief (SAI-... -M)	
Max. cable diameter (SAI-... -M)	mm

\* only when plugged in and secured

IDC	
PBT (UL 94 V0)	
PBT (UL 94 V0)	
CuZn, pre-nickel- & gold-plated	
CuZn, nickel-plated	
-20 ... +90	
grey, RAL 7032	
black	
PUR	
PUR/PVC	
Viton	
foamed PUR	
screw/tension clamp	
0.08 ... 1.5	
22 ... 14	
100	
7	
10	
tinned	
CU-Alloy	
0.8	
0.5	
Mechanical data	
Ingress Protection Class*	IP
Suitability for cable carrier	cycles at 15d
IDC connection	
Max. connect. frequency of a cable with same cross-section	
Stripping length	mm
Conductor cross-section (flexible)	mm <sup>2</sup>
Smallest strand diameter	mm
Conductor insulation material	
Conductor outside diameter	mm
Cable outside diameter	mm
Pin assignment	
Electrical data to VDE 110 (Apr 97)	
Operating voltage	V-
Max. current carrying capacity per I/O signal	A
– total with single supply	A
– total with dual supply	A
Rated voltage	V <sub>eff</sub>
Test voltage	kV <sub>eff</sub>
Pollution severity	
Insulation resistance	Ω
Other data	
Dimensions	see chapter G
Fixing holes	see chapter G
Function indicators	
for operating voltage	
for I/O function	
Current isolation (SAI-... -M)	
Cable strain relief (SAI-... -M)	
Max. cable diameter (SAI-... -M)	mm

M12 Push-Pull	
PA 6 GF	
PBT (UL 94 V0)	
CuSn6	
CuZn, nickel-plated	
-25 ... +80	
grey, RAL 7032	
black	
PUR	
halogen free, UL	
Viton	
foamed PUR	
tension clamp	
0.08 ... 1.5	
22 ... 14	
100	
7	
10	
tinned	
CU-Alloy	
0.8	
0.5	
Mechanical data	
Ingress Protection Class*	IP
Suitability for cable carrier	cycles at 15d
IDC connection	
Max. connect. frequency of a cable with same cross-section	
Stripping length	mm
Conductor cross-section (flexible)	mm <sup>2</sup>
Smallest strand diameter	mm
Conductor insulation material	
Conductor outside diameter	mm
Cable outside diameter	mm
Pin assignment	
Electrical data to VDE 110 (Apr 97)	
Operating voltage	V-
Max. current carrying capacity per I/O signal	A
– total with single supply	A
– total with dual supply	A
Rated voltage	V <sub>eff</sub>
Test voltage	kV <sub>eff</sub>
Pollution severity	
Insulation resistance	Ω
Other data	
Dimensions	see chapter G
Fixing holes	see chapter G
Function indicators	
for operating voltage	
for I/O function	
Current isolation (SAI-... -M)	
Cable strain relief (SAI-... -M)	
Max. cable diameter (SAI-... -M)	mm

\* only when plugged in and secured

# Contact assignment


## SAI-M/SAI-F – IDC

### 3-pole



Pole	Colour code	Assignment
1	brown	+ 24 V DC
2	white	input/output
3	blue	0 V DC



### 4-pole



Pole	Colour code	Assignment
1	brown	+ 24 V DC
2	no colour	Input/output 2
3	blue	0 V DC
4	black	Input/output 1



## M23

### 12-pole



Pole	Colour code	Plug-in station	Contact M12
1	white	1	4
2	green	2	4
3	yellow	3	4
4	grey	4	4
5	pink	5	4
6	red	6	4
7	black	7	4
8	violet	8	4
9	blue (-)	1-8	3
10	blue (-)	1-8	3
11	brown (+)	1-8	1
12	green-yellow (PE)	1-8	5

### 19-pole





Pole	Colour code	Plug-in station	Contact M12
1	violet	8	4
2	red	6	4
3	grey	4	4
4	red/blue	2	2
5	green	2	4
7	grey/pink	1	2
8	white/green	3	2
9	white/yellow	5	2
10	white/grey	7	2
11	black	7	4
13	yellow/brown	6	2
14	brown/green	4	2
15	white	1	4
16	yellow	3	4
17	pink	5	4
18	grey/brown	8	2
6	blue (-)	1-8	3
12	green-yellow (PE)	1-8	5
19	brown (+)	1-8	1

# Coding systems for round connectors



Round connectors are used for wiring sensors, actuators and data cables. To prevent wiring errors, there are different coding systems: for M12, the plug-in connectors are coded A, B and D. The M12 A-coded plug-in connector is available with 3 to 5 pins, 6 to 8 and 9 to 12 pins. There is no coding for M8 and M5.

The arrangement of the pins in the M8 plug-in connector (asymmetrical) rules out the possibility of 3 and 4-pole M8 plug-in connectors being connected together. In the case of M5 plug-in connectors, 3 and 4-pole plug-in connectors can be connected together since the pins are symmetrically arranged.



## A-coded, M12, Sensor wiring

2- to 5-pole:		Pole	Colour code	Assignment
 <p>Male</p>	 <p>Female</p>	1	brown	+ 24 V DC
		2	white	Input/output 2*
		3	blue	0 V DC
		4	black	Input/output 1
		5	grey	FE
		Housing		shield**
		*) = only 5-pole version		**) = only with shielded version

## A-coded, M12, PROFIBUS-PA

2- to 5-pole:		Pole	Assignment
 <p>Male</p>	 <p>Female</p>	1	DATA-B (red wire)
		3	DATA-A (green wire)
		Housing	shield

## A-coded, M12, CANopen/DeviceNet

2- to 5-pole:		Pole	Assignment
 <p>Male</p>	 <p>Female</p>	1	shield
		2	V+
		3	V- (CAN_GND)
		4	CAN_H signal
		5	CAN_L signal



Coding systems

B-coded, M12, PROFIBUS-DP



3- to 5-pole:		Pin	Assignment
<p>Male</p>	<p>Female</p>	2	Data A (green wire)
		4	Data B (red wire)
		Housing	shield

D-coded, M12, Industrial Ethernet

Industrial Ethernet

4-pole:		Pin	Assignment
<p>Male</p>	<p>Female</p>	1	TD+ (transmit data +)
		2	RD+ (receive data +)
		3	TD - (transmit data -)
		4	RD - (receive data -)
		Housing	shield



M12

8-pole:		Pole	Colour code	Assignment
<p>Male</p>	<p>Female</p>	1	white	signal
		2	brown	signal
		3	green	signal
		4	yellow	signal
		5	grey	+ 24 V DC
		6	pink	signal
		7	blue	0 V DC
		8	red	signal



M12

12-pole:		Pole	Colour code	Assignment
<p>Male</p>	<p>Female</p>	1	brown	+ 24 V DC
		2	blue	0 V DC
		3	white	input/output 1
		4	green	input/output 1
		5	pink	input/output 1
		6	yellow	input/output 1
		7	black	input/output 1
		8	grey	input/output 1
		9	red	input/output 1
		10	violet	input/output 1
		11	grey/pink	input/output 1
		12	red/blue	input/output 1



**M8 connector position**

3-pole:		Pole	Colour code	Assignment
 <p>Male</p>	 <p>Female</p>	1	brown	+ 24 V DC
		3	blue	0 V DC
		4	black	Input/output 1

**M8 connector position**

4-pole:		Pole	Colour code	Assignment
 <p>Male</p>	 <p>Female</p>	1	brown	+ 24 V DC
		2	white	Input/output 2
		3	blue	0 V DC
		4	black	Input/output 1


**M5 connector position**

4-pole:		Pole	Colour code	Assignment
 <p>Male</p>	 <p>Female</p>	1	brown	+ 24 V DC
		2	white	Input/output 2
		3	blue	0 V DC
		4	black	Input/output 1


Coding systems

M23

12-pole:



Male




Female


Pole	Colour code	Assignment	Cross-section
1	white	signal	0.34
2	green	signal	0.34
3	yellow	signal	0.34
4	grey	signal	0.34
5	pink	signal	0.34
6	red	signal	0.34
7	black	signal	0.34
8	violet	signal	0.34
9	nc	nc	nc
10	blue	0 V DC	0.75
11	brown	+ 24 V DC	0.75
12	green/yellow	PE	0.75

M23

19-pole:



Male



Female

Pole	Colour code	Assignment	Cross-section
1	violet	signal	0.34
2	red	signal	0.34
3	grey	signal	0.34
4	red/blue	signal	0.34
5	green	signal	0.34
6	blue	0 V DC	0.75
7	grey/pink	signal	0.34
8	white/green	signal	0.34
9	white/yellow	signal	0.34
10	white/grey	signal	0.34
11	black	signal	0.34
12	green/yellow	PE	0.75
13	yellow/brown	signal	0.34
14	brown/green	signal	0.34
15	white	signal	0.34
16	yellow	signal	0.34
17	pink	signal	0.34
18	grey/brown	signal	0.34
19	brown	+ 24 V DC	0.75

# Sensor Actuator Interface Passive – Connection plan

## Connection plan

Terminal Connection No.	Connector position	M5/M8 contact		M12- contact	IDC contact		Potential	Conductor colour	
		3-pole	4-pole		3-pole	4-pole		Conductor colour	Colour code
1	= 1	4	4	4	2	4	E/A 1-1	white	WH
2	= 2	4	4	4	2	4	E/A 2-1	green	GN
3	= 3	4	4	4	2	4	E/A 3-1	yellow	YE
4	= 4	4	4	4	2	4	E/A 4-1	grey	GY
5	= 5	4	4	4	2	4	E/A 5-1	pink	PK
6	= 6	4	4	4	2	4	E/A 6-1	red	RD
7	= 7	4	4	4	2	4	E/A 7-1	black	BK
8	= 8	4	4	4	2	4	E/A 8-1	violet	VT
9	= 1	-	2	2*		2	E/A 1-2	grey/pink	GYPK
10	= 2	-	2	2*		2	E/A 2-2	red/blue	RDBL
11	= 3	-	2	2*		2	E/A 3-2	white/green	WHGN
12	= 4	-	2	2*		2	E/A 4-2	brown/green	BNGN
13	= 5	-	2	2*		2	E/A 5-2	white/yellow	WHYE
14	= 6	-	2	2*		2	E/A 6-2	yellow/brown	YEBN
15	= 7	-	2	2*		2	E/A 7-2	white/grey	WHGY
16	= 8	-	2	2*		2	E/A 8-2	grey/brown	GYBN
17	= 1, 3, 5, 7	1	1	1	1	1	U1 + (24 V DC)	brown	BN
18	= 1, 3, 5, 7	3	3	3	3	3	U1 - (0 V)	blue	BU
19	= 2, 4, 6, 8	-	-	1	1	1	U2 + (24 V DC)	red*	RD*
20	= 2, 4, 6, 8	-	-	3	3	3	U2 - (0 V)	black*	BK*
21	= 1, 2, 3, 4, 5, 6, 7, 8	-	-	5	-	-	PE	green/yellow	GNYE


\* Contact used in 5-pole version only

## Plug insert, hood version

### Note:

SAI distributors with fixed cable have a single supply conductor as standard. The voltage U1 is supplied to all the sockets. An SAI distributor with fixed cable but with separate supply voltage is available on request.

## Pin assignment



## Tension clamp connection




## Screw connection



# Technical data for sensor cables



## M12

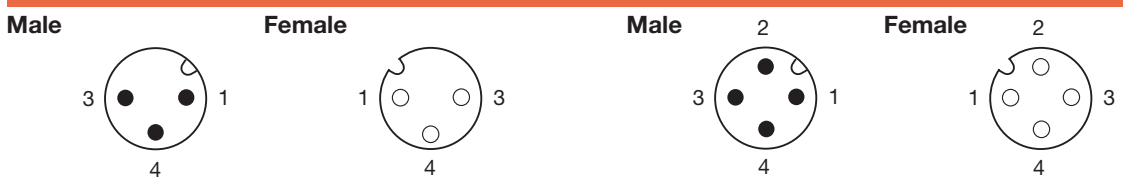

### Technical data

Material properties
Core cross-section
Cladding material
Wire core insulation
Conductor cross-section
Colour coding
Suitable for dragline cable carriers
Min. bending radius, flexible
Min. bending radius, rigid
Temperature, flexible
Temperature, rigid
UL
Colour
Free from halogens


3-pole		
PUR/TPE (Q)	PUR/PVC (U)	PVC/PVC (V)
0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>
PUR	PUR	PVC
TPE	PVC	PVC
4.3 ± 0.2	4.8 ± 0.2	4.8 ± 0.2
brown, blue, black	brown, blue, black	brown, blue, black
Yes*	Yes*	Reduced*
10 x conductor cross-section	10 x conductor cross-section	10 x conductor cross-section
5 x conductor cross-section	5 x conductor cross-section	5 x conductor cross-section
-25 °C / +80 °C	-5 °C / +80 °C	-5 °C / +80 °C
-50 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C
Yes	Yes	Yes
black	black	black
Yes	No	No

4-pole		
PUR/TPE (Q)	PUR/PVC (U)	PVC/PVC (V)
0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>
PUR	PUR	PVC
TPE	PVC	PVC
4.7 ± 0.2	5.2 ± 0.2	5.3 ± 0.2
brown, white, blue, black	brown, white, blue, black	brown, white, blue, black
Yes*	Yes*	Reduced*
10 x conductor cross-section	10 x conductor cross-section	10 x conductor cross-section
5 x conductor cross-section	5 x conductor cross-section	5 x conductor cross-section
-25 °C / +80 °C	-5 °C / +80 °C	-5 °C / +80 °C
-50 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C
Yes	Yes	Yes
black	black	black
Yes	No	No

\* Additional information available on request. Applies to unshielded M12 and M8 cables.

\* Additional information available on request. Applies to unshielded M12 and M8 cables.

## M12

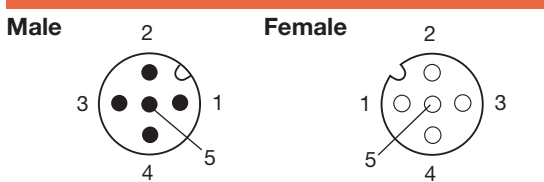


### Technical data

Material properties
Core cross-section
Cladding material
Wire core insulation
Conductor cross-section
Colour coding
Suitable for dragline cable carriers
Min. bending radius, flexible
Min. bending radius, rigid
Temperature, flexible
Temperature, rigid
UL
Colour
Free from halogens
Suitable for torsion

5-pole		
PUR/TPE (Q)	PUR/PVC (U)	PVC/PVC (V)
0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>
PUR	PUR	PVC
TPE	PVC	PVC
5.0 ± 0.2	5.6 ± 0.2	5.7 ± 0.1
brown, white, blue, black, grey	brown, white, blue, black, grey	brown, white, blue, black, grey
Yes*	Yes*	Reduced*
10 x conductor cross-section	10 x conductor cross-section	10 x conductor cross-section
5 x conductor cross-section	5 x conductor cross-section	5 x conductor cross-section
-25 °C / +80 °C	-5 °C / +80 °C	-5 °C / +80 °C
-50 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C
Yes	Yes	Yes
black	black	black
Yes	No	No

\* Additional information available on request. Applies to unshielded M12 and M8 cables.

## M12 Protected against welding splatter

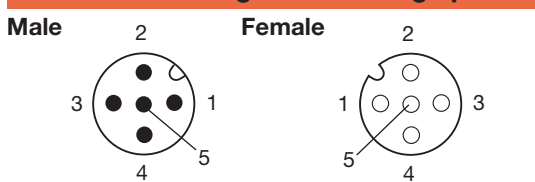


3-pole	4-pole	5-pole
PUR/PVC (T)	PUR/PVC (T)	PUR/PVC (T)
0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>
PUR	PUR	PUR
PVC	PVC	PVC
4.9 ± 0.2	4.9 ± 0.2	5.1 ± 0.2
brown, blue, black	brown, white, blue, black	brown, white, blue, black, grey
Yes*	Yes*	Yes*
7.5 x conductor cross-section	7.5 x conductor cross-section	7.5 x conductor cross-section
-30 °C / +120 °C	-30 °C / +120 °C	-30 °C / +120 °C
-40 °C / +120 °C	-40 °C / +120 °C	-40 °C / +120 °C
Yes	Yes	Yes
black	black	black
Yes	Yes	Yes
Yes	Yes	Yes

\* Additional information available on request.



**M12 shielded**

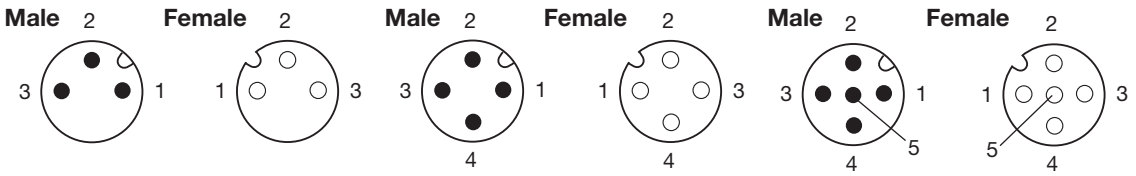

**Technical data**

**Material properties**

- Core cross-section
- Cladding material
- Wire core insulation
- Conductor cross-section
- Colour coding
- Suitable for dragline cable carriers
- Min. bending radius, flexible
- Min. bending radius, rigid
- Temperature, flexible
- Temperature, rigid
- UL
- Colour
- Free from halogens

	3-pole	4-pole	5-pole
<b>PUR/TPE</b>	PUR	PUR	PUR
<b>(Q)</b>	(Q)	(Q)	(Q)
Core cross-section	0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>	0.34 mm <sup>2</sup>
Cladding material	PUR	PUR	PUR
Wire core insulation	TPE	TPE	TPE
Conductor cross-section	5.0 ± 0.2	5.4 ± 0.2	5.7 ± 0.2
Colour coding	brown, blue, black	brown, white, blue, black	brown, white, blue, black, grey
Suitable for dragline cable carriers	Yes*	Yes*	Yes*
Min. bending radius, flexible	10 x conductor cross-section	10 x conductor cross-section	10 x conductor cross-section
Min. bending radius, rigid	5 x conductor cross-section	5 x conductor cross-section	5 x conductor cross-section
Temperature, flexible	-25 °C / +80 °C	-25 °C / +80 °C	-25 °C / +80 °C
Temperature, rigid	-40 °C / +80 °C	-40 °C / +80 °C	-40 °C / +80 °C
UL	Yes	Yes	Yes
Colour	black	black	black
Free from halogens	Yes	Yes	Yes

**Note**


\* Additional information available on request.

Overview of sensor cables




M8


Male




Female



Male



Female



Technical data

Material properties	
Core cross-section	0.25 mm <sup>2</sup>
Cladding material	PUR
Wire core insulation	TPE
Conductor cross-section	4.1 ± 0.2
Colour coding	brown, blue, black
Suitable for dragline cable carriers	Yes*
Min. bending radius, flexible	10 x conductor cross-section
Min. bending radius, rigid	5 x conductor cross-section
Temperature, flexible	-25 °C / +80 °C
Temperature, rigid	-50 °C / +80 °C
UL	No
Colour	black
Free from halogens	Yes
<b>Note</b>	

3-pole

PUR/TPE	PUR/PVC	PVC/PVC
0.25 mm <sup>2</sup>	0.25 mm <sup>2</sup>	0.25 mm <sup>2</sup>
PUR	PUR	PVC
TPE	PVC	PVC
4.1 ± 0.2	4.6 ± 0.2	4.5 ± 0.2
brown, blue, black	brown, blue, black	brown, blue, black
Yes*	Yes*	Reduced*
10 x conductor cross-section	10 x conductor cross-section	10 x conductor cross-section
5 x conductor cross-section	5 x conductor cross-section	5 x conductor cross-section
-25 °C / +80 °C	-5 °C / +80 °C	-5 °C / +80 °C
-50 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C
No	No	No
black	black	black
Yes	No	No
* Additional information available on request. Applies to unshielded M12 and M8 cables.		


4-pole

PUR/TPE	PUR/PVC	PVC/PVC
0.25 mm <sup>2</sup>	0.25 mm <sup>2</sup>	0.25 mm <sup>2</sup>
PUR	PUR	PVC
TPE	PVC	PVC
4.4 ± 0.2	5.0 ± 0.2	4.8 ± 0.2
black, brown, white, blue	black, brown, white, blue	brown, blue, black
Yes*	Yes*	Reduced*
10 x conductor cross-section	10 x conductor cross-section	10 x conductor cross-section
5 x conductor cross-section	5 x conductor cross-section	5 x conductor cross-section
-25 °C / +80 °C	-5 °C / +80 °C	-5 °C / +80 °C
-50 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C
No	No	No
black	black	black
Yes	No	No
* Additional information available on request. Applies to unshielded M12 and M8 cables.		

# Technical data for bus cables



## M 12

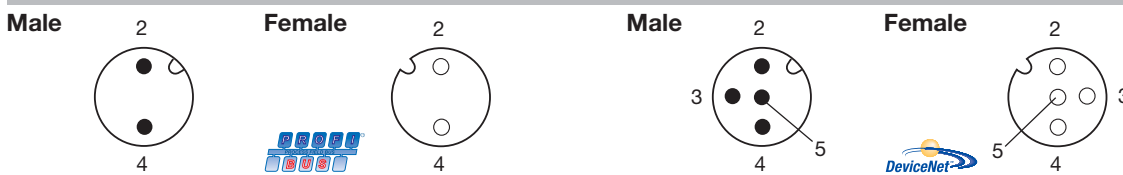


### Technical data

Material properties	
Core cross-section	0.24 mm <sup>2</sup>
Cladding material	PUR
Wire core insulation	TPE
Conductor cross-section	7.8 ± 0.2
Colour coding	red, green
Suitable for dragline cable carriers	Yes*
Min. bending radius, flexible	15 x conductor cross-section
Min. bending radius, rigid	7.5 x conductor cross-section
Temperature, flexible	-20 °C / +60 °C
Temperature, rigid	-40 °C / +70 °C
UL	No
Colour	violet
Free from halogens	Yes
<b>Note</b>	* Additional information available on request. ** for rigid installation

2-pole	
PUR/TPE	PVC/PVC
Core cross-section	0.34 mm <sup>2</sup>
Cladding material	PVC
Wire core insulation	PVC
Conductor cross-section	7.8 ± 0.2
Colour coding	red, green
Suitable for dragline cable carriers	No**
Min. bending radius, flexible	9 x conductor cross-section
Min. bending radius, rigid	18 x conductor cross-section
Temperature, flexible	-5 °C / +60 °C
Temperature, rigid	-20 °C / +70 °C
UL	No
Colour	violet
Free from halogens	No
<b>Note</b>	* Additional information available on request. ** for rigid installation

4-pole	
PUR/TPE	PVC/PVC
Core cross-section	2x 0.34 + 2x 0.22 mm <sup>2</sup>
Cladding material	PVC
Wire core insulation	PVC
Conductor cross-section	7.0 ± 0.3
Colour coding	red, black (0.34 mm <sup>2</sup> ) + white, blue (0.22 mm <sup>2</sup> )
Suitable for dragline cable carriers	Yes*
Min. bending radius, flexible	10 x conductor cross-section
Min. bending radius, rigid	5 x conductor cross-section
Temperature, flexible	-10 °C / +80 °C
Temperature, rigid	-40 °C / +80 °C
UL	Yes
Colour	black
Free from halogens	Yes
<b>Note</b>	* Additional information available on request.

## M 12

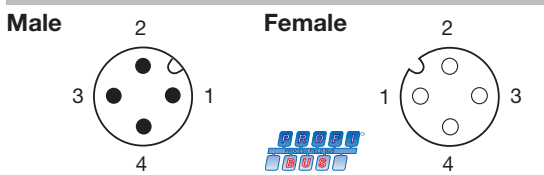

### Technical data


Material properties	
Core cross-section	1.0 mm <sup>2</sup>
Cladding material	PVC
Wire core insulation	PE
Conductor cross-section	8.0 ± 0.4
Colour coding	red, green
Suitable for dragline cable carriers	No
Min. bending radius, flexible	-
Min. bending radius, rigid	-
Temperature, flexible	-5 °C / +60 °C
Temperature, rigid	-30 °C / +80 °C
UL	No
Colour	black
Free from halogens	-
<b>Note</b>	

2-pole	
PVC/PE	PVC/PE
Core cross-section	1.0 mm <sup>2</sup>
Cladding material	PVC
Wire core insulation	PE
Conductor cross-section	8.0 ± 0.4
Colour coding	red, green
Suitable for dragline cable carriers	No
Min. bending radius, flexible	-
Min. bending radius, rigid	-
Temperature, flexible	-5 °C / +60 °C
Temperature, rigid	-30 °C / +80 °C
UL	No
Colour	blue
Free from halogens	-
<b>Note</b>	




# Drilling templates

SAI M12 and M12 Push-Pull:  
hood / M23 / M16 /  
fixed cable / IDC / Asi

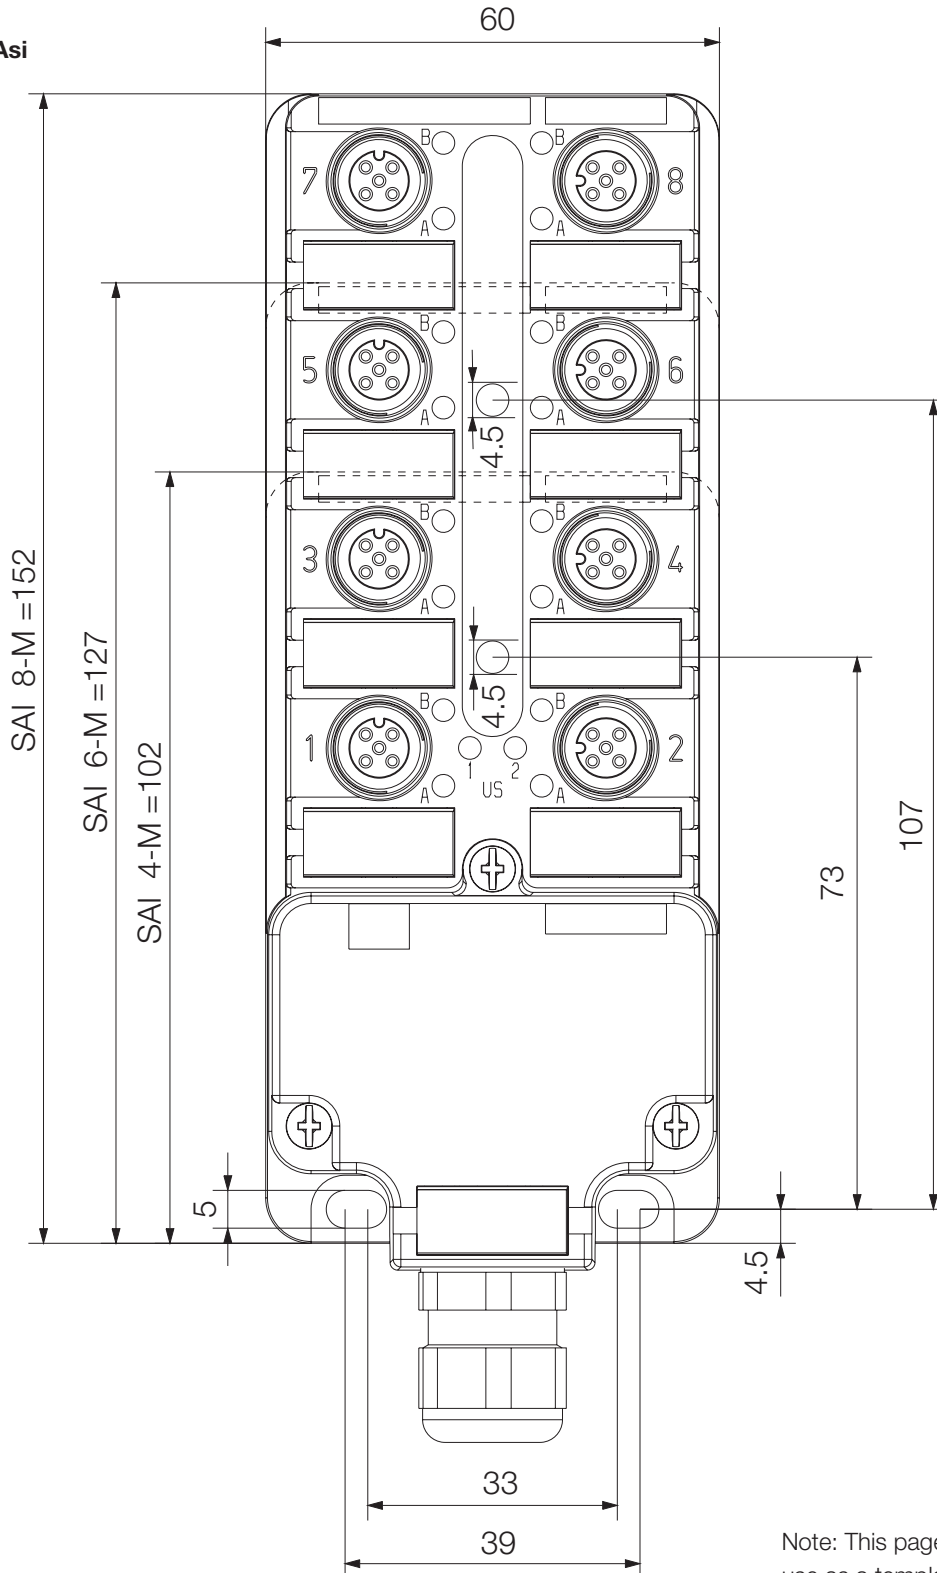

Note: This page can be copied to use as a template.


SAI stainless steel

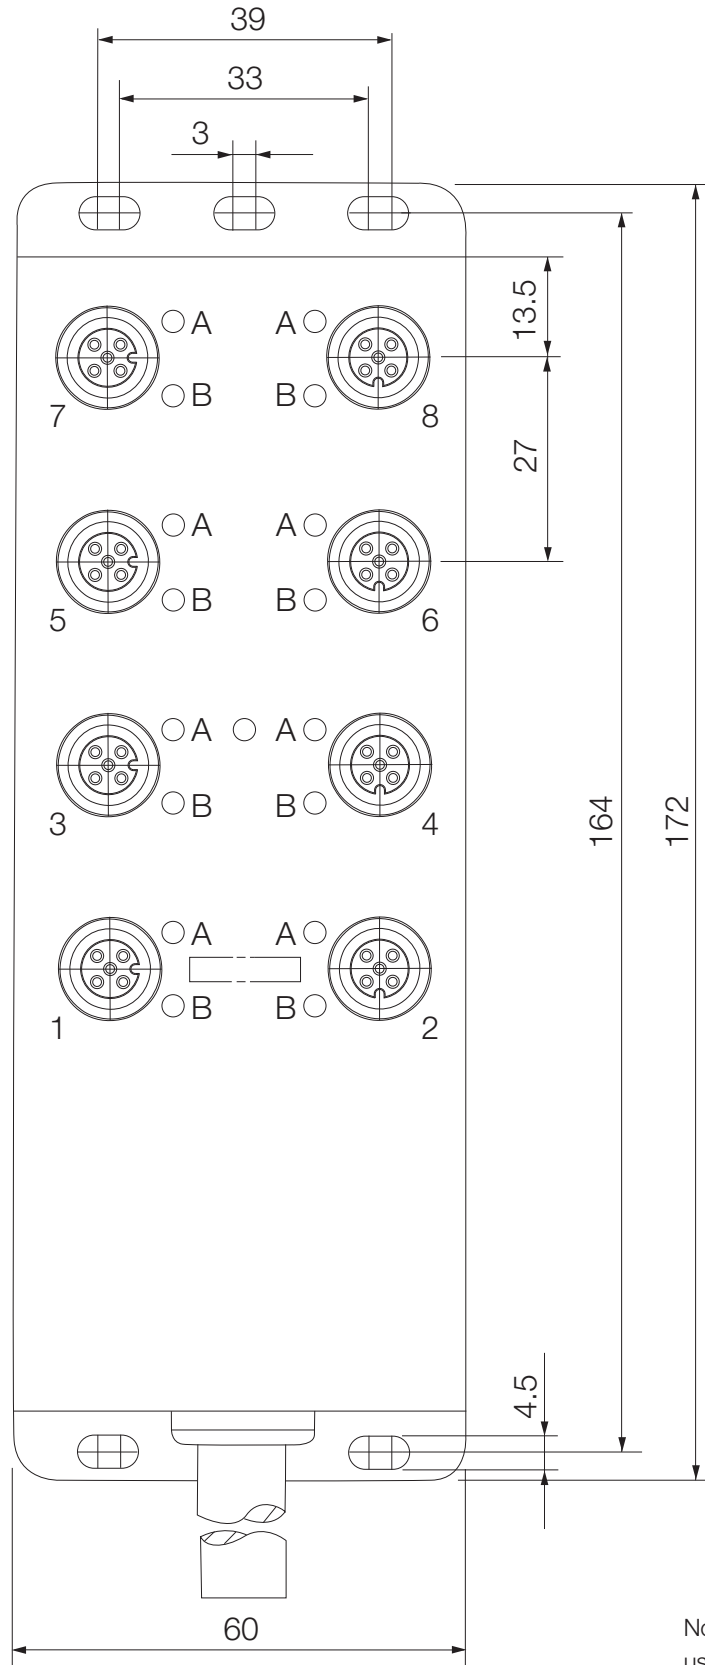

Note: This page can be copied to use as a template.


Drilling templates

SAI wall bushing

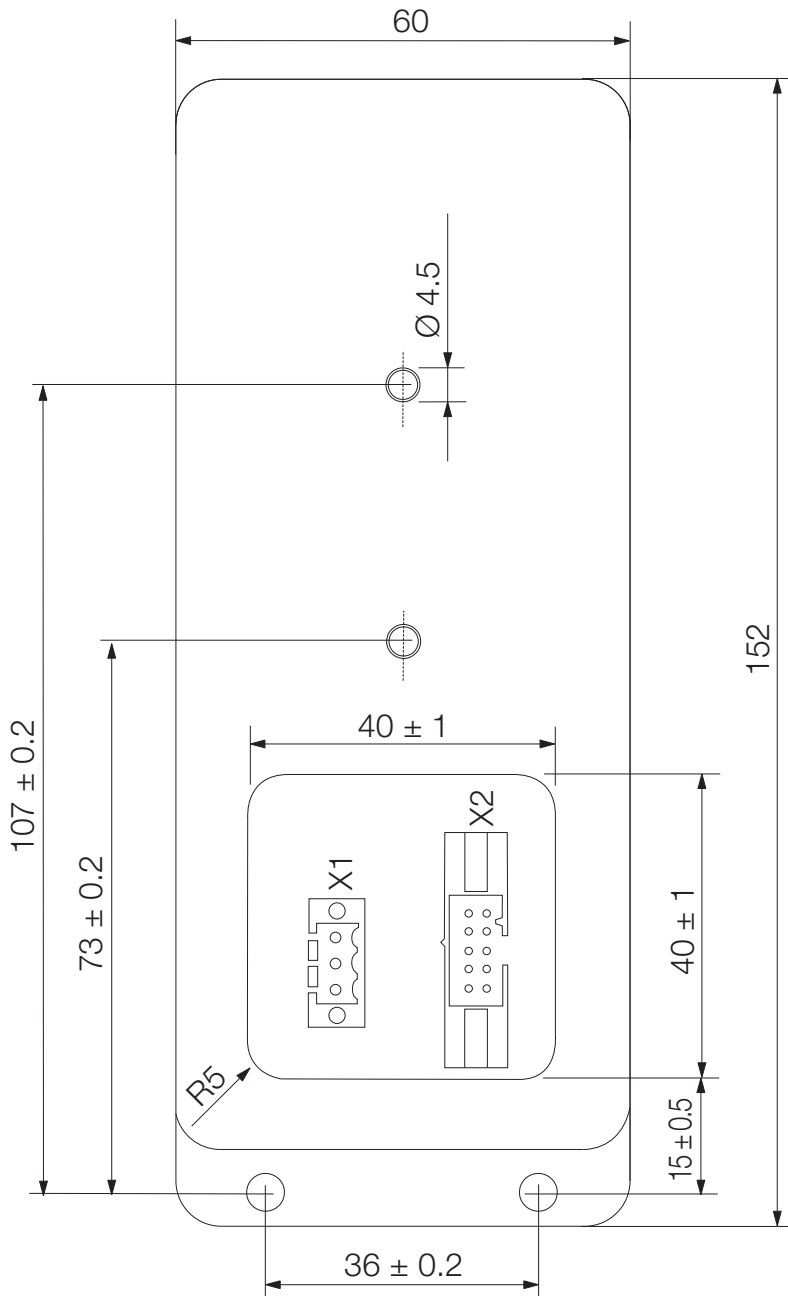

Note: This page can be copied to use as a template.



SAI M8 standard

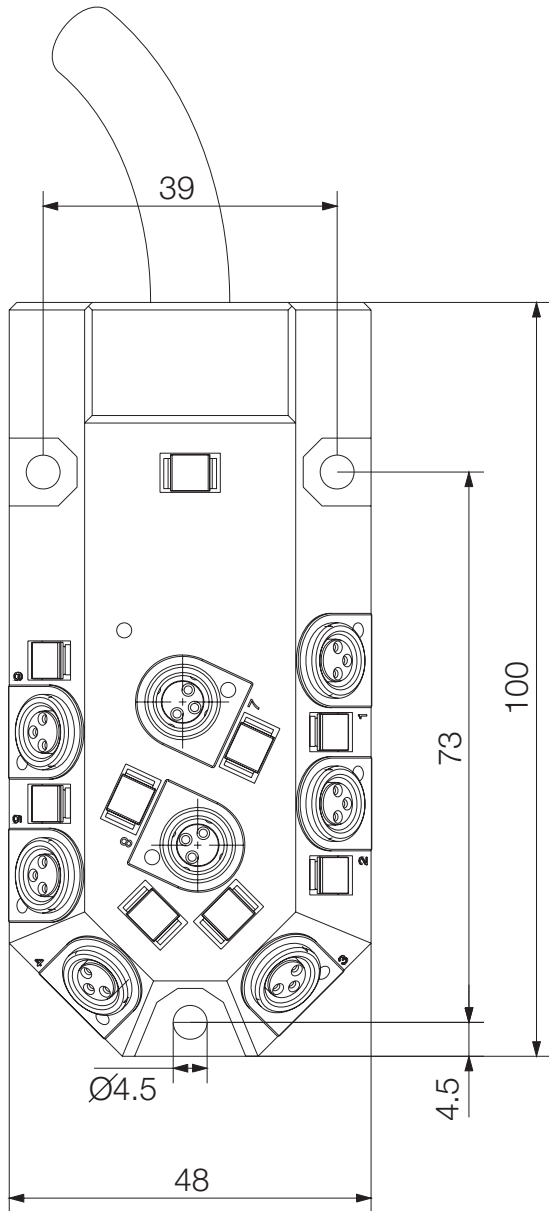

Note: This page can be copied to use as a template.



Drilling templates

SAI M8 line

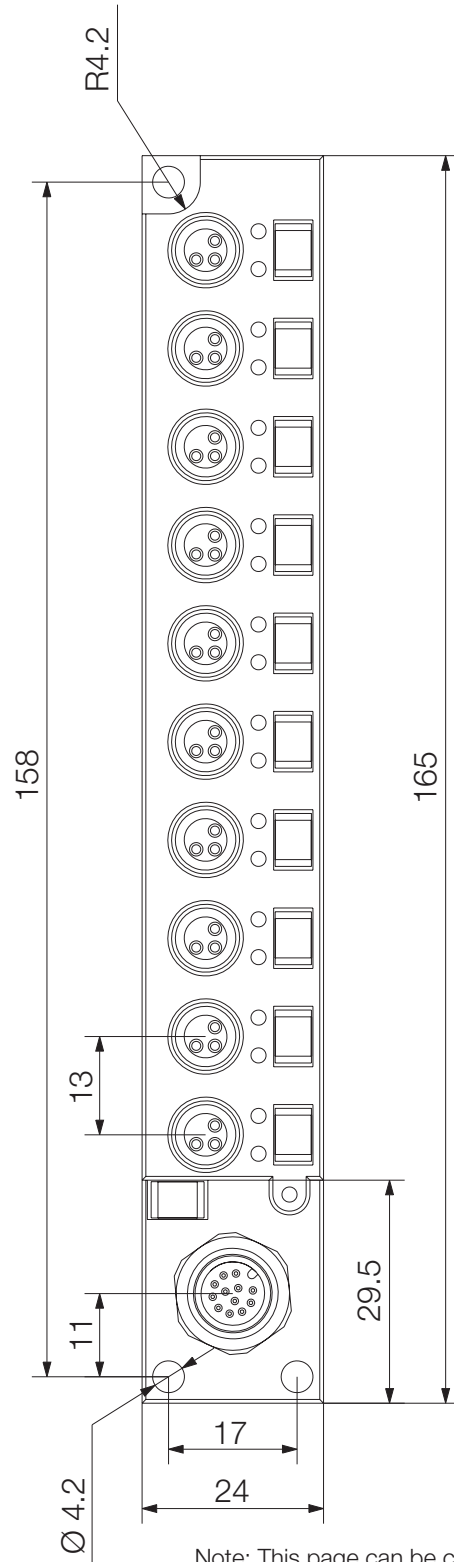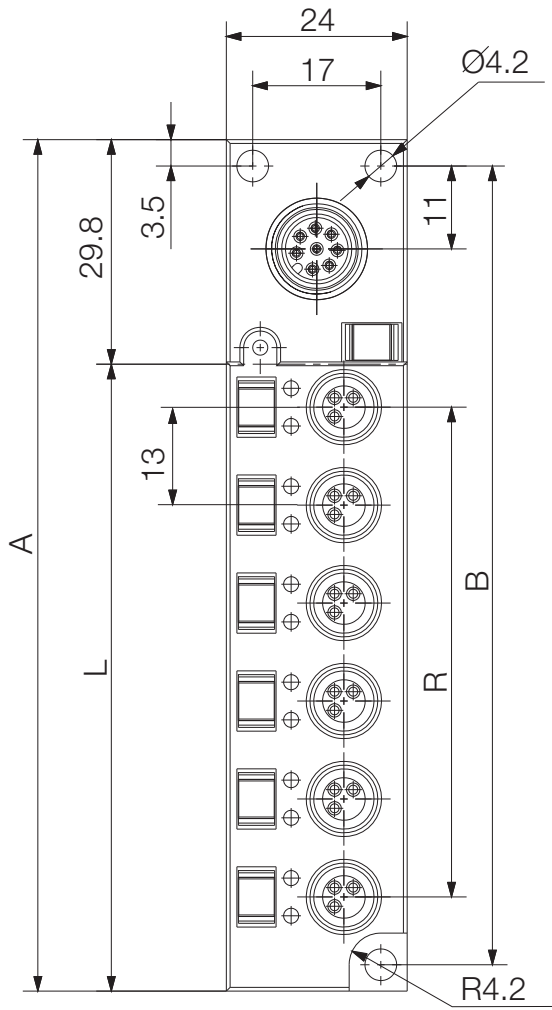

Note: This page can be copied to use as a template.


SAI M5

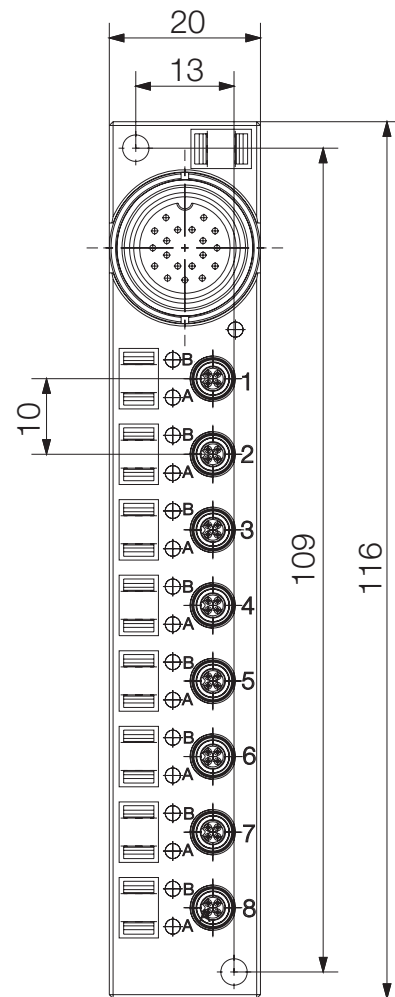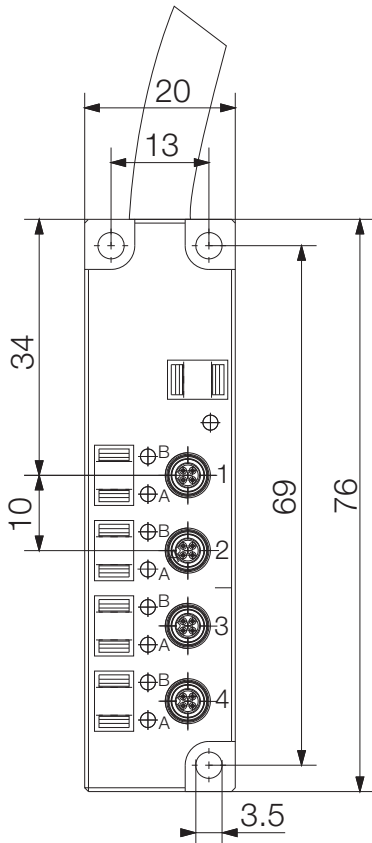

Note: This page can be copied to use as a template.

Drilling templates


SAI Active Universal

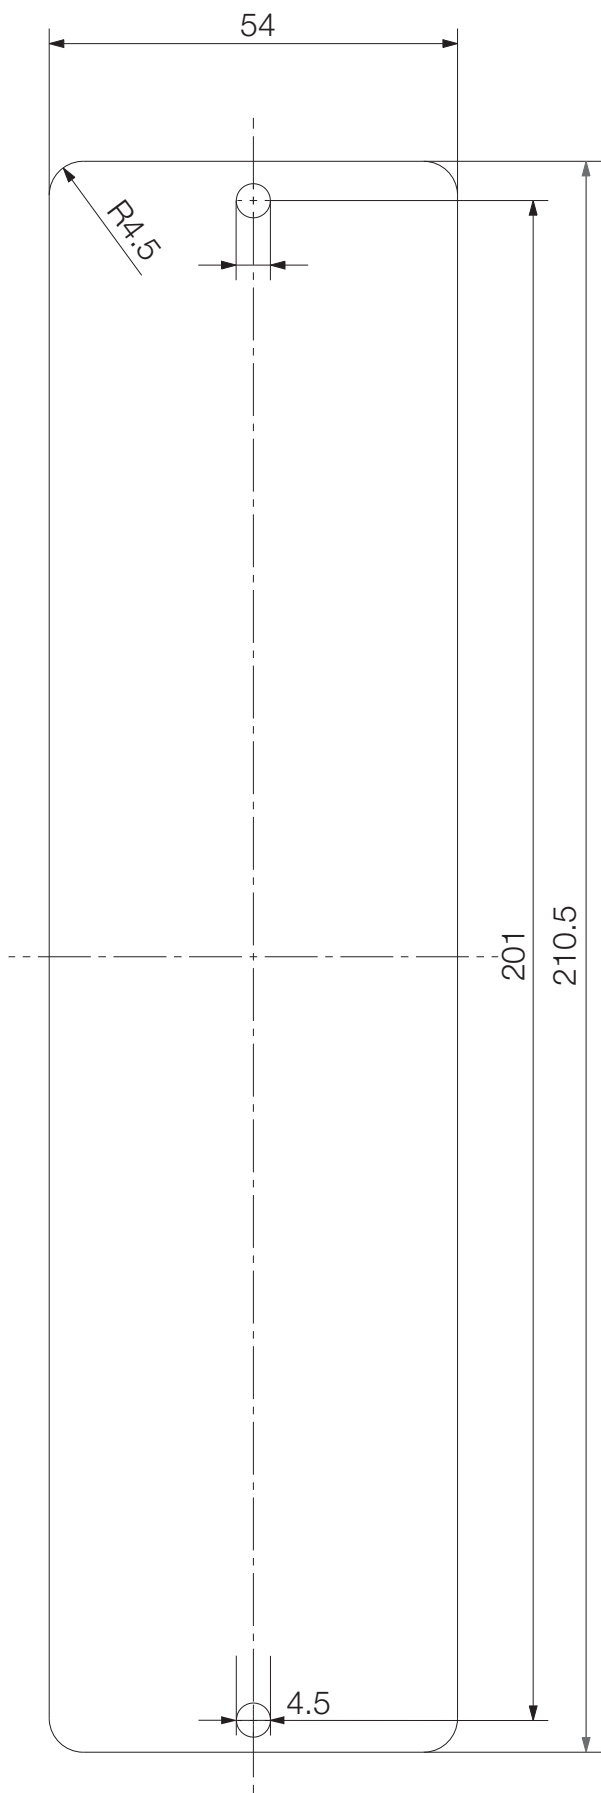

W

Note: This page can be copied to use as a template.

SAI Active Universal Pro:  
Subbus modules with digital outputs

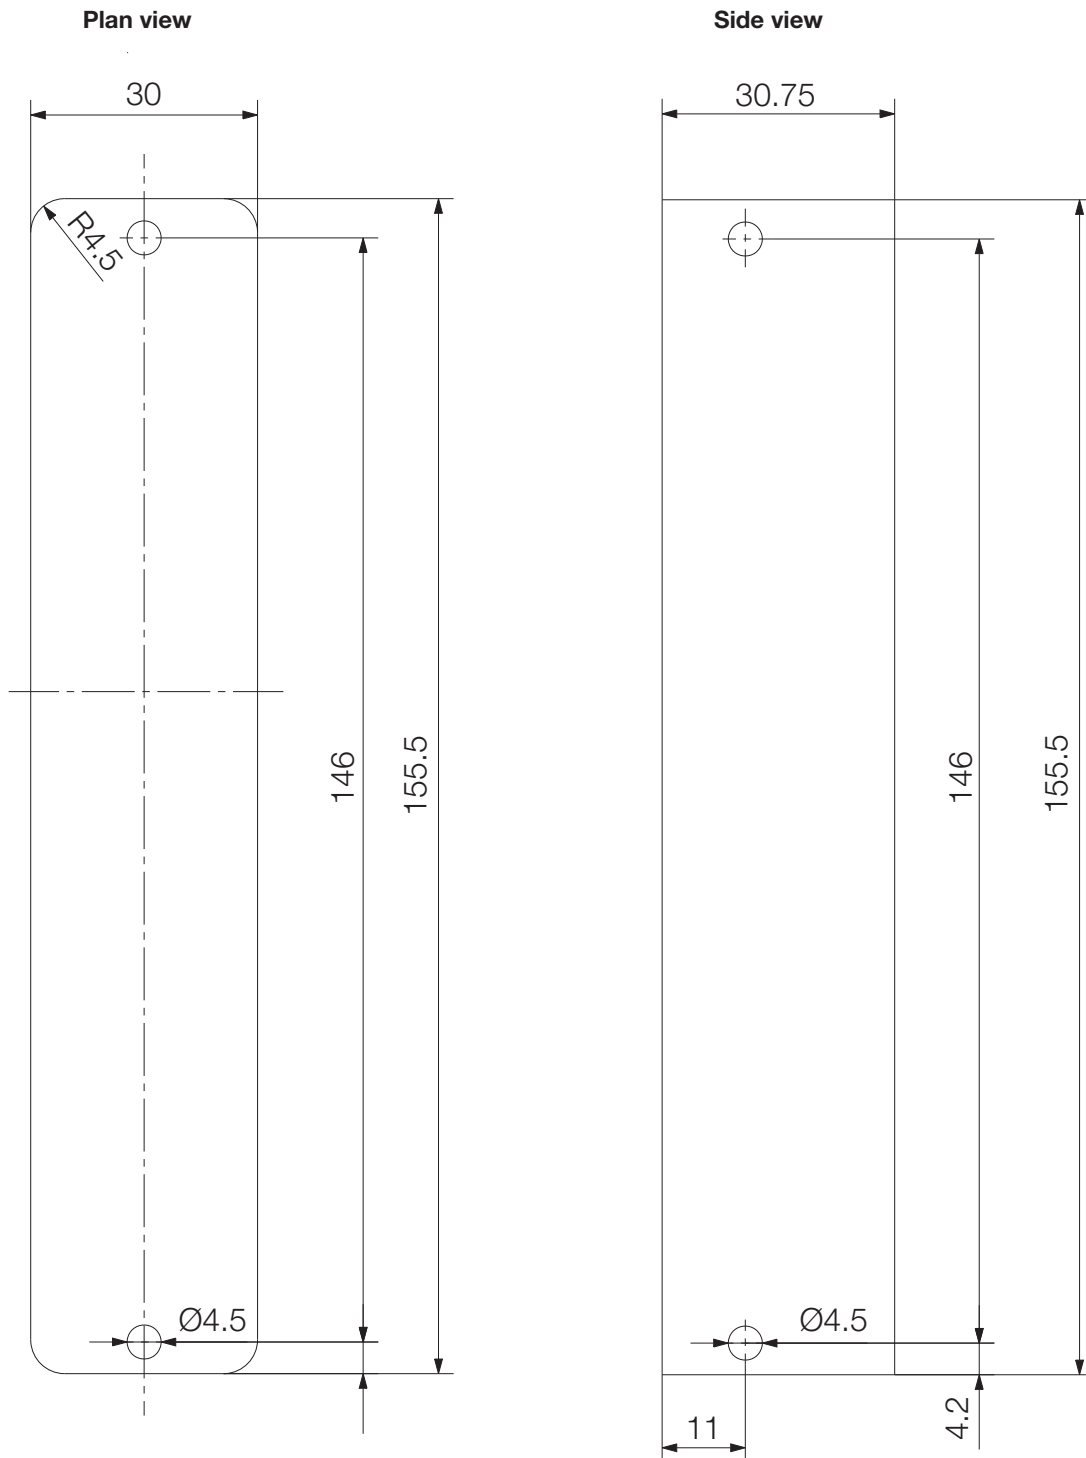


Note: This page can be copied to use as a template.



Drilling templates

SAI Active Universal Pro:  
Subbus modules without digital outputs

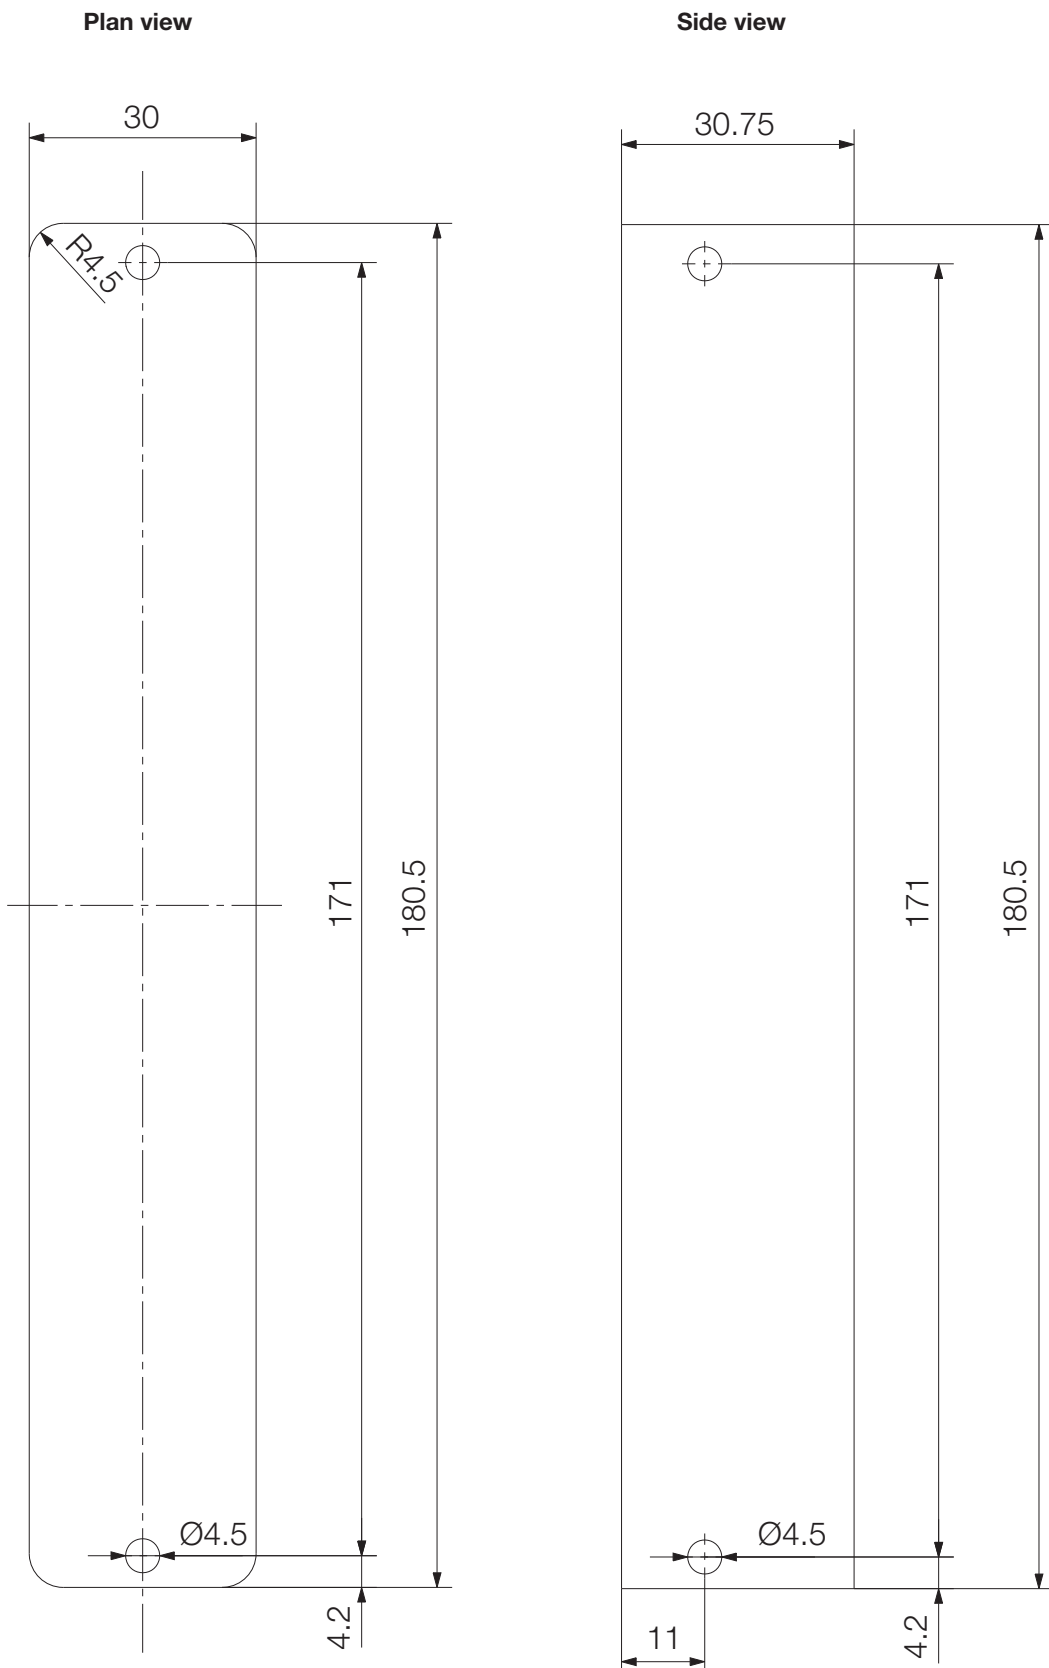

Note: This page can be copied to use as a template.



# Chemical resistance of nickel

The statements on the resistance of nickel to chemicals only apply when the coating is undamaged and is not subject to any mechanical loads. These statements are based on a review of the literature available and it should be noted that pure nickel is not considered in the literature – only alloyed nickel steels.

The statements on page W.15 are based on research, and once again please note that pure nickel has not been included in the testing. The findings in the research are based on undamaged alloyed nickel steels that have not been subject to any mechanical loads.

The six materials in question are:

Chlorobenzene	1
Chloroform	1
Chromic acid hydride	1
Acetic acid	1
Hydrofluoric acid	2
Concentrated hydrochloric acid	2

The findings for the two materials above marked with a “2” could have a critical impact on applications. The findings for the four materials marked with a “1” should be taken into account but would not be considered critical for applications.

A further advantage of nickel is its thermal stability. The resistance does not change up to a temperature of 120 °C.

Pure nickel:

Corrosion properties are determined by the resistance of the passive layer.

Good resistance in:

- water containing oxygen
- flowing seawater
- alkalis (very good resistance) even at high temperatures and high concentrations
- neutral and alkaline salt solutions (carbonates, phosphates, sulphates, chlorides and nitrates) even at high concentrations and temperatures

Known problems:

- corrosion attack in heavily oxidising acids and solutions containing chlorides
- in inorganic and organic acids only resistant in diluted solutions and at low temperatures
- coating is not toxic (formation of deposits by micro-organisms can lead to destruction of the passive coating)

# Chemical resistance of Pocan® (PBT)

Pocan offers good resistance to chemicals. Organic solvents, such as aliphatic hydrocarbons, alcohols, ether, long-chain ester as well as fats, oils and perchlorinated hydrocarbons do not corrode Pocan.

This is also true for water and aqueous solutions, neutral and acid salts, as well as diluted acids.

On the other hand, it is susceptible to alkalis, oxidising acids, ketones and phenols.

Susceptibility to universal alcohols, aromatics and ketones increases as the ambient temperature rises above 60 °C.

In the presence of water and aqueous solutions, hydrolytic degradation at higher temperatures increasingly leads to a decline in stability.

Substances like motor and transformer oils, petrol and brake fluids do not corrode Pocan, even at higher temperatures.

Medium	23 °C	60 °C
Acetic acid 10%	±	±
Acetone	+	-
Ammonia 10%	+	-
Ammonia, concentrated	±	-
Benzene	+	-
Brake fluid	+	+
Butane	+	+
Butanol	+	±
Butyl acetate	+	+
Calcium chloride 10%	+	±
Carbon disulphide	+	±
Carbon tetrachloride	+	±
Chlorobenzene	-	-
Chloroform	-	-
Chromic acid hydride 10%	+	+
Citric acid 10%	+	±
Cresol	-	-
Curd soap	+	+
Dibutyl phthalate	+	±
Diesel oil	+	+
Diethyl ether	+	±
Dioxan	+	-
Ethanol	+	+
Ethyl acetate	±	-
Ethyl dichloride	-	-
Ethylene glycol	+	±
Formic acid 10%	+	±
Freon 11	+	+
Frigen 113	+	+
Glacial acetic acid 10%	-	-
Glycerine	+	+
Heptane	+	+
Hexane	+	+
Hydraulic oil	+	+
Hydrochloric acid 10%	+	-
Hydrochloric acid, concentrated	-	-
Hydrofluoric acid 10%	+	+
Hydrogen peroxide 20%	+	±
Isopropyl alcohol	+	±
Kerosene	+	+

Medium	23 °C	60 °C
Linseed oil	+	+
Lubricating greases	+	+
Methanol	+	±
Methyl ethyl ketone	+	±
Methylene chloride	-	-
Mineral oils	+	+
Motor oils	+	+
Nitric acid 10%	+	±
Nitric acid, concentrated	-	-
Octane	+	+
Olive oil	+	+
Paraffin oil	+	+
Perchloroethylene	±	-
Petrol, normal and lead-free	+	+
Petrol, super	+	+
Petrol/methanol 85/15	+	+
Petroleum	+	+
Phenol 10%	-	-
Phosphoric acid 20%	+	±
Potassium chloride 10%	+	+
Potassium dichromate 10%	+	+
Potassium hydroxide 10%	-	-
Potassium permanganate 10%	+	±
Soap suds 10%	+	±
Sodium bisulphite 10%	+	+
Sodium carbonate 10%	+	+
Sodium chloride 10%	+	+
Sodium hydroxide 10%	-	-
Sulphuric acid 10%	+	±
Sulphuric acid, concentrated	-	-
Tetrahydrofuran	-	-
Toluene	±	-
Transformer oil	+	+
Trichlorethene/chloroform 1/1	±	-
Turpentine oil	+	+
Vegetable oils	+	+
Washing liquid	+	+
Washing powder, synthetic	+	+
Water	+	+
Xylol	±	-

The above values are for guidance only. A definite statement can only be made when based on the respective case in question.

+ = resistant  
- = not resistant  
± = partly resistant



# Index

<b>Index</b>	Index Type	X.2
	Index Order No.	X.9
	Addresses worldwide	X.18



Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
SAI-4-MM 5P M12	1783500000	G.31	SAI-8-F 3P M8 L 5M	1828680000	G.52	SAI-8-MM 5P M12	1783490000	G.6	SAI-AU M12 PB AI/AO/DI	1890000000	E.4
SAI-4-MM 5P M12	1783500000	G.33	SAI-8-F 3P M8 L 5M	1828680000	G.6	SAI-8-MM 5P M12 UT	1783491000	G.33	SAI-AU M12 PB AI/AO/DI	1890000000	E.9
SAI-4-MM 5P M12	1783500000	G.6	SAI-8-F 3P M8 PUR 10M	1784610000	G.48	SAI-8-MMH 5P M12 ZF	1782740000	G.31	SAI-AU M12 PB GW 16DI	1938550000	E.30
SAI-4-MMS 4P M12	1783540000	G.31	SAI-8-F 3P M8 PUR 5M	1784620000	G.48	SAI-8-MMH 5P M12 ZF	1782740000	G.33	SAI-AU M12 PB GW 16DI	1938550000	E.30
SAI-4-MMS 4P M12	1783540000	G.33	SAI-8-F 4P FC 10M	1847980000	G.17	SAI-8-MMS 4P M12	1783530000	G.31	SAI-AU M12 PB GW 16DI	1938550000	E.4
SAI-4-MMS 4P M12	1783540000	G.6	SAI-8-F 4P FC 2M	1847990000	G.17	SAI-8-MMS 4P M12	1783530000	G.33	SAI-AU M12 SB 2Counter	1938730000	E.31
SAI-4-MMS 5P M12	1783520000	G.31	SAI-8-F 4P FC 5M	1848000000	G.17	SAI-8-MMS 4P M12	1783530000	G.6	SAI-AU M12 SB 2Counter	1938730000	E.33
SAI-4-MMS 5P M12	1783520000	G.33	SAI-8-F 4P IDC PUR 10M	1766710000	G.27	SAI-8-MMS 5P M12	1783510000	G.31	SAI-AU M12 SB 2Counter	1938730000	E.35
SAI-4-MMS 5P M12	1783520000	G.6	SAI-8-F 4P IDC PUR 5M	1766700000	G.27	SAI-8-MMS 5P M12	1783510000	G.33	SAI-AU M12 SB 2Counter	1938730000	E.38
SAI-4-MMS 5P M12 1:1	1897680000	G.36	SAI-8-F 4P M5 L10M	1845810000	G.56	SAI-8-MMS 5P M12	1783510000	G.6	SAI-AU M12 SB 2Counter	1938730000	E.4
SAI-4-S 3P M8 L	1828740000	G.50	SAI-8-F 4P M5 L5M	1851750000	G.56	SAI-8-S 3P M5	1845850000	G.56	SAI-AU M12 SB 4AI	1938690000	E.31
SAI-4-S 3P M8 L	1828740000	G.6	SAI-8-F 4P M8 L 10M	1828610000	G.52	SAI-8-S 4P FC	1847920000	G.18	SAI-AU M12 SB 4AI	1938690000	E.33
SAI-4-S 3P M8 L OL	1051760000	G.50	SAI-8-F 4P M8 L 10M	1828610000	G.6	SAI-8-S 4P FC	1847920000	H.23	SAI-AU M12 SB 4AI	1938690000	E.35
SAI-4-S 4P FC	1847960000	G.18	SAI-8-F 4P M8 L 5M	1828620000	G.52	SAI-8-S 4P M12	9456020000	G.11	SAI-AU M12 SB 4AI	1938690000	E.37
SAI-4-S 4P FC	1847960000	H.23	SAI-8-F 4P M8 L 5M	1828620000	G.6	SAI-8-S 4P M12	9456020000	G.6	SAI-AU M12 SB 4AI	1938690000	E.4
SAI-4-S 4P M12	9456000000	G.11	SAI-8-F 4P M8 PUR 10M	1784570000	G.48	SAI-8-S 4P M12	9456020000	G.21	SAI-AU M12 SB 4AO	1938700000	E.31
SAI-4-S 4P M12	9456000000	G.6	SAI-8-F 4P M8 PUR 5M	1784580000	G.48	SAI-8-S 5P FC	1848040000	G.18	SAI-AU M12 SB 4AO	1938700000	E.33
SAI-4-S 4P M5	1845840000	G.56	SAI-8-F 4P PUR 10M	9456760000	G.52	SAI-8-S 5P FC	1848040000	H.23	SAI-AU M12 SB 4AO	1938700000	E.35
SAI-4-S 5P CNOMO	1861540000	G.21	SAI-8-F 4P PUR 10M	9456760000	G.6	SAI-8-S 5P M12	1795470000	G.11	SAI-AU M12 SB 4AO	1938700000	E.37
SAI-4-S 5P FC	1847970000	G.18	SAI-8-F 4P PUR 15M	9456770000	G.9	SAI-8-S 5P M12	1795470000	G.6	SAI-AU M12 SB 4AO	1938700000	E.4
SAI-4-S 5P FC	1847970000	H.23	SAI-8-F 4P PUR 15M	9456770000	G.9	SAI-8-S12 3P M8 L	1871680000	G.50	SAI-AU M12 SB 4PT100	1938710000	E.31
SAI-4-S 5P M12	9456000001	G.11	SAI-8-F 4P PUR 20M	9456790000	G.6	SAI-8-S12 3P M8 L	1871680000	G.6	SAI-AU M12 SB 4PT100	1938710000	E.33
SAI-4-S 5P M12	9456000001	G.6	SAI-8-F 4P PUR 20M	9456790000	G.9	SAI-8-S16 3P M5	1845880000	G.57	SAI-AU M12 SB 4PT100	1938710000	E.35
SAI-4-S16 3P M5	1845890000	G.57	SAI-8-F 4P PUR 3M	9456740000	G.9	SAI-8-S16/19P 4P M5	1845860000	G.57	SAI-AU M12 SB 4PT100	1938710000	E.4
SAI-4-S16 4P M5	1845870000	G.57	SAI-8-F 4P PUR 5M	9456750000	G.6	SAI-8-SH 4P FC	1859120000	G.19	SAI-AU M12 SB 4PT100	1938710000	E.4
SAI-4-SH 4P FC	1859110000	G.19	SAI-8-F 4P PUR 5M	9456750000	G.9	SAI-8-SH 4P FC	1859120000	H.24	SAI-AU M12 SB 4Thermo	1938720000	E.31
SAI-4-SH 4P FC	1859110000	H.24	SAI-8-F 5P 10M 0.5/1.0U	9457600000	G.9	SAI-8-SH 5P FC	1859140000	G.19	SAI-AU M12 SB 4Thermo	1938720000	E.33
SAI-4-SH 5P FC	1859130000	G.19	SAI-8-F 5P 15M 0.5/1.0U	1784510000	G.9	SAI-8-SH 5P FC	1859140000	H.24	SAI-AU M12 SB 4Thermo	1938720000	E.35
SAI-4-SH 5P M12	1859130000	H.24	SAI-8-F 5P 20M 0.5/1.0U	1784500000	G.9	SAI-8-SHB 5P F13 FC	1872460000	G.23	SAI-AU M12 SB 4Thermo	1938720000	E.39
SAI-6-F 3P IDC PUR 10M	1766750000	G.27	SAI-8-F 5P 2M 0.5/1.0U	7915030000	G.9	SAI-8-SHB 5P FC	1872440000	G.22	SAI-AU M12 SB 4Thermo	1938720000	E.4
SAI-6-F 3P IDC PUR 5M	1766740000	G.27	SAI-8-F 5P 5M 0.5/1.0U	9457590000	G.21	SAI-ASI T FF small	1026090000	C.65	SAI-AU M12 SB 8DI	1938610000	E.31
SAI-6-F 3P M8 L 10M	1828680000	G.52	SAI-8-F 5P CNOMO 10M	1861590000	G.9	SAI-ASI T FFR	1924980000	C.65	SAI-AU M12 SB 8DI	1938610000	E.33
SAI-6-F 3P M8 L 10M	1828680000	G.6	SAI-8-F 5P CNOMO 5M	1861550000	G.21	SAI-ASI T FFR	1925010000	C.64	SAI-AU M12 SB 8DI	1938610000	E.35
SAI-6-F 3P M8 L 5M	1828700000	G.52	SAI-8-F 5P FC 10M	1848010000	G.17	SAI-AU M12 BT 16DI	1006940000	E.4	SAI-AU M12 SB 8DI	1938610000	E.36
SAI-6-F 3P M8 L 5M	1828700000	G.6	SAI-8-F 5P FC 2M	1848020000	G.17	SAI-AU M12 BT 16DI	1006940000	E.45	SAI-AU M12 SB 8DI	1938610000	E.4
SAI-6-F 4P IDC PUR 10M	1766690000	G.27	SAI-8-F 5P FC 5M	1848030000	G.17	SAI-AU M12 BT 16DI	1006940000	E.46	SAI-AU M12 SB 8DIO	1938640000	E.31
SAI-6-F 4P IDC PUR 5M	1766680000	G.27	SAI-8-F 5P M12 5M VA	1865310000	G.28	SAI-AU M12 BT 16DI/8DO	1006930000	E.4	SAI-AU M12 SB 8DIO	1938640000	E.33
SAI-6-F 4P M8 L 10M	1849670000	G.52	SAI-8-F 5P NPN-PNP 5M	1814990000	G.38	SAI-AU M12 BT 16DI/8DO	1006930000	E.45	SAI-AU M12 SB 8DIO	1938640000	E.35
SAI-6-F 4P M8 L 10M	1849670000	G.6	SAI-8-F 5P PUR 10M	9456900000	G.6	SAI-AU M12 BT 16DI/8DO	1006930000	E.46	SAI-AU M12 SB 8DIO	1938640000	E.36
SAI-6-F 4P M8 L 5M	1849700000	G.52	SAI-8-F 5P PUR 10M	9456900000	G.9	SAI-AU M12 BT4AI2AO2DIO	1006920000	E.4	SAI-AU M12 SB 8DIO	1938640000	E.4
SAI-6-F 4P M8 L 5M	1849700000	G.6	SAI-8-F 5P PUR 15M	9456910000	G.6	SAI-AU M12 BT4AI2AO2DIO	1006920000	E.45	SAI-AU M12 SB 8DO 2A	1938680000	E.31
SAI-6-F 4P M8 L 5M	1849700000	G.6	SAI-8-F 5P PUR 15M	9456910000	G.9	SAI-AU M12 BT4AI2AO2DIO	1006920000	E.47	SAI-AU M12 SB 8DO 2A	1938680000	E.33
SAI-6-F 4P PUR 10M	9456480000	G.9	SAI-8-F 5P PUR 20M	9456930000	G.6	SAI-AU M12 CAN 16DI	1906650000	E.12	SAI-AU M12 SB 8DO 2A	1938680000	E.35
SAI-6-F 4P PUR 10M	9456480000	G.6	SAI-8-F 5P PUR 20M	9456930000	G.9	SAI-AU M12 CAN 16DI	1906650000	E.14	SAI-AU M12 SB 8DO 2A	1938680000	E.36
SAI-6-F 4P PUR 15M	9456490000	G.9	SAI-8-F 5P PUR 3M	9456880000	G.9	SAI-AU M12 CAN 16DI	1906650000	E.4	SAI-AU M12 SB 8DO 2A	1938680000	E.4
SAI-6-F 4P PUR 15M	9456490000	G.6	SAI-8-F 5P PUR 5M	9456890000	G.6	SAI-AU M12 CAN 16DI/8DO	1906660000	E.12	SAI-AU M12 USB GW 8IBO	1962240000	E.34
SAI-6-F 4P PUR 20M	9456510000	G.9	SAI-8-F 5P PUR 5M	9456890000	G.9	SAI-AU M12 CAN 16DI/8DO	1906660000	E.14	SAI-AU M12 USB GW 8IBO	1962240000	E.35
SAI-6-F 4P PUR 20M	9456510000	G.6	SAI-8-FMM-4P M12 10M	9456760002	G.31	SAI-AU M12 CAN 16DI/8DO	1906660000	E.13	SAI-AU M12 USB GW 8IBO	1962240000	E.4
SAI-6-F 4P PUR 3M	1760050000	G.26	SAI-8-FMM-4P M12 10M	9456760002	G.32	SAI-AU M12 CAN AI/AO/DI	1906670000	E.4	SAI-AU M8 CAN 16DI	1906680000	E.12
SAI-6-F 4P PUR 3M	1760050000	G.6	SAI-8-FMM-4P M12 10M	9456760002	G.6	SAI-AU M12 CAN AI/AO/DI	1906670000	E.14	SAI-AU M8 CAN 16DI	1906680000	E.14
SAI-6-F 4P PUR 3M	1760050000	G.26	SAI-8-FMM-4P M12 5M	9456750002	G.31	SAI-AU M12 CAN AI/AO/DI	1906670000	E.4	SAI-AU M8 CAN 16DI	1906680000	E.4
SAI-6-F 4P PUR 3M	1760050000	G.6	SAI-8-FMM-4P M12 5M	9456750002	G.32	SAI-AU M12 CAN 16DI/8DO	1906670000	E.16	SAI-AU M8 CAN 16DI/8DO	1906690000	E.12
SAI-6-F 5P PUR 20M	9456650000	G.9	SAI-8-FMM-4P M12 5M	9456750002	G.6	SAI-AU M12 DN 16DI	1906700000	E.18	SAI-AU M8 CAN 16DI/8DO	1906690000	E.14
SAI-6-F 5P PUR 20M	9456650000	G.6	SAI-8-M 3P IDC	1760061000	G.26	SAI-AU M12 DN 16DI	1906700000	E.4	SAI-AU M8 CAN 16DI/8DO	1906690000	E.4
SAI-6-F 5P PUR 20M	9456650000	G.9	SAI-8-M 3P IDC UT	1784670000	G.48	SAI-AU M12 DN 16DI/8DO	1906710000	E.16	SAI-AU M8 DN 16DI	1906730000	E.18
SAI-6-F 5P PUR 20M	9456650000	G.6	SAI-8-M 4P Exi Z1 IL	1868370000	G.59	SAI-AU M12 DN 16DI/8DO	1906710000	E.4	SAI-AU M8 DN 16DI	1906730000	E.16
SAI-6-F 5P PUR 3M	9456680000	G.9	SAI-8-M 4P Exi Z1 OL	1894380000	G.59	SAI-AU M12 DN AI/AO/DI	1906720000	E.17	SAI-AU M8 DN 16DI/8DO	1906740000	E.16
SAI-6-F 5P PUR 3M	9456680000	G.6	SAI-8-M 4P IDC	1766800000	G.26	SAI-AU M12 DN AI/AO/DI	1906720000	E.18	SAI-AU M8 DN 16DI/8DO	1906740000	E.18
SAI-6-F 5P PUR 5M	9456610000	G.9	SAI-8-M 4P IDC UT	1766801000	G.26	SAI-AU M12 DN AI/AO/DI	1906720000	E.4	SAI-AU M8 DN 16DI/8DO	1906740000	E.4
SAI-6-M 3P IDC	1760050000	G.26	SAI-8-M 4P M12	1705940000	G.8	SAI-AU M12 DN GW 16DI	1938570000	E.32	SAI-AU M8 EIP 16DI	1906930000	E.20
SAI-6-M 3P IDC	1760050000	G.6	SAI-8-M 4P M12	1705940000	G.8	SAI-AU M12 DN GW 16DI	1938570000	E.33	SAI-AU M8 EIP 16DI	1906930000	E.22
SAI-6-M 3P IDC UT	1705940000	G.26	SAI-8-M 4P M12 UT	1705941000	G.42	SAI-AU M12 EIP 16DI	1938570000	E.4	SAI-AU M8 EIP 16DI	1906930000	E.4
SAI-6-M 4P IDC	1766790000	G.26	SAI-8-M 4P M12 UT	1705941000	G.6	SAI-AU M12 EIP 16DI/8DO	1906900000	E.20	SAI-AU M8 EIP 16DI/8DO	1906940000	E.20
SAI-6-M 4P IDC UT	1766791000	G.26	SAI-8-M 4P M8	1784690000	G.48	SAI-AU M12 EIP 16DI	1906900000	E.22	SAI-AU M8 EIP 16DI/8DO	1906940000	E.22
SAI-6-M 4P IDC UT	1766791000	G.6	SAI-8-M 5P Ex Z22	1861530000	G.60	SAI-AU M12 EIP 16DI	1906900000	E.4	SAI-AU M8 EIP 16DI/8DO	1906940000	E.4
SAI-6-M 4P M12	1705930000	G.42	SAI-8-M 5P FC	1848070000	G.20	SAI-AU M12 EIP 16DI/8DO	1906910000	E.20	SAI-AU M8 IE 16DI	1906880000	E.24
SAI-6-M 4P M12	1705930000	G.8	SAI-8-M 5P M12	1701250000	G.6	SAI-AU M12 EIP 16DI/8DO	1906910000	E.22	SAI-AU M8 IE 16DI	1906880000	E.26
SAI-6-M 4P M12 UT	1705931000	G.42	SAI-8-M 5P M12 ECO	1892080000	G.15	SAI-AU M12 EIP 16DI/8DO	1906910000	E.4	SAI-AU M8 IE 16DI	1906880000	E.4
SAI-6-M 4P M12 UT	1705931000	G.6	SAI-8-M 5P M12 ECO UT	1892081000	G.15	SAI-AU M12 EIP AI/AO/DI	1906920000	E.21	SAI-AU M8 IE 16DI/8DO	1906890000	E.24
SAI-6-M 5P Ex Z22	1861840000	G.60	SAI-8-M 5P M12 Ex ia	1896090000	G.59	SAI-AU M12 EIP AI/AO/DI	1906920000	E.22	SAI-AU M8 IE 16DI/8DO	1906890000	E.26
SAI-6-M 5P M12	1701240000	G.6	SAI-8-M 5P M12 NPN	1781060000	G.8	SAI-AU M12 EIP AI/AO/DI	1906920000	E.4	SAI-AU M8 PB 16DI	1906550000	E.10
SAI-6-M 5P M12	1701240000	G.15	SAI-8-M 5P M12 NPN ECO	1892080005	G.15	SAI-AU M12 EIP GW 16DI	1019490000	E.32	SAI-AU M8 PB 16DI	1906550000	E.4
SAI-6-M 5P M12 ECO	1892090000	G.15	SAI-8-M 5P M12 OL2	1816610000	G.8	SAI-AU M12 EIP GW 16DI	1019490000	E.4	SAI-AU M8 PB 16DI	1906550000	E.8
SAI-6-M 5P M12 ECO UT	1892091000	G.15	SAI-8-M 5P M12 OL2	1816610000	G.42	SAI-AU M12 EIP GW 16DI	1019490000	E.4			



Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
SAIB 5/9-VA	1920710000	D.10	SAIBW-M-4/8 M12	1803910000	D.12	SAIL-M12BG-3-3.0Q	1926760300	B.6	SAIL-M12BW-3L3.0Q	1926650300	B.8
SAIB 5/9-VA-B-COD	1920710000	G.29	SAIBW-M-4/8 M12	1803910000	D.5	SAIL-M12BG-3-3.0U	9457820300	B.6	SAIL-M12BW-3L3.0U	9457800300	B.8
SAIB 5/9-VA-B-COD	1920730000	C.10	SAIBW-M-5/8 M12	1803920000	C.31	SAIL-M12BG-3-3.0V	1925570300	B.6	SAIL-M12BW-3L3.0V	1925460300	B.8
SAIB 5/9-VA-B-COD	1920730000	D.10	SAIBW-M-5/8 M12	1803920000	C.63	SAIL-M12BG-3-5.0Q	1926760500	B.6	SAIL-M12BW-3L5.0Q	1926650500	B.8
SAIB 5/9-VA-B-COD	1920730000	G.29	SAIBW-M-5/8 M12	1803920000	D.12	SAIL-M12BG-3-5.0U	9457820500	B.6	SAIL-M12BW-3L5.0U	9457800500	B.8
SAIB-12/9-(TL)	1924960000	D.5	SAIBW-M-5/8 M12	1803920000	D.5	SAIL-M12BG-3-5.0V	1925570500	B.6	SAIL-M12BW-3L5.0V	1925460500	B.8
SAIB-3/7	1924940000	D.5	SAIBW-M-5/8 M12 B-COD	1944580000	C.11	SAIL-M12BG-3B-1.5Q	1057740150	B.41	SAIL-M12BW-3LX.XQ	1926650000	B.8
SAIB-3/7	1021490000	D.7	SAIBW-M-5/8 M12 B-COD	1944580000	D.14	SAIL-M12BG-3S1.5Q	1867410150	B.16	SAIL-M12BW-3LX.XV	9457800000	B.8
SAIB-3/9	1021510000	D.5	SAIBW-M-5/8 M12 B-COD	1944580000	D.5	SAIL-M12BG-3-X.XQ	1926760000	B.6	SAIL-M12BW-3LX.XV	1925460000	B.8
SAIB-3/9	1021510000	D.7	SAIBW-M-3P(TL)	1920970000	D.19	SAIL-M12BG-3-X.XU	9457820000	B.6	SAIL-M12BW-3S1.5Q	1906950150	B.16
SAIB-3-IDC (0,75) M12	1852730000	D.23	SAIBW-M-3P(TL)	1920970000	D.6	SAIL-M12BG-3-X.XV	1925570000	B.6	SAIL-M12BW-3-X.XQ	1926820000	B.7
SAIB-3-IDC (0,75) M12	1852730000	D.5	SAIBW-M-4P(TL)	1920980000	D.19	SAIL-M12BG-4-1.5Q	1926770150	B.11	SAIL-M12BW-3-X.XU	9457320000	B.7
SAIB-3-IDC-M12B-COD	1864740000	C.12	SAIBW-M-4P(TL)	1920980000	D.6	SAIL-M12BG-4-1.5Q	1926770150	B.6	SAIL-M12BW-3-X.XV	1925630000	B.7
SAIB-3-IDC-M12B-COD	1864740000	D.13	SAIE-EW-M20/PG9-SW24-VA	1950270000	C.33	SAIL-M12BG-4-1.5QGE	1092920150	B.11	SAIL-M12BW-4-1.5Q	1926830150	B.11
SAIB-3-IDC-M8 small	1784030001	D.24	SAIE-M12B-4-0.5U-PP-M16	1861190000	D.29	SAIL-M12BG-4-1.5T	1968580150	B.11	SAIL-M12BW-4-1.5Q	1926830150	B.7
SAIB-3-IDC-M8 small	1784030001	D.6	SAIE-M12B-4-0.5U-M16	1861120000	D.29	SAIL-M12BG-4-1.5U	9457730150	B.11	SAIL-M12BW-4-1.5QGE	1092960150	B.11
SAIB-4/7	9457240000	D.5	SAIE-M12B-4-0.5U-PG9	1861250000	D.30	SAIL-M12BG-4-1.5U	9457730150	B.6	SAIL-M12BW-4-1.5T	1968570150	B.11
SAIB-4/7	9457240000	D.7	SAIE-M12B-5-0.5U-PP-M16	1856110000	D.29	SAIL-M12BG-4-1.5V	1925580150	B.11	SAIL-M12BW-4-1.5U	9457740150	B.11
SAIB-4/7-(KV)	1921080000	D.9	SAIE-M12B-5-0.5U-M16	1836910000	D.29	SAIL-M12BG-4-1.5V	1925580150	B.6	SAIL-M12BW-4-1.5U	9457740150	B.7
SAIB-4/9	1807230000	D.5	SAIE-M12B-5-0.5U-PG9	1814890000	D.30	SAIL-M12BG-4-10Q	1926771000	B.6	SAIL-M12BW-4-1.5V	1925640150	B.11
SAIB-4/9	1807230000	D.7	SAIE-M12B-8-0.5U-M16	1861140000	D.29	SAIL-M12BG-4-10U	9457731000	B.6	SAIL-M12BW-4-1.5V	1925640150	B.7
SAIB-4-IDC (0,75) M12	1852750000	D.23	SAIE-M12B-8-0.5U-PP-M16	1861210000	D.29	SAIL-M12BG-4-10V	1925581000	B.6	SAIL-M12BW-4-10Q	1926831000	B.7
SAIB-4-IDC-M12 small	1781540001	D.22	SAIE-M12B-8-0.5U-PG9	1861270000	D.30	SAIL-M12BG-4-3.0Q	1926770300	B.6	SAIL-M12BW-4-10U	9457741000	B.7
SAIB-4-IDC-M12 small	1781540001	D.5	SAIE-M12S-4-0.5U-AEH-VA	1861220001	C.33	SAIL-M12BG-4-3.0U	9457730300	B.6	SAIL-M12BW-4-10V	1925641000	B.7
SAIB-4-IDC-M8 small	1784050001	D.24	SAIE-M12S-4-0.5U-PP-M16	1861160000	D.29	SAIL-M12BG-4-3.0V	1925580300	B.6	SAIL-M12BW-4-2L1.5Q	1926660150	B.15
SAIB-4-IDC-M8 small	1784050001	D.6	SAIE-M12S-4-0.5U-M16	1861090000	D.29	SAIL-M12BG-4-5.0Q	1926770500	B.6	SAIL-M12BW-4-2L1.5Q	1926660150	B.8
SAIB-5/6S M12 5P A-COD	1191020000	D.5	SAIE-M12S-4-0.5U-PG9	1861220000	D.30	SAIL-M12BG-4-5.0Q	9457730600	B.6	SAIL-M12BW-4-2L1.5QGE	1092950150	B.15
SAIB-5/7	9457250000	D.5	SAIE-M12S-5-0.5U-PP-M16	1861170000	D.29	SAIL-M12BG-4-5.0V	1925580500	B.6	SAIL-M12BW-4-2L1.5T	1007000150	B.15
SAIB-5/7	9457250000	D.8	SAIE-M12S-5-0.5U-M16	1861230000	D.29	SAIL-M12BG-4B-1.5Q	1057750150	B.41	SAIL-M12BW-4-2L1.5U	9456380150	B.15
SAIB-5/7-(KV)	1921070000	D.9	SAIE-M12S-5-0.5U-PG9	1856120000	D.30	SAIL-M12BG-4S1.5Q	1812540150	B.16	SAIL-M12BW-4-2L1.5U	9456380150	B.8
SAIB-5/7-ZF	1924970000	D.16	SAIE-M12S-8-0.5U-PP-M16	1861180000	D.29	SAIL-M12BG-4-X.XQ	1926770000	B.6	SAIL-M12BW-4-2L1.5V	1925470150	B.15
SAIB-5/7-ZF	1924970000	D.5	SAIE-M12S-8-0.5U-M16	1861110000	D.29	SAIL-M12BG-4-X.XU	9457730000	B.6	SAIL-M12BW-4-2L1.5V	1925470150	B.7
SAIB-5/9	1807250000	D.5	SAIE-M12S-8-0.5U-PG9	1861240000	D.30	SAIL-M12BG-4-X.XV	1925580000	B.6	SAIL-M12BW-4-2L10Q	1926661000	B.8
SAIB-5/9	1807250000	D.8	SAIE-M23-L-EM	1170320000	H.19	SAIL-M12BG-5-1.5Q	1926780150	B.11	SAIL-M12BW-4-2L10U	9456381000	B.8
SAIB-8/9	1836960000	D.5	SAIE-M23-L-HW	1170340000	H.19	SAIL-M12BG-5-1.5Q	1926780150	B.7	SAIL-M12BW-4-2L10V	1925471000	B.8
SAIB-8/9	1836960000	D.8	SAIE-M23-L-RM	1170310000	H.19	SAIL-M12BG-5-1.5QGE	1092930150	B.11	SAIL-M12BW-4-2L3.0Q	1926660300	B.8
SAIBM 5/8S M12 5P B-COD	1784780000	C.11	SAIE-M23-L-VW	1170300000	H.19	SAIL-M12BG-5-1.5T	1021670150	B.11	SAIL-M12BW-4-2L3.0U	9456380300	B.8
SAIBM 5/8S M12 5P B-COD	1784780000	D.13	SAIE-M23-L-W	1170330000	H.19	SAIL-M12BG-5-1.5U	9457910150	B.11	SAIL-M12BW-4-2L3.0V	1925470300	B.8
SAIBM 5/8S M12 5P B-COD	1784780000	D.5	SAIE-M23-S-EM	1169970000	H.13	SAIL-M12BG-5-1.5U	9457910150	B.7	SAIL-M12BW-4-2L3.0Q	1926660500	B.8
SAIB-M23-12P-AN-1.0M	1877440100	H.22	SAIE-M23-S-HW	1169990000	H.13	SAIL-M12BG-5-1.5V	1925590150	B.11	SAIL-M12BW-4-2L5.0Q	9456380500	B.8
SAIB-M23-12P-ST-1.0M	1886440100	H.22	SAIE-M23-S-RM	1169950000	H.13	SAIL-M12BG-5-1.5V	1925590150	B.7	SAIL-M12BW-4-2L5.0V	1925470500	B.8
SAIB-M23-19P-AN-1.0M	1818140100	H.22	SAIE-M23-S-VW	1169940000	H.13	SAIL-M12BG-5-10Q	1926781000	B.7	SAIL-M12BW-4-2LXLXQ	1926660000	B.8
SAIB-M23-19P-ST-1.0M	1818180100	H.22	SAIE-M23-S-W	1169980000	H.13	SAIL-M12BG-5-10U	9457911000	B.7	SAIL-M12BW-4-2LXLXU	9456380000	B.8
SAIBM-4/8S-M12 4P A-ZF	1784740002	D.5	SAIE-M5B-3-0.2U	1873060000	D.31	SAIL-M12BG-5-10V	1925591000	B.7	SAIL-M12BW-4-2LXLV	1925470000	B.8
SAIBM-4/8S-M12 4P D-ZF	1892130001	D.15	SAIE-M5B-4-0.2U	1873040000	D.31	SAIL-M12BG-5-3.0Q	1926780300	B.7	SAIL-M12BW-4-3.0Q	1926830300	B.7
SAIBM-4/8S-M12 4P D-ZF	1892130001	D.7	SAIE-M5S-3-0.2U	1873050000	D.31	SAIL-M12BG-5-3.0U	9457910300	B.7	SAIL-M12BW-4-3.0U	9457740300	B.7
SAIBM-4/8S-M12 4P D-COD	1892130000	C.50	SAIE-M5S-4-0.2U	1873030000	D.31	SAIL-M12BG-5-3.0V	1925590300	B.7	SAIL-M12BW-4-3.0V	1925640300	B.7
SAIBM-4/8S-M12 4P D-COD	1892130000	C.71	SAIE-M8B-3-0.5U-PP-M8	1856130000	D.31	SAIL-M12BG-5-5.0Q	1926780500	B.7	SAIL-M12BW-4-3L1.5Q	1963950150	B.15
SAIBM-4/8S-M12 4P D-COD	1892130000	D.13	SAIE-M8B-4-0.5U-PP-M8	1856140000	D.31	SAIL-M12BG-5-5.0U	9457910500	B.7	SAIL-M12BW-4-3L1.5U	1963940150	B.15
SAIBM-4/8S-M12 4P D-COD	1892130000	D.5	SAIE-M8R-3-0.5U-PP-M8	1861280000	D.31	SAIL-M12BG-5-5.0V	1925590500	B.7	SAIL-M12BW-4-3L1.5V	1963960150	B.15
SAIB-M-5/8S M12 5P A-COD	1784750000	C.31	SAIE-M8R-4-0.5U-PP-M8	1861290000	D.31	SAIL-M12BG-5B-1.5Q	1061880150	B.41	SAIL-M12BW-4-5.0Q	1926830500	B.7
SAIB-M-5/8S M12 5P A-COD	1784750000	C.63	SAIE-M8S-3-0.5U-PP-M8	1078730000	D.31	SAIL-M12BG-5S1.5Q	9456140150	B.16	SAIL-M12BW-4-5.0U	9457740500	B.7
SAIB-M-5/8S M12 5P A-COD	1784750000	D.12	SAIE-M8S-4-0.5U-PP-M8	1078720000	D.31	SAIL-M12BG-5-X.XQ	1926780000	B.7	SAIL-M12BW-4-5.0V	1925640500	B.7
SAIB-M-5/8S M12 5P A-COD	1784750000	D.5	SAIEND CAN M8 4P	1955340000	C.61	SAIL-M12BG-5-X.XU	9457910000	B.7	SAIL-M12BW-4B-1.5Q	106190150	B.41
SAIBM-8/11	1118920000	D.11	SAIEND CAN M8 4P	1955340000	E.31	SAIL-M12BG-5-X.XV	1925590000	B.7	SAIL-M12BW-4S1.5Q	1808970150	B.16
SAIB-M8-3P	1803870000	D.17	SAIEND CAN M8 4P	1955340000	E.33	SAIL-M12BG-6-(S)-1.5U	1890520150	B.14	SAIL-M12BW-4-X.XQ	1926830000	B.7
SAIB-M8-3P	1803870000	D.6	SAIEND CAN M8 4P	1955340000	E.35	SAIL-M12BG-6-(S)-10U	1890521000	B.14	SAIL-M12BW-4-X.XV	1925640000	B.7
SAIB-M8-4P	1803880000	D.17	SAIEND CAN-M12 5P A-COD	1784760000	E.14	SAIL-M12BG-6-(S)-3.0U	1890520300	B.14	SAIL-M12BW-5-1.5Q	1926840150	B.11
SAIB-M8-4P	1803880000	D.6	SAIEND CAN-M12 5P A-COD	1784760000	E.18	SAIL-M12BG-6-(S)-5.0U	1890520500	B.14	SAIL-M12BW-5-1.5Q	1926840150	B.7
SAIBM-M8-3P-(IF)	1010080000	D.18	SAIEND CAN-M12 5P A-COD	1784760000	E.33	SAIL-M12BG-8-1.5U	1865870150	B.14	SAIL-M12BW-5-1.5QGE	1092970150	B.11
SAIBM-M8-3P-(IF)	1010080000	D.6	SAIEND PB M12 5P B-COD	1784770000	E.10	SAIL-M12BG-8-10U	1865871000	B.14	SAIL-M12BW-5-1.5T	1021690150	B.11
SAIBM-M8-3P(TL)	1921010000	D.8	SAIEND PB M12 5P B-COD	1784770000	E.31	SAIL-M12BG-8-3.0U	1865870300	B.14	SAIL-M12BW-5-1.5U	9457690150	B.11
SAIBM-M8-3P(TL)	1921010000	D.6	SAIEND PB M12 5P B-COD	1784770000	E.45	SAIL-M12BG-8-5.0U	1865870500	B.14	SAIL-M12BW-5-1.5U	9457690150	B.7
SAIBM-M8-4P-(IF)	1010090000	D.18	SAIH-CD-2x0.34/2x0.22-PUR	1058630000	C.62	SAIL-M12BG-CD-1.5A	1964690150	C.58	SAIL-M12BW-5-1.5V	1925650150	B.11
SAIBM-M8-4P-(IF)	1010090000	D.6	SAIH-PB-2X0.24-PUR	1232620000	C.8	SAIL-M12BG-CD-1.5B	1060120150	C.58	SAIL-M12BW-5-1.5V	1925650150	B.7
SAIBM-M8-4P(TL)	1921020000	D.18	SAIH-PB-2X0.34-PVC	1933640000	C.9	SAIL-M12BG-PB-1.5D	1873320150	C.6	SAIL-M12BW-5-10Q	1926841000	B.7
SAIBM-M8-4P(TL)	1921020000	D.6	SAIH-PB-PA-2X1.0-PVC-BL	1232630000	C.30	SAIL-M12BG-PB-1.5E	1058540150	C.6	SAIL-M12BW-5-10U	9457691000	B.7
SAIB-VSA-3P/230/11-H/OB	1873150000	D.32	SAIH-PB-PA-2X1.0-PVC-SW	1232640000	C.30	SAIL-M12BG-VA-2/4-1.5U	1939410150	B.13	SAIL-M12BW-5-10V	1925651000	B.7
SAIB-VSA-3P/230/9/LD	1873110000	D.32	SAIH-SLL-3x0,25mm(PUR)	1902140000	B.51	SAIL-M12BG-VA-4-1.5U	9457950150	B.13	SAIL-M12BW-5-3.0Q	1926840300	B.7
SAIB-VSA-3P/230/9-H/OB	1873130000	D.32	SAIH-SLL-3x0,25mm(PVC)	1902190000	B.51	SAIL-M12BW-12-5.0U	1898241000	B.14	SAIL-M12BW-5-3.0Q	19257690300	B.7
SAIB-VSA-3P/24/9/LD	1873120000	D.32	SAIH-SLL-3x0,25mm(TPE)	1022970000	B.51	SAIL-M12BW-12-10U	1898240500	B.14	SAIL-M12BW-5-3.0V	1925650300	B.7
SAIB-VSA-3P/250/11-OB	1873090000	D.32	SAIH-SLL-3x0,34mm(PUR)	1902110000	B.51	SAIL-M12BW-3L1.5Q	1926820150	B.11	SAIL-M12BW-5-5.0Q	1926840500	B.7
SAIB-VSA-3P/250/9-OB	1873070000	D.32	SAIH-SLL-3x0,34mm(PVC)	1902160000	B.51	SAIL-M12BW-3L1.5Q	1926820150	B.7	SAIL-M12BW-5-5.0U	9457690500	B.7
SAIB-VSA-4P/230/11-H/OB	1873160000	D.32	SAIH-SLL-3x0,34mm(TPE)	1022940000	B.51	SAIL-M12BW-3L1.5QGE	1092940150	B.11	SAIL-M12BW-5-5.0V	1925650500	B.7
SAIB-VSA-4P/230/9-H/OB	1873140000	D.32	SAIH-SLL-3x0,75-8x0,34	9457420000	B.52	SAIL-M12BW					

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
SAIL-M12G-3-3.0V	1925430300	B.4	SAIL-M12GM12G-4-5.0V	1925310500	B.6	SAIL-M12GM12W-4-2L1.0V	1925421000	B.8	SAIL-M12GM8W-4-1.5Q	1938080150	B.29
SAIL-M12G-3-5.0Q	1926620500	B.4	SAIL-M12GM12G-4S1.5Q	1058500150	B.28	SAIL-M12GM12W-4-2L3.0Q	1926610300	B.8	SAIL-M12GM8W-4-1.5Q	1938080150	B.5
SAIL-M12G-3-5.0U	9457810500	B.4	SAIL-M12GM12G-4-X.XU	1926500000	B.6	SAIL-M12GM12W-4-2L3.0V	1906410300	B.8	SAIL-M12GM8W-4-1.5U	9456670150	B.29
SAIL-M12G-4-1.5Q	1925430500	B.4	SAIL-M12GM12G-4-X.XU	1906300000	B.6	SAIL-M12GM12W-4-2L3.0V	1925420300	B.8	SAIL-M12GM8W-4-1.5U	9456670150	B.5
SAIL-M12G-3B-1.5Q	1057770150	B.16	SAIL-M12GM12G-4-X.XU	1925310000	B.6	SAIL-M12GM12W-4-2L5.0Q	1926610500	B.8	SAIL-M12GM8W-4-1.5V	1938210150	B.29
SAIL-M12G-3S1.5Q	1906470150	B.41	SAIL-M12GM12G-5-0.3U	9457340030	F.7	SAIL-M12GM12W-4-2L5.0Q	1906410500	B.8	SAIL-M12GM8W-4-1.5V	1938210150	B.5
SAIL-M12G-3-X.XQ	1926620000	B.4	SAIL-M12GM12G-5-0.6U	9457340060	F.7	SAIL-M12GM12W-4-2L5.0V	1925420500	B.8	SAIL-M12GM8W-4-1.5V	1938081000	B.5
SAIL-M12G-3-X.XU	9457810000	B.4	SAIL-M12GM12G-5-1.5Q	1926510150	B.25	SAIL-M12GM12W-4-2LX.XQ	1926610000	B.8	SAIL-M12GM8W-4-1.5V	9456671000	B.5
SAIL-M12G-3-X.XV	1925430000	B.4	SAIL-M12GM12G-5-1.5Q	1926510150	B.7	SAIL-M12GM12W-4-2LX.XU	1906410000	B.8	SAIL-M12GM8W-4-1.5V	1938211000	B.5
SAIL-M12G-4-1.5Q	1926630150	B.11	SAIL-M12GM12G-5-1.5QGE	1093030150	B.25	SAIL-M12GM12W-4-2LX.XV	1925420000	B.8	SAIL-M12GM8W-4-3.0Q	1938080300	B.5
SAIL-M12G-4-1.5Q	1926630150	B.4	SAIL-M12GM12G-5-1.5T	1011970150	B.25	SAIL-M12GM12W-4-3.0Q	1926540300	B.7	SAIL-M12GM8W-4-3.0Q	9456670300	B.5
SAIL-M12G-4-1.5QGE	1077750150	B.11	SAIL-M12GM12G-5-1.5U	9457340150	B.25	SAIL-M12GM12W-4-3.0U	9457310300	B.7	SAIL-M12GM8W-4-3.0Q	1938210300	B.5
SAIL-M12G-4-1.5T	1021770150	B.11	SAIL-M12GM12G-5-1.5U	9457340150	B.7	SAIL-M12GM12W-4-3.0V	1925350300	B.7	SAIL-M12GM8W-4-5.0Q	1938080500	B.5
SAIL-M12G-4-1.5U	9456100150	B.11	SAIL-M12GM12G-5-1.5U	9457340150	F.7	SAIL-M12GM12W-4-3L1.5Q	1232810150	B.27	SAIL-M12GM8W-4-5.0Q	9456670500	B.5
SAIL-M12G-4-1.5U	9456100150	B.4	SAIL-M12GM12G-5-1.5U	1925320150	B.25	SAIL-M12GM12W-4-3L1.5U	1963910150	B.27	SAIL-M12GM8W-4-5.0Q	1938210500	B.5
SAIL-M12G-4-1.5V	1925440150	B.11	SAIL-M12GM12G-5-1.5V	1925320150	B.7	SAIL-M12GM12W-4-3L1.5V	1963930150	B.27	SAIL-M12GM8W-4L1.5Q	1962280150	B.31
SAIL-M12G-4-1.5V	1925440150	B.4	SAIL-M12GM12G-5-1.5V	1926511000	B.7	SAIL-M12GM12W-4-3LW1.5QGE	1093060150	B.27	SAIL-M12GM8W-4L1.5QGE	1093130150	B.31
SAIL-M12G-4-1.5Q	1926631000	B.4	SAIL-M12GM12G-5-10U	9457341000	B.7	SAIL-M12GM12W-4-3LW1.5T	1020930150	B.27	SAIL-M12GM8W-4L1.5U	1906430150	B.31
SAIL-M12G-4-10U	9456101000	B.4	SAIL-M12GM12G-5-10V	1925321000	B.7	SAIL-M12GM12W-4-5.0Q	1926540500	B.7	SAIL-M12GM8W-4L1.5V	1962300150	B.31
SAIL-M12G-4-10U	1925441000	B.4	SAIL-M12GM12G-5-3.0Q	1926510300	B.7	SAIL-M12GM12W-4-5.0Q	9457310500	B.7	SAIL-M12GM8W-4-X.XQ	1938080000	B.5
SAIL-M12G-3-X.XQ	1926630300	B.4	SAIL-M12GM12G-5-3.0U	9457340300	B.7	SAIL-M12GM12W-4-5.0V	1925350500	B.7	SAIL-M12GM8W-4-X.XU	9456670000	B.5
SAIL-M12G-4-3.0U	9456100300	B.4	SAIL-M12GM12G-5-3.0V	1925320300	B.7	SAIL-M12GM12W-4S1.5Q	1059480150	B.28	SAIL-M12GM8W-4-X.VX	1938210000	B.5
SAIL-M12G-4-3.0V	1925440300	B.4	SAIL-M12GM12G-5-5.0Q	1926510500	B.7	SAIL-M12GM12W-4-X.XQ	1926540000	B.7	SAIL-M12GM8WR-3-1.5QGE	1093150150	B.30
SAIL-M12G-4-5.0Q	1926630500	B.4	SAIL-M12GM12G-5-5.0U	9457340500	B.7	SAIL-M12GM12W-4-X.XU	9457310000	B.7	SAIL-M12GM8WR-3-1.5U	9457570150	B.30
SAIL-M12G-4-5.0U	9456100500	B.4	SAIL-M12GM12G-5-5.0V	1925320500	B.7	SAIL-M12GM12W-4-X.VX	1925350000	B.7	SAIL-M12G-PB-1.5Q	1873900150	C.6
SAIL-M12G-4-5.0V	1925440500	B.4	SAIL-M12GM12G-5B-1.5Q	1057850150	B.42	SAIL-M12GM12W-5-1.5Q	1926550150	B.25	SAIL-M12G-PB-1.5E	1058530150	C.6
SAIL-M12G-4B-1.5Q	1057780150	B.41	SAIL-M12GM12G-5S1.5Q	1058510150	B.28	SAIL-M12GM12W-5-1.5Q	1926550150	B.7	SAIL-M12W-3-1.5Q	1926700150	B.11
SAIL-M12G-4S1.5Q	1906480150	B.16	SAIL-M12GM12G-5-X.XQ	1926510000	B.7	SAIL-M12GM12W-5-1.5QGE	1093080150	B.25	SAIL-M12W-3-1.5Q	1926700150	B.4
SAIL-M12G-4-X.XQ	1926630000	B.4	SAIL-M12GM12G-5-X.XU	9457740000	B.7	SAIL-M12GM12W-5-1.5T	1011990150	B.25	SAIL-M12W-3-1.5QGE	1093160150	B.11
SAIL-M12G-4-X.XU	9456100000	B.4	SAIL-M12GM12G-5-X.XU	9457340000	B.7	SAIL-M12GM12W-5-1.5U	9457270150	B.25	SAIL-M12W-3-1.5T	1021760150	B.11
SAIL-M12G-4-X.VX	1925440000	B.7	SAIL-M12GM12G-5-X.VX	1925320000	B.7	SAIL-M12GM12W-5-1.5U	9457270150	B.25	SAIL-M12W-3-1.5U	9456690150	B.11
SAIL-M12G-5-1.5Q	1926640150	B.11	SAIL-M12GM12G-CD-1.5A	1964710150	C.59	SAIL-M12GM12W-5-1.5V	1925360150	B.25	SAIL-M12W-3-1.5U	9456690150	B.4
SAIL-M12G-5-1.5QGE	1926640150	B.4	SAIL-M12GM12G-CD-1.5B	1060130150	C.59	SAIL-M12GM12W-5-1.5V	1925360150	B.7	SAIL-M12W-3-1.5V	1925510150	B.11
SAIL-M12G-5-1.5QGE	1092990150	B.11	SAIL-M12GM12G-PB-1.5E	1873310150	C.7	SAIL-M12GM12W-5-10Q	1926551000	B.7	SAIL-M12W-3-1.5V	1925510150	B.4
SAIL-M12G-5-1.5T	1021650150	B.11	SAIL-M12GM12G-PB-1.5E	1058570150	C.7	SAIL-M12GM12W-5-10Q	9457271000	B.7	SAIL-M12W-3-1.5V	1926701000	B.4
SAIL-M12G-5-1.5U	9457610150	B.11	SAIL-M12GM12W-2/4-1.5Q	1926560150	B.26	SAIL-M12GM12W-5-10V	1925361000	B.7	SAIL-M12W-3-1.5V	9456691000	B.4
SAIL-M12G-5-1.5U	9457610150	B.4	SAIL-M12GM12W-2/4-1.5QGE	1093040150	B.26	SAIL-M12GM12W-5-3.0Q	1926550300	B.7	SAIL-M12W-3-1.5V	1925510000	B.4
SAIL-M12G-5-1.5V	1925450150	B.11	SAIL-M12GM12W-2/4-1.5U	9457890150	B.26	SAIL-M12GM12W-5-3.0Q	9457270300	B.7	SAIL-M12W-3-3.0Q	1926700300	B.4
SAIL-M12G-5-1.5V	1925450150	B.4	SAIL-M12GM12W-2/4-1.5V	1925370150	B.26	SAIL-M12GM12W-5-3.0V	1925360300	B.7	SAIL-M12W-3-3.0Q	9456690300	B.4
SAIL-M12G-5-10U	1926641000	B.4	SAIL-M12GM12W-3-1.5Q	1926530150	B.25	SAIL-M12GM12W-5-5.0Q	1926550500	B.7	SAIL-M12W-3-3.0V	1925510300	B.4
SAIL-M12G-5-10U	9457611000	B.4	SAIL-M12GM12W-3-1.5Q	1926530150	B.7	SAIL-M12GM12W-5-5.0Q	9457270500	B.7	SAIL-M12W-3-5.0Q	1926700500	B.4
SAIL-M12G-5-10U	1925451000	B.4	SAIL-M12GM12W-3-1.5QGE	1093050150	B.25	SAIL-M12GM12W-5-5.0V	1925360500	B.7	SAIL-M12W-3-5.0Q	9456690500	B.4
SAIL-M12G-5-3.0Q	1926640300	B.4	SAIL-M12GM12W-3-1.5T	1021720150	B.25	SAIL-M12GM12W-5S1.5Q	1057920150	B.42	SAIL-M12W-3-5.0V	1925510500	B.4
SAIL-M12G-5-3.0Q	9457610300	B.4	SAIL-M12GM12W-3-1.5U	9457390150	B.25	SAIL-M12GM12W-5S1.5U	1059540150	B.28	SAIL-M12W-3B-1.5Q	1057800150	B.41
SAIL-M12G-5-3.0V	1925450300	B.4	SAIL-M12GM12W-3-1.5U	9457390150	B.7	SAIL-M12GM12W-5-X.XQ	1926550000	B.7	SAIL-M12W-3S1.5Q	1906500150	B.16
SAIL-M12G-5-5.0Q	1926640500	B.4	SAIL-M12GM12W-3-1.5V	1925340150	B.25	SAIL-M12GM12W-5-X.XU	9457270000	B.7	SAIL-M12W-3-X.XQ	1926700000	B.4
SAIL-M12G-5-5.0U	9457610500	B.4	SAIL-M12GM12W-3-1.5V	1925340150	B.7	SAIL-M12GM12W-5-X.VX	1925360000	B.7	SAIL-M12W-3-X.XU	9456690000	B.4
SAIL-M12G-5-5.0V	1925450500	B.4	SAIL-M12GM12W-3-1.5V	1926531000	B.7	SAIL-M12GM12W-CD-1.5A	1061990150	C.59	SAIL-M12W-3-X.VX	1925510000	B.4
SAIL-M12G-5B-1.5Q	1057790150	B.41	SAIL-M12GM12W-3-10Q	1926531000	B.7	SAIL-M12GM12W-CD-1.5B	1062190150	C.59	SAIL-M12W-3-X.XU	1925510000	B.4
SAIL-M12G-5S1.5Q	1926690150	B.16	SAIL-M12GM12W-3-10U	9457391000	B.7	SAIL-M12GM12W-CD-1.5B	1062190150	C.59	SAIL-M12W-4-1.5Q	1926710150	B.11
SAIL-M12G-5-X.XQ	1926640000	B.4	SAIL-M12GM12W-3-10V	1925341000	B.7	SAIL-M12GM12W-PB-1.5D	1062310150	C.7	SAIL-M12W-4-1.5Q	1926710150	B.4
SAIL-M12G-5-X.XU	1926640000	B.4	SAIL-M12GM12W-3-3.0Q	1926530300	B.7	SAIL-M12GM12W-PB-1.5E	1062380150	C.7	SAIL-M12W-4-1.5QGE	1093170150	B.11
SAIL-M12G-5-X.VX	1925450000	B.4	SAIL-M12GM12W-3-3.0Q	9457390300	B.7	SAIL-M12GM8G-3-1.5Q	1938040150	B.29	SAIL-M12W-4-1.5T	1021790150	B.11
SAIL-M12G-CD-1.5A	1964700150	C.58	SAIL-M12GM12W-3-3.0Q	1925340300	B.7	SAIL-M12GM8G-3-1.5U	9457770150	B.29	SAIL-M12W-4-1.5U	1906260150	B.11
SAIL-M12G-CD-1.5B	1060110150	C.58	SAIL-M12GM12W-3-5.0Q	1926530500	B.7	SAIL-M12GM8G-3-1.5V	1938170150	B.29	SAIL-M12W-4-1.5U	1906260150	B.4
SAIL-M12GM12G-2/4-1.5Q	1926520150	B.26	SAIL-M12GM12W-3-5.0Q	9457390500	B.7	SAIL-M12GM8G-4-1.5Q	1938070150	B.29	SAIL-M12W-4-1.5U	1925520150	B.11
SAIL-M12GM12G-2/4-1.5QGE	1093000150	B.26	SAIL-M12GM12W-3-5.0V	1925340500	B.7	SAIL-M12GM8G-4-1.5Q	1938070150	B.25	SAIL-M12W-4-1.5V	1925520150	B.4
SAIL-M12GM12G-2/4-1.5U	9456990150	B.26	SAIL-M12GM12W-3B-1.5Q	1057900150	B.42	SAIL-M12GM8G-4-1.5U	9456660150	B.29	SAIL-M12W-4-1.5V	1925520150	B.4
SAIL-M12GM12G-2/4-1.5V	1925330150	B.26	SAIL-M12GM12W-3L1.5Q	1926600150	B.27	SAIL-M12GM8G-4-1.5U	9456660150	B.29	SAIL-M12W-4-10Q	1926711000	B.4
SAIL-M12GM12G-3-1.5Q	1926490150	B.25	SAIL-M12GM12W-3L1.5Q	1926600150	B.8	SAIL-M12GM8G-4-1.5V	1938200150	B.5	SAIL-M12W-4-10U	1925521000	B.4
SAIL-M12GM12G-3-1.5Q	1926490150	B.6	SAIL-M12GM12W-3L1.5T	1004320150	B.27	SAIL-M12GM8G-4-1.5V	1938200150	B.5	SAIL-M12W-4-3.0Q	1926710300	B.4
SAIL-M12GM12G-3-1.5QGE	1093010150	B.25	SAIL-M12GM12W-3L1.5U	9457790150	B.27	SAIL-M12GM8G-4-1.5Q	1938071000	B.29	SAIL-M12W-4-3.0U	1906260300	B.4
SAIL-M12GM12G-3-1.5T	1021710150	B.25	SAIL-M12GM12W-3L1.5U	9457790150	B.8	SAIL-M12GM8G-4-1.5Q	9456661000	B.5	SAIL-M12W-4-3.0V	1925520300	B.4
SAIL-M12GM12G-3-1.5U	9457230150	B.25	SAIL-M12GM12W-3L1.5V	1925410150	B.27	SAIL-M12GM8G-4-10U	1938201000	B.5	SAIL-M12W-4-5.0Q	1926710500	B.4
SAIL-M12GM12G-3-1.5V	1925300150	B.6	SAIL-M12GM12W-3L1.5V	1925410150	B.8	SAIL-M12GM8G-4-3.0Q	1938070300	B.5	SAIL-M12W-4-5.0U	1906260500	B.4
SAIL-M12GM12G-3-1.5V	1925300150	B.25	SAIL-M12GM12W-3L1.5V	1925410150	B.8	SAIL-M12GM8G-4-3.0V	9456660300	B.5	SAIL-M12W-4-5.0U	1925520500	B.4
SAIL-M12GM12G-3-3.0Q	1925300150	B.6	SAIL-M12GM12W-3L1.5V	1925410150	B.8	SAIL-M12GM8G-4-3.0V	1938200300	B.5	SAIL-M12W-4B-1.5Q	1057810150	B.41
SAIL-M12GM12G-3-3.0Q	1925300150	B.6	SAIL-M12GM12W-3L1.5V	1925410150	B.8	SAIL-M12GM8G-4-5.0Q	1938070500	B.5	SAIL-M12W-4S1.5Q	1059650150	B.16
SAIL-M12GM12G-3-5.0Q	1926490500	B.6	SAIL-M12GM12W-3L3.0Q	1926600300	B.8	SAIL-M12GM8G-4-5.0Q	9456660500	B.5	SAIL-M12W-4-X.XQ	1926710000	B.4
SAIL-M12GM12G-3-5.0Q	9457230500	B.6	SAIL-M12GM12W-3L3.0Q	9457790300	B.8	SAIL-M12GM8G-4-5.0V	1938200500	B.5	SAIL-M12W-4-X.XU	1906260000	B.4
SAIL-M12GM12G-3-5.0V	1925300500	B.6	SAIL-M12GM12W-3L3.0Q	9457790300	B.8	SAIL-M12GM8G-4-5.0V	1938200500	B.5	SAIL-M12W-4-X.VX	1925520000	B.4
SAIL-M12GM12G-3B-1.5Q	1057830150	B.42	SAIL-M12GM12W-3L3.0Q	1926410300	B.8	SAIL-M12GM8G-4-X.XQ	1938070000	B.5	SAIL-M12W-4-X.VX	1925520000	B.4
SAIL-M12GM12G-3S1.5Q	1058490150	B.28									

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
SAIL-M12WM12G-5-1.5U	9456500150	B.7	SAIL-M12WM8W-4-5.0U	1906340500	B.5	SAIL-M8BW-4-1.5O	1927080150	B.18	SAIL-M8GM12G-4-X.XQ	1938130000	B.6
SAIL-M12WM12G-5-10U	9456501000	B.7	SAIL-M12WM8W-4-5.0V	1938220500	B.5	SAIL-M8BW-4-1.5O	1927080150	B.5	SAIL-M8GM12G-4-X.XU	1937980000	B.6
SAIL-M12WM12G-5-3.0O	9456500300	B.7	SAIL-M12WM8W-4-X.XQ	1938090000	B.5	SAIL-M8BW-4-1.5OGE	1093240150	B.18	SAIL-M8GM12G-4-X.XV	1938260000	B.6
SAIL-M12WM12G-5-5.0O	9456500500	B.7	SAIL-M12WM8W-4-X.XU	1906340000	B.5	SAIL-M8BW-4-1.5U	9456150150	B.18	SAIL-M8GM12W-3-1.5Q	1938110010	B.7
SAIL-M12WM12G-5B-1.5Q	1057890150	B.42	SAIL-M12WM8W-4-X.XV	1938220000	B.5	SAIL-M8BW-4-1.5U	9456150150	B.5	SAIL-M8GM12W-3-1.5U	1937960150	B.7
SAIL-M12WM12G-5-X.XQ	9456500000	B.7	SAIL-M12W-PB-1.5D	1061970150	C.6	SAIL-M8BW-4-1.5V	1927340150	B.18	SAIL-M8GM12W-3-3.0O	1938240150	B.7
SAIL-M12WM12W-3-1.5Q	1926570150	B.25	SAIL-M12W-PB-1.5E	1062340150	C.6	SAIL-M8BW-4-1.5V	1927340150	B.5	SAIL-M8GM12W-3-10Q	1938111000	B.7
SAIL-M12WM12W-3-1.5Q	1926570150	B.7	SAIL-M23-KSW-7/12	1169930000	H.12	SAIL-M8BW-4-10Q	1927081000	B.5	SAIL-M8GM12W-3-10Q	1937961000	B.7
SAIL-M12WM12W-3-1.5U	1815670150	B.25	SAIL-M5BG-3P-1.5U	1873290150	B.22	SAIL-M8BW-4-10U	9456151000	B.5	SAIL-M8GM12W-3-10V	1938241000	B.7
SAIL-M12WM12W-3-1.5U	1815670150	B.7	SAIL-M5BG-4P-1.5U	1873250150	B.22	SAIL-M8BW-4-10V	1927341000	B.5	SAIL-M8GM12W-3-3.0Q	1938110300	B.7
SAIL-M12WM12W-3-1.5V	1925380150	B.25	SAIL-M5BW-3P-1.5U	1873260150	B.22	SAIL-M8BW-4-3.0Q	1927080300	B.5	SAIL-M8GM12W-3-3.0O	1937960300	B.7
SAIL-M12WM12W-3-1.5V	1925380150	B.7	SAIL-M5BW-4P-1.5U	1873270150	B.22	SAIL-M8BW-4-3.0O	9456150300	B.5	SAIL-M8GM12W-3-3.0V	1938240300	B.7
SAIL-M12WM12W-3-1.5Q	1926570150	B.7	SAIL-M5G-3P-1.5U	1854060150	B.22	SAIL-M8BW-4-3.0V	1927340300	B.5	SAIL-M8GM12W-3-5.0Q	1938110500	B.7
SAIL-M12WM12W-3-1.5Q	1926570150	B.25	SAIL-M5G-4P-1.5U	1871700150	B.22	SAIL-M8BW-4-5.0Q	1927080500	B.5	SAIL-M8GM12W-3-5.0O	1937960500	B.7
SAIL-M12WM12W-3-10U	1815671000	B.7	SAIL-M5W-3P-1.5U	1873280150	B.22	SAIL-M8BW-4-5.0O	9456150500	B.5	SAIL-M8GM12W-3-5.0V	1938240500	B.7
SAIL-M12WM12W-3-10U	1925381000	B.7	SAIL-M5W-4P-1.5U	1873240150	B.22	SAIL-M8BW-4-5.0V	1927340500	B.5	SAIL-M8GM12W-3-X.XQ	1938110000	B.7
SAIL-M12WM12W-3-3.0Q	1926570300	B.7	SAIL-M8BG-3-1.5Q	1926980150	B.18	SAIL-M8BW-4L1.5Q	1927100150	B.20	SAIL-M8GM12W-3-X.XU	1937960000	B.7
SAIL-M12WM12W-3-3.0O	1815670300	B.7	SAIL-M8BG-3-1.5Q	1926980150	B.18	SAIL-M8BW-4L1.5OGE	1093230150	B.20	SAIL-M8GM12W-3-X.XV	1937960000	B.7
SAIL-M12WM12W-3-3.0V	1925380300	B.7	SAIL-M8BG-3-1.5Q	1926980150	B.4	SAIL-M8BW-4L1.5QGE	1093230150	B.20	SAIL-M8GM12W-3-X.XV	1938240000	B.7
SAIL-M12WM12W-3-5.0Q	1926570500	B.7	SAIL-M8BG-3-1.5QGE	1093190150	B.18	SAIL-M8BW-4L1.5U	1906400150	B.20	SAIL-M8GM12W-4-1.5Q	1938140150	B.7
SAIL-M12WM12W-3-5.0O	1815670500	B.7	SAIL-M8BG-3-1.5U	9457450150	B.18	SAIL-M8BW-4L1.5V	1927360150	B.20	SAIL-M8GM12W-4-1.5U	1937990150	B.7
SAIL-M12WM12W-3-5.0V	1925380500	B.7	SAIL-M8BG-3-1.5U	9457450150	B.4	SAIL-M8BW-4S1.5U	1906630150	B.21	SAIL-M8GM12W-4-1.5V	1938270150	B.7
SAIL-M12WM12W-3B-1.5Q	1061910150	B.42	SAIL-M8BG-3-1.5V	1927240150	B.18	SAIL-M8BW-4-X.XU	9456150000	B.5	SAIL-M8GM12W-4-10Q	1938141000	B.7
SAIL-M12WM12W-3B-1.5Q	1059720150	B.28	SAIL-M8BG-3-1.5V	1927240150	B.4	SAIL-M8BWR-3-1.5Q	1948620150	B.19	SAIL-M8GM12W-4-10U	1937991000	B.7
SAIL-M12WM12W-3-X.XQ	1926570000	B.7	SAIL-M8BG-3-10Q	1926981000	B.4	SAIL-M8BWR-3-1.5U	1827010150	B.19	SAIL-M8GM12W-4-10V	1938271000	B.7
SAIL-M12WM12W-3-X.XU	1815670000	B.7	SAIL-M8BG-3-10Q	9457451000	B.4	SAIL-M8BWR-3-1.5V	1948720150	B.19	SAIL-M8GM12W-4-3.0Q	1938140300	B.7
SAIL-M12WM12W-3-X.XV	1925380000	B.7	SAIL-M8BG-3-10V	1927241000	B.4	SAIL-M8BWR-4-1.5Q	1948640150	B.19	SAIL-M8GM12W-4-3.0O	1937990300	B.7
SAIL-M12WM12W-4-1.5Q	1926580150	B.25	SAIL-M8BG-3-3.0Q	1926980300	B.4	SAIL-M8BWR-4-1.5U	1948540150	B.19	SAIL-M8GM12W-4-3.0O	1938270300	B.7
SAIL-M12WM12W-4-1.5Q	1926580150	B.7	SAIL-M8BG-3-3.0U	9457450300	B.4	SAIL-M8BWR-4-1.5V	1948740150	B.19	SAIL-M8GM12W-4-3.0Q	1938140500	B.7
SAIL-M12WM12W-4-1.5U	1906310150	B.25	SAIL-M8BG-3-3.0V	1927240300	B.4	SAIL-M8BWS-3LX.XQ	1927090000	B.5	SAIL-M8GM12W-4-5.0O	1937990500	B.7
SAIL-M12WM12W-4-1.5U	1906310150	B.7	SAIL-M8BG-3-5.0Q	1926980500	B.4	SAIL-M8BWS-3LX.XU	1927350000	B.5	SAIL-M8GM12W-4-5.0O	1938270500	B.7
SAIL-M12WM12W-4-1.5V	1925390150	B.25	SAIL-M8BG-3-5.0O	9457450500	B.4	SAIL-M8BWS-3-X.XQ	1927060000	B.5	SAIL-M8GM12W-4-X.XQ	1938140000	B.7
SAIL-M12WM12W-4-1.5V	1925390150	B.7	SAIL-M8BG-3-5.0V	1927240500	B.4	SAIL-M8BWS-3-X.XU	9457380000	B.5	SAIL-M8GM12W-4-X.XU	1937990000	B.7
SAIL-M12WM12W-4-10Q	1926581000	B.7	SAIL-M8BG-3S1.5U	1906600150	B.21	SAIL-M8BWS-3.X.XQ	1927320000	B.5	SAIL-M8GM12W-4-X.XV	1938270000	B.7
SAIL-M12WM12W-4-10U	1906311000	B.7	SAIL-M8BG-4-1.5Q	1927000150	B.18	SAIL-M8BWS-4-X.XQ	1927080000	B.5	SAIL-M8GM8G-3-1.5Q	1926890150	B.32
SAIL-M12WM12W-4-10V	1925391000	B.7	SAIL-M8BG-4-1.5Q	1927000150	B.5	SAIL-M8BWS-4.X.XV	1927340000	B.5	SAIL-M8GM8G-3-1.5O	1926890150	B.4
SAIL-M12WM12W-4-3.0Q	1926580300	B.7	SAIL-M8BG-4-1.5QGE	1093200150	B.18	SAIL-M8G-3-1.5Q	1926970150	B.18	SAIL-M8GM8G-3-1.5OGE	1104470150	B.32
SAIL-M12WM12W-4-3.0O	1906310300	B.7	SAIL-M8BG-4-1.5U	9457850150	B.18	SAIL-M8G-3-1.5Q	1926970150	B.4	SAIL-M8GM8G-3-1.5U	1824570150	B.32
SAIL-M12WM12W-4-3.0O	1925390300	B.7	SAIL-M8BG-4-1.5U	9457850150	B.5	SAIL-M8G-3-1.5U	1824590150	B.18	SAIL-M8GM8G-3-1.5U	1824570150	B.4
SAIL-M12WM12W-4-5.0Q	1926580500	B.7	SAIL-M8BG-4-1.5V	1927280150	B.18	SAIL-M8G-3-1.5U	1824590150	B.4	SAIL-M8GM8G-3-1.5V	1927150150	B.32
SAIL-M12WM12W-4-5.0O	1906310500	B.7	SAIL-M8BG-4-1.5V	1927280150	B.5	SAIL-M8G-3-1.5U	1927230150	B.18	SAIL-M8GM8G-3-1.5V	1927150150	B.4
SAIL-M12WM12W-4-5.0V	1925390500	B.7	SAIL-M8BG-4-10Q	1927001000	B.5	SAIL-M8G-3-1.5U	1927230150	B.4	SAIL-M8GM8G-3-10Q	1926891000	B.4
SAIL-M12WM12W-4S1.5Q	1059730150	B.28	SAIL-M8BG-4-10U	9457851000	B.5	SAIL-M8G-3-1.5Q	1926971000	B.4	SAIL-M8GM8G-3-10U	1824571000	B.4
SAIL-M12WM12W-4-X.XQ	1926580000	B.7	SAIL-M8BG-4-10V	1927261000	B.5	SAIL-M8G-3-10U	1824591000	B.4	SAIL-M8GM8G-3-10V	1927151000	B.4
SAIL-M12WM12W-4-X.XU	1906310000	B.7	SAIL-M8BG-4-3.0Q	1927000300	B.5	SAIL-M8G-3-10V	1927231000	B.4	SAIL-M8GM8G-3-3.0Q	1926890300	B.4
SAIL-M12WM12W-4-X.XV	1925390000	B.7	SAIL-M8BG-4-3.0O	9457850300	B.5	SAIL-M8G-3-3.0Q	1926970300	B.4	SAIL-M8GM8G-3-3.0O	1824570300	B.4
SAIL-M12WM12W-5-1.5Q	1926590150	B.25	SAIL-M8BG-4-3.0O	1927260300	B.5	SAIL-M8G-3-3.0O	1824590300	B.4	SAIL-M8GM8G-3-3.0O	1927150300	B.4
SAIL-M12WM12W-5-1.5Q	1926590150	B.7	SAIL-M8BG-4-5.0Q	1927000500	B.5	SAIL-M8G-3-3.0V	1927230300	B.4	SAIL-M8GM8G-3-5.0Q	1926890500	B.4
SAIL-M12WM12W-5-1.5U	9457900150	B.25	SAIL-M8BG-4-5.0O	9457850500	B.5	SAIL-M8G-3-5.0O	1926970500	B.4	SAIL-M8GM8G-3-5.0O	1824570500	B.4
SAIL-M12WM12W-5-1.5U	9457900150	B.7	SAIL-M8BG-4-5.0V	1927260500	B.5	SAIL-M8G-3-5.0O	1824590500	B.4	SAIL-M8GM8G-3-5.0O	1927150500	B.4
SAIL-M12WM12W-5-1.5V	1925400150	B.25	SAIL-M8BG-4S-1.5Q-SB	1981910150	C.61	SAIL-M8G-3-5.0V	1927230500	B.4	SAIL-M8GM8G-3-X.XQ	1926890000	B.4
SAIL-M12WM12W-5-1.5V	1925400150	B.7	SAIL-M8BG-4S1.5U	1906610150	B.21	SAIL-M8G-3S1.5U	1906560150	B.21	SAIL-M8GM8G-3-X.XU	1824570000	B.4
SAIL-M12WM12W-5-10Q	1926591000	B.7	SAIL-M8BG-4S-10Q-SB	1981911000	C.61	SAIL-M8G-3-X.XQ	1926970000	B.4	SAIL-M8GM8G-3-X.XV	1927150000	B.4
SAIL-M12WM12W-5-10U	9457901000	B.7	SAIL-M8BG-4S-3.0Q-SB	1981910300	C.61	SAIL-M8G-3-X.XU	1824590000	B.4	SAIL-M8GM8G-4-1.5Q	1926900150	B.32
SAIL-M12WM12W-5-10V	1925401000	B.7	SAIL-M8BG-4S-5.0Q-SB	1981910500	C.61	SAIL-M8G-3-X.XV	1927230000	B.4	SAIL-M8GM8G-4-1.5O	1926900150	B.5
SAIL-M12WM12W-5-3.0O	1926590300	B.7	SAIL-M8BG-4-X.XU	9457850000	B.5	SAIL-M8G-4-1.5Q	1926990150	B.18	SAIL-M8GM8G-4-1.5O	1880470150	B.32
SAIL-M12WM12W-5-3.0O	9457900300	B.7	SAIL-M8BGR-3-1.5Q	1948610150	B.19	SAIL-M8G-4-1.5Q	1926990150	B.4	SAIL-M8GM8G-4-1.5U	1880470150	B.5
SAIL-M12WM12W-5-3.0O	1925400300	B.7	SAIL-M8BGR-3-1.5U	1827020150	B.19	SAIL-M8G-4-1.5U	1906270150	B.18	SAIL-M8GM8G-4-1.5V	1927160150	B.32
SAIL-M12WM12W-5-5.0Q	1926590500	B.7	SAIL-M8BGR-3-1.5V	1948710150	B.19	SAIL-M8G-4-1.5U	1906270150	B.4	SAIL-M8GM8G-4-1.5V	1927160150	B.5
SAIL-M12WM12W-5-5.0O	9457900500	B.7	SAIL-M8BGR-4-1.5Q	1948630150	B.19	SAIL-M8G-4-1.5U	1927250150	B.18	SAIL-M8GM8G-4-10Q	1926901000	B.5
SAIL-M12WM12W-5-5.0O	1925400500	B.7	SAIL-M8BGR-4-1.5U	1948530150	B.19	SAIL-M8G-4-1.5U	1927250150	B.4	SAIL-M8GM8G-4-10U	1880471000	B.5
SAIL-M12WM12W-5B-1.5Q	1061930150	B.42	SAIL-M8BGR-4-1.5V	1948730150	B.19	SAIL-M8G-4-10Q	1926991000	B.4	SAIL-M8GM8G-4-10V	1927161000	B.5
SAIL-M12WM12W-5S1.5Q	1059740150	B.28	SAIL-M8BGS-3-X.XQ	1926980000	B.4	SAIL-M8G-4-10U	1906271000	B.4	SAIL-M8GM8G-4-3.0Q	1926900300	B.5
SAIL-M12WM12W-5-X.XQ	1926590000	B.7	SAIL-M8BGS-3-X.XU	9457450000	B.4	SAIL-M8G-4-10U	1927251000	B.4	SAIL-M8GM8G-4-3.0O	1880470300	B.5
SAIL-M12WM12W-5-X.XU	9457900000	B.7	SAIL-M8BGS-3-X.XV	1927240000	B.4	SAIL-M8G-4-3.0Q	1926990300	B.4	SAIL-M8GM8G-4-3.0O	1927160300	B.5
SAIL-M12WM12W-5-X.XV	1925400000	B.7	SAIL-M8BGS-4-X.XQ	1927000500	B.5	SAIL-M8G-4-3.0O	1906270300	B.4	SAIL-M8GM8G-4-5.0Q	1926900500	B.5
SAIL-M12WM12W-CD-1.5A	1062150150	C.59	SAIL-M8BGS-4-X.XV	1927260000	B.5	SAIL-M8G-4-3.0V	1927250300	B.4	SAIL-M8GM8G-4-5.0O	1880470500	B.5
SAIL-M12WM12W-CD-1.5B	1062210150	C.59	SAIL-M8BW-3-1.5Q	1927060150	B.18	SAIL-M8G-4-5.0O	1926990500	B.4	SAIL-M8GM8G-4-5.0O	1927160500	B.5
SAIL-M12WM12W-PB-1.5D	1062330150	C.7	SAIL-M8BW-3-1.5Q	1927060150	B.5	SAIL-M8G-4-5.0O	1906270500	B.4	SAIL-M8GM8G-4S-0.25-CAN	1216820025	C.60
SAIL-M12WM12W-PB-1.5E	1062400150	C.7	SAIL-M8BW-3-1.5QGE	1093220150	B.18	SAIL-M8G-4-5.0O	1927250500	B.4	SAIL-M8GM8G-4S-0.2-CAN	1216820020	C.60
SAIL-M12WM8W-3-1.5Q	1938060150	B.29	SAIL-M8BW-3-1.5U	9457380150	B.18	SAIL-M8G-4S1.5U	1906570150	B.21	SAIL-M8GM8G-4S-0.3-CAN	1216820030	C.60
SAIL-M12WM8W-3-1.5Q	1938060150	B.5	SAIL-M8BW-3-1.5U	9457380150	B.5	SAIL-M8G-4-X.XQ	1926990000	B.4	SAIL-M8GM8G-4S-0.3Q-SB	1981900030	C.61
SAIL-M12WM8W-3-1.5U	1906330150	B.29	SAIL-M8BW-3-1.5V	1927320150	B.18	SAIL-M8G-4-X.XU	1906270000	B.4	SAIL-M8GM8G-4S-0.5-CAN	1216820050	C.60
SAIL-M12WM8W-3-1.5U	1906330150	B.5	SAIL-M8BW-3-1.5V	1927320150	B.5	SAIL-M8G-4-X.XV	1927250000	B.4	SAIL-M8GM8G-4S-0.5-O-CAN	1216820080	C.60
SAIL-M12WM8W-3-1.5V	1938190150	B.29	SAIL-M8BW-3-10Q	1927061000							



Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
SAIL-M8GM8W-3-1.5V	1927170150	B.32	SAIL-M8WM12W-3-10Q	1938121000	B.7	SAI-M23-BE-16	1170090000	H.15	SAIS-4-IDC M12 small	1781550001	D.5
SAIL-M8GM8W-3-1.5V	1927170150	B.5	SAIL-M8WM12W-3-10U	1937971000	B.7	SAI-M23-BE-17	1170110000	H.15	SAIS-4-IDC M8 small	1784060001	D.24
SAIL-M8GM8W-3-10Q	1926911000	B.5	SAIL-M8WM12W-3-10V	1938251000	B.7	SAI-M23-BE-19	1170130000	H.15	SAIS-4-IDC M8 small	1784060001	D.6
SAIL-M8GM8W-3-10U	1824581000	B.5	SAIL-M8WM12W-3-3.0Q	1938120300	B.7	SAI-M23-BE-6	1170020000	H.14	SAIS-5-7	9456940000	D.5
SAIL-M8GM8W-3-10V	1927117000	B.5	SAIL-M8WM12W-3-3.0Q	1937970300	B.7	SAI-M23-BE-7	1170040000	H.14	SAIS-5-7	9456940000	D.8
SAIL-M8GM8W-3-3.0Q	1926910300	B.5	SAIL-M8WM12W-3-3.0V	1938250300	B.7	SAI-M23-BE-9	1170060000	H.14	SAIS-5-7-(KV)	1921050000	D.9
SAIL-M8GM8W-3-3.0U	1824580300	B.5	SAIL-M8WM12W-3-5.0Q	1938120500	B.7	SAI-M23-BE-L-4/4	1995810000	H.20	SAIS-5/7-ZF	1906390000	D.16
SAIL-M8GM8W-3-3.0V	1927170300	B.5	SAIL-M8WM12W-3-5.0U	1937970500	B.7	SAI-M23-BE-L-6	1170370000	H.20	SAIS-5/7-ZF	1906390000	D.5
SAIL-M8GM8W-3-5.0Q	1926910500	B.5	SAIL-M8WM12W-3-5.0V	1938250500	B.7	SAI-M23-GS-7/12	1995840000	H.12	SAIS-5/9	1807350000	D.5
SAIL-M8GM8W-3-5.0U	1824580500	B.5	SAIL-M8WM12W-3-X.XQ	1938120000	B.7	SAI-M23-GS-L-7/12	1995800000	H.18	SAIS-5/9	1807350000	D.8
SAIL-M8GM8W-3-5.0V	1927170500	B.5	SAIL-M8WM12W-3-X.XU	1937970000	B.7	SAI-M23-GS-S-7/12	1169920000	H.12	SAIS-8/9	1836970000	D.5
SAIL-M8GM8W-3L1.5Q	1926930150	B.34	SAIL-M8WM12W-3-X.XV	1938250000	B.7	SAI-M23-GSW-L-7/12	1170280000	H.18	SAIS-8/9	1836970000	D.8
SAIL-M8GM8W-3L1.5U	1926930150	B.5	SAIL-M8WM12W-4-1.5Q	1938150150	B.7	SAI-M23-KBC-0-08/0.56	1995860000	H.16	SAI-SA-3-IDC	9457720000	D.20
SAIL-M8GM8W-3L1.5U	1877250150	B.34	SAIL-M8WM12W-4-1.5U	1938000150	B.7	SAI-M23-KBC-0-08/0.56	1995860000	I.12	SAI-SA-3-IDC	9457720000	G.24
SAIL-M8GM8W-3L1.5U	1877250150	B.5	SAIL-M8WM12W-4-1.5V	1938280150	B.7	SAI-M23-KBC-0-08/0.56	1995860000	I.13	SAI-SA-3-IDC (1Set)	1896740000	D.20
SAIL-M8GM8W-3L1.5V	1927190150	B.34	SAIL-M8WM12W-4-10Q	1938151000	B.7	SAI-M23-KBC-0.25/1.00	1995830000	H.21	SAI-SA-4-IDC	1766810000	D.20
SAIL-M8GM8W-3L1.5V	1927190150	B.5	SAIL-M8WM12W-4-10U	1938001000	B.7	SAI-M23-KBC-0.25/1.00	1995830000	I.12	SAI-SA-4-IDC	1766810000	G.24
SAIL-M8GM8W-3L1.5V	1926931000	B.5	SAIL-M8WM12W-4-10V	1938281000	B.7	SAI-M23-KBC-0.34/1.00	1170180000	H.16	SAI-SCREWY BOX	1939180000	1.6
SAIL-M8GM8W-3L1.5U	1877251000	B.5	SAIL-M8WM12W-4-3.0Q	1938150300	B.7	SAI-M23-KBC-0.34/1.00	1170180000	I.12	SAI-SCREWY TOOL BOX	1939170000	1.6
SAIL-M8GM8W-3L1.5U	1927191000	B.5	SAIL-M8WM12W-4-3.0U	1938000300	B.7	SAI-M23-KBC-0.34/1.00	1170180000	I.13	SAI-SK M12 MT	1802750000	D.27
SAIL-M8GM8W-3L3.0Q	1926930300	B.5	SAIL-M8WM12W-4-3.0V	1938280300	B.7	SAI-M23-KBC-0.75/2.50	1995820000	H.21	SAI-SK M5	1855310000	D.27
SAIL-M8GM8W-3L3.0U	1877250300	B.5	SAIL-M8WM12W-4-5.0Q	1938150500	B.7	SAI-M23-KBC-0.75/2.50	1995820000	I.12	SAI-SK M8	1802760000	D.27
SAIL-M8GM8W-3L3.0V	1927190300	B.5	SAIL-M8WM12W-4-5.0U	1938000500	B.7	SAI-M23-KBC-1.00-1.5	1170210000	H.16	SAI-SK M8	1802760000	E.10
SAIL-M8GM8W-3L3.0V	1926930500	B.5	SAIL-M8WM12W-4-5.0V	1938280500	B.7	SAI-M23-KBC-1.5-14-56	1170230000	H.16	SAI-SK M8	1802760000	E.14
SAIL-M8GM8W-3L5.0U	1877250500	B.5	SAIL-M8WM12W-4-X.XQ	1938150000	B.7	SAI-M23-KBC-1.5-14-56	1170230000	I.12	SAI-SK M8	1802760000	E.18
SAIL-M8GM8W-3L5.0U	1927190500	B.5	SAIL-M8WM12W-4-X.XU	1938000000	B.7	SAI-M23-KBC-1.5-14-56	1170230000	I.13	SAI-SK M8	1802760000	E.22
SAIL-M8GM8W-3LX.XQ	1926930000	B.5	SAIL-M8WM12W-4-X.XV	1938280000	B.7	SAI-M23-KBC-1.5-56-1.0	1170240000	H.16	SAI-SK M8	1802760000	E.26
SAIL-M8GM8W-3LX.XU	1877250000	B.5	SAIL-M8WM8G-3-1.5Q	1078750150	B.32	SAI-M23-KBC-1.5-56-1.0	1170240000	I.12	SAI-SK M8	1802760000	E.31
SAIL-M8GM8W-3LX.XV	1927190000	B.5	SAIL-M8WM8W-3-1.5Q	1926950150	B.5	SAI-M23-KBC-1.5-56-1.0	1170240000	I.13	SAI-SK M8	1802760000	E.33
SAIL-M8GM8W-3-X.XQ	1926910000	B.5	SAIL-M8WM8W-3-1.5U	1857670150	B.32	SAI-M23-KBC-2-0.75-2.0	1170260000	H.17	SAI-SK M8	1802760000	E.35
SAIL-M8GM8W-3-X.XU	1824580000	B.5	SAIL-M8WM8W-3-1.5U	1857670150	B.5	SAI-M23-KBC-2-0.75-2.0	1170260000	I.12	SAI-SK Stecker M12	1781520000	D.27
SAIL-M8GM8W-3-X.XV	1927170000	B.5	SAIL-M8WM8W-3-1.5V	1927210150	B.32	SAI-M23-KBC-2-0.75-2.0	1170260000	I.13	SAI-SK Stecker M12	1781520000	E.10
SAIL-M8GM8W-4-1.5Q	1926920150	B.32	SAIL-M8WM8W-3-1.5V	1927210150	B.5	SAI-M23-KBC-L-2.5-4.0	1170420000	H.21	SAI-SK Stecker M12	1781520000	E.14
SAIL-M8GM8W-4-1.5Q	1926920150	B.5	SAIL-M8WM8W-3-10Q	1926951000	B.5	SAI-M23-KBC-L-2.5-4.0	1170420000	I.12	SAI-SK Stecker M12	1781520000	E.18
SAIL-M8GM8W-4-1.5U	1857660150	B.32	SAIL-M8WM8W-3-10U	1857671000	B.5	SAI-M23-KS-7/12	1169900000	H.12	SAI-SK Stecker M12	1781520000	E.22
SAIL-M8GM8W-4-1.5U	1857660150	B.5	SAIL-M8WM8W-3-10V	1927211000	B.5	SAI-M23-KSC-0.25-1.0	1170390000	H.21	SAI-SK Stecker M12	1781520000	E.26
SAIL-M8GM8W-4-1.5V	1927180150	B.32	SAIL-M8WM8W-3-3.0Q	1926950300	B.5	SAI-M23-KSC-0.25-1.0	1170390000	I.12	SAI-SK Stecker M12	1781520000	E.31
SAIL-M8GM8W-4-1.5V	1927180150	B.5	SAIL-M8WM8W-3-3.0U	1857670300	B.5	SAI-M23-KSC-0.08/0.56	1170140000	H.16	SAI-SK Stecker M12	1781520000	E.33
SAIL-M8GM8W-4-10Q	1926921000	B.5	SAIL-M8WM8W-3-3.0U	1927210300	B.5	SAI-M23-KSC-0.14/1.00	1170150000	H.16	SAI-SK Stecker M12	1781520000	E.35
SAIL-M8GM8W-4-10U	1857661000	B.5	SAIL-M8WM8W-3-5.0Q	1926950500	B.5	SAI-M23-KSC-0.14/1.00	1170150000	I.12	SAI-SK Stecker M12	1781520000	E.45
SAIL-M8GM8W-4-10V	1927181000	B.5	SAIL-M8WM8W-3-5.0U	1857670500	B.5	SAI-M23-KSC-0.14/1.00	1170150000	I.13	SAI-SK-M12	9456050000	D.27
SAIL-M8GM8W-4-3.0Q	1926920300	B.5	SAIL-M8WM8W-3-5.0V	1927210500	B.5	SAI-M23-KSC-1.00-1.5	1170170000	H.16	SAI-SK-M12	9456050000	E.10
SAIL-M8GM8W-4-3.0U	1857660300	B.5	SAIL-M8WM8W-3-X.XQ	1926950000	B.5	SAI-M23-KSC-1.5-0.14-1	1170220000	H.16	SAI-SK-M12	9456050000	E.14
SAIL-M8GM8W-4-3.0V	1927180300	B.5	SAIL-M8WM8W-3-X.XU	1857670000	B.5	SAI-M23-KSC-1.5-0.14-1	1170220000	I.12	SAI-SK-M12	9456050000	E.18
SAIL-M8GM8W-4-5.0Q	1926920500	B.5	SAIL-M8WM8W-3-X.XV	1927210000	B.5	SAI-M23-KSC-1.5-0.14-1	1170220000	I.13	SAI-SK-M12	9456050000	E.22
SAIL-M8GM8W-4-5.0Q	1857660500	B.5	SAIL-M8WM8W-4-1.5Q	1926960150	B.32	SAI-M23-KSC-2-0.75-2.0	1170250000	H.17	SAI-SK-M12	9456050000	E.26
SAIL-M8GM8W-4-5.0U	1927180500	B.5	SAIL-M8WM8W-4-1.5Q	1926960150	B.5	SAI-M23-KSC-2-0.75-2.0	1170250000	I.12	SAI-SK-M12	9456050000	E.31
SAIL-M8GM8W-4-5.0V	1927180500	B.5	SAIL-M8WM8W-4-1.5U	1857680150	B.32	SAI-M23-KSC-2-0.75-2.0	1170250000	I.13	SAI-SK-M12	9456050000	E.33
SAIL-M8GM8W-4L1.5Q	1926940150	B.34	SAIL-M8WM8W-4-1.5U	1857680150	B.5	SAI-M23-KSC-L-0.75-2.5	1170400000	H.21	SAI-SK-M12	9456050000	E.45
SAIL-M8GM8W-4L1.5U	1906450150	B.34	SAIL-M8WM8W-4-1.5U	1927220150	B.32	SAI-M23-KSC-L-0.75-2.5	1170400000	I.12	SAI-SK-M12 BU	9456050000	D.27
SAIL-M8GM8W-4L1.5U	1927200150	B.34	SAIL-M8WM8W-4-1.5V	1927220150	B.5	SAI-M23-KSC-L-2.5-4.0	1170410000	H.21	SAI-SK-M12 IDC	1748450000	D.27
SAIL-M8GM8W-4-X.XQ	1926920000	B.5	SAIL-M8WM8W-4-10Q	1926961000	B.5	SAI-M23-KSC-L-2.5-4.0	1170410000	I.12	SAI-SK-M12 IDC	1748450000	G.25
SAIL-M8GM8W-4-X.XU	1857660000	B.5	SAIL-M8WM8W-4-10U	1857681000	B.5	SAI-M23-KSW-L-7/12	1170270000	H.18	SAI-SK-M12-UNI	2330260000	D.27
SAIL-M8GM8W-4-X.XV	1927180000	B.5	SAIL-M8WM8W-4-10V	1927221000	B.5	SAI-M23-KSW-L-7/12	1170290000	H.18	SAI-SK-M12-UNI	2330260000	E.10
SAIL-M8GM8WR-3-1.5Q	1948560150	B.33	SAIL-M8WM8W-4-10V	1927221000	B.5	SAI-M23-SE-12	1170070000	H.14	SAI-SK-M12-UNI	2330260000	E.14
SAIL-M8GM8WR-3-1.5U	1948480150	B.33	SAIL-M8WM8W-4-3.0Q	1926960300	B.5	SAI-M23-SE-16	1170080000	H.15	SAI-SK-M12-UNI	2330260000	E.18
SAIL-M8GM8WR-3-1.5V	1948660150	B.33	SAIL-M8WM8W-4-3.0U	1857680300	B.5	SAI-M23-SE-17	1170100000	H.15	SAI-SK-M12-UNI	2330260000	E.22
SAIL-M8GM8WR-4-1.5Q	1948590150	B.33	SAIL-M8WM8W-4-3.0U	1927220300	B.5	SAI-M23-SE-19	1170120000	H.15	SAI-SK-M12-UNI	2330260000	E.26
SAIL-M8GM8WR-4-1.5U	1948510150	B.33	SAIL-M8WM8W-4-5.0Q	1926960500	B.5	SAI-M23-SE-6	1170000000	H.14	SAI-SK-M12-UNI	2330260000	E.31
SAIL-M8GM8WR-4-1.5V	1948690150	B.33	SAIL-M8WM8W-4-5.0U	1857680500	B.5	SAI-M23-SE-7	1170030000	H.14	SAI-SK-M12-UNI	2330260000	E.33
SAIL-M8W-3-1.5Q	1927050150	B.18	SAIL-M8WM8W-4-5.0V	1927220500	B.5	SAI-M23-SE-9	1170050000	H.14	SAI-SK-M12-UNI	2330260000	E.35
SAIL-M8W-3-1.5Q	1927050150	B.4	SAIL-M8WM8W-4-X.XQ	1926960000	B.5	SAI-M23-SE-L-4/4	1170380000	H.20	SAI-SK-M12-UNI	2330260000	E.45
SAIL-M8W-3-1.5U	1857550150	B.18	SAIL-M8WM8W-4-X.XU	1857680000	B.5	SAI-M23-SE-L-6	1170350000	H.20	SAISM 5/8S M12 5P B-COD	1784790000	C.11
SAIL-M8W-3-1.5U	1857550150	B.4	SAIL-M8WM8W-4-X.XV	1927220000	B.5	SAIP-M12BG-3-1.5U	1108730150	B.12	SAISM 5/8S M12 5P B-COD	1784790000	D.13
SAIL-M8W-3-1.5V	1927310150	B.18	SAIL-M8WM8W-3-1.5Q	1948670150	B.33	SAIP-M12BG-5-1.5U	1108750150	B.12	SAISM 5/8S M12 5P B-COD	1784790000	D.5
SAIL-M8W-3-1.5V	1927310150	B.4	SAIL-M8WM8W-3-1.5U	1948670150	B.33	SAIP-M12BG-3-1.5U	1108770150	B.12	SAISM-M23-12P-AN-1,0M	1906290100	H.22
SAIL-M8W-3-10Q	1927051000	B.4	SAIL-M8WM8W-3-1.5V	1948670150	B.33	SAIP-M12BW-4-1.5U	1108780150	B.12	SAISM-M23-12P-ST-1,0M	1906280100	H.22
SAIL-M8W-3-10U	1857511000	B.4	SAIL-M8WM8W-3-1.5V	1948520150	B.33	SAIP-M12BW-5-1.5U	1108790150	B.12	SAISM-M23-19P-AN-1,0M	1818090100	H.22
SAIL-M8W-3-10V	1927311000	B.4	SAIL-M8WM8W-4-1.5U	1948520150	B.33	SAIP-M12G-3-1.5U	1108800150	B.12	SAISM-M23-19P-ST-1,0M	1818160100	H.22
SAIL-M8W-3-3.0Q	1927050300	B.4	SAIL-M8WM8W-4-1.5U	1948700150	B.33	SAIP-M12G-4-1.5U	1108810150	B.12	SAISM-4/8S-M12 4P D-ZF	1892120001	D.15
SAIL-M8W-3-3.0U	1857550300	B.4	SAIL-VSA-1.5U(0.5)	1845120150	B.45	SAIP-M12G-5-1.5U	1108820150	B.12	SAISM-4/8S-M12 4P D-ZF	1892120001	D.5
SAIL-M8W-3-3.0V	1927310300	B.4	SAIL-VSA-M12G-1.5U	9457040000	B.45	SAIP-M12W-3-1.5U	1108670150	B.12	SAISM-4/8S-M12-4P D-COD	1892120000	C.70
SAIL-M8W-3-5.0Q	1927050500	B.4	SAIL-VSA-M12W-1.5U	1857690150	B.45	SAIP-M12W-4-1.5U	1108680150	B.12	SAISM-4/8S-M12-4P D-COD	1892120000	C.71
SAIL-M8W-3-5.0U	1857550500	B.4	SAIL-VSB-1.5U	9457930150	B.46	SAIP-M12W-5-1.5U	1108690150	B.12	SAISM-4/8S-M12-4P D-COD	1892120000	D.13
SAIL-M8W-3-5.0V	1927310500	B.4	SAIL-VSB-1.5U(0.5)	1845140150	B.50	SAIP-M12W-5-1.5U	1108				

Type	Order No.	Page
SAISW-4/7	9457290000	D.7
SAISW-4/7-(KV)	1962620000	D.9
SAISW-4/8S-M12 4P D-ZF	1803930001	C.70
SAISW-4/8S-M12 4P D-ZF	1803930001	D.15
SAISW-4/8S-M12 4P D-ZF	1803930001	D.5
SAISW-4/8S-M12-4P D-COD	1160550000	C.71
SAISW-4/9	1807360000	D.7
SAISW-4-IDC M12	1812870000	D.22
SAISW-5/7	9456950000	D.5
SAISW-5/7	9456950000	D.8
SAISW-5/7-(KV)	1962610000	D.9
SAISW-M-4/8 M12	1803930000	C.31
SAISW-M-4/8 M12	1803930000	D.12
SAISW-M-4/8 M12	1803930000	D.5
SAISW-M-5/8 M12	1803940000	C.31
SAISW-M-5/8 M12	1803940000	C.63
SAISW-M-5/8 M12	1803940000	D.12
SAISW-M-5/8 M12	1803940000	D.5
SAISW-M-5/8 M12 B-COD	1944570000	C.11
SAISW-M-5/8 M12 B-COD	1944570000	D.14
SAISW-M-5/8 M12 B-COD	1944570000	D.5
SAISW-M8-3P(TL)	1920990000	D.19
SAISW-M8-3P(TL)	1920990000	D.6
SAISW-M8-4P(TL)	1921000000	D.19
SAISW-M8-4P(TL)	1921000000	D.6
SAIS-ZW-5	9457540000	D.26
SAIS-ZWW	1837560000	D.26
SAI-WDF 5P B M12 60mm	1820690000	D.26
SAI-WDF 5P M12 60mm	1819450000	C.28
SAI-WDF 5P M12 60mm	1819450000	C.29
SAI-WDF 5P M12 60mm	1819450000	D.26
SAI-Y-4-4/2-4 M12/8	1783420000	D.25
SAI-Y-4S-M12/M12	1060730000	D.25
SAI-Y-5S B2-4 2M12	1783410000	D.25
SAI-Y-5S- M12/M12	1826880000	D.25
SAI-Y-5S M12/M12 2Bo	1881710000	D.26
SAI-Y-5S PARA 2M12	1783430000	D.25
SAI-Y-5S PARA 2M12	1783430000	F.7
Screwty- M12	1900000000	I.5
Screwty- M12 F	1900020000	I.5
Screwty M12 KO o. SD	1900100000	I.5
Screwty M12f KO o. SD	1900120000	I.5
Screwty M23	1981560000	I.5
Screwty- M8	1900010000	I.5
Screwty- M8 F	1900030000	I.5
Screwty M8 KO o. SD	1900110000	I.5
Screwty M8F KO o. SD	1900130000	I.5
Screwty Set	1910000000	I.5
Screwty Set -DM	1920000000	I.5
Screwty-M12 F-DM	1900021000	I.5
Screwty-M12-DM	1900001000	F.7
Screwty-M12-DM	1900001000	G.25
Screwty-M12-DM	1900001000	I.5
Screwty-M8 F-DM	1900031000	I.5
Screwty-M8-DM	1900011000	I.5
SFC 0/12 NEUTRAL BL	1813170000	I.14
SFC 0/12 NEUTRAL GE	1813160000	I.14
SFC 0/12 NEUTRAL RT	1813150000	I.14
SFC 0/12 NEUTRAL WS	1813130000	I.14
SFC 0/21 NEUTRAL BL	1813220000	I.14
SFC 0/21 NEUTRAL GE	1813210000	I.14
SFC 0/21 NEUTRAL RT	1813200000	I.14
SFC 0/21 NEUTRAL WS	1813190000	I.14
SFC 0/30 NEUTRAL BL	1813270000	I.14
SFC 0/30 NEUTRAL GE	1813260000	I.14
SFC 0/30 NEUTRAL RT	1813250000	I.14
SFC 0/30 NEUTRAL WS	1813240000	I.14
SFC 1/12 NEUTRAL BL	1747320002	I.14
SFC 1/12 NEUTRAL GE	1747320004	I.14
SFC 1/12 NEUTRAL RT	1747320003	I.14
SFC 1/12 NEUTRAL WS	1747320001	I.14
SFC 1/21 NEUTRAL BL	1779080002	I.14
SFC 1/21 NEUTRAL GE	1779080004	I.14
SFC 1/21 NEUTRAL RT	1779080003	I.14
SFC 1/21 NEUTRAL WS	1779080001	I.14
SFC 1/30 NEUTRAL BL	1805720000	I.14
SFC 1/30 NEUTRAL GE	1805730000	I.14
SFC 1/30 NEUTRAL RT	1805740000	I.14
SFC 1/30 NEUTRAL WS	1805760000	I.14
SFC 2.5/12 MC NE BL	1062030000	I.14
SFC 2.5/12 MC NE GE	1062010000	I.14
SFC 2.5/12 MC NE RT	1062020000	I.14
SFC 2.5/12 MC NE WS	1062000000	I.14
SFC 2.5/12 MC SDR	1062040000	I.14
SFC 2.5/21 MC NE BL	1062090000	I.14
SFC 2.5/21 MC NE GE	1062070000	I.14
SFC 2.5/21 MC NE RT	1062080000	I.14
SFC 2.5/21 MC NE WS	1062050000	I.14
SFC 2.5/21 MC SDR	1062110000	I.14
SFC 2/12 NEUTRAL BL	1758320002	I.14
SFC 2/12 NEUTRAL GE	1758320004	I.14
SFC 2/12 NEUTRAL RT	1758320003	I.14
SFC 2/12 NEUTRAL WS	1758320001	I.14
SFC 2/21 NEUTRAL BL	1805770000	I.14
SFC 2/21 NEUTRAL GE	1805780000	I.14
SFC 2/21 NEUTRAL RT	1805790000	I.14
SFC 2/21 NEUTRAL WS	1805810000	I.14
SFC 2/30 NEUTRAL BL	1805820000	I.14
SFC 2/30 NEUTRAL GE	1805830000	I.14
SFC 2/30 NEUTRAL RT	1805850000	I.14

Type	Order No.	Page
SFC 2/30 NEUTRAL WS	1805870000	I.14
STRIPAX	9005000000	I.9
STRIPPER 6-16 RED-LINE	9203110000	I.8

## T

TM 203/18 V0	1798480000	I.15
TM 4/12 HF/HB	1719840000	C.66
TM 4/12 HF/HB	1719840000	C.67
TM 4/12 HF/HB	1719840000	C.68
TM 4/12 HF/HB	1719840000	C.69
TM 4/18 HF/HB	1719850000	C.66
TM 4/18 HF/HB	1719850000	C.67
TM 4/18 HF/HB	1719850000	C.68
TM 4/18 HF/HB	1719850000	C.69
TM 4/18 HF/HB	1719850000	I.15
TM-I 12 NEUTRAL GE	1718411687	C.66
TM-I 12 NEUTRAL GE	1718411687	C.67
TM-I 12 NEUTRAL GE	1718411687	C.68
TM-I 12 NEUTRAL GE	1718411687	C.69
TM-I 18 NEUTRAL GE	1718431687	C.66
TM-I 18 NEUTRAL GE	1718431687	C.67
TM-I 18 NEUTRAL GE	1718431687	C.68
TM-I 18 NEUTRAL GE	1718431687	C.69
TM-I 18 NEUTRAL GE	1718431687	I.15
TM-I 18 NEUTRAL WS	1718431044	I.15

## V

VG M16 - MS 1/EMV	1909500000	C.73
VG M16-1/K68	1909860000	C.73
VG M16-1/MS68	1909910000	C.73
VG M16-EXE MS	1737210000	C.73
VP M16-EXE SW	1737070000	C.73
VP M16-MS65	1777730000	C.73

## W

WK-1/4"(Screwty)	1862200000	I.5
WS 10/5 MC BEDRUCKT	1635010000	I.16
WS 10/5 MC NEUTRAL	1635000000	I.16
WS 15/5 MC BEDRUCKT	1609890000	I.16
WS 15/5 MC NEUTRAL	1609880000	I.16

Order No.	Type	Page
<b>100000000</b>		
1001180001	PRINTJET PRO 230V	L.15
1004310150	SAIL-M12GM12W-4-2L1.5T	B.27
1004320150	SAIL-M12GM12W-3L1.5T	B.27
1004330150	SAIL-M12BW-3L1.5T	B.15
1005270150	SAIL-ZW-M12BW-3-1.5U	B.37
1005460150	SAIL-ZW-M12BG-3-1.5U	B.37
1006920000	SAI-AU M12 BT4A12AO2DIO	E.4
1006920000	SAI-AU M12 BT4A12AO2DIO	E.45
1006920000	SAI-AU M12 BT4A12AO2DIO	E.47
1006930000	SAI-AU M12 BT 16DI/8DO	E.4
1006930000	SAI-AU M12 BT 16DI/8DO	E.45
1006930000	SAI-AU M12 BT 16DI/8DO	E.46
1006940000	SAI-AU M12 BT 16DI	E.4
1006940000	SAI-AU M12 BT 16DI	E.45
1006940000	SAI-AU M12 BT 16DI	E.46
1006980000	SAI-AU M12 GW PB/BT 12I	E.4
1006980000	SAI-AU M12 GW PB/BT 12I	E.44
1006980000	SAI-AU M12 GW PB/BT 12I	E.45
1007000150	SAIL-M12BW-4-2L1.5T	B.15
<b>101000000</b>		
1010060000	SAISM-M8-3P-(IF)	D.18
1010060000	SAISM-M8-3P-(IF)	D.6
1010070000	SAISM-M8-4P-(IF)	D.18
1010070000	SAISM-M8-4P-(IF)	D.6
1010080000	SAIBM-M8-3P-(IF)	D.18
1010080000	SAIBM-M8-3P-(IF)	D.6
1010090000	SAIBM-M8-4P-(IF)	D.18
1010090000	SAIBM-M8-4P-(IF)	D.6
1010840015	IE-C5DB4RE0015MCSXXX-X	C.68
1010840030	IE-C5DB4RE0030MCSXXX-X	C.68
1010840050	IE-C5DB4RE0050MCSXXX-X	C.68
1010840100	IE-C5DB4RE0100MCSXXX-X	C.68
1010850015	IE-C5DB4RE0015MCSMCS-E	C.68
1010850030	IE-C5DB4RE0030MCSMCS-E	C.68
1010850100	IE-C5DB4RE0100MCSMCS-E	C.68
1011970150	SAIL-M12GM12G-5-1.5T	B.25
1011990150	SAIL-M12GM12W-5-1.5T	B.25
1019490000	SAI-AU M12 EIP GW 16DI	E.32
1019490000	SAI-AU M12 EIP GW 16DI	E.33
1019490000	SAI-AU M12 EIP GW 16DI	E.4
<b>102000000</b>		
1020930150	SAIL-M12GM12W-4-3LW1.5T	B.27
1021280000	SAISW-3/7	D.5
1021280000	SAISW-3/7	D.7
1021290000	SAISW-3/9	D.7
1021310000	SAIBW-3/7	D.5
1021310000	SAIBW-3/7	D.7
1021320000	SAIBW-3/9	D.7
1021470000	SAIS-3/7	D.5
1021480000	SAIS-3/9	D.7
1021480000	SAIS-3/9	D.7
1021490000	SAIB-3/7	D.7
1021510000	SAIB-3/9	D.5
1021510000	SAIB-3/9	D.7
1021650150	SAIL-M12G-5-1.5T	B.11
1021660150	SAIL-M12W-5-1.5T	B.11
1021760150	SAIL-M12BG-5-1.5T	B.11
1021690150	SAIL-M12BW-5-1.5T	B.11
1021710150	SAIL-M12GM12G-3-1.5T	B.25
1021720150	SAIL-M12GM12W-3-1.5T	B.25
1021730150	SAIL-M12GM12G-4-1.5T	B.25
1021740150	SAIL-M12GM12W-4-1.5T	B.25
1021750150	SAIL-M12G-3-1.5T	B.11
1021760150	SAIL-M12W-3-1.5T	B.11
1021770150	SAIL-M12G-4-1.5T	B.11
1021790150	SAIL-M12W-4-1.5T	B.11
1022940000	SAIH-SLL-3x0,34mm²(TPE)	B.51
1022950000	SAIH-SLL-4x0,34mm²(TPE)	B.51
1022960000	SAIH-SLL-5x0,34mm²(TPE)	B.51
1022970000	SAIH-SLL-3x0,25mm²(TPE)	B.51
1022980000	SAIH-SLL-4x0,25mm²(TPE)	B.51
1024050000	PRINTJET PRO 115V	L.15
1024140000	PJ PRO TNAW	L.15
1024310000	SAI-AU M8 PB GW 16DI	E.30
1024310000	SAI-AU M8 PB GW 16DI	E.31
1024310000	SAI-AU M8 PB GW 16DI	E.4
1025940015	IE-C5DD4UG0015MCSXXX-X	C.66
1025940030	IE-C5DD4UG0030MCSXXX-X	C.66
1025940050	IE-C5DD4UG0050MCSXXX-X	C.66
1025940100	IE-C5DD4UG0100MCSXXX-X	C.66
1025950015	IE-C5DD4UG0015MCSMCS-E	C.66
1025950030	IE-C5DD4UG0030MCSMCS-E	C.66
1025950050	IE-C5DD4UG0050MCSMCS-E	C.66
1025950100	IE-C5DD4UG0100MCSMCS-E	C.66
1026090000	SAI-ASI T FF small	C.65
1027040000	PJ PRO TINTK INK K	L.15
1027050000	PJ PRO TINTK INK C	L.15
1027060000	PJ PRO TINTK INK M	L.15
1027070000	PJ PRO TINTK INK Y	L.15
1027110000	PJ PRO TINTK INK SET COL	L.15

Order No.	Type	Page
<b>104000000</b>		
1044470015	IE-C5DD4UG0015MCSA20-E	C.66
1044470030	IE-C5DD4UG0030MCSA20-E	C.66
1044470050	IE-C5DD4UG0050MCSA20-E	C.66
1044470100	IE-C5DD4UG0100MCSA20-E	C.66
<b>105000000</b>		
1051760000	SAI-6-S 3P M8 L OL	G.50
1057720000	SAI-6-S 3P M8 L SL	G.51
1057720000	SAI-6-S 3P M8 L SL	G.6
1057740150	SAIL-M12BG-3B-1.5Q	B.41
1057750150	SAIL-M12BG-4B-1.5Q	B.41
1057760150	SAIL-M12BW-5B-1.5Q	B.41
1057770150	SAIL-M12G-3B-1.5Q	B.41
1057780150	SAIL-M12G-4B-1.5Q	B.41
1057790150	SAIL-M12G-5B-1.5Q	B.41
1057800150	SAIL-M12W-3B-1.5Q	B.41
1057810150	SAIL-M12W-4B-1.5Q	B.41
1057820150	SAIL-M12W-5B-1.5Q	B.41
1057830150	SAIL-M12GM12G-3B-1.5Q	B.42
1057850150	SAIL-M12GM12G-5B-1.5Q	B.42
1057870150	SAIL-M12WM12G-3B-1.5Q	B.42
1057890150	SAIL-M12WM12G-5B-1.5Q	B.42
1057900150	SAIL-M12GM12W-3B-1.5Q	B.42
1057920150	SAIL-M12GM12W-5B-1.5Q	B.42
1058490150	SAIL-M12GM12G-3S1.5Q	B.28
1058500150	SAIL-M12GM12G-4S1.5Q	B.28
1058510150	SAIL-M12GM12G-5S1.5Q	B.28
1058530150	SAIL-M12G-PB-1.5E	C.6
1058540150	SAIL-M12G-PB-1.5E	C.6
1058570150	SAIL-M12GM12G-PB-1.5E	C.7
1058630000	SAIH-CD-2x0.34/2x0.22-PUR	C.62
1059330015	IE-C5DD4UG0030MSSMCS-E	C.66
1059330030	IE-C5DD4UG0050MSSMCS-E	C.66
1059330050	IE-C5DD4UG0100MSSMCS-E	C.66
1059340015	IE-C5DB4RE0015MSSMCS-E	C.68
1059340030	IE-C5DB4RE0030MSSMCS-E	C.68
1059340050	IE-C5DB4RE0050MSSMCS-E	C.68
1059340100	IE-C5DB4RE0100MSSMCS-E	C.68
1059430000	SAI-8-M 4P M12 DIP	G.13
1059470150	SAIL-M12GM12W-3S1.5Q	B.28
1059480150	SAIL-M12GM12W-4S1.5Q	B.28
1059540150	SAIL-M12GM12W-5S1.5Q	B.28
1059650150	SAIL-M12W-4S1.5Q	B.16
1059720150	SAIL-M12WM12W-3S1.5Q	B.28
1059730150	SAIL-M12WM12W-4S1.5Q	B.28
1059740150	SAIL-M12WM12W-5S1.5Q	B.28
1059750015	IE-C5DD4UG0015MCAXXX-X	C.67
1059750030	IE-C5DD4UG0030MCAXXX-X	C.67
1059750050	IE-C5DD4UG0050MCAXXX-X	C.67
1059750100	IE-C5DD4UG0100MCAXXX-X	C.67
1059770015	IE-C5DD4UG0015MCSMCA-E	C.67
1059770030	IE-C5DD4UG0030MCSMCA-E	C.67
1059770050	IE-C5DD4UG0050MCSMCA-E	C.67
1059770100	IE-C5DD4UG0100MCSMCA-E	C.67
1059890015	IE-C5DD4UG0015MCAMCA-E	C.67
1059890030	IE-C5DD4UG0030MCAMCA-E	C.67
1059890050	IE-C5DD4UG0050MCAMCA-E	C.67
1059890100	IE-C5DD4UG0100MCAMCA-E	C.67
1059900015	IE-C5DB4RE0015MCAXXX-X	C.69
1059900030	IE-C5DB4RE0030MCAXXX-X	C.69
1059900050	IE-C5DB4RE0050MCAXXX-X	C.69
1059900100	IE-C5DB4RE0100MCAXXX-X	C.69
1059940015	IE-C5DB4RE0015MCSMCA-E	C.69
1059940030	IE-C5DB4RE0030MCSMCA-E	C.69
1059940050	IE-C5DB4RE0050MCSMCA-E	C.69
1059940100	IE-C5DB4RE0100MCSMCA-E	C.69
1059970015	IE-C5DB4RE0015MCAMCA-E	C.69
1059970030	IE-C5DB4RE0030MCAMCA-E	C.69
1059970050	IE-C5DB4RE0050MCAMCA-E	C.69
1059970100	IE-C5DB4RE0100MCAMCA-E	C.69
<b>106000000</b>		
1060110150	SAIL-M12G-CD-1.5B	C.58
1060120150	SAIL-M12BG-CD-1.5B	C.58
1060130150	SAIL-M12GM12G-CD-1.5B	C.59
1060730000	SAI-Y-4S-M12/M12	D.25
1061880150	SAIL-M12BG-5B-1.5Q	B.41
1061890150	SAIL-M12BW-3B-1.5Q	B.41
1061900150	SAIL-M12BW-4B-1.5Q	B.41
1061910150	SAIL-M12WM12W-3B-1.5Q	B.42
1061930150	SAIL-M12WM12W-5B-1.5Q	B.42
1061970150	SAIL-M12W-PB-1.5D	C.6
10621980150	SAIL-M12BW-CD-1.5A	C.58
1061990150	SAIL-M12GM12W-CD-1.5A	C.59
1062000000	SFC 2.5/12 MC NE WS	L.14
1062010000	SFC 2.5/12 MC NE GE	L.14
1062020000	SFC 2.5/12 MC NE RT	L.14
1062030000	SFC 2.5/12 MC NE BL	L.14
1062040000	SFC 2.5/12 MC SDR	L.14
1062050000	SFC 2.5/21 MC NE WS	L.14
1062070000	SFC 2.5/21 MC NE GE	L.14
1062080000	SFC 2.5/21 MC NE RT	L.14
1062090000	SFC 2.5/21 MC NE BL	L.14
1062110000	SFC 2.5/21 MC SDR	L.14
1062150150	SAIL-M12WM12W-CD-1.5A	C.59

Order No.	Type	Page
<b>107000000</b>		
1070630000	SAI-4-F 5P M12 L 5M	G.10
1070640000	SAI-4-F 5P M12 L 10M	G.10
1070650000	SAI-4-F 4P M12 L 5M	G.10
1070660000	SAI-4-F 4P M12 L 10M	G.10
1077750150	SAIL-M12G-4-1.5QGE	B.11
1078720000	SAIE-M8S-4-0.5U-FP-M8	D.31
1078730000	SAIE-M8S-3-0.5U-FP-M8	D.31
1078750150	SAIL-M8WM8G-3-1.5Q	B.32
<b>109000000</b>		
1092910150	SAIL-M12BG-3-1.5QGE	B.11
1092920150	SAIL-M12BG-4-1.5QGE	B.11
1092930150	SAIL-M12BG-5-1.5QGE	B.11
1092940150	SAIL-M12W-3-1.5QGE	B.11
1092950150	SAIL-M12W-4-1.5QGE	B.15
1092960150	SAIL-M12W-5-1.5QGE	B.11
1092970150	SAIL-M12GM12W-3-1.5QGE	B.11
1092980150	SAIL-M12G-3-1.5QGE	B.11
1092990150	SAIL-M12G-5-1.5QGE	B.11
1093000150	SAIL-M12GM12G-2/4-1.5QGE	B.26
1093010150	SAIL-M12GM12G-3-1.5QGE	B.25
1093020150	SAIL-M12GM12G-4-1.5QGE	B.25
1093030150	SAIL-M12GM12G-5-1.5QGE	B.25
1093040150	SAIL-M12GM12W-2/4-1.5QGE	B.26
1093050150	SAIL-M12GM12W-3-1.5QGE	B.25
1093060150	SAIL-M12GM12W-4-3LW1.5QGE	B.27
1093070150	SAIL-M12GM12W-4-1.5QGE	B.25
1093080150	SAIL-M12GM12W-5-1.5QGE	B.25
1093110150	SAIL-M12GM8W-3L1.5QGE	B.31
1093130150	SAIL-M12GM8W-4L1.5QGE	B.31
1093150150	SAIL-M12GM8WR-3-1.5QGE	B.30
1093160150	SAIL-M12W-3-1.5QGE	B.11
1093170150	SAIL-M12W-4-1.5QGE	B.11
1093180150	SAIL-M12W-5-1.5QGE	B.11
1093190150	SAIL-M8BG-3-1.5QGE	B.18
1093200150	SAIL-M8BG-4-1.5QGE	B.18
1093210150	SAIL-M8BW-3L1.5QGE	B.20
1093220150	SAIL-M8BW-3-1.5QGE	B.18
1093230150	SAIL-M8BW-4L1.5QGE	B.20
1093240150	SAIL-M8BW-4-1.5QGE	B.18
1093250150	SAIL-ZW-M8BG-3-1.5QGE	B.39
1093260150	SAIL-ZW-M8BW-3-1.5QGE	B.39
<b>110000000</b>		
1104470150	SAIL-M8GM8G-3-1.5QGE	B.32
1106670150	SAIP-M12W-3-1.5U	B.12
1106680150	SAIP-M12W-4-1.5U	B.12
1106690150	SAIP-M12W-5-1.5U	B.12
1106730150	SAIP-M12BG-3-1.5U	B.12
1106740150	SAIP-M12BG-4-1.5U	B.12
1106750150	SAIP-M12BG-5-1.5U	B.12
1106770150	SAIP-M12BW-3-1.5U	B.12
1106780150	SAIP-M12BW-4-1.5U	B.12
1106790150	SAIP-M12BW-5-1.5U	B.12
1106800150	SAIP-M12G-3-1.5U	B.12
1106810150	SAIP-M12G-4-1.5U	B.12
1106820150	SAIP-M12G-5-1.5U	B.1

Order No.	Type	Page
<b>1600000000</b>		
1606550000	BL 3.50/07/180 SN DKGN BX	G.41
1609801044	DEK 5/5 MC-10 NEUT. WS	L.16
1609810000	DEK 5/5 MC BEDRUCKT	L.16
1609880000	WS 15/5 MC NEUTRAL	L.16
1609890000	WS 15/5 MC BEDRUCKT	L.16
1609940000	ESG 9/20 MC NEUTRAL WS	L.16

Order No.	Type	Page
<b>1630000000</b>		
1635000000	WS 10/5 MC NEUTRAL	L.16
1635010000	WS 10/5 MC BEDRUCKT	L.16

Order No.	Type	Page
<b>1700000000</b>		
1701230000	SAI-4-M 5P M12	G.6
1701230000	SAI-4-M 5P M12	G.8
1701231000	SAI-4-M 5P M12 UT	G.2
1701232000	SAI-4-M 5P M12 UT	G.42
1701232000	SAI-4-MH-5P M12	G.31
1701232000	SAI-4-MH-5P M12	G.34
1701233000	SAI-4-MHD-5P M12	G.31
1701233000	SAI-4-MHD-5P M12	G.35
1701240000	SAI-6-M 5P M12	G.6
1701240000	SAI-6-M 5P M12	G.8
1701241000	SAI-6-M 5P M12 UT	G.8
1701241000	SAI-6-M 5P M12 UT	G.42
1701242000	SAI-6-MH-5P M12	G.31
1701242000	SAI-6-MH-5P M12	G.34
1701243000	SAI-6-MHD-5P M12	G.31
1701243000	SAI-6-MHD-5P M12	G.35
1701250000	SAI-8-M 5P M12	G.6
1701250000	SAI-8-M 5P M12	G.8
1701251000	SAI-8-M 5P M12 UT	G.8
1701251000	SAI-8-M 5P M12 UT	G.42
1701252000	SAI-8-MH-5P M12	G.31
1701252000	SAI-8-MH-5P M12	G.34
1701253000	SAI-8-MHD-5P M12	G.31
1701253000	SAI-8-MHD-5P M12	G.35
1705920000	SAI-4-M 4P M12	G.6
1705920000	SAI-4-M 4P M12	G.8
1705921000	SAI-4-M 4P M12 UT	G.8
1705921000	SAI-4-M 4P M12 UT	G.42
1705922000	SAI-4-MH-4P M12	G.31
1705922000	SAI-4-MH-4P M12	G.34
1705923000	SAI-4-MHD-4P M12	G.31
1705923000	SAI-4-MHD-4P M12	G.35
1705930000	SAI-6-M 4P M12	G.6
1705930000	SAI-6-M 4P M12	G.8
1705931000	SAI-6-M 4P M12 UT	G.8
1705931000	SAI-6-M 4P M12 UT	G.42
1705932000	SAI-6-MH-4P M12	G.31
1705932000	SAI-6-MH-4P M12	G.34
1705933000	SAI-6-MHD-4P M12	G.31
1705933000	SAI-6-MHD-4P M12	G.35
1705940000	SAI-8-M 4P M12	G.6
1705940000	SAI-8-M 4P M12	G.8
1705941000	SAI-8-M 4P M12 UT	G.8
1705941000	SAI-8-M 4P M12 UT	G.42
1705942000	SAI-8-MH-4P M12	G.31
1705942000	SAI-8-MH-4P M12	G.34
1705943000	SAI-8-MHD-4P M12	G.31
1705943000	SAI-8-MHD-4P M12	G.35

Order No.	Type	Page
<b>1710000000</b>		
1718411687	TM-I 12 NEUTRAL GE	C.66
1718411687	TM-I 12 NEUTRAL GE	C.67
1718411687	TM-I 12 NEUTRAL GE	C.68
1718411687	TM-I 12 NEUTRAL GE	C.69
1718431044	TM-I 18 NEUTRAL WS	L.15
1718431687	TM-I 18 NEUTRAL GE	C.66
1718431687	TM-I 18 NEUTRAL GE	C.67
1718431687	TM-I 18 NEUTRAL GE	C.68
1718431687	TM-I 18 NEUTRAL GE	C.69
1718431687	TM-I 18 NEUTRAL GE	L.15
1719840000	TM 4/12 HF/HB	C.66
1719840000	TM 4/12 HF/HB	C.67
1719840000	TM 4/12 HF/HB	C.68
1719840000	TM 4/12 HF/HB	C.69
1719850000	TM 4/18 HF/HB	C.66
1719850000	TM 4/18 HF/HB	C.67
1719850000	TM 4/18 HF/HB	C.68
1719850000	TM 4/18 HF/HB	C.69
1719850000	TM 4/18 HF/HB	L.15

Order No.	Type	Page
<b>1720000000</b>		
1724750000	SAI-4/6/8-MH BL3.5	G.26
1724750000	SAI-4/6/8-MH BL3.5	G.37
1724750000	SAI-4/6/8-MH BL3.5	G.8
1724750050	SAI-4/6/8-MH BL3.5 SV	L.15
1724750050	SAI-4/6/8-MH BL3.5 SV	G.26
1724750050	SAI-4/6/8-MH BL3.5 SV	G.8
1724752000	SAI-4/6/8-MH-MH BL 3.5	G.31
1724752000	SAI-4/6/8-MH-MH BL 3.5	G.34
1724753000	SAI-4/6/8-MH-MHD BL 3.5	G.31
1724753000	SAI-4/6/8-MH-MHD BL 3.5	G.35
1724754000	SAI-4/6/8-MH-MM BL 3.5	G.33

Order No.	Type	Page
<b>1730000000</b>		
1736230000	GWDR M16-NP	C.73
1737070000	VP M16-EXE SW	C.73
1737210000	VG M16-EXE MS	C.73

Order No.	Type	Page
<b>1740000000</b>		
1747320001	SFC 1/12 NEUTRAL WS	L.14
1747320002	SFC 1/12 NEUTRAL BL	L.14
1747320003	SFC 1/12 NEUTRAL RT	L.14
1747320004	SFC 1/12 NEUTRAL GE	L.14

Order No.	Type	Page
<b>1750000000</b>		
1752080000	SAI-4/6/8-MH BLZF3.5	G.26
1752080000	SAI-4/6/8-MH BLZF3.5	G.8
1752080050	SAI-4/6/8-MH BLZF3.5 SV	G.15
1752080050	SAI-4/6/8-MH BLZF3.5 SV	G.26
1752080050	SAI-4/6/8-MH BLZF3.5 SV	G.8
1758320001	SFC 2/12 NEUTRAL WS	L.14
1758320002	SFC 2/12 NEUTRAL BL	L.14
1758320003	SFC 2/12 NEUTRAL RT	L.14
1758320004	SFC 2/12 NEUTRAL GE	L.14

Order No.	Type	Page
<b>1760000000</b>		
1760040000	SAI-4-M 3P IDC	G.26
1760041000	SAI-4-M 3P IDC UT	G.26
1760050000	SAI-6-M 3P IDC	G.26
1760051000	SAI-6-M 3P IDC UT	G.26
1760060000	SAI-8-M 3P IDC	G.26
1760061000	SAI-8-M 3P IDC UT	G.26
1766660000	SAI-4-F 4P IDC PUR 5M	G.27
1766670000	SAI-4-F 4P IDC PUR 10M	G.27
1766680000	SAI-6-F 4P IDC PUR 5M	G.27
1766690000	SAI-6-F 4P IDC PUR 10M	G.27
1766700000	SAI-8-F 4P IDC PUR 5M	G.27
1766710000	SAI-8-F 4P IDC PUR 10M	G.27
1766720000	SAI-4-F 3P IDC PUR 5M	G.27
1766730000	SAI-4-F 3P IDC PUR 10M	G.27
1766740000	SAI-6-F 3P IDC PUR 5M	G.27
1766750000	SAI-6-F 3P IDC PUR 10M	G.27
1766760000	SAI-8-F 3P IDC PUR 5M	G.27
1766770000	SAI-8-F 3P IDC PUR 10M	G.27
1766780000	SAI-4-M 4P IDC	G.26
1766781000	SAI-4-M 4P IDC UT	G.26
1766790000	SAI-6-M 4P IDC	G.26
1766791000	SAI-6-M 4P IDC UT	G.26
1766800000	SAI-8-M 4P IDC	G.26
1766801000	SAI-8-M 4P IDC UT	G.26
1766810000	SAI-SA-4-IDC	D.20
1766810000	SAI-SA-4-IDC	G.24
1767880000	SAI-8-M 5P M12 ZF III	G.8

Order No.	Type	Page
<b>1770000000</b>		
1777730000	VP M16-MS65	C.73
1779080001	SFC 1/21 NEUTRAL WS	L.14
1779080002	SFC 1/21 NEUTRAL BL	L.14
1779080003	SFC 1/21 NEUTRAL RT	L.14
1779080004	SFC 1/21 NEUTRAL GE	L.14

Order No.	Type	Page
<b>1780000000</b>		
1781060000	SAI-8-M 5P M12 NPN	G.8
1781520000	SAI-SK Stecker M12	D.27
1781520000	SAI-SK Stecker M12	E.10
1781520000	SAI-SK Stecker M12	E.14
1781520000	SAI-SK Stecker M12	E.18
1781520000	SAI-SK Stecker M12	E.22
1781520000	SAI-SK Stecker M12	E.26
1781520000	SAI-SK Stecker M12	E.31
1781520000	SAI-SK Stecker M12	E.33
1781520000	SAI-SK Stecker M12	E.35
1781520000	SAI-SK Stecker M12	E.45
1781540001	SAIB-4-IDC-M12 small	D.2
1781550001	SAIS-4-IDC M12 small	D.22
1781550001	SAIS-4-IDC M12 small	D.5
1782740000	SAI-8-MMH 5P M12 ZF	G.31
1782740000	SAI-8-MMH 5P M12 ZF	G.33
1782750000	SAI-4/6/8-MH MH BLZF3.5	G.31
1782750000	SAI-4/6/8-MH MH BLZF3.5	G.34
1782760000	SAI-8-MH-5P M12 ZF III	G.31
1782760000	SAI-8-MH-5P M12 ZF III	G.34
1783410000	SAI-Y-5S B2-4 2M12	D.25
1783420000	SAI-Y-4-4/2-4 M12/8	D.25
1783430000	SAI-Y-5S PARA 2M12	D.25
1783430000	SAI-Y-5S PARA 2M12	F.7
1783490000	SAI-8-MM 5P M12	G.31
1783490000	SAI-8-MM 5P M12	G.33
1783490000	SAI-8-MM 5P M12	G.36
1783491000	SAI-8-MM 5P M12 UT	G.31
1783500000	SAI-4-MM 5P M12	G.33
1783500000	SAI-4-MM 5P M12	G.33
1783500000	SAI-4-MM 5P M12	G.6
1783510000	SAI-8-MMS 5P M12	G.31
1783510000	SAI-8-MMS 5P M12	G.33
1783510000	SAI-8-MMS 5P M12	G.36

Order No.	Type	Page
1783520000	SAI-4-MMS 5P M12	G.31
1783520000	SAI-4-MMS 5P M12	G.33
1783520000	SAI-4-MMS 5P M12	G.6
1783530000	SAI-8-MMS 4P M12	G.31
1783530000	SAI-8-MMS 4P M12	G.33
1783540000	SAI-8-MMS 4P M12	G.6
1783540000	SAI-4-MMS 4P M12	G.31
1783540000	SAI-4-MMS 4P M12	G.33
1783540000	SAI-4-MMS 4P M12	G.6
1784030001	SAIB-3-IDC-M8 small	D.24
1784030001	SAIB-3-IDC-M8 small	D.6
1784040001	SAIS-3-IDC M8 small	D.24
1784040001	SAIS-3-IDC M8 small	D.6
1784050001	SAIB-4-IDC-M8 small	D.24
1784050001	SAIB-4-IDC-M8 small	D.6
1784060001	SAIS-4-IDC M8 small	D.24
1784060001	SAIS-4-IDC M8 small	D.6
1784500000	SAI-8-F 5P 20M 0.5/1.0U	G.9
1784510000	SAI-8-F 5P 15M 0.5/1.0U	G.9
1784570000	SAI-8-F 4P M8 PUR 10M	G.48
1784580000	SAI-8-F 4P M8 PUR 5M	G.48
1784590000	SAI-4-F 4P M8 PUR 10M	G.48
1784600000	SAI-4-F 4P M8 PUR 5M	G.48
1784610000	SAI-8-F 3P M8 PUR 10M	G.48
1784620000	SAI-8-F 3P M8 PUR 5M	G.48
1784630000	SAI-4-F 3P M8 PUR 10M	G.48
1784640000	SAI-4-F 3P M8 PUR 5M	G.48
1784650000	SAI-8-M23 4P M8	G.49
1784650000	SAI-8-M23 4P M8	H.25
1784660000	SAI-4-M23 4P M8	G.49
1784660000	SAI-4-M23 4P M8	H.25
1784670000	SAI-8-M 3P M8	G.48
1784680000	SAI-4-M 3P M8	G.48
1784690000	SAI-8-M 4P M8	G.48
1784700000	SAI-4-M 4P M8	G.48
1784740000	SAIS-M-5/8S M12 5P A-COD	C.31
1784740000	SAIS-M-5/8S M12 5P A-COD	C.63
1784740000	SAIS-M-5/8S M12 5P A-COD	D.12
1784740000	SAIS-M-5/8S M12 5P A-COD	D.5
1784740000	SAIS-M-5/8S M12 5P A-COD	D.5
1784750000	SAIB-M-5/8S M12 5P A-COD	C.31
1784750000	SAIB-M-5/8S M12 5P A-COD	C.63
1784750000	SAIB-M-5/8S M12 5P A-COD	D.12
1784750000	SAIB-M-5/8S M12 5P A-COD	D.5
1784760000	SAIEND CAN-M12 5P A-COD	E.14
1784760000	SAIEND CAN-M12 5P A-COD	E.18
1784760000	SAIEND CAN-M12 5P A-COD	E.33
1784770000	SAIEND PB M12 5P B-COD	E.10
1784770000	SAIEND PB M12 5P B-COD	E.31
1784770000	SAIEND PB M12 5P B-COD	E.45
1784780000	SAIEND PB M12 5P B-COD	C.11
1784780000	SAIEND PB M12 5P B-COD	D.13
1784780000	SAIEND PB M12 5P B-C	



Order No.	Type	Page
1813200000	SFC 0/21 NEUTRAL RT	I.14
1813210000	SFC 0/21 NEUTRAL GE	I.14
1813220000	SFC 0/21 NEUTRAL BL	I.14
1813240000	SFC 0/30 NEUTRAL WS	I.14
1813250000	SFC 0/30 NEUTRAL RT	I.14
1813260000	SFC 0/30 NEUTRAL GE	I.14
1813270000	SFC 0/30 NEUTRAL BL	I.14
1814890000	SAIE-M12B-5-0.5U-PG9	D.30
1814990000	SAI-8-F 5P NPN-PNP 5M	G.38
1815670000	SAIL-M12WM12W-3-X.XU	B.7
1815670150	SAIL-M12WM12W-3-1.5U	B.25
1815670150	SAIL-M12WM12W-3-1.5U	B.7
1815670300	SAIL-M12WM12W-3-3.0U	B.7
1815670500	SAIL-M12WM12W-3-5.0U	B.7
1815671000	SAIL-M12WM12W-3-10U	B.7
1816610000	SAI-8-M 5P M12 DL2	G.8
1818090100	SAIS-M23-19P-AN-1.0M	H.22
1818140100	SAIB-M23-19P-AN-1.0M	H.22
1818160100	SAIS-M23-19P-ST-1.0M	H.22
1818180100	SAIB-M23-19P-ST-1.0M	H.22
1819450000	SAI-WDF 5P M12 60mm	C.28
1819450000	SAI-WDF 5P M12 60mm	C.29
1819450000	SAI-WDF 5P M12 60mm	D.26

## 1820000000

1820690000	SAI-WDF 5P B M12 60mm	D.26
1821050000	SAIL-M12WM12G-3-X.XU	B.6
1821050150	SAIL-M12WM12G-3-1.5U	B.6
1821050300	SAIL-M12WM12G-3-3.0U	B.6
1821050500	SAIL-M12WM12G-3-5.0U	B.6
1821051000	SAIL-M12WM12G-3-10U	B.6
1824570000	SAIL-M8GM8B-3-X.XU	B.4
1824570150	SAIL-M8GM8B-3-1.5U	B.32
1824570150	SAIL-M8GM8B-3-1.5U	B.4
1824570300	SAIL-M8GM8B-3-3.0U	B.4
1824570500	SAIL-M8GM8B-3-5.0U	B.4
1824571000	SAIL-M8GM8B-3-10U	B.4
1824580000	SAIL-M8GM8B-3-X.XU	B.5
1824580150	SAIL-M8GM8B-3-1.5U	B.32
1824580150	SAIL-M8GM8B-3-1.5U	B.5
1824580300	SAIL-M8GM8B-3-3.0U	B.5
1824580500	SAIL-M8GM8B-3-5.0U	B.5
1824581000	SAIL-M8GM8B-3-10U	B.5
1824590000	SAIL-M8G-3-X.XU	B.4
1824590150	SAIL-M8G-3-1.5U	B.18
1824590150	SAIL-M8G-3-1.5U	B.4
1824590300	SAIL-M8G-3-3.0U	B.4
1824590500	SAIL-M8G-3-5.0U	B.4
1824591000	SAIL-M8G-3-10U	B.4
1826880000	SAI-Y-SS- M12/M12	D.25
1827010150	SAIL-M8BWR-3-1.5U	B.19
1827020150	SAIL-M8BGR-3-1.5U	B.19
1828610000	SAI-8-F 4P M8 L 10M	G.52
1828610000	SAI-8-F 4P M8 L 10M	G.6
1828620000	SAI-8-F 4P M8 L 5M	G.52
1828620000	SAI-8-F 4P M8 L 5M	G.6
1828630000	SAI-12-F 3P M8 L 10M	G.52
1828630000	SAI-12-F 3P M8 L 10M	G.6
1828640000	SAI-12-F 3P M8 L 5M	G.52
1828640000	SAI-12-F 3P M8 L 5M	G.6
1828650000	SAI-10-F 3P M8 L 10M	G.52
1828650000	SAI-10-F 3P M8 L 10M	G.6
1828660000	SAI-10-F 3P M8 L 5M	G.52
1828660000	SAI-10-F 3P M8 L 5M	G.6
1828670000	SAI-8-F 3P M8 L 10M	G.52
1828670000	SAI-8-F 3P M8 L 10M	G.6
1828680000	SAI-8-F 3P M8 L 5M	G.52
1828680000	SAI-8-F 3P M8 L 5M	G.6
1828690000	SAI-6-F 3P M8 L 10M	G.52
1828690000	SAI-6-F 3P M8 L 10M	G.6
1828700000	SAI-6-F 3P M8 L 5M	G.52
1828700000	SAI-6-F 3P M8 L 5M	G.6
1828710000	SAI-4-F 3P M8 L 10M	G.52
1828710000	SAI-4-F 3P M8 L 10M	G.6
1828720000	SAI-4-F 3P M8 L 5M	G.52
1828720000	SAI-4-F 3P M8 L 5M	G.6
1828730000	SAI-6-S 3P M8 L	G.50
1828730000	SAI-6-S 3P M8 L	G.6
1828740000	SAI-4-S 3P M8 L	G.50
1828740000	SAI-4-S 3P M8 L	G.6

## 1830000000

1831020000	SAI-8-M16 4P M12	G.12
1836910000	SAIE-M12B-5-0.5U-M16	D.29
1836960000	SAIB-8/9	D.5
1836960000	SAIB-8/9	D.8
1836970000	SAIS-8/9	D.5
1836970000	SAIS-8/9	D.8
1837560000	SAIS-ZWW	D.26

## 1840000000

1845120150	SAIL-VSA-1.5U(0.5)	B.49
1845140150	SAIL-VSB-1.5U(0.5)	B.50
1845160150	SAIL-VSBD-1.5U(0.5)	B.50
1845800000	SAI-4-F 4P M5 L10M	G.56
1845810000	SAI-8-F 4P M5 L10M	G.56
1845820000	SAI-4-F 3P M5 L10M	G.56

Order No.	Type	Page
1845830000	SAI-8-F 3P M5 L10M	G.56
1845840000	SAI-4-S 4P M5	G.56
1845850000	SAI-8-S 3P M5	G.56
1845860000	SAI-8-S16/19P 4P M5	G.57
1845870000	SAI-4-S16 4P M5	G.57
1845880000	SAI-8-S16 3P M5	G.57
1845890000	SAI-4-S16 3P M5	G.57
1847560000	SAI-8-B 5P M12 SL	G.39
1847920000	SAI-8-S 4P FC	G.18
1847920000	SAI-8-S 4P FC	H.23
1847930000	SAI-4-F 5P FC 10M	G.17
1847940000	SAI-4-F 5P FC 2M	G.17
1847950000	SAI-4-F 5P FC 5M	G.17
1847960000	SAI-4-S 4P FC	G.18
1847960000	SAI-4-S 4P FC	H.23
1847970000	SAI-4-S 5P FC	G.18
1847970000	SAI-4-S 5P FC	H.23
1847980000	SAI-8-F 4P FC 10M	G.17
1847990000	SAI-8-F 4P FC 2M	G.17
1848000000	SAI-8-F 4P FC 5M	G.17
1848010000	SAI-8-F 5P FC 10M	G.17
1848020000	SAI-8-F 5P FC 2M	G.17
1848030000	SAI-8-F 5P FC 5M	G.17
1848040000	SAI-8-S 5P FC	G.18
1848040000	SAI-8-S 5P FC	H.23
1848050000	SAI-4-F 4P FC 10M	G.17
1848060000	SAI-4-F 4P FC 5M	G.17
1848070000	SAI-8-M 5P FC	G.20
1848080000	SAI-4-F 4P FC 2M	G.17
1849670000	SAI-6-F 4P M8 L 10M	G.52
1849670000	SAI-6-F 4P M8 L 10M	G.6
1849680000	SAI-4-F 4P M8 L 5M	G.52
1849680000	SAI-4-F 4P M8 L 5M	G.6
1849690000	SAI-4-F 4P M8 L 10M	G.52
1849690000	SAI-4-F 4P M8 L 10M	G.6
1849700000	SAI-6-F 4P M8 L 5M	G.52
1849700000	SAI-6-F 4P M8 L 5M	G.6

## 1850000000

1851740000	SAI-4-F 3P M5 L5M	G.56
1851750000	SAI-8-F 4P M5 L5M	G.56
1851760000	SAI-8-F 3P M5 L5M	G.56
1851770000	SAI-4-F 4P M5 L5M	G.56
1852720000	SAIS-3-IDC (0,75) M12	D.23
1852730000	SAIB-3-IDC (0,75) M12	D.23
1852730000	SAIB-3-IDC (0,75) M12	D.5
1852740000	SAIS-4-IDC (0,75) M12	D.23
1852740000	SAIS-4-IDC (0,75) M12	D.5
1852750000	SAIB-4-IDC (0,75) M12	D.23
1854000000	SAI-4-M 5P M12 ZF	G.8
1854060150	SAIL-M5G-3P-1.5U	B.22
1855310000	SAI-SK M5	D.27
1856110000	SAIE-M12B-5-0.5U-FP-M16	D.29
1856120000	SAIE-M12S-5-0.5U-PG9	D.30
1856130000	SAIE-M8B-3-0.5U-FP-M8	D.31
1856140000	SAIE-M8B-4-0.5U-FP-M8	D.31
1857550000	SAIL-M8W-3-X.XU	B.4
1857550150	SAIL-M8W-3-1.5U	B.18
1857550150	SAIL-M8W-3-1.5U	B.4
1857550300	SAIL-M8W-3-3.0U	B.4
1857550500	SAIL-M8W-3-5.0U	B.4
1857551000	SAIL-M8W-3-10U	B.4
1857560000	SAIL-M8W-4-X.XU	B.4
1857560150	SAIL-M8W-4-1.5U	B.18
1857560150	SAIL-M8W-4-1.5U	B.4
1857560300	SAIL-M8W-4-3.0U	B.4
1857560500	SAIL-M8W-4-5.0U	B.4
1857561000	SAIL-M8W-4-10U	B.4
1857660000	SAIL-M8GM8W-4-X.XU	B.5
1857660150	SAIL-M8GM8W-4-1.5U	B.32
1857660150	SAIL-M8GM8W-4-1.5U	B.5
1857660300	SAIL-M8GM8W-4-3.0U	B.5
1857660500	SAIL-M8GM8W-4-5.0U	B.5
1857661000	SAIL-M8GM8W-4-10U	B.5
1857670000	SAIL-M8WM8W-3-X.XU	B.5
1857670150	SAIL-M8WM8W-3-1.5U	B.32
1857670150	SAIL-M8WM8W-3-1.5U	B.5
1857670300	SAIL-M8WM8W-3-3.0U	B.5
1857670500	SAIL-M8WM8W-3-5.0U	B.5
1857671000	SAIL-M8WM8W-3-10U	B.5
1857680000	SAIL-M8WM8W-4-X.XU	B.5
1857680150	SAIL-M8WM8W-4-1.5U	B.32
1857680150	SAIL-M8WM8W-4-1.5U	B.5
1857680300	SAIL-M8WM8W-4-3.0U	B.5
1857680500	SAIL-M8WM8W-4-5.0U	B.5
1857681000	SAIL-M8WM8W-4-10U	B.5
1857690150	SAIL-VSA-M12W-1.5U	B.45
1857700150	SAIL-VSB-M12W-1.5U	B.46
1857710150	SAIL-VSBD-M12W-1.5U	B.46
1857720150	SAIL-VSC-M12W-1.5U	B.47
1857730150	SAIL-VSCD-M12W-1.5U	B.47
1859110000	SAI-4-SH 4P FC	G.19
1859110000	SAI-4-SH 4P FC	H.24
1859120000	SAI-8-SH 4P FC	G.19
1859120000	SAI-8-SH 4P FC	H.24
1859130000	SAI-4-SH 5P FC	G.19
1859130000	SAI-4-SH 5P FC	H.24
1859140000	SAI-8-SH 5P FC	G.19
1859140000	SAI-8-SH 5P FC	H.24

Order No.	Type	Page
1861090000	SAIE-M12S-4-0.5U-M16	D.29
1861110000	SAIE-M12S-8-0.5U-M16	D.29
1861120000	SAIE-M12B-4-0.5U-M16	D.29
1861140000	SAIE-M12B-8-0.5U-M16	D.29
1861160000	SAIE-M12S-4-0.5U-FP-M16	D.29
1861170000	SAIE-M12S-5-0.5U-FP-M16	D.29
1861180000	SAIE-M12S-8-0.5U-FP-M16	D.29
1861190000	SAIE-M12B-4-0.5U-FP-M16	D.29
1861210000	SAIE-M12B-8-0.5U-FP-M16	D.29
1861220000	SAIE-M12S-4-0.5U-PG9	D.30
1861220001	SAIE-M12S-4-0.5U-AEH-VA	C.33
1861230000	SAIE-M12S-5-0.5U-M16	D.29
1861240000	SAIE-M12S-8-0.5U-PG9	D.30
1861250000	SAIE-M12B-4-0.5U-PG9	D.30
1861270000	SAIE-M12B-8-0.5U-PG9	D.30
1861280000	SAIE-M8R-3-0.5U-FP-M8	D.31
1861290000	SAIE-M8R-4-0.5U-FP-M8	D.31
1861530000	SAI-8-M 5P Ex Z22	G.60
1861540000	SAI-4-S 5P CNOMO	G.21
1861550000	SAI-8-F 5P CNOMO 5M	G.21
1861560000	SAI-4-F 5P CNOMO 10M	G.21
1861570000	SAI-4-F 5P CNOMO 5M	G.21
1861580000	SAI-8-S 5P CNOMO	G.21
1861590000	SAI-8-F 5P CNOMO 10M	G.21
1861840000	SAI-6-M 5P Ex Z22	G.60
1861850000	SAI-4-M 5P Ex Z22	G.60
1862200000	WK-1/4"(Screwty)	I.5
1864730000	SAIS-3-IDC-M12B-COD	C.12
1864730000	SAIS-3-IDC-M12B-COD	D.13
1864740000	SAIB-3-IDC-M12B-COD	C.12
1864740000	SAIB-3-IDC-M12B-COD	D.13
1865310000	SAI-8-F 5P M12 5M VA	G.28
1865870150	SAIL-M12BG-8-1.5U	B.14
1865870300	SAIL-M12BG-8-3.0U	B.14
1865870500	SAIL-M12BG-8-5.0U	B.14
1865871000	SAIL-M12BG-8-10U	B.14
1867410150	SAIL-M12BG-3S1.5Q	B.16
1868350000	SAI-4-M 4P Exi Z1 OL	G.59
1868360000	SAI-4-M 4P Exi Z1 IL	G.59
1868370000	SAI-8-M 4P Exi Z1 IL	G.59
1868560000	DAE M12 PA short	C.73

## 1870000000

1871680000	SAI-8-S12 3P M8 L	G.50
1871680000	SAI-8-S12 3P M8 L	G.6
1871700150	SAIL-M5G-4P-1.5U	B.22
1871710000	SAIS-3/7	D.5
1872440000	SAI-8-SHB 5P FC	G.22
1872460000	SAI-8-SHB 5P F13 FC	G.23
1873030000	SAIE-M5S-4-0.2U	D.31
1873040000	SAIE-M5B-4-0.2U	D.31
1873050000	SAIE-M5S-3-0.2U	D.31
1873060000	SAIE-M5B-3-0.2U	D.31
1873070000	SAIB-VSA-3P/250/9-OB	D.32
1873080000	SAIB-VSA-4P/250/9-OB	D.32
1873090000	SAIB-VSA-3P/250/11-OB	D.32
1873100000	SAIB-VSA-4P/250/11-OB	D.32
1873110000	SAIB-VSA-3P/230/9-LD	D.32
1873120000	SAIB-VSA-3P/24/9-LD	D.32
1873130000	SAIB-VSA-3P/230/9-H/OB	D.32
1873140000	SAIB-VSA-4P/230/9-H/OB	D.32
1873150000	SAIB-VSA-3P/230/11-H/OB	D.32
1873160000	SAIB-VSA-4P/230/11-H/OB	D.32
1873170000	SAIB-VSB-3P/250/9-OB	D.32
1873180000	SAIB-VSB-3P/24/9-LD	D.32
1873190000	SAIB-VSBD-3P/250/9-OB	D.32
1873200000	SAIB-VSC-3P/250/7-OB	D.32
1873210000	SAIB-VSC-4P/250/7-OB	D.32
1873220000	SAIB-VSCD-3P/250/7-OB	D.32



Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page
1906310300	SAIL-M12WM12W-4-3.0U	B.7	1906930000	SAI-AU M8 EIP 16DI	E.22	1925350500	SAIL-M12GM12W-4-5.0V	B.7	1925590150	SAIL-M12BG-5-1.5V	B.11
1906310500	SAIL-M12WM12W-4-5.0U	B.7	1906930000	SAI-AU M8 EIP 16DI	E.4	1925351000	SAIL-M12GM12W-4-10V	B.7	1925590150	SAIL-M12BG-5-1.5V	B.7
1906311000	SAIL-M12WM12W-4-10U	B.7	1906940000	SAI-AU M8 EIP 16DI/8DO	E.20	1925360000	SAIL-M12GM12W-5-X.XV	B.7	1925590300	SAIL-M12BG-5-3.0V	B.7
1906330000	SAIL-M12WM8W-3-X.XU	B.5	1906940000	SAI-AU M8 EIP 16DI/8DO	E.22	1925360150	SAIL-M12GM12W-5-1.5V	B.25	1925590500	SAIL-M12BG-5-5.0V	B.7
1906330150	SAIL-M12WM8W-3-1.5U	B.29	1906940000	SAI-AU M8 EIP 16DI/8DO	E.4	1925360150	SAIL-M12GM12W-5-1.5V	B.7	1925591000	SAIL-M12BG-5-10V	B.7
1906330300	SAIL-M12WM8W-3-3.0U	B.5	1906950150	SAIL-M12BW-3S1.5Q	B.16	1925360300	SAIL-M12GM12W-5-3.0V	B.7	1925630000	SAIL-M12BW-3-X.XV	B.7
1906330500	SAIL-M12WM8W-3-5.0U	B.5	1909500000	VG M16 - MS 1/EMV	C.73	1925360500	SAIL-M12GM12W-5-5.0V	B.7	1925630150	SAIL-M12BW-3-1.5V	B.11
1906331000	SAIL-M12WM8W-3-10U	B.5	1909860000	VG M16-1/K68	C.73	1925361000	SAIL-M12GM12W-5-10V	B.7	1925630300	SAIL-M12BW-3-3.0V	B.7
1906340000	SAIL-M12WM8W-4-X.XU	B.5	1909910000	VG M16-1/MS68	C.73	1925370150	SAIL-M12GM12W-2/4-1.5V	B.26	1925630500	SAIL-M12BW-3-5.0V	B.7
1906340150	SAIL-M12WM8W-4-1.5U	B.29				1925380000	SAIL-M12WM12W-3-X.XV	B.7	1925631000	SAIL-M12BW-3-10V	B.7
1906340300	SAIL-M12WM8W-4-3.0U	B.5				1925380150	SAIL-M12WM12W-3-1.5V	B.25	1925640000	SAIL-M12BW-4-X.XV	B.7
1906340500	SAIL-M12WM8W-4-5.0U	B.5				1925380300	SAIL-M12WM12W-3-1.5V	B.7	1925640150	SAIL-M12BW-4-1.5V	B.11
1906341000	SAIL-M12WM8W-4-10U	B.5				1925380500	SAIL-M12WM12W-3-3.0V	B.7	1925640300	SAIL-M12BW-4-3.0V	B.7
1906390000	SAIS-5/7-ZF	D.16				1925381000	SAIL-M12WM12W-3-10V	B.7	1925640500	SAIL-M12BW-4-5.0V	B.7
1906390000	SAIS-5/7-ZF	D.5				1925390150	SAIL-M12WM12W-4-1.5V	B.25	1925641000	SAIL-M12BW-4-10V	B.7
1906400150	SAIL-M8BW-4L1.5U	B.20				1925390150	SAIL-M12WM12W-4-1.5V	B.7	1925650000	SAIL-M12BW-5-X.XV	B.7
1906410000	SAIL-M12GM12W-4-2LX.XU	B.8				1925390300	SAIL-M12WM12W-4-3.0V	B.7	1925650150	SAIL-M12BW-5-1.5V	B.11
1906410150	SAIL-M12GM12W-4-2L1.5U	B.27				1925390500	SAIL-M12WM12W-4-5.0V	B.7	1925650500	SAIL-M12BW-5-5.0V	B.7
1906410300	SAIL-M12GM12W-4-2L3.0U	B.8				1925391000	SAIL-M12WM12W-4-10V	B.7	1925650500	SAIL-M12BW-5-10V	B.7
1906410500	SAIL-M12GM12W-4-2L5.0U	B.8				1925400000	SAIL-M12WM12W-5-X.XV	B.7	1925651000	SAIL-M12BW-5-10V	B.7
1906411000	SAIL-M12GM12W-4-2L10U	B.8				1925400000	SAIL-M12WM12W-5-1.5V	B.25	1925649000	SAIL-M12GM12G-3-X.XQ	B.6
1906430150	SAIL-M12GM8W-4L1.5U	B.31				1925400150	SAIL-M12WM12W-5-1.5V	B.7	19256490150	SAIL-M12GM12G-3-1.5Q	B.25
1906450150	SAIL-M8GM8W-4L1.5U	B.34				1925400300	SAIL-M12WM12W-5-3.0V	B.8	19256490150	SAIL-M12GM12G-3-1.5Q	B.6
1906470150	SAIL-M12G-3S1.5Q	B.16				1925400500	SAIL-M12WM12W-5-5.0V	B.7	19256490300	SAIL-M12GM12G-3-3.0Q	B.6
1906480150	SAIL-M12G-4S1.5Q	B.16				1925401000	SAIL-M12WM12W-5-10V	B.7	19256490500	SAIL-M12GM12G-3-5.0Q	B.6
1906500150	SAIL-M12W-3S1.5Q	B.16				1925410000	SAIL-M12GM12W-3L1.5V	B.27	19256491000	SAIL-M12GM12G-3-10Q	B.6
1906520150	SAIL-M12W-5S1.5Q	B.16				1925410150	SAIL-M12GM12W-3L1.5V	B.8	1925650000	SAIL-M12GM12G-4-X.XQ	B.6
1906540150	SAIL-M12BW-5S1.5Q	B.16				1925410300	SAIL-M12GM12W-3L3.0V	B.8	19256500150	SAIL-M12GM12G-4-1.5Q	B.25
1906550000	SAI-AU M8 PB 16DI	E.10				1925410500	SAIL-M12GM12W-3L5.0V	B.8	19256500150	SAIL-M12GM12G-4-1.5Q	B.6
1906550000	SAI-AU M8 PB 16DI	E.4				1925411000	SAIL-M12GM12W-3L10V	B.8	1925650300	SAIL-M12GM12G-4-3.0Q	B.6
1906550000	SAI-AU M8 PB 16DI	E.8				1925420000	SAIL-M12GM12W-4-2LX.XV	B.8	1925650500	SAIL-M12GM12G-4-5.0Q	B.6
1906560150	SAIL-M8G-3S1.5U	B.21				1925420150	SAIL-M12GM12W-4-2L1.5V	B.27	1925651000	SAIL-M12GM12G-4-10Q	B.6
1906570150	SAIL-M8G-4S1.5U	B.21				1925420150	SAIL-M12GM12W-4-2L1.5V	B.8	1925651000	SAIL-M12GM12G-5-X.XQ	B.7
1906580150	SAIL-M8W-3S1.5U	B.21				1925420300	SAIL-M12GM12W-4-2L3.0V	B.8	19256510150	SAIL-M12GM12G-5-1.5Q	B.25
1906590150	SAIL-M8W-4S1.5U	B.21				1925420500	SAIL-M12GM12W-4-2L5.0V	B.8	19256510150	SAIL-M12GM12G-5-1.5Q	B.7
1906600150	SAIL-M8BG-3S1.5U	B.21				1925421000	SAIL-M12GM12W-4-2L10V	B.8	19256510300	SAIL-M12GM12G-5-3.0Q	B.6
1906610150	SAIL-M8BG-4S1.5U	B.21				1925430000	SAIL-M12G-3-X.XV	B.4	19256510500	SAIL-M12GM12G-5-5.0Q	B.6
1906620150	SAIL-M8BW-3S1.5U	B.21				1925430150	SAIL-M12G-3-1.5V	B.11	19256511000	SAIL-M12GM12G-5-10Q	B.7
1906630150	SAIL-M8BW-4S1.5U	B.21				1925430150	SAIL-M12G-3-1.5V	B.4	19256520150	SAIL-M12GM12G-2/4-1.5Q	B.26
1906640000	SAI-AU M8 PB 16DI/8DO	E.10				1925430300	SAIL-M12G-3-3.0V	B.4	19256530000	SAIL-M12GM12W-3-X.XQ	B.7
1906640000	SAI-AU M8 PB 16DI/8DO	E.4				1925430500	SAIL-M12G-3-5.0V	B.4	19256530150	SAIL-M12GM12W-3-1.5Q	B.7
1906640000	SAI-AU M8 PB 16DI/8DO	E.8				1925431000	SAIL-M12G-3-10V	B.4	19256530150	SAIL-M12GM12W-3-1.5Q	B.25
1906650000	SAI-AU M12 CAN 16DI	E.12				1925440000	SAIL-M12G-4-X.XV	B.4	19256530300	SAIL-M12GM12W-3-3.0Q	B.6
1906650000	SAI-AU M12 CAN 16DI	E.14				1925440150	SAIL-M12G-4-1.5V	B.11	19256530500	SAIL-M12GM12W-3-5.0Q	B.7
1906650000	SAI-AU M12 CAN 16DI	E.4				1925440150	SAIL-M12G-4-1.5V	B.4	19256531000	SAIL-M12GM12W-3-10Q	B.7
1906660000	SAI-AU M12 CAN 16DI/8DO	E.12				1925440300	SAIL-M12G-4-3.0V	B.8	19256540000	SAIL-M12GM12W-3-X.XQ	B.7
1906660000	SAI-AU M12 CAN 16DI/8DO	E.14				1925440500	SAIL-M12G-4-5.0V	B.4	19256540150	SAIL-M12GM12W-4-1.5Q	B.25
1906660000	SAI-AU M12 CAN 16DI/8DO	E.4				1925441000	SAIL-M12G-4-10V	B.4	19256540150	SAIL-M12GM12W-4-1.5Q	B.7
1906670000	SAI-AU M12 CAN AI/AO/DI	E.13				1925450000	SAIL-M12G-5-X.XV	B.4	19256540300	SAIL-M12GM12W-4-3.0Q	B.6
1906670000	SAI-AU M12 CAN AI/AO/DI	E.14				1925450150	SAIL-M12G-5-1.5V	B.11	19256540500	SAIL-M12GM12W-4-5.0Q	B.7
1906670000	SAI-AU M12 CAN AI/AO/DI	E.4				1925450150	SAIL-M12G-5-1.5V	B.4	19256541000	SAIL-M12GM12W-4-10Q	B.6
1906680000	SAI-AU M8 CAN 16DI	E.12				1925450300	SAIL-M12G-5-3.0V	B.4	19256550000	SAIL-M12GM12W-5-X.XQ	B.7
1906680000	SAI-AU M8 CAN 16DI	E.14				1925450500	SAIL-M12G-5-5.0V	B.8	19256550150	SAIL-M12GM12W-5-1.5Q	B.25
1906680000	SAI-AU M8 CAN 16DI	E.4				1925451000	SAIL-M12G-5-10V	B.4	19256550150	SAIL-M12GM12W-5-1.5Q	B.7
1906690000	SAI-AU M8 CAN 16DI/8DO	E.12				1925460000	SAIL-M12BW-3LX.XV	B.8	19256550300	SAIL-M12GM12W-5-3.0Q	B.6
1906690000	SAI-AU M8 CAN 16DI/8DO	E.14				1925460150	SAIL-M12BW-3L1.5V	B.15	19256550500	SAIL-M12GM12W-5-5.0Q	B.7
1906690000	SAI-AU M8 CAN 16DI/8DO	E.4				1925460150	SAIL-M12BW-3L1.5V	B.8	19256551000	SAIL-M12GM12W-5-10Q	B.6
1906700000	SAI-AU M12 DN 16DI	E.16				1925460300	SAIL-M12BW-3L3.0V	B.8	19256560150	SAIL-M12GM12W-2/4-1.5Q	B.26
1906700000	SAI-AU M12 DN 16DI	E.18				1925460500	SAIL-M12BW-3L5.0V	B.8	19256570000	SAIL-M12WM12W-3-X.XQ	B.7
1906700000	SAI-AU M12 DN 16DI	E.4				1925461000	SAIL-M12BW-3L10V	B.8	19256570150	SAIL-M12WM12W-3-1.5Q	B.25
1906710000	SAI-AU M12 DN 16DI/8DO	E.16				1925470000	SAIL-M12BW-4-2LX.XV	B.8	19256570150	SAIL-M12WM12W-3-1.5Q	B.7
1906710000	SAI-AU M12 DN 16DI/8DO	E.18				1925470150	SAIL-M12BW-4-2L1.5V	B.15	19256570300	SAIL-M12WM12W-3-3.0Q	B.7
1906710000	SAI-AU M12 DN 16DI/8DO	E.4				1925470150	SAIL-M12BW-4-2L1.5V	B.8	19256570500	SAIL-M12WM12W-3-5.0Q	B.6
1906720000	SAI-AU M12 DN AI/AO/DI	E.17				1925470300	SAIL-M12BW-4-2L3.0V	B.8	19256571000	SAIL-M12WM12W-3-10Q	B.7
1906720000	SAI-AU M12 DN AI/AO/DI	E.18				1925470500	SAIL-M12BW-4-2L5.0V	B.8	19256580000	SAIL-M12WM12W-4-X.XQ	B.7
1906720000	SAI-AU M12 DN AI/AO/DI	E.4				1925471000	SAIL-M12BW-4-2L10V	B.8	19256580150	SAIL-M12WM12W-4-1.5Q	B.25
1906730000	SAI-AU M8 DN 16DI	E.16				1925510000	SAIL-M12W-3-X.XV	B.4	19256580150	SAIL-M12WM12W-4-1.5Q	B.6
1906730000	SAI-AU M8 DN 16DI	E.18				1925510150	SAIL-M12W-3-1.5V	B.11	19256580300	SAIL-M12WM12W-3-1.5Q	B.7
1906730000	SAI-AU M8 DN 16DI	E.4				1925510150	SAIL-M12W-3-1.5V	B.4	19256580500	SAIL-M12WM12W-3-10Q	B.7
1906740000	SAI-AU M8 DN 16DI/8DO	E.16				1925510300	SAIL-M12W-3-3.0V	B.8	19256581000	SAIL-M12WM12W-4-10Q	B.7
1906740000	SAI-AU M8 DN 16DI/8DO	E.18				1925510500	SAIL-M12W-3-5.0V	B.4	19256590000	SAIL-M12WM12W-5-X.XQ	B.7
1906740000	SAI-AU M8 DN 16DI/8DO	E.4				1925511000	SAIL-M12W-3-10V	B.4	19256590150	SAIL-M12WM12W-5-1.5Q	B.25
1906850000	SAI-AU M12 IE 16DI	E.24				1925520000	SAIL-M12W-4-X.XV	B.4	19256590150	SAIL-M12WM12W-5-1.5Q	B.6
1906850000	SAI-AU M12 IE 16DI	E.26				1925520150	SAIL-M12W-4-1.5V	B.11	19256590300	SAIL-M12WM12W-5-3.0Q	B.7
1906850000	SAI-AU M12 IE 16DI	E.4				1925520150	SAIL-M12W-4-1.5V	B.4	19256590500	SAIL-M12WM12W-5-5.0Q	B.6
1906860000	SAI-AU M12 IE 16DI/8DO	E.24				1925520300	SAIL-M12W-4-3.0V	B.4	19256591000	SAIL-M12WM12W-5-10Q	B.7
1906860000	SAI-AU M12 IE 16DI/8DO	E.26				1925520500	SAIL-M12W-4-5.0V	B.8	1926600000	SAIL-M12GM12W-3LX.XQ	B.8
1906860000	SAI-AU M12 IE 16DI/8DO	E.4				1925521000	SAIL-M12W-4-10V	B.4	1926600150	SAIL-M12GM12W-3L1.5Q	B.27
1906870000	SAI-AU M12 IE AI/AO/DI	E.25				1925530000	SAIL-M12W-5-X.XV	B.8	1926600300	SAIL-M12GM12W-3L3.0Q	B.8
1906870000	SAI-AU M12 IE AI/AO/DI	E.26				1925530150	SAIL-M12W-5-1.5V	B.11	1926600500	SAIL-M12GM12W-3L5.0Q	B.8
1906870000	SAI-AU M12 IE AI/AO/DI	E.4				1925530150	SAIL-M12W-5-1.5V	B.4	1926601000	SAIL-M12GM12W-3L10Q	B.8
1906880000	SAI-AU M8 IE 16DI	E.24				1925530300	SAIL-M12W-5-3.0V	B.8	1926610000	SAIL-M12GM12W-4-2LX.XQ	B.8
1906880000	SAI-AU M8 IE 16DI	E.26				1925530500	SAIL-M12W-5-5.0V	B.4	1926610000	SAIL-M12GM12W-4-2LX.XQ	B.8
1906880000	SAI-AU M8 IE 16DI	E.4				1925531000	SAIL-M12W-5-10V	B.4	1926610150	SAIL-M12GM12W-4-2L1.5Q	B.27
1906890000	SAI-AU M8 IE 16DI/8DO	E.24				1925532000	SAIL-M12GM12G-5-3.0V	B.7	1926610150	SAIL-M12GM12W-4-2L1.5Q	B.6
1906890000	SAI-AU M8 IE 16DI/8DO	E.26				1925320300	SAIL-M12GM12G-5-5.0V	B.7			

Order No.	Type	Page
1926630300	SAIL-M12G-4-3.0Q	B.4
1926630500	SAIL-M12G-4-5.0Q	B.4
1926631000	SAIL-M12G-4-10Q	B.4
1926640000	SAIL-M12G-5-X.XQ	B.4
1926640150	SAIL-M12G-5-1.5Q	B.11
1926640500	SAIL-M12G-5-1.5Q	B.4
1926640300	SAIL-M12G-5-3.0Q	B.4
1926640500	SAIL-M12G-5-5.0Q	B.4
1926641000	SAIL-M12G-5-10Q	B.4
1926650000	SAIL-M12BW-3LX.XQ	B.8
1926650150	SAIL-M12BW-3L1.5Q	B.15
1926650500	SAIL-M12BW-3L1.5Q	B.8
1926650300	SAIL-M12BW-3L3.0Q	B.8
1926650000	SAIL-M12BW-3L5.0Q	B.8
1926651000	SAIL-M12BW-3L10Q	B.8
1926660000	SAIL-M12BW-4-2LX.XQ	B.8
1926660150	SAIL-M12BW-4-2L1.5Q	B.15
1926660500	SAIL-M12BW-4-2L1.5Q	B.8
1926660300	SAIL-M12BW-4-2L3.0Q	B.8
1926660500	SAIL-M12BW-4-2L5.0Q	B.8
1926661000	SAIL-M12BW-4-2L10Q	B.8
1926690150	SAIL-M12G-5S1.5Q	B.16
1926700000	SAIL-M12W-3-X.XQ	B.4
1926700150	SAIL-M12W-3-1.5Q	B.11
1926700500	SAIL-M12W-3-1.5Q	B.4
1926700300	SAIL-M12W-3-3.0Q	B.4
1926700500	SAIL-M12W-3-5.0Q	B.4
1926701000	SAIL-M12W-3-10Q	B.4
1926710000	SAIL-M12W-4-X.XQ	B.4
1926710150	SAIL-M12W-4-1.5Q	B.11
1926710500	SAIL-M12W-4-1.5Q	B.4
1926710300	SAIL-M12W-4-3.0Q	B.4
1926710500	SAIL-M12W-4-5.0Q	B.4
1926711000	SAIL-M12W-4-10Q	B.4
1926720000	SAIL-M12W-5-X.XQ	B.4
1926720150	SAIL-M12W-5-1.5Q	B.11
1926720500	SAIL-M12W-5-1.5Q	B.4
1926720300	SAIL-M12W-5-3.0Q	B.4
1926720500	SAIL-M12W-5-5.0Q	B.4
1926721000	SAIL-M12W-5-10Q	B.4
1926760000	SAIL-M12BG-3-X.XQ	B.6
1926760150	SAIL-M12BG-3-1.5Q	B.11
1926760500	SAIL-M12BG-3-1.5Q	B.6
1926760300	SAIL-M12BG-3-3.0Q	B.6
1926760500	SAIL-M12BG-3-5.0Q	B.6
1926761000	SAIL-M12BG-3-10Q	B.6
1926770000	SAIL-M12BG-4-X.XQ	B.6
1926770150	SAIL-M12BG-4-1.5Q	B.11
1926770500	SAIL-M12BG-4-1.5Q	B.6
1926770300	SAIL-M12BG-4-3.0Q	B.6
1926770500	SAIL-M12BG-4-5.0Q	B.6
1926771000	SAIL-M12BG-4-10Q	B.6
1926780000	SAIL-M12BG-5-X.XQ	B.7
1926780150	SAIL-M12BG-5-1.5Q	B.11
1926780500	SAIL-M12BG-5-1.5Q	B.7
1926780300	SAIL-M12BG-5-3.0Q	B.7
1926780500	SAIL-M12BG-5-5.0Q	B.7
1926781000	SAIL-M12BG-5-10Q	B.7
1926820000	SAIL-M12BW-3-X.XQ	B.7
1926820150	SAIL-M12BW-3-1.5Q	B.11
1926820500	SAIL-M12BW-3-1.5Q	B.7
1926820300	SAIL-M12BW-3-3.0Q	B.7
1926820500	SAIL-M12BW-3-5.0Q	B.7
1926821000	SAIL-M12BW-3-10Q	B.7
1926830000	SAIL-M12BW-4-X.XQ	B.7
1926830150	SAIL-M12BW-4-1.5Q	B.11
1926830500	SAIL-M12BW-4-1.5Q	B.7
1926830300	SAIL-M12BW-4-3.0Q	B.7
1926830500	SAIL-M12BW-4-5.0Q	B.7
1926831000	SAIL-M12BW-4-10Q	B.7
1926840000	SAIL-M12BW-5-X.XQ	B.7
1926840150	SAIL-M12BW-5-1.5Q	B.11
1926840500	SAIL-M12BW-5-1.5Q	B.7
1926840300	SAIL-M12BW-5-3.0Q	B.7
1926840500	SAIL-M12BW-5-5.0Q	B.7
1926841000	SAIL-M12BW-5-10Q	B.7
1926890000	SAIL-M8GM8G-3-X.XQ	B.4
1926890150	SAIL-M8GM8G-3-1.5Q	B.32
1926890500	SAIL-M8GM8G-3-1.5Q	B.4
1926890300	SAIL-M8GM8G-3-3.0Q	B.4
1926890500	SAIL-M8GM8G-3-5.0Q	B.4
1926891000	SAIL-M8GM8G-3-10Q	B.4
1926900000	SAIL-M8GM8G-4-X.XQ	B.5
1926900150	SAIL-M8GM8G-4-1.5Q	B.32
1926900500	SAIL-M8GM8G-4-1.5Q	B.5
1926900300	SAIL-M8GM8G-4-3.0Q	B.5
1926900500	SAIL-M8GM8G-4-5.0Q	B.5
1926901000	SAIL-M8GM8G-4-10Q	B.5
1926900000	SAIL-M8GM8G-3-X.XV	B.5
1926900150	SAIL-M8GM8G-3-1.5V	B.32
1926900500	SAIL-M8GM8G-3-1.5V	B.5
1926900300	SAIL-M8GM8G-3-3.0V	B.5
1926900500	SAIL-M8GM8G-3-5.0V	B.4
1926910000	SAIL-M8GM8G-3-10V	B.4
1926910000	SAIL-M8GM8G-4-X.XQ	B.5
1926910150	SAIL-M8GM8G-4-1.5Q	B.32
1926910500	SAIL-M8GM8G-4-1.5Q	B.5
1926910300	SAIL-M8GM8G-4-3.0Q	B.5
1926910500	SAIL-M8GM8G-4-5.0Q	B.5
1926911000	SAIL-M8GM8G-4-10Q	B.5
1926920000	SAIL-M8GM8G-4-X.XQ	B.5
1926920150	SAIL-M8GM8G-4-1.5Q	B.32
1926920500	SAIL-M8GM8G-4-1.5Q	B.5
1926920300	SAIL-M8GM8G-4-3.0Q	B.5
1926920500	SAIL-M8GM8G-4-5.0Q	B.5
1926921000	SAIL-M8GM8G-4-10Q	B.5
1926930000	SAIL-M8GM8G-3LX.XV	B.34
1926930150	SAIL-M8GM8G-3L1.5V	B.5

Order No.	Type	Page
1926930000	SAIL-M8GM8W-3LX.XQ	B.5
1926930150	SAIL-M8GM8W-3L1.5Q	B.34
1926930500	SAIL-M8GM8W-3L3.0Q	B.5
1926930300	SAIL-M8GM8W-3L5.0Q	B.5
1926930500	SAIL-M8GM8W-3L5.0Q	B.5
1926931000	SAIL-M8GM8W-3L10Q	B.5
1926940150	SAIL-M8GM8W-4L1.5Q	B.34
1926950000	SAIL-M8WM8W-3-X.XQ	B.5
1926950150	SAIL-M8WM8W-3-1.5Q	B.5
1926950300	SAIL-M8WM8W-3-3.0Q	B.5
1926950500	SAIL-M8WM8W-3-5.0Q	B.5
1926951000	SAIL-M8WM8W-3-10Q	B.5
1926960000	SAIL-M8WM8W-4-X.XQ	B.5
1926960150	SAIL-M8WM8W-4-1.5Q	B.32
1926960500	SAIL-M8WM8W-4-1.5Q	B.5
1926960300	SAIL-M8WM8W-4-3.0Q	B.5
1926960500	SAIL-M8WM8W-4-5.0Q	B.5
1926961000	SAIL-M8WM8W-4-10Q	B.5
1926970000	SAIL-M8G-3-X.XQ	B.4
1926970150	SAIL-M8G-3-1.5Q	B.18
1926970500	SAIL-M8G-3-1.5Q	B.4
1926970300	SAIL-M8G-3-3.0Q	B.4
1926970500	SAIL-M8G-3-5.0Q	B.4
1926971000	SAIL-M8G-3-10Q	B.4
1926980000	SAIL-M8BGS-3-X.XQ	B.4
1926980150	SAIL-M8BGS-3-1.5Q	B.18
1926980500	SAIL-M8BGS-3-1.5Q	B.4
1926980300	SAIL-M8BGS-3-3.0Q	B.4
1926980500	SAIL-M8BGS-3-5.0Q	B.4
1926981000	SAIL-M8BGS-3-10Q	B.4
1926990000	SAIL-M8G-4-X.XQ	B.4
1926990150	SAIL-M8G-4-1.5Q	B.18
1926990500	SAIL-M8G-4-1.5Q	B.4
1926990300	SAIL-M8G-4-3.0Q	B.4
1926990500	SAIL-M8G-4-5.0Q	B.4
1926991000	SAIL-M8G-4-10Q	B.4
1927000000	SAIL-M8BGS-4-X.XQ	B.5
1927000150	SAIL-M8BGS-4-1.5Q	B.18
1927000500	SAIL-M8BGS-4-1.5Q	B.5
1927000300	SAIL-M8BGS-4-3.0Q	B.5
1927000500	SAIL-M8BGS-4-5.0Q	B.5
1927001000	SAIL-M8BGS-4-10Q	B.5
1927050000	SAIL-M8W-3-X.XQ	B.4
1927050150	SAIL-M8W-3-1.5Q	B.18
1927050500	SAIL-M8W-3-1.5Q	B.4
1927050300	SAIL-M8W-3-3.0Q	B.4
1927050500	SAIL-M8W-3-5.0Q	B.4
1927051000	SAIL-M8W-3-10Q	B.4
1927060000	SAIL-M8BW-3-X.XQ	B.5
1927060150	SAIL-M8BW-3-1.5Q	B.18
1927060500	SAIL-M8BW-3-1.5Q	B.5
1927060300	SAIL-M8BW-3-3.0Q	B.5
1927060500	SAIL-M8BW-3-5.0Q	B.5
1927061000	SAIL-M8BW-3-10Q	B.5
1927070000	SAIL-M8W-4-X.XQ	B.4
1927070150	SAIL-M8W-4-1.5Q	B.18
1927070500	SAIL-M8W-4-1.5Q	B.4
1927070300	SAIL-M8W-4-3.0Q	B.4
1927070500	SAIL-M8W-4-5.0Q	B.4
1927071000	SAIL-M8W-4-10Q	B.4
1927080000	SAIL-M8BW5-4-X.XQ	B.5
1927080150	SAIL-M8BW-4-1.5Q	B.18
1927080500	SAIL-M8BW-4-1.5Q	B.5
1927080300	SAIL-M8BW-4-3.0Q	B.5
1927080500	SAIL-M8BW-4-5.0Q	B.5
1927081000	SAIL-M8BW-4-10Q	B.5
1927090000	SAIL-M8BW5-3LX.XQ	B.5
1927090150	SAIL-M8BW-3L1.5Q	B.20
1927090500	SAIL-M8BW-3L1.5Q	B.5
1927090300	SAIL-M8BW-3L3.0Q	B.5
1927090500	SAIL-M8BW-3L5.0Q	B.5
1927091000	SAIL-M8BW-3L10Q	B.5
1927100150	SAIL-M8BW-4L1.5Q	B.20
1927150000	SAIL-M8GM8G-3-X.XV	B.4
1927150150	SAIL-M8GM8G-3-1.5V	B.32
1927150500	SAIL-M8GM8G-3-1.5V	B.4
1927150300	SAIL-M8GM8G-3-3.0V	B.4
1927150500	SAIL-M8GM8G-3-5.0V	B.4
1927151000	SAIL-M8GM8G-3-10V	B.4
1927160000	SAIL-M8GM8G-4-X.XV	B.5
1927160150	SAIL-M8GM8G-4-1.5V	B.32
1927160500	SAIL-M8GM8G-4-1.5V	B.5
1927160300	SAIL-M8GM8G-4-3.0V	B.5
1927160500	SAIL-M8GM8G-4-5.0V	B.5
1927161000	SAIL-M8GM8G-4-10V	B.5
1927170000	SAIL-M8GM8W-3-X.XV	B.5
1927170150	SAIL-M8GM8W-3-1.5V	B.32
1927170500	SAIL-M8GM8W-3-1.5V	B.5
1927170300	SAIL-M8GM8W-3-3.0V	B.5
1927170500	SAIL-M8GM8W-3-5.0V	B.5
1927171000	SAIL-M8GM8W-3-10V	B.5
1927180000	SAIL-M8GM8W-4-X.XV	B.5
1927180150	SAIL-M8GM8W-4-1.5V	B.32
1927180500	SAIL-M8GM8W-4-1.5V	B.5
1927180300	SAIL-M8GM8W-4-3.0V	B.5
1927180500	SAIL-M8GM8W-4-5.0V	B.5
1927181000	SAIL-M8GM8W-4-10V	B.5
1927190000	SAIL-M8GM8W-3LX.XV	B.34
1927190150	SAIL-M8GM8W-3L1.5V	B.34
1927190500	SAIL-M8GM8W-3L1.5V	B.5

Order No.	Type	Page
1927190300	SAIL-M8GM8W-3L3.0V	B.5
1927190500	SAIL-M8GM8W-3L5.0V	B.5
1927191000	SAIL-M8GM8W-3L10V	B.5
1927200150	SAIL-M8WM8W-4L1.5V	B.34
1927210000	SAIL-M8WM8W-3-X.XV	B.5
1927210150	SAIL-M8WM8W-3-1.5V	B.32
1927210500	SAIL-M8WM8W-3-1.5V	B.5
1927210300	SAIL-M8WM8W-3-3.0V	B.5
1927210500	SAIL-M8WM8W-3-5.0V	B.5
1927211000	SAIL-M8WM8W-3-10V	B.5
1927220000	SAIL-M8WM8W-4-X.XV	B.5
1927220150	SAIL-M8WM8W-4-1.5V	B.32
1927220500	SAIL-M8WM8W-4-1.5V	B.5
1927220300	SAIL-M8WM8W-4-3.0V	B.5
1927220500	SAIL-M8WM8W-4-5.0V	B.5
1927221000	SAIL-M8WM8W-4-10V	B.5
1927230000	SAIL-M8G-3-X.XV	B.4
1927230150	SAIL-M8G-3-1.5V	B.18
1927230500	SAIL-M8G-3-1.5V	B.4
1927231000	SAIL-M8G-3-3.0V	B.4
1927230500	SAIL-M8G-3-5.0V	B.4
1927231000	SAIL-M8G-3-10V	B.4
1927240000	SAIL-M8BGS-3-X.XV	B.4
1927240150	SAIL-M8BGS-3-1.5V	B.18
1927240500	SAIL-M8BGS-3-1.5V	B.4
1927240300	SAIL-M8BGS-3-3.0V	B.4
1927240500	SAIL-M8BGS-3-5.0V	B.4
1927241000	SAIL-M8BGS-3-10V	B.4
1927250000	SAIL-M8G-4-X.XV	B.4
1927250150	SAIL-M8G-4-1.5V	B.18
1927250500	SAIL-M8G-4-1.5V	B.4
1927250300	SAIL-M8G-4-3.0V	B.4
1927250500	SAIL-M8G-4-5.0V	B.4
1927251000	SAIL-M8G-4-10V	B.4
1927260000	SAIL-M8BGS-4-X.XV	B.5
1927260150	SAIL-M8BGS-4-1.5V	B.18
1927260500	SAIL-M8BGS-4-1.5V	B.5
1927260300	SAIL-M8BGS-4-3.0V	B.5
1927260500	SAIL-M8BGS-4-5.0V	B.5
1927261000	SAIL-M8BGS-4-10V	B.5
1927310000	SAIL-M8W-3-X.XV	B.4
1927310150	SAIL-M8W-3-1.5V	B.18
1927310500	SAIL-M8W-3-1.5V	B.4
1927310300	SAIL-M8W-3-3.0V	B.4
1927310500	SAIL-M8W-3-5.0V	B.4
1927311000	SAIL-M8W-3-10V	B.4
1927320000	SAIL-M8BW5-3-X.XV	B.5
1927320150	SAIL-M8BW-3-1.5V	B.18
1927320500	SAIL-M8BW-3-1.5V	B.5
1927320300	SAIL-M8BW-3-3.0V	B.5
1927320500	SAIL-M8BW-3-5.0V	B.5
1927321000	SAIL-M8BW-3-10V	B.5
1927330000	SAIL-M8W-4-X.XV	B.4
1927330150	SAIL-M8W-4-1.5V	B.18
1927330500	SAIL-M8W-4-1.5V	B.4
1927330300	SAIL-M8W-4-3.0V	B.4
1927330500	SAIL-M8W-4-5.0V	B.4
1927331000	SAIL-M8W-4-10V	B.4
1927340000	SAIL-M8BW5-4-X.XV	B.5
1927340150	SAIL-M8BW-4-1.5V	B.18
1927340500	SAIL-M8BW-4-1.5V	B.5
1927340300	SAIL-M8BW-4-3.0V	B.5
1927340500	SAIL-M8BW-4-5.0V	B.5
1927341000	SAIL-M8BW-4-10V	B.5
1927350000	SAIL-M8BW5-3LX.XV	B.5
1927350150	SAIL-M8BW-3L1.5V	B.20
1927350500	SAIL-M8BW-3L1.5V	B.5
1927350300	SAIL-M8BW-3L3.0V	B.5

Order No.	Type	Page
1938230000	SAIL-M8GM12G-3-X.XV	B.6
1938230150	SAIL-M8GM12G-3-1.5V	B.6
1938230300	SAIL-M8GM12G-3-3.0V	B.6
1938230500	SAIL-M8GM12G-3-5.0V	B.6
1938231000	SAIL-M8GM12G-3-10V	B.6
1938240000	SAIL-M8GM12W-3-X.XV	B.7
1938240150	SAIL-M8GM12W-3-1.5V	B.7
1938240300	SAIL-M8GM12W-3-3.0V	B.7
1938240500	SAIL-M8GM12W-3-5.0V	B.7
1938241000	SAIL-M8GM12W-3-10V	B.7
1938250000	SAIL-M8WM12W-3-X.XV	B.7
1938250150	SAIL-M8WM12W-3-1.5V	B.7
1938250300	SAIL-M8WM12W-3-3.0V	B.7
1938250500	SAIL-M8WM12W-3-5.0V	B.7
1938251000	SAIL-M8WM12W-3-10V	B.7
1938260000	SAIL-M8GM12G-4-X.XV	B.6
1938260150	SAIL-M8GM12G-4-1.5V	B.6
1938260300	SAIL-M8GM12G-4-3.0V	B.6
1938260500	SAIL-M8GM12G-4-5.0V	B.6
1938261000	SAIL-M8GM12G-4-10V	B.6
1938270000	SAIL-M8GM12W-4-X.XV	B.7
1938270150	SAIL-M8GM12W-4-1.5V	B.7
1938270300	SAIL-M8GM12W-4-3.0V	B.7
1938270500	SAIL-M8GM12W-4-5.0V	B.7
1938271000	SAIL-M8GM12W-4-10V	B.7
1938280000	SAIL-M8WM12W-4-X.XV	B.7
1938280150	SAIL-M8WM12W-4-1.5V	B.7
1938280300	SAIL-M8WM12W-4-3.0V	B.7
1938280500	SAIL-M8WM12W-4-5.0V	B.7
1938281000	SAIL-M8WM12W-4-10V	B.7
1938300000	SAI-SSA-PG7	D.34
1938550000	SAI-AU M12 PB GW 16DI	E.30
1938550100	SAI-AU M12 PB GW 16DI	E.31
1938550500	SAI-AU M12 PB GW 16DI	E.4
1938570000	SAI-AU M12 DN GW 16DI	E.32
1938570000	SAI-AU M12 DN GW 16DI	E.33
1938570000	SAI-AU M12 DN GW 16DI	E.4
1938580000	SAI-AU M12 IE GW 16DI	E.34
1938580000	SAI-AU M12 IE GW 16DI	E.35
1938580000	SAI-AU M12 IE GW 16DI	E.4
1938600000	SAI-AU M8 SB 8DI	E.31
1938600000	SAI-AU M8 SB 8DI	E.33
1938600000	SAI-AU M8 SB 8DI	E.35
1938600000	SAI-AU M8 SB 8DI	E.36
1938600000	SAI-AU M8 SB 8DI	E.4
1938610000	SAI-AU M12 SB 8DI	E.31
1938610000	SAI-AU M12 SB 8DI	E.33
1938610000	SAI-AU M12 SB 8DI	E.35
1938610000	SAI-AU M12 SB 8DI	E.36
1938610000	SAI-AU M12 SB 8DI	E.4
1938630000	SAI-AU M8 SB 8DIO	E.31
1938630000	SAI-AU M8 SB 8DIO	E.33
1938630000	SAI-AU M8 SB 8DIO	E.35
1938630000	SAI-AU M8 SB 8DIO	E.36
1938630000	SAI-AU M8 SB 8DIO	E.4
1938640000	SAI-AU M12 SB 8DIO	E.31
1938640000	SAI-AU M12 SB 8DIO	E.33
1938640000	SAI-AU M12 SB 8DIO	E.35
1938640000	SAI-AU M12 SB 8DIO	E.36
1938640000	SAI-AU M12 SB 8DIO	E.4
1938660000	SAI-AU M8 SB 8DO 2A	E.31
1938660000	SAI-AU M8 SB 8DO 2A	E.33
1938660000	SAI-AU M8 SB 8DO 2A	E.35
1938660000	SAI-AU M8 SB 8DO 2A	E.36
1938660000	SAI-AU M8 SB 8DO 2A	E.4
1938680000	SAI-AU M12 SB 8DO 2A	E.31
1938680000	SAI-AU M12 SB 8DO 2A	E.33
1938680000	SAI-AU M12 SB 8DO 2A	E.35
1938680000	SAI-AU M12 SB 8DO 2A	E.36
1938680000	SAI-AU M12 SB 8DO 2A	E.4
1938690000	SAI-AU M12 SB 4A	E.31
1938690000	SAI-AU M12 SB 4A	E.33
1938690000	SAI-AU M12 SB 4A	E.35
1938690000	SAI-AU M12 SB 4A	E.37
1938690000	SAI-AU M12 SB 4A	E.4
1938700000	SAI-AU M12 SB 4A	E.31
1938700000	SAI-AU M12 SB 4A	E.33
1938700000	SAI-AU M12 SB 4A	E.35
1938700000	SAI-AU M12 SB 4A	E.37
1938700000	SAI-AU M12 SB 4A	E.4
1938710000	SAI-AU M12 SB 4PT100	E.31
1938710000	SAI-AU M12 SB 4PT100	E.33
1938710000	SAI-AU M12 SB 4PT100	E.35
1938710000	SAI-AU M12 SB 4PT100	E.4
1938710000	SAI-AU M12 SB 4PT100	E.40
1938720000	SAI-AU M12 SB 4Thermo	E.31
1938720000	SAI-AU M12 SB 4Thermo	E.33
1938720000	SAI-AU M12 SB 4Thermo	E.35
1938720000	SAI-AU M12 SB 4Thermo	E.39
1938720000	SAI-AU M12 SB 4Thermo	E.4
1938730000	SAI-AU M12 SB 2Counter	E.31
1938730000	SAI-AU M12 SB 2Counter	E.33
1938730000	SAI-AU M12 SB 2Counter	E.35
1938730000	SAI-AU M12 SB 2Counter	E.38
1938730000	SAI-AU M12 SB 2Counter	E.4
1939170000	SAI-SCREWTY TOOL BOX	I.6
1939180000	SAI-SCREWTY BOX	I.6
1939370150	SAIL-M12BW-VA/2/4-1.5U	B.13
1939410150	SAIL-M12BG-VA/2/4-1.5U	B.13

Order No.	Type	Page
<b>1940000000</b>		
1944570000	SAISW-M-5/8 M12 B-COD	C.11
1944570000	SAISW-M-5/8 M12 B-COD	D.14
1944570000	SAISW-M-5/8 M12 B-COD	D.5
1944580000	SAIBW-M-5/8 M12 B-COD	C.11
1944580000	SAIBW-M-5/8 M12 B-COD	D.14
1944580000	SAIBW-M-5/8 M12 B-COD	D.5
1948470150	SAIL-M8GM8GR-3-1.5U	B.33
1948480150	SAIL-M8GM8WR-3-1.5U	B.33
1948490150	SAIL-M8WM8WR-3-1.5U	B.33
1948500150	SAIL-M8GM8GR-4-1.5U	B.33
1948510150	SAIL-M8GM8WR-4-1.5U	B.33
1948520150	SAIL-M8WM8WR-4-1.5U	B.33
1948530150	SAIL-M8BGR-4-1.5U	B.19
1948540150	SAIL-M8BWR-4-1.5U	B.19
1948550150	SAIL-M8GM8GR-3-1.5Q	B.33
1948560150	SAIL-M8GM8WR-3-1.5Q	B.33
1948570150	SAIL-M8WM8WR-3-1.5Q	B.33
1948580150	SAIL-M8GM8GR-4-1.5Q	B.33
1948590150	SAIL-M8GM8WR-4-1.5Q	B.33
1948600150	SAIL-M8WM8WR-4-1.5Q	B.33
1948610150	SAIL-M8BGR-3-1.5Q	B.19
1948620150	SAIL-M8BWR-3-1.5Q	B.19
1948630150	SAIL-M8BGR-4-1.5Q	B.19
1948640150	SAIL-M8BWR-4-1.5Q	B.19
1948650150	SAIL-M8GM8GR-3-1.5V	B.33
1948660150	SAIL-M8GM8WR-3-1.5V	B.33
1948670150	SAIL-M8WM8WR-3-1.5V	B.33
1948680150	SAIL-M8GM8GR-4-1.5V	B.33
1948690150	SAIL-M8GM8WR-4-1.5V	B.33
1948700150	SAIL-M8WM8WR-4-1.5V	B.33
1948710150	SAIL-M8BGR-3-1.5V	B.19
1948720150	SAIL-M8BWR-3-1.5V	B.19
1948730150	SAIL-M8BGR-4-1.5V	B.19
1948740150	SAIL-M8BWR-4-1.5V	B.19
<b>1950000000</b>		
1950270000	SAIE-EW-M20/PG9-SW24-VA	C.33
1955340000	SAIEND CAN M8 4P	C.61
1955340000	SAIEND CAN M8 4P	E.31
1955340000	SAIEND CAN M8 4P	E.33
1955340000	SAIEND CAN M8 4P	E.35
<b>1960000000</b>		
1962240000	SAI-AU M12 USB GW 8I80	E.34
1962240000	SAI-AU M12 USB GW 8I80	E.35
1962240000	SAI-AU M12 USB GW 8I80	E.4
1962270150	SAIL-M12GM8W-3L1.5Q	B.31
1962280150	SAIL-M12GM8W-4L1.5Q	B.31
1962290150	SAIL-M12GM8W-3L1.5V	B.31
1962300150	SAIL-M12GM8W-4L1.5V	B.31
1962610000	SAISW-5/7-(KV)	D.9
1962620000	SAISW-4/7-(KV)	D.9
1962630000	SAIBW-5/7-(KV)	D.9
1963910150	SAIL-M12GM12W-4-3L1.5U	B.27
1963930150	SAIL-M12GM12W-4-3L1.5V	B.27
1963940150	SAIL-M12BW-4-3L1.5U	B.15
1963950150	SAIL-M12BW-4-3L1.5Q	B.15
1963960150	SAIL-M12BW-4-3L1.5V	B.15
1964280150	SAIL-ZW-M12BW-2/4-1.5U	B.38
1964290150	SAIL-ZW-M12BW-2/4L1.5U	B.38
1964300150	SAIL-ZW-M8BW-3-1.5U	B.39
1964310150	SAIL-ZW-3-1.5U	B.37
1964690150	SAIL-M12BG-CD-1.5A	C.58
1964700150	SAIL-M12G-CD-1.5A	C.58
1964710150	SAIL-M12GM12G-1.5A	C.59
1968220000	SAI-AU M12 PB 8DI8DO 2A	E.10
1968220000	SAI-AU M12 PB 8DI8DO 2A	E.4
1968220000	SAI-AU M12 PB 8DI8DO 2A	E.8
1968560150	SAIL-M12BW-3-1.5T	B.11
1968570150	SAIL-M12BW-4-1.5T	B.11
1968580150	SAIL-M12BG-4-1.5T	B.11
1968590150	SAIL-M12BG-3-1.5T	B.11
<b>1970000000</b>		
1975450000	SAI-AU M8 PB 8DI8DO 2A	E.10
1975450000	SAI-AU M8 PB 8DI8DO 2A	E.4
1975450000	SAI-AU M8 PB 8DI8DO 2A	E.8
<b>1980000000</b>		
1981560000	Screwty M23	I.5
1981900030	SAIL-M8GM8G-4S-0.3Q-SB	C.61
1981900100	SAIL-M8GM8G-4S-1.0Q-SB	C.61
1981900150	SAIL-M8GM8G-4S-1.5Q-SB	C.61
1981900300	SAIL-M8GM8G-4S-3.0Q-SB	C.61
1981900500	SAIL-M8GM8G-4S-5.0Q-SB	C.61
1981901000	SAIL-M8GM8G-4S-10Q-SB	C.61
1981901500	SAIL-M8GM8G-4S-15Q-SB	C.61
1981902000	SAIL-M8GM8G-4S-20Q-SB	C.61
1981910150	SAIL-M8BG-4S-1.5Q-SB	C.61
1981910300	SAIL-M8BG-4S-3.0Q-SB	C.61
1981910500	SAIL-M8BG-4S-5.0Q-SB	C.61
1981911000	SAIL-M8BG-4S-10Q-SB	C.61
1984530150	SAIL-M12GM8GR-3-1.5U	B.30

Order No.	Type	Page
<b>1990000000</b>		
1995800000	SAI-M23-GS-L-7/12	H.18
1995810000	SAI-M23-BE-L-4/4	H.20
1995820000	SAI-M23-KBC-0.75/2.50	H.21
1995820000	SAI-M23-KBC-0.75/2.50	I.12
1995830000	SAI-M23-KBC-0.25/1.00	H.21
1995830000	SAI-M23-KBC-0.25/1.00	I.12
1995840000	SAI-M23-GS-7/12	H.12
1995850000	SAI-M23-BE-1.2	H.14
1995860000	SAI-M23-KBC-0.08/0.56	H.16
1995860000	SAI-M23-KBC-0.08/0.56	I.12
1995860000	SAI-M23-KBC-0.08/0.56	I.13
<b>2330000000</b>		
2330260000	SAI-SK-M12-UNI	D.27
2330260000	SAI-SK-M12-UNI	E.10
2330260000	SAI-SK-M12-UNI	E.14
2330260000	SAI-SK-M12-UNI	E.18
2330260000	SAI-SK-M12-UNI	E.22
2330260000	SAI-SK-M12-UNI	E.26
2330260000	SAI-SK-M12-UNI	E.31
2330260000	SAI-SK-M12-UNI	E.33
2330260000	SAI-SK-M12-UNI	E.35
2330260000	SAI-SK-M12-UNI	E.45
<b>4290000000</b>		
4294820000	1/4" Handgriff	I.5
<b>7910000000</b>		
7915030000	SAI-B-F 5P 2M 0.5/1.0U	G.9
<b>8390000000</b>		
8395500000	PB-DP SUB-D	C.14
<b>8420000000</b>		
8425910000	POS-4P M12 PG13,5 300 mm	C.33
8425930000	POS-4P M12 M20 150mm	C.33
8425940000	POS-4P M12 M20 300mm	C.33
8425960000	SAI-SK-M12 BU	D.27
8426220000	FBCon M12 4P FM EMC	C.31
8426220000	FBCon M12 4P FM EMC	D.12
8426220000	FBCon M12 4P FM EMC	D.5
<b>8460000000</b>		
8460860000	PB-DP SUB-D TERM	C.15
<b>8550000000</b>		
8556460000	FBCon Term.D Ex FM	C.56
<b>8560000000</b>		
8564060000	FBCon PA CG/M12 1way	C.36
8564070000	FBCon PA CG/M12 2way	C.37
8564080000	FBCon PA CG/M12 4way	C.38
8564090000	FBCon PA CG 1way	C.36
8564100000	FBCon PA CG 2way	C.37
8564110000	FBCon PA CG 4way	C.38
8564150000	FBCon PA CG/M12 1way Ex	C.52
8564160000	FBCon PA CG/M12 2way Ex	C.53
8564170000	FBCon PA CG/M12 4way Ex	C.54
8564180000	FBCon PA CG 1way Ex	C.52
8564190000	FBCon PA CG 2way Ex	C.53
8564200000	FBCon PA CG 4way Ex	C.54
8564240000	FBCon PA CG 8way Ex	C.55
8564250000	FBCon PA CG/M12 8way Ex	C.55
8564290000	FBCon DP CG Term 24V	C.24
8564300000	FBCon PA CG 8way	C.39
8564310000	FBCon PA CG/M12 8way	C.39
8564320000	FBCon DP M12 Term 5V	C.24
8564330000	FBCon DP M12 Term 24V	C.24
8564340000	FBCon DP CG 1way	C.23
8564350000	FBCon DP M12 1way	C.23
<b>8600000000</b>		
8606180000	FBCon Term.D Ex FM/PEAN	C.56
8606190000	FBCon Term.D Ex	C.56
8606200000	FBCon Term.D Ex PEAN	C.56
<b>8610000000</b>		
8613670000	FBCon SS PCG 1way	C.36
8613680000	FBCon SS PCG 4way	C.38
<b>8640000000</b>		
8640720000	FBCon SS PCG 8way	C.39
<b>8700000000</b>		
8703430000	FBCon SS CG 1way	C.36
8703450000	FBCon SS CG 4way	C.38

Order No.	Type	Page
8703470000	FBCon SS CG 8way	C.39
<b>8710000000</b>		
8714080000	FBCon PA CG/M12 1way OVP	C.41
8714090000	FBCon PA CG/M12 2way OVP	C.42
8714100000	FBCon PA CG/M12 4way OVP	C.43
8714110000	FBCon PA CG/M12 8way OVP	C.44
8714120000	FBCon PA CG 1way OVP	C.41
8714130000	FBCon PA CG 2way OVP	C.42
8714140000	FBCon PA CG 4way OVP	C.43
87141500		



Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page
9456000001	SAI-4-S 5P M12	G.6	9456690150	SAIL-M12W-3-1.5U	B.4	9457451000	SAIL-M8BG-3-10U	B.4	9457910500	SAIL-M12BG-5-5.0U	B.7
9456010000	SAI-6-S 4P M12	G.11	9456690300	SAIL-M12W-3-3.0U	B.4	9457460000	SAIL-M8BW-3LX.XU	B.5	9457911000	SAIL-M12BG-5-10U	B.7
9456010000	SAI-6-S 4P M12	G.6	9456690500	SAIL-M12W-3-5.0U	B.4	9457460150	SAIL-M8BW-3L1.5U	B.20	9457920150	SAIL-VSC-1.5U	B.47
9456010001	SAI-6-S 5P M12	G.11	9456691000	SAIL-M12W-3-10U	B.4	9457460150	SAIL-M8BW-3L1.5U	B.5	9457930150	SAIL-VSB-1.5U	B.46
9456010001	SAI-6-S 5P M12	G.6	9456740000	SAI-8-F 4P PUR 3M	G.9	9457460300	SAIL-M8BW-3L3.0U	B.5	9457950150	SAIL-M12BG-VA-4-1.5U	B.13
9456020000	SAI-8-S 4P M12	G.11	9456750000	SAI-8-F 4P PUR 5M	G.9	9457460500	SAIL-M8BW-3L5.0U	B.5	9457960150	SAIL-M12BW-VA-4-1.5U	B.13
9456020000	SAI-8-S 4P M12	G.6	9456750000	SAI-8-F 4P PUR 5M	G.9	9457461000	SAIL-M8BW-3L10U	B.5	9457970000	SAIH-SLL-5X0.75-16X0.34	B.52
9456050000	SAI-SK-M12	D.27	9456750002	SAI-8-FMM-4P M12 5M	G.31	9457490150	SAIL-ZW-M8BG-3-1.5U	B.39	9457980000	SAIL-M12GM8W-3-X.XU	B.5
9456050000	SAI-SK-M12	E.10	9456750002	SAI-8-FMM-4P M12 5M	G.32	9457540000	SAIS-ZW-5	D.26	9457980150	SAIL-M12GM8W-3-1.5U	B.29
9456050000	SAI-SK-M12	E.14	9456750002	SAI-8-FMM-4P M12 5M	G.6	9457550000	SAIS-4/7	D.5	9457980150	SAIL-M12GM8W-3-1.5U	B.5
9456050000	SAI-SK-M12	E.18	9456760000	SAI-8-F 4P PUR 10M	G.6	9457550000	SAIS-4/7	D.7	9457980300	SAIL-M12GM8W-3-3.0U	B.5
9456050000	SAI-SK-M12	E.22	9456760000	SAI-8-F 4P PUR 10M	G.9	9457560000	SAIH-SLL-3X0.75-16X0.34	B.52	9457980500	SAIL-M12GM8W-3-5.0U	B.5
9456050000	SAI-SK-M12	E.26	9456760002	SAI-8-FMM-4P M12 10M	G.31	9457570150	SAIL-M12GM8WR-3-1.5U	B.30	9457981000	SAIL-M12GM8W-3-10U	B.5
9456050000	SAI-SK-M12	E.31	9456760002	SAI-8-FMM-4P M12 10M	G.32	9457590000	SAI-8-F 5P 5M 0.5/1.0U	G.9			
9456050000	SAI-SK-M12	E.33	9456760002	SAI-8-FMM-4P M12 10M	G.6	9457600000	SAI-8-F 5P 10M 0.5/1.0U	G.9			
9456050000	SAI-SK-M12	E.35	9456770000	SAI-8-F 4P PUR 15M	G.6	9457610000	SAIL-M12G-5-X.XU	B.4			
9456050000	SAI-SK-M12	E.45	9456770000	SAI-8-F 4P PUR 15M	G.9	9457610150	SAIL-M12G-5-1.5U	B.11			
9456070150	SAIL-VSBD-1.5U	B.46	9456790000	SAI-8-F 4P PUR 20M	G.6	9457610150	SAIL-M12G-5-1.5U	B.4			
9456100000	SAIL-M12G-4-X.XU	B.4	9456790000	SAI-8-F 4P PUR 20M	G.9	9457610300	SAIL-M12G-5-3.0U	B.4			
9456100150	SAIL-M12G-4-1.5U	B.11	9456880000	SAI-8-F 5P PUR 3M	G.9	9457610500	SAIL-M12G-5-5.0U	B.4			
9456100150	SAIL-M12G-4-1.5U	B.4	9456880000	SAI-8-F 5P PUR 5M	G.6	9457611000	SAIL-M12G-5-10U	B.4			
9456100300	SAIL-M12G-4-3.0U	B.4	9456890000	SAI-8-F 5P PUR 5M	G.6	9457670000	SAIL-M12W-5-X.XU	B.4			
9456100500	SAIL-M12G-4-5.0U	B.4	9456890000	SAI-8-F 5P PUR 10M	G.9	9457670150	SAIL-M12W-5-1.5U	B.11			
9456101000	SAIL-M12G-4-10U	B.4	9456900000	SAI-8-F 5P PUR 10M	G.6	9457670150	SAIL-M12W-5-1.5U	B.4			
9456140150	SAIL-M12BG-5S1.5Q	B.16	9456910000	SAI-8-F 5P PUR 15M	G.9	9457670300	SAIL-M12W-5-3.0U	B.4			
9456150000	SAIL-M8BW-4-X.XU	B.5	9456910000	SAI-8-F 5P PUR 15M	G.9	9457670500	SAIL-M12W-5-5.0U	B.4			
9456150150	SAIL-M8BW-4-1.5U	B.18	9456930000	SAI-8-F 5P PUR 20M	G.6	9457671000	SAIL-M12W-5-10U	B.4			
9456150150	SAIL-M8BW-4-1.5U	B.5	9456930000	SAI-8-F 5P PUR 20M	G.9	9457680150	SAIL-VSB-M12G-1.5U	B.46			
9456150300	SAIL-M8BW-4-3.0U	B.5	9456940000	SAIS-5/7	D.5	9457690000	SAIL-M12BW-5-X.XU	B.7			
9456150500	SAIL-M8BW-4-5.0U	B.5	9456940000	SAIS-5/7	D.8	9457690150	SAIL-M12BW-5-1.5U	B.11			
9456151000	SAIL-M8BW-4-10U	B.5	9456950000	SAISW-5/7	D.5	9457690150	SAIL-M12BW-5-1.5U	B.7			
9456170150	SAIL-VSCD-M12G-1.5U	B.47	9456950000	SAISW-5/7	D.8	9457690300	SAIL-M12BW-5-3.0U	B.4			
9456180000	SAI-4-F 4P PUR 3M	G.9	9456990150	SAIL-M12GM12G-2/4-1.5U	B.26	9457690500	SAIL-M12BW-5-5.0U	B.7			
9456190000	SAI-4-F 4P PUR 5M	G.6	9457040000	SAIL-VSA-M12G-1.5U	B.45	9457691000	SAIL-M12BW-5-10U	B.7			
9456190000	SAI-4-F 4P PUR 5M	G.9	9457150000	SAIL-M12GM12G-4-0.3U	F.7	9457700000	SAIBW-4/7	D.5			
9456190002	SAI-4-FMM-4P M12 5M	G.31	9457160000	SAIL-M12GM12G-4-0.6U	F.7	9457700000	SAIBW-4/7	D.7			
9456190002	SAI-4-FMM-4P M12 5M	G.32	9457170000	SAIL-M12GM12G-4-0.9U	F.7	9457710150	SAIL-VSA-1.5U	B.45			
9456190002	SAI-4-FMM-4P M12 5M	G.6	9457230000	SAIL-M12GM12G-3-X.XU	B.6	9457720000	SAI-SA-3-IDC	D.20			
9456200000	SAI-4-F 4P PUR 10M	G.6	9457230150	SAIL-M12GM12G-3-1.5U	B.25	9457720000	SAI-SA-3-IDC	G.24			
9456200000	SAI-4-F 4P PUR 10M	G.9	9457230150	SAIL-M12GM12G-3-1.5U	B.6	9457730000	SAIL-M12BG-4-X.XU	B.6			
9456200002	SAI-4-FMM-4P M12 10M	G.31	9457230300	SAIL-M12GM12G-3-3.0U	B.6	9457730150	SAIL-M12BG-4-1.5U	B.11			
9456200002	SAI-4-FMM-4P M12 10M	G.32	9457230500	SAIL-M12GM12G-3-5.0U	B.6	9457730150	SAIL-M12BG-4-1.5U	B.6			
9456200002	SAI-4-FMM-4P M12 10M	G.6	9457231000	SAIL-M12GM12G-3-10U	B.6	9457730300	SAIL-M12BG-4-3.0U	B.6			
9456210000	SAI-4-F 4P PUR 15M	G.6	9457240000	SAIB-4/7	D.5	9457730500	SAIL-M12BG-4-5.0U	B.6			
9456210000	SAI-4-F 4P PUR 15M	G.9	9457240000	SAIB-4/7	D.7	9457731000	SAIL-M12BG-4-10U	B.6			
9456230000	SAI-4-F 4P PUR 20M	G.6	9457250000	SAIB-5/7	D.5	9457740000	SAIL-M12GM12G-5-X.XU	B.7			
9456230000	SAI-4-F 4P PUR 20M	G.9	9457250000	SAIB-5/7	D.8	9457740150	SAIL-M12BW-4-1.5U	B.11			
9456240150	SAIL-VSCD-1.5U	B.47	9457260000	SAIBW-5/7	D.5	9457740150	SAIL-M12BW-4-1.5U	B.7			
9456320000	SAI-4-F 5P PUR 3M	G.9	9457260000	SAIBW-5/7	D.8	9457740300	SAIL-M12BW-4-3.0U	B.7			
9456330000	SAI-4-F 5P PUR 5M	G.6	9457270000	SAIL-M12GM12W-5-X.XU	B.7	9457740500	SAIL-M12BW-4-5.0U	B.7			
9456330000	SAI-4-F 5P PUR 5M	G.9	9457270150	SAIL-M12GM12W-5-1.5U	B.25	9457741000	SAIL-M12BW-4-10U	B.7			
9456340000	SAI-4-F 5P PUR 10M	G.6	9457270150	SAIL-M12GM12W-5-1.5U	B.7	9457760000	SAIL-M12GM8W-3LX.XU	B.5			
9456340000	SAI-4-F 5P PUR 10M	G.9	9457270300	SAIL-M12GM12W-5-3.0U	B.7	9457760150	SAIL-M12GM8W-3L1.5U	B.31			
9456350000	SAI-4-F 5P PUR 15M	G.6	9457270500	SAIL-M12GM12W-5-5.0U	B.7	9457760150	SAIL-M12GM8W-3L1.5U	B.5			
9456350000	SAI-4-F 5P PUR 15M	G.9	9457271000	SAIL-M12GM12W-5-10U	B.7	9457760300	SAIL-M12GM8W-3L3.0U	B.5			
9456370000	SAI-4-F 5P PUR 20M	G.6	9457290000	SAISW-4/7	D.5	9457760500	SAIL-M12GM8W-3L5.0U	B.5			
9456370000	SAI-4-F 5P PUR 20M	G.9	9457290000	SAISW-4/7	D.7	9457761000	SAIL-M12GM8W-3L10U	B.5			
9456380000	SAIL-M12BW-4-2LX.XU	B.8	9457310000	SAIL-M12GM12W-4-X.XU	B.7	9457770150	SAIL-M12GM8G-3-1.5U	B.29			
9456380150	SAIL-M12BW-4-2L1.5U	B.15	9457310150	SAIL-M12GM12W-4-1.5U	B.25	9457780150	SAIL-VSBD-M12G-1.5U	B.46			
9456380150	SAIL-M12BW-4-2L1.5U	B.8	9457310150	SAIL-M12GM12W-4-1.5U	B.7	9457790000	SAIL-M12GM12W-3LX.XU	B.8			
9456380300	SAIL-M12BW-4-2L3.0U	B.8	9457310300	SAIL-M12GM12W-4-3.0U	B.7	9457790150	SAIL-M12GM12W-3L1.5U	B.27			
9456380500	SAIL-M12BW-4-2L5.0U	B.8	9457310500	SAIL-M12GM12W-4-5.0U	B.7	9457790150	SAIL-M12GM12W-3L1.5U	B.8			
9456381000	SAIL-M12BW-4-2L10U	B.8	9457311000	SAIL-M12GM12W-4-10U	B.7	9457790300	SAIL-M12GM12W-3L3.0U	B.8			
9456460000	SAI-6-F 4P PUR 3M	G.9	9457320000	SAIL-M12BW-3-X.XU	B.7	9457790500	SAIL-M12GM12W-3L5.0U	B.8			
9456470000	SAI-6-F 4P PUR 5M	G.6	9457320150	SAIL-M12BW-3-1.5U	B.11	9457791000	SAIL-M12GM12W-3L10U	B.8			
9456470000	SAI-6-F 4P PUR 5M	G.9	9457320150	SAIL-M12BW-3-1.5U	B.7	9457800000	SAIL-M12BW-3LX.XU	B.8			
9456490000	SAI-6-F 4P PUR 10M	G.6	9457320300	SAIL-M12BW-3-3.0U	B.7	9457800150	SAIL-M12BW-3L1.5U	B.15			
9456490000	SAI-6-F 4P PUR 10M	G.9	9457320500	SAIL-M12BW-3-5.0U	B.7	9457800150	SAIL-M12BW-3L1.5U	B.8			
9456490000	SAI-6-F 4P PUR 15M	G.6	9457321000	SAIL-M12BW-3-10U	B.7	9457800300	SAIL-M12BW-3L3.0U	B.8			
9456490000	SAI-6-F 4P PUR 15M	G.9	9457340000	SAIL-M12GM12G-5-X.XU	B.7	9457800500	SAIL-M12BW-3L5.0U	B.8			
9456500000	SAIL-M12WM12G-5-X.XU	B.7	9457340030	SAIL-M12GM12G-5-0.3U	F.7	9457801000	SAIL-M12BW-3L10U	B.8			
9456500150	SAIL-M12WM12G-5-1.5U	B.7	9457340060	SAIL-M12GM12G-5-0.6U	F.7	9457810000	SAIL-M12G-3-X.XU	B.4			
9456500300	SAIL-M12WM12G-5-3.0U	B.7	9457340150	SAIL-M12GM12G-5-1.5U	B.25	9457810150	SAIL-M12G-3-1.5U	B.11			
9456500500	SAIL-M12WM12G-5-5.0U	B.7	9457340150	SAIL-M12GM12G-5-1.5U	B.7	9457810150	SAIL-M12G-3-1.5U	B.4			
9456501000	SAIL-M12WM12G-5-10U	B.7	9457340150	SAIL-M12GM12G-5-1.5U	B.7	9457810300	SAIL-M12G-3-3.0U	B.4			
9456510000	SAI-6-F 4P PUR 20M	G.6	9457340300	SAIL-M12GM12G-5-3.0U	B.7	9457810500	SAIL-M12G-3-5.0U	B.4			
9456510000	SAI-6-F 4P PUR 20M	G.9	9457340500	SAIL-M12GM12G-5-5.0U	B.7	9457811000	SAIL-M12G-3-10U	B.4			
9456600000	SAI-6-F 5P PUR 3M	G.9	9457341000	SAIL-M12GM12G-5-10U	B.7	9457820000	SAIL-M12BG-3-X.XU	B.6			
9456610000	SAI-6-F 5P PUR 5M	G.6	9457350000	SAI-8-MF 5P PUR 5M OL	G.42	9457820150	SAIL-M12BG-3-1.5U	B.11			
9456610000	SAI-6-F 5P PUR 5M	G.9	9457380000	SAIL-M8BWS-3-X.XU	B.5	9457820150	SAIL-M12BG-3-1.5U	B.6			
9456620000	SAI-6-F 5P PUR 10M	G.6	9457380150	SAIL-M8BW-3-1.5U	B.18	9457820300	SAIL-M12BG-3-3.0U	B.6			
9456620000	SAI-6-F 5P PUR 10M	G.9	9457380150	SAIL-M8BW-3-1.5U	B.5	9457820500	SAIL-M12BG-3-5.0U	B.6			
9456630000	SAI-6-F 5P PUR 15M	G.6	9457380300	SAIL-M8BW-3-10U	B.5	9457821000	SAIL-M12BG-3-10U	B.6			
9456630000	SAI-6-F 5P PUR 15M	G.9	9457380500	SAIL-M8BW-3-5.0U	B.5	9457850000	SAIL-M8BG-4-X.XU	B.5			
9456650000	SAI-6-F 5P PUR 20M	G.6	9457381000	SAIL-M8BW-3-10U	B.5	9457850150	SAIL-M8BG-4-1.5U	B.18			
9456650000	SAI-6-F 5P PUR 20M	G.9	9457390000	SAIL-M12GM12W-3-X.XU	B.7	9457850150	SAIL-M8BG-4-1.5U	B.5			
9456660000	SAIL-M12GM8G-4-X.XU	B.5	9457390150	SAIL-M12GM12W-3-1.5U	B.25	9457850300	SAIL-M8BG-4-3.0U	B.5			
9456660150	SAIL-M12GM8G-4-1.5U	B.29	9457390150	SAIL-M12GM12W-3-1.5U	B.7	9457850500	SAIL-M8BG-4-5.0				





# Addresses worldwide

- AE United Arab Emirates**  
Weidmüller Middle East FZE  
P.O. Box 8591  
SAIF-Zone  
Sharjah – U. A. E.  
Phone +971 6 5572723  
Fax +971 6 5572724  
wme.info@weidmueller.com
- AR Argentina**  
CPI SA  
Bauness 2660  
1431 Buenos Aires  
Phone +54 11 45238008  
Fax +54 11 45220546  
info@cpi.com.ar  
www.cpi.com.ar
- AT Austria**  
Weidmüller GmbH.  
Industriezentrum Nö Süd  
Straße 2, Objekt M2  
2355 Wiener Neudorf  
Phone +43 2236 6708-0  
Fax +43 2236 6708-199  
office.at@weidmueller.com
- AU Australia**  
Weidmüller Pty. Ltd.  
P.O.Box 6944  
Huntingwood Drive 43  
Huntingwood,  
NSW, 2148  
Phone +61 2 9671-9999  
Fax +61 2 9671-9911  
info@weidmuller.com.au  
www.weidmuller.com.au
- AZ Azerbaijan**  
West Industries Ltd.  
Caspian Plaza, 5-th Floor  
44 J. Jabbarly Str., Baku  
Phone +99412 499 15 15  
Fax +99412 499 14 93  
sales@west-i.com
- BA Bosnia and Herzegovina**  
BH ES ELEKTROSISTEM d.o.o.  
Bul. Vojvode S.  
Stepanovica kod br. 272  
78000 BiH - Banja Luka  
Phone +387 51 420-340  
Fax +387 51 420-341  
elsist@inecco.net  
www.elektrosistem.ba
- BE Belgium**  
Weidmüller Benelux B.V.  
Mechelsesteenweg 519 bus 6 en 7  
1930 Nossegem  
Phone +32 2 752 4070  
Fax +32 2 751 3606  
info@weidmueller.be  
www.weidmueller.be
- BG Bulgaria**  
Weid-Bul EOOD  
1113 Sofia  
33A Nezabravka, bl.  
315, fl.3, ap. 10  
Phone +359 2 9632560  
Fax +359 2 9631098  
weidbul@nat.bg  
www.weidbul.com
- BH Bahrain**  
Khayber Trading Company  
P.O. Box 1976 Manama,  
Phone +973 720747  
Fax +973 720331  
khayber@batelco.com.bh
- BR Brazil**  
Conexel Conexoes Elétricas Ltda.  
Rua Garcia Lorca, 176  
09695-900, Sao Paulo SP  
Phone +55 11 43669600  
Fax +55 11 43621677  
vendas@conexel.com.br  
www.conexel.com.br
- BY Belarus**  
TECHNIKON Ltd.  
Oktyabrskaya Str. 16/5  
Apt. 704, Minsk 220801  
Phone +375 17 2275830  
Fax +375 17 2275830  
technikon@belsonet.net
- CA Canada**  
W Interconnections CANADA Ltd.  
10 Spy Court, Markham,  
Ontario L3 R5 H6  
Phone +1 905 475-1507  
Fax +1 905 475-2798  
info1@weidmuller.ca  
www.weidmuller.ca
- CH Switzerland**  
Weidmüller Schweiz AG  
Rundbuckstraße 2  
8212 Neuhausen am Rheinfall  
Phone +41 52 6740707  
Fax +41 52 6740708  
info@weidmueller.ch  
www.weidmueller.ch
- CL Chile**  
Felipe Bahamondes S.A./ATS AGRO  
Maria Luisa Santander 0475  
Casilla 3425  
Santiago  
Phone +56 2 341-1271  
Fax +56 2 341-1275  
felipe@atsintech.com
- CN China**  
Weidmüller Interface International  
Trading (Shanghai) Co., Ltd.  
25F, BM Intercontinental Business  
Center,  
100 Yutong Road, Shanghai 200070  
P.R. China  
Phone +86 21 22195008  
Fax +86 21 22195009  
www.cnweidmuller.com
- CO Colombia**  
Automatización Avanzada S. A.  
Carrera 97 No.24c, 23 B4  
4 Bogotá D. C.  
Phone +57 1 5478510  
Fax +57 1 4223044  
comercial@  
automatizacionavanzada.com  
www.automatizacionavanzada.com
- CR Costa Rica**  
ELVATRON S.A.  
la Uruca 400 Norte  
Banco Costa Rica  
San José Costa Rica  
Phone +506 2 961060  
Fax +506 5 200609  
dirk.haase@elvatron.com  
www.elvatron.com
- CZ Czech Republic**  
Weidmüller s. r. o.  
Lomnického 5/1705  
14000 Praha 4  
Phone +420 2 44001400  
Fax +420 2 44001499  
office@weidmueller.cz  
www.weidmueller.cz
- DE Germany**  
Weidmüller GmbH & Co. KG  
P.O. Box 3054  
32720 Detmold  
Ohmstraße 9  
32758 Detmold  
Phone +49 5231 1428-0  
Fax +49 5231 1428-116  
weidmueller@weidmueller.de  
www.weidmueller.de
- DK Denmark**  
Wexoe A/S  
Lejrvej 31  
3500 Vaerloese  
Phone +45 45465800  
Fax +45 45465801  
wexoe@wexoe.dk  
www.wexoe.dk
- EC Ecuador**  
Elsystec S. A. Electricidad  
Sistemas y Tecnología  
Vasco de Contreras N35-25  
y Mañosa, Quito  
Phone +593 2 2456510  
Fax +593 2 2456755  
Elsystec@uio.satnet.net
- EE Estonia**  
Soots Interface OÜ  
Pärnu mnt 142  
11317 Tallinn  
Phone +372 5296177  
Fax +372 6096933  
info@sootsinterface.ee  
www.sootsinterface.ee
- EG Egypt**  
Standard Electric (OMEGA)  
87, Mohamed Farid Street  
Heliopolis, Cairo  
Phone +20 26422977  
Fax +20 26422955  
stdelec@rite.com
- ES Spain**  
Weidmüller S. A.  
Narcis Monturiol 11-13  
Pol. Ind. Sudoeste  
08960 Sant Just Desvern  
Barcelona  
Phone +34 93 4803386  
Fax +34 93 3718055  
weidmuller@weidmuller.es  
www.weidmuller.es
- FI Finland**  
JUHA-ELEKTRO OY  
P. O. Box 57, 641 Helsinki  
Kylvöpolku 6, 680 Helsinki  
Phone +358 10 6328 100  
Fax +358 10 8328 109  
info@juha-elektro.fi  
www.juha-elektro.fi
- FR France**  
Weidmüller E. U. R. L.  
12, Chaussée Jules César  
B.P. 263 Orny  
95523 Cergy Pontoise Cedex  
Phone +33 1 34245500  
Fax +33 1 34245501  
mail@weidmuller.fr
- GB Great Britain**  
Weidmüller Ltd.  
1 Abbey Wood Road  
Kings, West Malling  
ME19 4YT  
Phone +44 1732 877000  
Fax +44 1732 874296  
marketing@weidmuller.co.uk
- GR Greece**  
Electrorama S.A.  
1 An. Martail Str.  
41335 Larissa  
Phone +30 2410 552533188  
Fax +30 2410 283463189  
valizos@electrorama.com.gr
- Greece**  
GA Contact Solutions  
11, Ippokratous Str.  
14452 Metamorfoisi Attika  
Phone +30 210 2823233  
Fax +30 210 2823233  
gasaless@gmail.com
- HK Hong Kong**  
United Equity Limited  
Suite B, 11/F International Industrial  
Centre  
2-8 Kwei Tei Street, Fotan, Shatin  
Phone +852 26876739  
Fax +852 26876735  
united\_equity@sinatown.com
- HR Croatia**  
Elektro Partner d.o.o.  
Slavonska Avenija 24/6  
10000 Zagreb  
Phone +385 1 6184793  
Fax +385 1 6184795  
elektropartner@zg.t-com.hr
- HU Hungary**  
Weidmüller Kft  
Gubacsi út 6  
1097 Budapest  
Phone +36 1 3827700  
Fax +36 1 3827701  
info@weidmueller.hu
- ID Indonesia**  
PT. Nego Electrindo  
Ruko Mega Grosir Cempaka Mas,  
Blok I, No 20 – 22  
Jl. Let.Jend. Suprato –  
Jakarta 10640  
Phone +62 21 42882255  
Fax +62 21 42882266  
sales@negoelectrindo.co.id
- IE Ireland**  
Please contact Weidmüller Ltd. in  
Great Britain
- IL Israel**  
A.U.Shay Ltd.  
P.O. Box 10049  
Embar Street 23/25  
Petch-Tikva 49222  
Phone +972 3 9233601  
Fax +972 3 9234601
- ISRAEL**  
ATEKA Ltd.  
23 Hayetzira St.  
Kiryat Aryeh  
49130 Petch-Tikva, Israel  
Phone +972 3 9392344  
Fax +972 3 9243273  
marketing@ateka.co.il  
www.ateka.co.il
- IN India**  
Weidmüller Electronics India Pvt. Ltd  
Plot # 32, 3rd Floor, North Court  
Lane North Avenue, Opp Jogger's Park  
Kalyani Nagar, Maharashtra  
411006 Pune  
Phone +91 9049800960  
Nitish.Rajan@weidmueller.de
- IR Iran**  
Tamin Ehtiajat Fani Tehran (TAF Co.)  
72, Iranshahr Ave.(Unit # 5)  
15816 Tehran  
Phone +98 21 8831-7851  
Fax +98 21 8882-0268  
tafco@safineh.net
- IS Iceland**  
Samey Automation Center  
Lyngas 13, 210 Garoabaer,  
Phone +354 510 5200  
Fax +354 510 5201  
samey@samey.is
- IT Italy**  
Weidmüller S.R.L.  
Via Albert Einstein 4  
20092 Cinisello Balsamo  
Milano  
Phone +39 02 660681  
Fax +39 02 6124945  
weidmuller@weidmuller.it  
www.weidmuller.it
- JO Jordan**  
HORIZONS  
P.O.Box: 330607  
Amman Jordan 11133  
Phone +962 6 4882114  
Fax +962 6 4882115  
horizons@go.com.jo
- JP Japan**  
Nihon Weidmüller Co. Ltd.  
Sphere Tower Tennoz,  
2-2-8 Higashi-Shinagawa,  
Shinagawa-Ku, Tokyo 140-0002  
Phone +81 3 6711-5300  
Fax +81 3 6711-5333  
www.weidmuller.co.jp
- KR Korea**  
Weidmüller Korea Co., Ltd.  
6floor, Sukyong building, 242-54  
Nonhyun-dong, Kangnam-Gu  
Seoul, Korea  
Zip: 135-830  
Phone +82 2 5160003  
Fax +82 2 5160090  
info@weidmuller.co.kr
- KW Kuwait**  
KANA CONTROLS General  
Trading & Cont. CO. W.L.L.  
Al Rai Industrial Area,  
Plot 28-30, St. 31  
P.O.Box: 25593  
Safat, 13016  
Phone +966-474 1373/4  
Fax +966-474 1537  
info@kanacontrols.com

Group companies **DE**Agency abroad **DE**Without own Agency **DE**

- LB Lebanon**  
Progress Engineering & Trading Enterprises  
Al Nahr Street  
Beirut  
Phone +961 1 444664  
Fax +961 1 561880  
progress@inco.com.lb
- LT Lithuania**  
ELEKTROS IRANGA  
Tinklu g.29a, 5319 Panevezys  
Phone +370 45582828  
Fax +370 45582727  
info@eliranga.lt
- LU Luxembourg**  
Please contact Weidmüller  
Benelux B.V. in the Netherlands
- LV Latvia**  
SIA "ABI4"  
56A Daugavgrivas str.  
1007 Riga  
Phone +371 67470999  
Fax +371 67465637  
abi\_4@tvnet.lv
- MD Moldova**  
BERHORD A&D srl  
44, srt. Sarmizegetusa 37/3  
Off 414, b-dul Decebal, 3,  
Christinau, MD 2001  
Phone +373 22 507137  
Fax +373 22 507134  
atuleanu@berhord.com
- ME Montenegro**  
Please contact  
ES-YU Elektrosistem in Serbia
- MK Macedonia**  
ELEKTRO – SMK doool  
UL. III Makedonska brigada b.b.  
1000 Skopje  
Phone +389 22 460 295  
Fax +389 22 460 298  
Elektro-smk@telekabel.net.mk
- MT Malta**  
E. S. S., Electrical Supplies  
& Services Ltd  
104 J. Sciberras Str.  
Hamrun HMR 08  
Phone +356 21 255 777  
Fax +356 21 255 999  
robert@ess.com.mt
- MU Mauritius**  
MUBELO Electrical Ltd  
Office 26, Gateway building,  
St. Jean Road, Quatre Bornes  
Phone +230 498 6410  
Fax +230 467 0989  
richard.mubelo@orange.mu
- MX Mexico**  
W Interconnections, S.A. DE C.V.  
Blvd. Hermanos Serdán No. 698  
Col. San Rafael Oriente  
Puebla, C.P. 72029  
Phone +52 222 22686227  
clientes@weidmuller.com.mx
- MY Malaysia**  
Connect Plus Technology Sdn Bhd  
No. 43, Jalan PJS 11/22,  
Bandar Sunway, 46150 Petaling Jaya  
Selangor Darul Ehsan  
Phone +60 3 5633 7363  
Fax +60 3-5633 6562  
paul@cpotech.com.my  
www.cpotech.com.my
- NL Netherlands**  
Weidmüller Benelux B.V.  
Franciscusweg 221  
1216 SE Hilversum  
Postbus 1505  
1200 BM Hilversum  
Phone +31 35 6261261  
Fax +31 35 6232044  
info@weidmuller.nl
- NO Norway**  
Siv. Ing. J. F. Knudtzen A/S  
Billingstadsletta 97  
P.O. Box 160  
1378 Nesbru  
Phone +47 66 983350  
Fax +47 66 980955  
firmapost@jfkudtzen.no  
www.jfkudtzen.no
- NZ New Zealand**  
Cuthbert S. Steward Limited  
27 Te Puni Street  
POB 38496  
Petone, Wellington  
Phone +64 4 5686156  
Fax +64 4 5686056  
info@weidmueller.de
- OM Oman**  
DAN INTERNATIONAL LLC.  
PO.BOX 2901  
111 Seeb  
Phone +968 503 677  
Fax +968 503 755  
yedu@danintl.com
- PE Peru**  
TECNOLOGÍA ELÉCTRICA Y  
SOLUCIONES S.A.C.  
Calle Huandoy 501, Lima 32, Peru  
Phone / Fax +51 1 562-0004  
info@tecsol-peru.com
- Peru**  
IMGEPRO DEL PERU S.A.C.  
Jr. Arequipa 3410, Lima 31, Peru  
Phone / Fax +51 1 569-7678  
dbernardo@imgepro.com.pe  
www.imgepro.pe
- PH Philippines**  
Enclosure Systems Specialists Inc  
W-15 La Fuerza Compound  
2241 Don Chino Roces Avenue  
Makati City 1231  
Phone +63 2 813 8580  
Fax +63 2 813 8596  
sales\_encsys@pltdsl.net
- PK Pakistan**  
Kana Controls (Pak)  
Apartment No. 33 C III  
Chenab Block,  
Allama Iqbal Town  
Lahore, Pakistan  
Phone +92 42 5419948  
+92 42 7845160  
+92 42 5422895  
nadeem@kanapak.com  
www.kanapak.com
- PL Poland**  
Weidmüller Sp. z o.o.  
Ul. Golezdzinowska 10  
03-302 Warszawa  
Phone +48 22 5100940  
Fax +48 22 5100941  
biuro@weidmuller.com.pl  
www.weidmuller.pl
- PT Portugal**  
Weidmüller Sistemas de  
Interface S. A.  
Estrada Outeiro Polima, R. Augusto  
Dias da Silva, Lote B, Esc. 2  
2785-515 Aboboda -São Domingos  
de Rana  
Phone +351 21 4459191  
Fax +351 21 4455871  
www.weidmueller.pt
- QA Qatar**  
Doha Motors Trading Co.  
(Technical Division)  
Post Box No. 145  
Airport Road  
Doha - Qatar  
Phone +974 465 1441  
Fax +974 465 0925  
dmtctech@qatar.net.qa
- RO Romania**  
Rominterface Impex SRL  
Str. Gh. Dem Teodorescu 30 A  
30916 Bucuresti - sector 3  
Phone +40 21 3220230  
Fax +40 21 3228857  
office@rominterface.ro
- RS Serbia**  
ES-YU Elektrosistem  
Pariske komune 41  
11070 Novi Beograd, Serbia  
Phone +381 11 3018660  
Fax +381 11 2693608  
esyu@eunet.rs  
www.elektrosistem.co.rs
- RU Russia**  
Weidmüller Interface GmbH & Co. KG  
Representative Office  
Varshavskoye highway, 25A, bld. 6  
117105 Moscow  
Phone +7 4 95 771-6940  
Fax +7 4 95 771-6941  
info@weidmueller.ru  
www.weidmueller.rus
- SA Saudi Arabia**  
Al Abdulkarim Holding Co.  
P.O. Box. 4  
Dammam 31411  
Phone +9668337110  
Fax +9668338242  
salehsk@akh.com.sa  
www.akte.com.sa
- Saudi Electric Supply Co.**  
P.O. Box 3298  
Al Khobar 31952  
Phone +966 3 882 9546227  
Fax +966 3 882 9547  
Safdar.malik@sesco-ge.com
- SE Sweden**  
Weidmüller AB  
Axel Daniéssons väg 271  
P.O. box 31025  
200 49 Malmö  
Phone +46 (0) 7 71 43 00 44  
Fax +46 (0) 40 37 48 60  
info@weidmuller.se  
www.weidmuller.se
- SG Singapore**  
Weidmüller Pte. Ltd.  
78 Bendemeer Road  
#04-03 Luzerne  
Singapore 339940  
Phone +65 6841 5311  
Fax +65 6841 5377  
info@weidmuller.com.sg  
www.weidmuller.com.sg
- SI Slovenia**  
ELEKTROSPOJIL d.o.o.  
Stegne 25, 1000 Ljubljana  
Phone +386 15113810  
Fax +386 15111604  
info@elektrospojil.si  
www.elektrospojil.si
- SK Slovakia**  
ELEKTRIS s.r.o.  
Elektrárėnská 1  
83104 Bratislava  
Phone +421 2 49200113  
Fax +421 2 49200119  
weidmueller@computel.sk
- TH Thailand**  
Pisanu Engineering Co., Ltd  
800/43-45 Soi Trakulsuk  
Asoke-dindaeng Road,  
Dindaeng, Bangkok 10400  
Phone +66 2 245 9113  
Fax +66 2 6429220  
jayasankar@pisanu.co.th  
www.pisanu.co.th
- TN Tunisia**  
Please contact  
Weidmüller E.U.R.L. in France
- TR Turkey**  
Weidmüller Elektronik Ticaret Ltd.  
Sirketi  
Kavacik Mah. Orhan Veli Kanik  
Caddesi 9/1  
34810 Beykoz – İstanbul  
Phone +90 216 5371070 (Pbx)  
Fax +90 216 5371077  
info@weidmuller.com.tr  
www.weidmuller.com.tr
- TW Taiwan**  
Fittatek Co., Ltd.  
12F No. 165 Fu-Kuo Road,  
Tso Ying Dist, Kaohsiung  
Phone +886 7 556 0858  
Fax +886 7 556 3279  
stanley@fittatek.com.tw  
www.fittatek.com.tw
- Taiwan**  
Eucan Enterprise Ltd.  
No. 145 He Ping 2nd Rd  
Kaohsiung  
Phone +886 7 715 6610  
Fax +886 7 715 8748  
mark@eucan.com.tw  
www.eucan.com.tw
- UA Ukraine**  
TEKO INTERFACE ooo  
ul. Lewanewskogo 6  
03058 Kiev  
Phone +38 044 401 09 90  
Fax +38 044 401 08 64  
weidmueller@tekointerface.com  
www.tekointerface.com.ua
- US United States**  
W-Interconnections Inc.  
821 Southlake Boulevard,  
Virginia - Richmond 23236  
Phone +1 804 7942877  
Fax +1 804 3792593  
info@weidmuller.com  
www.weidmuller.com
- UY Uruguay**  
REWO Uruguay S.A  
Av. Bolivia 2001 Esq Rocafuerte  
Carrasco Montevideo 11300  
Phone / Fax +598 260 48439  
clorda@reworuguay.com.uy
- UZ Uzbekistan**  
OOO "Elektro Potential"  
Gani Mavijanovna str., 2B  
100084 Tashkent  
Phone +998 98-3003821  
Fax +998 71-1249286  
mz1958@yandex.ru
- VE Venezuela**  
Somierinca C.A.  
Quinta Sagrado Corazon de Jesus -  
3ra Transversal - Los Dos Caminos,  
Caracas 1070 - A  
Phone +58 212 2352748  
Fax +58 212 2399341  
kiemoeller@cantv.net  
www.kmsomerinca.com.ve
- VN Vietnam**  
AUMI Co., Ltd  
E1, La Thanh Hotel,  
218 Doi Can Street,  
Lieu Giai Ward, Ba Dinh District,  
Hanoi City  
Phone +84 4762 8601  
Fax +84 4266 1391  
aumi@aumi.com.vn
- Linh Kim Hai Co., Ltd  
78 Hoa Cuc Street Ward 7,  
Phu Thuan District,  
Ho Chi Minh City  
Phone +84 8517 1717  
Fax +84 8517 1818  
lkh@linhkimhai.com.vn
- New Sky Co., Ltd  
44/28 Tan Hai Street,  
Ward 13, Tan Binh District,  
Ho Chi Minh City  
Phone +84 8812 6593  
Fax +84 8812 6594  
newskey-e@hcm.vnn.vn  
www.newskey-e.com
- ZA South Africa**  
Phambili Interface (Pty) Ltd  
P.O. Box 193, 1609 Johannesburg  
5 Bundo Road, Sebenza  
1610 Johannesburg, Endenvale  
Phone +27 11 452 1930  
Fax +27 11 452 6455  
sales@weidmuller.co.za  
www.radicinterface.co.za
- DE Other countries**  
Weidmüller Interface GmbH & Co. KG  
Postfach 3030  
32720 Detmold  
Klingenbergstraße 16  
32758 Detmold  
Phone +49 5231 14-0  
Fax +49 5231 14-2083  
info@weidmueller.de  
www.weidmueller.com



We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.

All orders are based on our general terms of delivery, which can be reviewed on the websites of our group companies where you place your order. On demand we can also send the general terms of delivery to you.

# www.weidmueller.com

Argentina	Indonesia	Saudi Arabia
Australia	Iran	Serbia
Austria	Ireland	Singapore
Azerbaijan	Israel	Slovakia
Bahrain	Italy	Slovenia
Belarus	Japan	South Africa
Belgium	Jordan	Spain
Bosnia and Herzegovina	Kazakhstan	Sweden
Brazil	Korea	Switzerland
Bulgaria	Kuwait	Taiwan
Canada	Latvia	Thailand
Chile	Lebanon	Tunisia
China	Lithuania	Turkey
Colombia	Luxembourg	Ukraine
Costa Rica	Macedonia	United Arab Emirates
Croatia	Malaysia	United States
Czech Republic	Malta	Uruguay
Denmark	Mexico	Uzbekistan
Ecuador	Moldova	Venezuela
Egypt	Netherlands	Vietnam
Estonia	New Zealand	
Finland	Norway	
France	Oman	
Germany	Pakistan	
Great Britain	Peru	
Greece	Philippines	
Hong Kong	Poland	
Hungary	Portugal	
Iceland	Qatar	
India	Romania	
	Russia	

**Weidmüller is a leading international provider of solutions for electrical connectivity, transmission and conditioning of power, signal and data in industrial environments.**

**The company with headquarters in Detmold/Germany develops, produces and sells products in the field of electrical connectivity and electronics all over the world. Via a network of application specialists Weidmüller offers engineering services and develops application specific solutions.**

**The complete product and service portfolio consistently assures both Weidmüller and its customers of competitive advantages and an increase in value.**

Order number:  
1235620000/10/2010/SMMD

