

# 3M™ Bumpon™ Protective Products


## Molded Shapes - Colored and Clear Series

SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100

### Product Description

3M™ Bumpon™ Protective Products Molded Shapes - Colored and Clear Series are pressure-sensitive, adhesive-backed polyurethane products. They can be used as feet, stops, spacers, and protectors in many applications.

The urethane is a durable, resilient elastomer. The aggressive, high tack, pressure sensitive adhesive is protected with a release liner making application fast and easy.

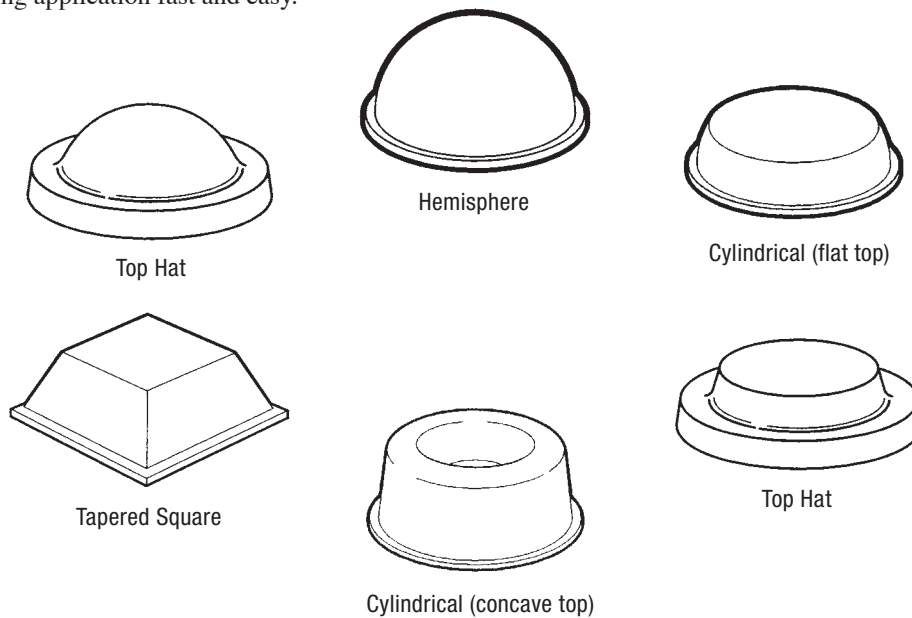

### Features

All 3M™ Bumpon™ Protective Products feature a plasticizer-free, urethane composition which exhibits:

- Excellent skid resistance
- Long aging resiliency – will not crack or harden
- Abrasion resistance
- Resistance to marring and staining

### Application Ideas




Use almost anywhere slamming, scratching, nicking, scuffing, marring, sliding, vibration, or noise could be a problem for your product.

- **Feet** on the bottom of small appliances, desk top or handheld electronic devices, electronic cabinetry, telephones, keyboards, foot pedals, scales, clocks, speakers, dispensers, and computers.
- **Stops** for cabinet doors, lids, and drawers.
- **Spacers** for picture frames to provide alignment; for electronic and automotive applications as an aid in assembly.
- **Protectors** to prevent damage in shipping, and keep parts from direct contact with each other.




**3M™ Bumpon™ Protective Products**  
**Molded Shapes - Colored and Clear Series**  
**SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100**

**3M™ Bumpon™ Protective Products**







**Cylindrical Shapes (with flat tops)**

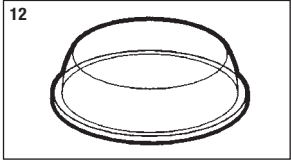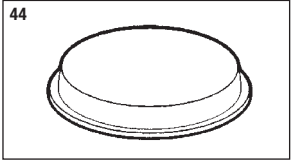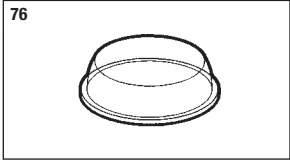Molded Shape Number	12	44	76
			
<b>Product Number</b>	<b>Bumpon SJ5012, SJ5312*, SJ5412**</b>	<b>Bumpon SJ5744, SJ5344*</b>	<b>Bumpon SJ5076, SJ5376*</b>
<b>Colors</b>	Black, Brown, White, Gray, Transparent*, True White**	Black, Transparent*	Black, Transparent*
<b>Width inches (mm)</b>	0.50 (12.7)	0.75 (19.9)	0.315 (8.0)
<b>Height inches (mm)</b>	0.14 (3.5)	0.16 (4.1)	0.110 (2.8)
<b>Pad Format</b>	5x8 (40)	4x10 (40)	8x7 (56)

**Cylindrical Shapes (with concave tops)**

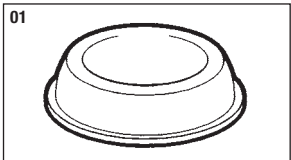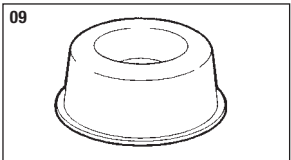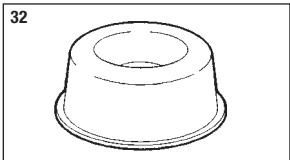Molded Shape Number	01	09	32
			
<b>Product Number</b>	<b>Bumpon SJ5001</b>	<b>Bumpon SJ5009, SJ5309*</b>	<b>Bumpon SJ5532</b>
<b>Colors</b>	Black	White, Gray, Brown, Black Transparent*	Gray, Black
<b>Width inches (mm)</b>	0.50 (12.7)	0.88 (22.3)	1.88 (47.7)
<b>Height inches (mm)</b>	0.14 (3.5)	0.40 (10.1)	0.66 (16.7)
<b>Pad Format</b>	5x8 (40)	3x8 (24)	Separate Parts

**Hemispherical Shapes**

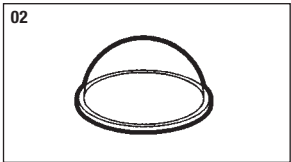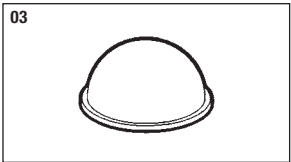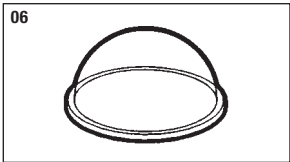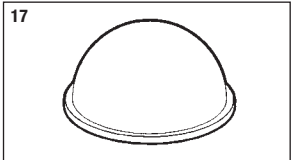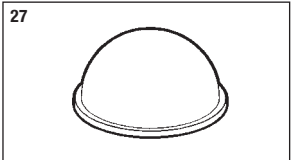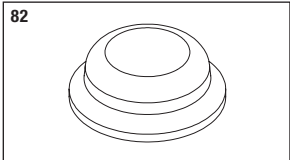Molded Shape Number	02	03	06
			
<b>Product Number</b>	<b>Bumpon SJ5302*, SJ5402**</b>	<b>Bumpon SJ5003*</b>	<b>Bumpon SJ5306*, SJ5406**</b>
<b>Colors</b>	Transparent*, True White**	Black, Brown, Gray, Transparent*	Transparent*, True White**
<b>Width inches (mm)</b>	0.312 (7.9)	0.44 (11.1)	0.375 (9.5)
<b>Height inches (mm)</b>	0.085 (2.2)	0.20 (5.0)	0.150 (3.8)
<b>Pad Format</b>	8x18 (144) [Bumpon SJ5402] 17x24 (408) [Bumpon SJ5302]	8x7 (56)	6x8 (48)
Molded Shape Number	17	27	82
			
<b>Product Number</b>	<b>Bumpon SJ5017, SJ5317*</b>	<b>Bumpon SJ5027, SJ5327*</b>	<b>Bumpon SJ5382*</b>
<b>Colors</b>	White, Gray, Black, Transparent*	White, Gray, Brown, Black, Transparent*	Transparent*
<b>Width inches (mm)</b>	0.75 (19.0)	0.63 (16.0)	0.25 (6.4)
<b>Height inches (mm)</b>	0.38 (9.6)	0.31 (7.9)	0.075 (1.9)
<b>Pad Format</b>	4x10 (40)	5x8 (40)	8x18 (144)

\*Bumpon SJ5300 series identifies transparent products. \*\*Bumpon SJ5400 series identifies true white products.

**Note:** All dimensions ±0.02 inches or ±0.5 mm measured without the adhesive liner.

**Important:** Some Bumpon molded shapes listed (or specific color versions) may require special minimum order quantities. Consult your local 3M representative or our website: [www.3M.com/Bumpons](http://www.3M.com/Bumpons).

# 3M™ Bumpon™ Protective Products


## Molded Shapes - Colored and Clear Series

SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100

### 3M™ Bumpon™ Protective Products

#### Tapered Square Shapes

Molded Shape Number



Product Number

**Bumpon SJ5705, SJ6105**

Colors

Black

Width inches (mm)


1.275 (32.4)

Height inches (mm)

0.250 (6.4)

Pad Format

3x3 (9)




**Bumpon SJ5007, SJ5307\***

Black, White, Transparent\*

0.413 (10.4)

0.98 (2.5)

6x9 (54)



**Bumpon SJ5008, SJ5308\***


White, Gray, Black, Transparent\*

0.50 (12.7)

0.12 (3.1)

8x10 (80)

Molded Shape Number



Product Number

**Bumpon SJ5514**

Colors

White, Gray, Black

Width inches (mm)


0.81 (20.6)

Height inches (mm)

0.52 (13.1)

Pad Format

4x1 (4)




**Bumpon SJ5018, SJ5318\***

White, Gray, Brown, Black, Transparent\*

0.50 (12.7)

0.23 (5.8)

8x10 (80)



**Bumpon SJ5023, SJ5323\***

White, Gray, Brown, Black, Transparent\*

0.81 (20.5)

0.30 (7.6)


4x9 (36)

\*Bumpon SJ5300 series identifies transparent products.

**Note:** All dimensions  $\pm 0.02$  inches or  $\pm 0.5$  mm measured without the adhesive liner.

#### Top Hat and Continuous Strip Shapes

Molded Shape Number



Product Number

**Bumpon SJ6115 - Top Hat**

Colors

Black

Diameter of Brim, inches (mm)

0.625 (15.9)

Height of Brim, inches (mm)


0.093 (2.36)

Total Height, inches (mm)

0.187 (4.75)

Form

5x8 (40)



**Bumpon SJ6125 - Top Hat**


Black

0.625 (15.9)

0.093 (2.36)

0.250 (6.35)

5x8 (40)



**Bumpon SJ5510 - Continuous Strip\***

White, Gray, Black, Brown

Width, inches (mm): 0.50 (12.7)

Height, inches (mm): 0.15 (3.88)

50' rolls, 5 rolls per case

**Note:** Dimensions for Bumpon SJ6115 and Bumpon SJ6125  $\pm 0.005$  inches ( $\pm 0.13$  mm) for diameter  $\pm 0.015$  inches ( $\pm 0.38$  mm) for height measured without adhesive liner. Bumpon Top Hat products were created as an optional, non-skid foot shape, to be used in a recess (see page 7). They provide high resistance to removal, knock-off or shearing, when used in conjunction with a recessed location.

\*Continuous molded strip can be cut by the customer to a specific length. The surface has lines that appear every 9" on the strip.

**Important:** Some Bumpon molded shapes listed (or specific color versions) may require special minimum order quantities. Consult your local 3M representative or our website: [www.3M.com/Bumpons](http://www.3M.com/Bumpons).

#### Special Products

##### Custom Shape and Color

3M can match most colors and customize shapes to your specifications. 3M has over 100 available standard and custom molded shapes. Electronic format (CAD and PDF) drawings are available on request.

##### Special Easy Strip Packaging

Packaged into strips or die cut and perforated pads can help simplify some assembly operations. Product currently available:

- 3M™ Bumpon™ Protective Product SJ5518 die cut perforated on pads of 64
- 3M™ Bumpon™ Protective Product SJ5508 die cut and perforated on pads of 64
- 3M™ Bumpon™ Protective Product SJ5523 4x1 matrix separated by perforations
- 3M™ Bumpon™ Protective Product SJ5514 4x1 matrix separated by perforations

**Note:** Custom Bumpon products may require a qualifying minimum quantity and/or a one time set-up charge. Call your local 3M sales representative for more information.

**3M™ Bumpon™ Protective Products**  
**Molded Shapes - Colored and Clear Series**  
**SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100**

**Typical Physical Properties and Performance Characteristics**

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

		3M™ Bumpon™ Protective Products		
3M Test Method		SJ5000 SJ5500 SJ5700	SJ5300 SJ5400	SJ6100
<b>Hardness, Shore M</b>	ASTM-D2240	75	75	75
<b>Resilience, %</b>	ASTM-D2632, 0.125" sample	30	5	30
<b>Kinetic Coefficient of Friction (Mk) (Dependent on Test Surface)<sup>1</sup></b>	ASTM-D1894 Stainless Steel Glass Formica® laminate Wood	>1 >1 0.9-1.4 0.9-1.4	>1 >1 0.9-1.4 0.9-1.4	>1 >1 0.9-1.4 0.9-1.4
<b>Abrasion Resistance (Taber H18, 1kg) g/1000 cycles<sup>2</sup></b>	ASTM-C501	1.7-1.9	0.13	0.13
<b>Tensile, lbs/in<sup>2</sup> (MPa)<sup>2</sup></b>	ASTM-D412, Die A	600 (4.1)	740 (5.1)	600 (4.1)
<b>Elongation,%<sup>2</sup></b>	ASTM-D412, Die A	100	65	100
<b>Dielectric Strength, volts/mil<sup>2</sup></b>	ASTM-D1000	200	370	200
<b>Stain Resistance<sup>3</sup></b>	3M-24 hours @ 158°F against white paint 7 days exposed to UV.	No Staining	No Staining	No Staining
<b>Flammability Listing</b>	UL-94HB	Pass; UL Recognized	Not UL Recognized	Pass; UL Recognized
<b>Application Temperature</b>		40°F (5°C) to 125°F (52°C)		
<b>Service Temperature</b>	Constant: Intermittent:	-30°F (-34°C) to 150°F (66°C) Up to 225°F (107°C)		
<b>Solvent and Fuel Resistance<sup>3</sup></b>	24 hour immersion 5% Detergent in water 25% Ammonia in water Bleach Hydrochloric Acid (1 Normal Solution) Diesel Fuel Auto Oil Isopropyl Alcohol Heptane Toluol Lacquer Thinner	No Apparent Effect No Apparent Effect No Apparent Effect No Apparent Effect No Apparent Effect No Apparent Effect Slight Swelling Slight Swelling Considerable Swelling Considerable Swelling		

**Notes:**

<sup>1</sup>Two important laws of friction applicable to Bumpon products are: (1) Friction is independent of the area of contact between solids and (2) friction is proportional to the load between solid surfaces. Thus, if the load (weight) is doubled the force required to cause sliding is also double. This is expressed mathematically as follows: Sliding Force = M<sub>k</sub> x weight.

<sup>2</sup>These properties were run on sheet material from the same materials as the individual Bumpon products

<sup>3</sup>Reference test for 24 hours. Results may vary for different product application conditions.

**3M™ Bumpon™ Protective Products**  
**Molded Shapes - Colored and Clear Series**  
**SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100**

**Relative Adhesive Performance Characteristics**

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

<b>3M™ Bumpon™ Protective Products</b>			
	<b>SJ5000 SJ5500 SJ5700</b>	<b>SJ5300 SJ5400</b>	<b>SJ6100</b>
<b>Adhesive:</b>	Natural Rubber R-30	Acrylic A-20	Synthetic Rubber R-25
<b>Initial Adhesion</b> <b>Low Surface Energy:</b> <b>High Surface Energy:</b>	Good Good	Poor Fair	Excellent Excellent
<b>Adhesion (Peel)</b> <b>Low Surface Energy:</b> <b>High Surface Energy:</b>	Good Good	Poor Good	Excellent Excellent
<b>Static Shear</b> <b>75°F (25°C):</b> <b>120°F (49°C):</b> <b>158°F (70°C)</b>	Excellent Good Poor	Excellent Excellent Excellent	Excellent Good Fair
<b>Dynamic Shear:</b>	Good	Excellent	Good
<b>Solvent Resistance:</b>	Good	Excellent	Good

**Adhesive Performance**

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

The following table on peel adhesion provide representative performance characteristics of the adhesive systems used in the construction of 3M™ Bumpon™ Protective Products molded series products.

**90° Peel Adhesion**

**\*Peel Force, oz. Per 1/2 inch**

<b>3M™ Bumpon™ Protective Products</b>			
	<b>SJ5000 SJ5500 SJ5700</b>	<b>SJ5300 SJ5400</b>	<b>SJ6100</b>
<b>Substrate:</b>	Natural Rubber R-30	Acrylic A-20	Synthetic Rubber R-25
<b>Polypropylene</b>	25	3	52
<b>Polystyrene</b>	25	11	55
<b>ABS</b>	25	25	55
<b>Stainless Steel</b>	22	25	55
<b>Aluminum</b>	22	25	55

\*3M Test Method TM-2011; 72 hour dwell, 1/2 inch wide samples pulled at 12 inches per minute. Testing completed using Bumpon Resilient Rollstock products SJ5816, SJ6016, and SJ6216, which use the same adhesive system as the molded series products.

# 3M™ Bumpon™ Protective Products

## Molded Shapes - Colored and Clear Series

SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100


### Application Techniques

To obtain maximum adhesion, surfaces must be unified, dry, and free of contaminants. Surface contact is essential to adhesive performance. To maximize contact on a substrate:


- Clean surfaces with low strength solvent such as isopropyl alcohol (rubbing alcohol) or heptane.\*
- Apply firm pressure to help increase the cold flow and contact of the adhesive with the substrate.
- Allow time (dwell) to increase the surface contact and adhesion (see illustrations below).

\***Note:** Be sure to follow the manufacturer’s precautions and directions for use when using solvents.

#### Adhesive Surface Contact

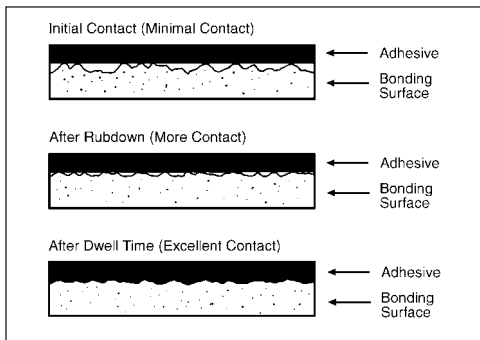

#### Rubber Adhesive vs. Acrylic Adhesive Bond Build-up

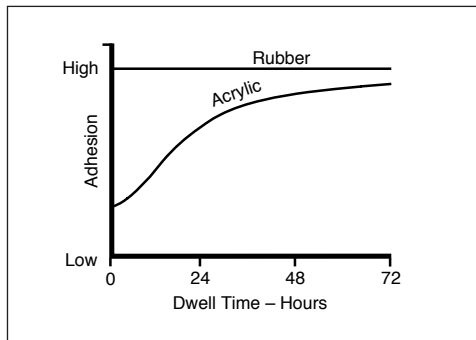

### Environmental Exposure

Colored and transparent 3M™ Bumpon™ Protective Products are intended for interior applications where resilience and other physical properties will remain unchanged. When exposed to UV light for extended periods some slight discoloration or yellowing may occur.

Bumpon products may be used outdoors in a protected area with some discoloration possible; colored Bumpon products may chalk.

Simultaneous exposure to high humidity and temperature may degrade (soften) the Bumpon product urethane.

# 3M™ Bumpon™ Protective Products

## Molded Shapes - Colored and Clear Series

SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100

### Product Selections Considerations

#### Alignment

Alignment is more difficult with a rectangular shaped 3M™ Bumpon™ Protective Product when no recess is provided.

#### Circular shaped product



(top view)

#### Rectangular shaped product



(top view)

#### Point of Contact

The point of contact provides either a large contact area or a very small (point) contact area depending on the shape of the Bumpon product.


#### Flat



(side view)

- Increased load capacity
- Better wear resistance

#### Hemisphere



(side view)

- Increased sound dampening
- Increased energy absorption

#### Profile

The profile is defined by the height and the diameter (or width) of the Bumpon product.

#### Low Profile



- Increased load capacity
- Less susceptible to being sheared off substrate

#### High Profile



- Better heat dissipation
- Not recommended if sideways shearing is possible

#### Recess

A recess is not necessary; however, there are several benefits to providing a recess.



- Provides target area for the Bumpon product during attachment process
- Improves adhesion performance: impact absorption and shear strength
- Provides neater appearance
- Provides uniform location

### Storage

Store in original cartons at 60° to 80°F (16° to 27°C) and 40 to 50% relative humidity.

### Shelf Life

To obtain best performance, use this product within 18 months from date of manufacture.

# 3M™ Bumpon™ Protective Products

## Molded Shapes - Colored and Clear Series

SJ5000 • SJ5300 • SJ5400 • SJ5500 • SJ5700 • SJ6100

### Certification/Recognition

**MSDS:** Refer to Product Label and Material Safety Data Sheet for Health and Safety Information before using this product.

**TSCA:** This product is defined as an article under the Toxic Substances Control Act and therefore, it is exempt from inventory listing requirements.

**RoHS:** This product complies with the requirements of EU Directive 2002/95/EC and 2005/618/EC.

**EU REACH:** This product is an article, without intended release of a chemical substance, under the REACH regulation (refer to REACH, Article 3[3]). It is not a chemical preparation. Therefore, it is not subject to the pre-registration or the registration process. It does not require a safety data sheet. This product does not contain at greater than 0.1% by weight a Substance of Very High Concern (SVHC) substance identified according to Article 59 of REACH. This declaration reflects the substances on the candidate SVHC list, effective December, 2010.

### For Additional Information

To request additional product information or to arrange for sales assistance, call toll free 1-800-251-8634. Address correspondence to: 3M, Electronics Markets Materials Division, 3M Center, Building 225-3S-06, St. Paul, MN 55144-1000. Our fax number is 651-778-4244 or 1-877-369-2923. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



**Electronics Markets Materials Division**  
3M Center, Building 225-3S-06  
St. Paul, MN 55144-1000  
1-800-251-8634 phone  
651-778-4244 fax  
www.3M.com/Bumpons

3M and Bumpon are trademarks of  
3M Company.  
Formica is a registered trademark of  
the Formica Corporation.  
Please recycle. Printed in U.S.A.  
© 3M 2011. All rights reserved.  
60-5002-0526-9

