


PF-XTI-AL (PIO)630VDC Audio Capacitors Paper in Oil, Tin Foil

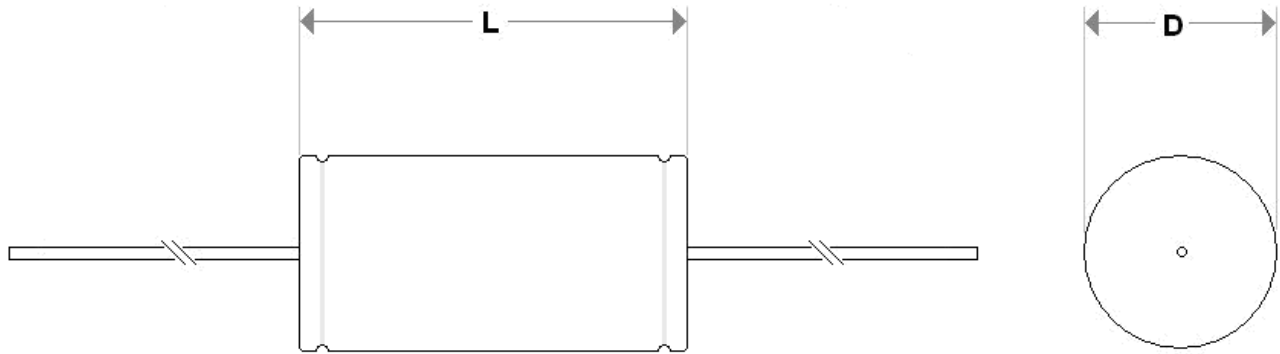

CAPACITANCE μF	D	L
0.001 – 0.05	15mm	34mm
0.1 – 0.47	25mm	54mm
1.0	35mm	54mm
2.0	45mm	95mm

AMPOHM audio capacitors are specially designed for high performance audio systems. These paper in oil (PIO) capacitors are hand wound using high purity tin foil and have their leads hand soldered. They are oil impregnated before being assembled oil filled and hermetically sealed in an aluminium housing with phenolic resin and rubber end discs. The 1.0mm diameter tinned copper lead out wires are solder sealed to the eyelets in the end discs. This construction results in these components being ideally suited for use as coupling capacitors or as replacement components in existing designs.

Type: PF-XTI-AL
Capacitance: 0.001 μF – 2.0 μF
Dissipation Factor: < 0.01 @ 1KHz
Tolerance: +/- 20% up to 0.1 μF
 +/- 10% up to 2.0 μF
 +/- 5% above 5.0 μF

Rated Voltage: 630V DC
Temperature Range: -40 to +85C

Marking:

	AMPOHM
	AUDIO CAPACITOR
	TYPE
	VALUE/VOLTAGE
	SPEC
	DATE CODE

Line on label denotes outer foil

Witness Innovation... Experience Technology



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
 Tel: 01423 865641 • Fax: 01423 798246 • E-mail: sales@ampohm.co.uk • Website: www.ampohm.co.uk

Witness Innovation... Experience Technology



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
Tel: 01423 865641 ▪ Fax: 01423 798246 ▪ E-mail: sales@ampohm.co.uk ▪ Website: www.ampohm.co.uk

Registered in England & Wales No: 5654904

VAT Registration: 874 7628 73

(a subsidiary of GSPK Circuits Ltd)