


Model No.	POS.1	POS.2	POS.3
1MS1	ON	NONE	ON
Term. Comm.	2-3		2-1
SCHEMATIC		OPEN	

SWITCH FUNCTION

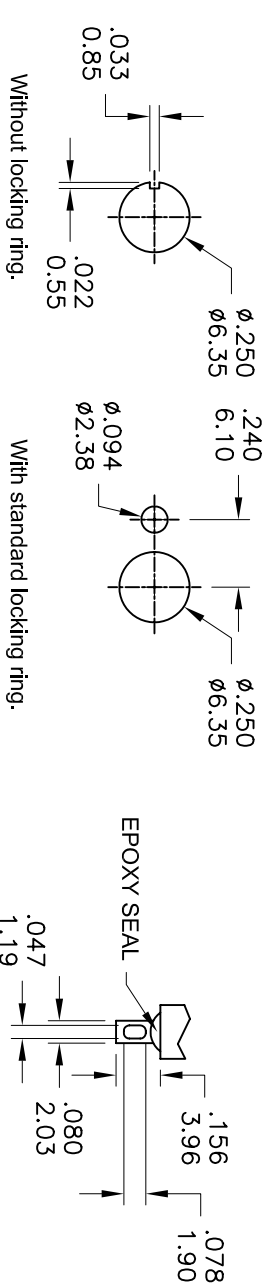

PANEL MOUNTING

SOLDER LUG

SPECIFICATIONS

ELECTRICAL LIFE: 40,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10m Ω max. initial @ 24VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30 ° C to 85 ° C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94V-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 2Amps @250VAC
 5Amps @120 VAC or 28 VDC

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.

符號	原尺寸	修改後尺寸	變更日期
1 (A)			
2 (B)			
3 (C)			
4 (D)			
5 (E)			

SCALE (比例) : 3 : 2	
TOLERANCE (公差) :	
0.00 mm ± 0.25mm	
0.0 mm ± 0.40mm	
ANGULAR : ± 2.54 mm	
FILE NAME : 1MSP0001	

TITLE 圖名	Miniature Toggle Switches	SIZE 圖紙	A4
DWG NO. 圖號	1MS1T1B1M1QE	UNIT 單位	inch mm
REV. 版本	A	DATA 日期	DEC - 13 - 2001
CHECKED BY 審核	Aber Chen	DRAWN BY 製圖	BOBO
SHEET 張數		1 of 1	