

ADSP-BF548 EZ-KIT Lite® Evaluation System Manual

Revision 1.2, April 2008

Part Number
82-000206-01

Analog Devices, Inc.
One Technology Way
Norwood, Mass. 02062-9106



Copyright Information

©2008 Analog Devices, Inc., ALL RIGHTS RESERVED. This document may not be reproduced in any form without prior, express written consent from Analog Devices, Inc.

Printed in the USA.

Limited Warranty

The EZ-KIT Lite evaluation system is warranted against defects in materials and workmanship for a period of one year from the date of purchase from Analog Devices or from an authorized dealer.

Disclaimer

Analog Devices, Inc. reserves the right to change this product without prior notice. Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under the patent rights of Analog Devices, Inc.

Trademark and Service Mark Notice

The Analog Devices icon bar and logo, VisualDSP++, the VisualDSP++ logo, Blackfin, the Blackfin logo, the CROSSCORE logo, EZ-KIT Lite, and EZ-Extender are registered trademarks of Analog Devices, Inc.

All other brand and product names are trademarks or service marks of their respective owners.

Regulatory Compliance

The ADSP-BF548 EZ-KIT Lite is designed to be used solely in a laboratory environment. The board is not intended for use as a consumer end product or as a portion of a consumer end product. The board is an open system design which does not include a shielded enclosure and therefore may cause interference to other electrical devices in close proximity. This board should not be used in or near any medical equipment or RF devices.

The ADSP-BF548 EZ-KIT Lite has been certified to comply with the essential requirements of the European EMC directive 89/336/EEC amended by 93/68/EEC and therefore carries the “CE” mark.

The ADSP-BF548 EZ-KIT Lite has been appended to Analog Devices, Inc. Technical Construction File (TCF) referenced ‘DSPTOOLS1’ dated December 21, 1997 and was awarded CE Certification by an appointed European Competent Body as listed below.

Technical Certificate No: Z600ANA1.029

Issued by: Technology International (Europe) Limited
60 Shrivenham Hundred Business Park
Shrivenham, Swindon, SN6 8TY, UK



The EZ-KIT Lite evaluation system contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused EZ-KIT Lite boards in the protective shipping package.



CONTENTS

PREFACE

Purpose of This Manual	xix
Intended Audience	xix
Manual Contents	xx
What's New in This Manual	xxi
Technical or Customer Support	xxii
Supported Processors	xxiii
Product Information	xxiii
MyAnalog.com	xxiv
Processor Product Information	xxiv
Related Documents	xxv
Online Technical Documentation	xxvii
Printed Manuals	xxx
Notation Conventions	xxxi

USING ADSP-BF548 EZ-KIT LITE

Package Contents	1-3
Default Configuration	1-4
Installation and Session Startup	1-5

CONTENTS

Evaluation License Restrictions	1-7
Memory Map	1-7
DDR Interface	1-9
Burst Flash Memory Interface	1-12
NAND Flash Interface	1-12
SPI Interface	1-13
SD Interface	1-14
EPPI Interface	1-14
LCD Module Interface	1-15
Touchscreen Interface	1-17
Keypad Interface	1-18
Rotary Encoder Interface	1-18
Ethernet Interface	1-19
Audio Interface	1-19
ATAPI Interface	1-21
USB OTG Interface	1-22
UART Interface	1-22
CAN Interface	1-23
Host Interface	1-24
RTC Interface	1-25
LEDs and Push Buttons	1-25
JTAG Interface	1-26
Expansion Interface	1-26
Power Measurements	1-27

Design Reference Information	1-28
Power-On-Self Test	1-28
Example Programs	1-29
Background Telemetry Channel	1-29

ADSP-BF548 EZ-KIT LITE HARDWARE REFERENCE

System Architecture	2-2
Programmable Flags	2-3
Push Button and Switch Settings	2-15
Boot Mode Select Switch (SW1)	2-15
Keypad Enable Switch (SW2)	2-16
Rotary Encoder with Momentary Switch (SW3)	2-17
Rotary Encoder Enable Switch (SW4)	2-17
Push Button Enable Switch (SW5)	2-18
CAN0 Enable Switch (SW6)	2-18
UART Enable Switch (SW7)	2-19
Audio Loopback Test Switch (SW8)	2-19
Reset Push Button (SW9)	2-20
Programmable Flag Push Buttons (SW10–13)	2-20
LCD/PPI Configuration Switch (SW14)	2-21
CAN1 Enable Switch (SW15)	2-22
Peripheral Control Enable (SW16)	2-22
LCD Module Configuration (SW17)	2-23
Jumpers	2-25
UART1 Loopback Jumper (JP1)	2-26

CONTENTS

SPI1 Enable Jumper (JP2)	2-26
Ethernet Speed Select Jumper (JP3)	2-27
VDDINT Power Jumper (JP4)	2-27
VDDEXT Power Jumper (JP5)	2-28
VDDDDR Power Jumper (JP6)	2-28
MOSI1 Out Jumper (JP7)	2-29
MOSI1 In Jumper (JP8)	2-29
USB OTG Power Jumper (JP11)	2-30
PPI1FS3 Pull-down Jumper (JP12)	2-30
LEDs	2-31
User LEDs (LED1–6)	2-31
Power LED (LED7)	2-32
Reset LED (LED8)	2-32
Ethernet Link/Activity LED (LED9)	2-32
Connectors	2-33
Expansion Interface Connectors (J1–3)	2-34
Ethernet Connector (J4)	2-34
SD Memory Card Connector (J5)	2-35
RS-232 Connector (J6)	2-35
Power Connector (J7)	2-35
Dual Audio Connectors (J8 and J9)	2-36
Audio Connector (J10)	2-36
CAN Connectors (J11 and J12)	2-36
Battery Holder (J13)	2-37

ATAPI Connector (J14)	2-37
Keypad Connector (P1)	2-37
Host Interface Connector (P3)	2-38
USB OTG Connector (P4)	2-38
LCD Backlight Connector (P5)	2-38
SPORT2 Connector (P6)	2-39
SPORT3 Connector (P7)	2-39
PPI1 Connector (P8)	2-39
SPI Connector (P9)	2-40
Two-Wire Interface Connector (P10)	2-40
TIMERS Connector (P11)	2-40
UART3 Connector (P12)	2-41
LCD Touchscreen Connector (P14)	2-41
LCD Data Connector (P15)	2-41
USB Debug Agent Connector (ZJ1)	2-42
JTAG Connector (ZP4)	2-42

ADSP-BF548 EZ-KIT LITE BILL OF MATERIALS

ADSP-BF548 EZ-KIT LITE SCHEMATIC

Title Page	B-1
DDR Interface	B-2
EBIU	B-3
Control	B-4
PPI, Keypad, Thumbwheel Interface	B-5

CONTENTS

Processor Power	B-6
AC'97 Audio	B-7
ATAPI Hard Drive, USB, OTG	B-8
Ethernet	B-9
CAN	B-10
MXVR Port, UART, SD Conn	B-11
MXVR	B-12
LCD	B-13
Push Buttons, LEDs, Boot Mode	B-14
Expansion Interface and JTAG	B-15
Stamp Connectors	B-16
Power Page 1	B-17
Power Page 2	B-18

INDEX

PREFACE

Thank you for purchasing the ADSP-BF548 EZ-KIT Lite[®], Analog Devices, Inc. evaluation system for Blackfin[®] processors.

Blackfin processors embody a new type of embedded processor designed specifically to meet the computational demands and power constraints of today's embedded audio, video, and communications applications. They deliver breakthrough signal-processing performance and power efficiency within a reduced instruction set computing (RISC) programming model.

Blackfin processors support a media instruction set computing (MISC) architecture. This architecture is the natural merging of RISC, media functions, and digital signal processing (DSP) characteristics. Blackfin processors deliver signal-processing performance in a microprocessor-like environment.

Based on the Micro Signal Architecture (MSA), Blackfin processors combine a 32-bit RISC instruction set, dual 16-bit multiply accumulate (MAC) DSP functionality, and eight-bit video processing performance that had previously been the exclusive domain of very-long instruction word (VLIW) media processors.

The evaluation board is designed to be used in conjunction with the VisualDSP++[®] development environment to test the ADSP-BF548 processor capabilities. The VisualDSP++ development environment gives you the ability to perform advanced application code development and debug, such as:

- Create, compile, assemble, and link application programs written in C++, C, and ADSP-BF548 assembly
- Load, run, step, halt, and set breakpoints in application programs
- Read and write data and program memory
- Read and write core and peripheral registers
- Plot memory

Access to the ADSP-BF548 processor from a personal computer (PC) is achieved through a USB port or an optional JTAG emulator. The USB interface gives unrestricted access to the ADSP-BF548 processor and the evaluation board peripherals. Analog Devices JTAG emulators offer faster communication between the host PC and target hardware. Analog Devices carries a wide range of in-circuit emulation products. To learn more about Analog Devices emulators and processor development tools, go to <http://www.analog.com/dsp/tools/>.

The ADSP-BF548 EZ-KIT Lite provides example programs to demonstrate the evaluation board capabilities.



The ADSP-BF548 EZ-KIT Lite installation is part of the VisualDSP++ installation. The EZ-KIT Lite is a licensed product that offers an unrestricted evaluation license for the first 90 days. For details about evaluation license restrictions after the 90 days, refer to “[Evaluation License Restrictions](#)” on page 1-7 and the *VisualDSP++ Installation Quick Reference Card*.

The board features:

- Analog Devices ADSP-BF548 Blackfin processor
 - ✓ Core performance up to 600 MHz
 - ✓ External bus performance up to 133 MHz
 - ✓ 400-pin mini-BGA package
 - ✓ 25 MHz crystal
- Double data rate (DDR) synchronous dynamic random access memory (SDRAM)
 - ✓ Micron MT46V32M16 – 64 MB (8M x 16-bits x 4 banks)
- Burst flash memory
 - ✓ Intel PC28F128K3C115 – 32 MB (16M x 16-bits)
- NAND flash memory
 - ✓ ST Micro NAND02 – 2 Gb
- SPI flash memory
 - ✓ ST Micro M25P16 – 16 Mb
- Advanced technology attachment packet interface (ATAPI)
 - ✓ Toshiba 2.5" MK4032GAX – 40 GB HDD
- Analog audio interface
 - ✓ Analog Devices AD1980 SoundMAX codec
 - ✓ 6 DAC channels for 5.1 surround
 - ✓ 1 input stereo MIC jack
 - ✓ 1 input stereo LINE IN jack

- ✓ 1 output stereo LINE OUT/HEAD PHONE OUT jack
 - ✓ 1 output stereo SURROUND jack
 - ✓ 1 output center and LFE jack
- TFT LCD display with touchscreen
 - ✓ Sharp LQ043T1DG01 – 480 x 272, 4.3” touchscreen LCD
 - ✓ Analog Devices AD7877 – touchscreen controller
- Ethernet interface
 - ✓ SMSC LAN9218 device
 - ✓ 10-BaseT and 100-BaseTX Ethernet controller
 - ✓ Integrated PHY and MAC
 - ✓ HP Auto-MDIX
- Keypad
 - ✓ ACT components– 4 x 4 keypad assembly
- Thumbwheel
 - ✓ CTS Corp rotary encoder
- Universal asynchronous receiver/transmitter (UART)
 - ✓ ADM3202 RS-232 line driver/receiver
 - ✓ DB9 female connector
- LEDs
 - ✓ 10 LEDs: 1 power (green), 1 board reset (red), 1 USB (red), 6 general-purpose (amber), and 1 USB monitor (amber)

- Push buttons
 - ✓ 5 push buttons: 1 reset, 4 programmable flags with debounce logic
- Expansion interface: all ADSP-BF548 processor signals
- Other features
 - ✓ JTAG ICE 14-pin header
 - ✓ USB OTG connector
 - ✓ HOST interface connector
 - ✓ Blackfin power measurement jumpers
 - ✓ PPI 1 IDC connector
 - ✓ SPORT2 and SPORT3 IDC connectors
 - ✓ TWI, SPI, timers, UART3 IDC connectors

For information about the hardware components of the EZ-KIT Lite, refer to the *ADSP-BF548 EZ-KIT Lite Evaluation System Manual*.

Purpose of This Manual

The *ADSP-BF548 EZ-KIT Lite Evaluation System Manual* provides instructions for installing the product hardware (board). The text describes operation and configuration of the board components and provides guidelines for running your own code on the ADSP-BF548 EZ-KIT Lite. Finally, a schematic and a bill of materials are provided as a reference for future designs.

EZ-KIT Lite users should use this manual in conjunction with the *Getting Started with ADSP-BF548 EZ-KIT Lite*, which familiarizes users with the hardware capabilities of the evaluation system and demonstrates how to access these capabilities in the VisualDSP++ environment.

Intended Audience

The product software installation is detailed in the *VisualDSP++ Installation Quick Reference Card*.

Intended Audience

The primary audience for this manual is a programmer who is familiar with Analog Devices processors. This manual assumes that the audience has a working knowledge of the appropriate processor architecture and instruction set. Programmers who are unfamiliar with Analog Devices processors can use this manual but should supplement it with other texts (such as the *ADSP-BF548 Blackfin Processor Hardware Reference* and *Blackfin Processor Instruction Set Reference*) that describe your target architecture.

Programmers who are unfamiliar with VisualDSP++ should refer to the VisualDSP++ online Help and user's or getting started guides. For the locations of these documents, see [“Related Documents”](#).

Manual Contents

The manual consists of:

- Chapter 1, [“Using ADSP-BF548 EZ-KIT Lite” on page 1-1](#).
Describes EZ-KIT Lite functionality from a programmer's perspective and provides an easy-to-access memory map.
- Chapter 2, [“ADSP-BF548 EZ-KIT Lite Hardware Reference” on page 2-1](#).
Provides information on the EZ-KIT Lite hardware components.
- Appendix A, [“ADSP-BF548 EZ-KIT Lite Bill Of Materials” on page A-1](#).
Provides a list of components used to manufacture the EZ-KIT Lite board.

- Appendix B, “[ADSP-BF548 EZ-KIT Lite Schematic](#)” on page B-1 Provides the resources to allow EZ-KIT Lite board-level debugging or to use as a reference design. Appendix B is part of the online Help.

What’s New in This Manual

The *ADSP-BF548 EZ-KIT Lite Evaluation System Manual* has been updated to reflect the latest revision of the board.

Technical or Customer Support

You can reach Analog Devices, Inc. Customer Support in the following ways:

- Visit the Embedded Processing and DSP products Web site at <http://www.analog.com/processors/technicalSupport>
- E-mail tools questions to processor.tools.support@analog.com
- E-mail processor questions to processor.support@analog.com (World wide support)
processor.europe@analog.com (Europe support)
processor.china@analog.com (China support)
- Phone questions to **1-800-ANALOGD**
- Contact your Analog Devices, Inc. local sales office or authorized distributor
- Send questions by mail to:
Analog Devices, Inc.
One Technology Way

Supported Processors

P. O. Box 9106
Norwood, MA 02062-9106
USA

Supported Processors

This evaluation system supports Analog Devices ADSP-BF548 Blackfin embedded processors.

Product Information

You can obtain product information from the Analog Devices Web site, from the product CD-ROM, or from printed publications (manuals).

Analog Devices is online at www.analog.com. Our Web site provides information about a broad range of products—analog integrated circuits, amplifiers, converters, and digital signal processors.

MyAnalog.com

MyAnalog.com is a free feature of the Analog Devices Web site that allows customization of a Web page to display only the latest information on products you are interested in. You can choose to receive weekly e-mail notifications containing updates to the Web pages that meet your interests, including documentation errata against all manuals. You can also choose to receive weekly e-mail notifications containing updates to the Web pages that meet your interests. MyAnalog.com provides access to books, application notes, data sheets, code examples, and more.

Registration:

Visit www.myanalog.com to sign up. Click **Register** to use MyAnalog.com. Registration takes about five minutes and serves as means for you to select the information you want to receive.

If you are already a registered user, just log on. Your user name is your e-mail address.

Processor Product Information

For information on embedded processors and DSPs, visit our Web site at www.analog.com/processors, which provides access to technical publications, data sheets, application notes, product overviews, and product announcements.

You may also obtain additional information about Analog Devices and its products in any of the following ways.

- E-mail questions or requests for information to
processor.support@analog.com (World wide support)
processor.europe@analog.com (Europe support)
processor.china@analog.com (China support)
- Fax questions or requests for information to
1-781-461-3010 (North America)
+49-89-76903-157 (Europe)

Related Documents

For information on product related development software, see the following publications.



If you plan to use the EZ-KIT Lite board in conjunction with a JTAG emulator, also refer to the documentation that accompanies the emulator.

Table 1. Related Processor Publications

Title	Description
<i>ADSP-BF542/BF544/BF548/BF549 Blackfin Embedded Processor Preliminary Data Sheet</i>	General functional description, pinout, and timing.
<i>ADSP-BF548 Blackfin Processor Hardware Reference</i>	Description of internal processor architecture and all register functions.
<i>Blackfin Processor Programming Reference</i>	Description of all allowed processor assembly instructions.

Table 2. Related VisualDSP++ Publications

Title	Description
<i>ADSP-BF548 EZ-KIT Lite Evaluation System Manual</i>	Description of the hardware capabilities of the evaluation system; description of how to access these capabilities in the VisualDSP++ environment.
<i>VisualDSP++ User's Guide</i>	Description of the VisualDSP++ features and usage.
<i>VisualDSP++ Assembler and Preprocessor Manuals</i>	Description of the assembler function and commands.
<i>VisualDSP++ C/C++ Compiler and Library Manual for Blackfin Processors</i>	Description of the compiler function and commands for Blackfin processors.
<i>VisualDSP++ Linker and Utilities Manual</i>	Description of the linker function and commands.
<i>VisualDSP++ Loader and Utilities Manual</i>	Description of the loader/splitter function and commands.
<i>VisualDSP++ Device Drivers and System Services Manual for Blackfin Processors</i>	Description of the device drivers' and system services' functions and commands

All documentation is available online. Visit the Technical Library Web site to access all processor and tools manuals and data sheets:

<http://www.analog.com/processors/technicalsupport/technicallibrary/>.

Online Technical Documentation

Online documentation comprises the VisualDSP++ Help system, software tools manuals, hardware tools manuals, processor manuals, the Dinkum Abridged C++ library, and Flexible License Manager (FlexLM) network license manager software documentation. You can easily search across the entire VisualDSP++ documentation set for any topic of interest. For easy printing, supplementary .pdf files of most manuals are provided in the Docs folder on the VisualDSP++ installation CD.

Each documentation file type is described as follows.

File	Description
.chm	Help system files and manuals in Help format
.htm or .html	Dinkum Abridged C++ library and FlexLM network license manager software documentation. Viewing and printing the .html files requires a browser, such as Internet Explorer 6.0 (or higher).
.pdf	VisualDSP++ and processor manuals in Portable Documentation Format (PDF). Viewing and printing the .pdf files requires a PDF reader, such as Adobe Acrobat Reader (4.0 or higher).

If documentation is not installed on your system as part of the software installation, you can add it from the VisualDSP++ CD at any time by running the Tools installation. Access the online documentation from the VisualDSP++ environment, Windows[®] Explorer, or the Analog Devices Web site.

Accessing Documentation From VisualDSP++

To view VisualDSP++ Help, click on the **Help** menu item or go to the Windows task bar and navigate to the VisualDSP++ documentation via the **Start** menu. To view ADSP-BF548 EZ-KIT Lite Help, which is part of the VisualDSP++ Help system, use the **Contents** or **Search** tab of the Help window.

Product Information

Accessing Documentation From Windows

In addition to any shortcuts you may have constructed, there are many ways to open VisualDSP++ online Help or the supplementary documentation from Windows.

Help system files (.chm) are located in the `Help` folder, and .pdf files are located in the `Docs` folder of your VisualDSP++ installation CD-ROM. The `Docs` folder also contains the Dinkum Abridged C++ library and the FlexLM network license manager software documentation.

Your software installation kit includes online Help as part of the Windows interface. These help files provide information about VisualDSP++ and the ADSP-BF548 EZ-KIT Lite evaluation system.

Accessing Documentation From Web

Download manuals at the following Web site:

<http://www.analog.com/processors/technicalSupport/technicalLibrary/>.

Select a processor family and book title. Download archive (.zip) files, one for each manual. Use any archive management software, such as WinZip, to decompress downloaded files.

Printed Manuals

For general questions regarding literature ordering, call the Literature Center at **1-800-ANALOGD (1-800-262-5643)** and follow the prompts.

Processor Manuals

Hardware reference and instruction set reference manuals may be ordered through the Literature Center at **1-800-ANALOGD (1-800-262-5643)**,

or downloaded from the Analog Devices Web site. Manuals may be ordered by title or by product number located on the back cover of each manual.

Data Sheets

All data sheets (preliminary and production) may be downloaded from the Analog Devices Web site. Only production (final) data sheets (Rev. 0, A, B, C, and so on) can be obtained from the Literature Center at 1-800-ANALOGD (1-800-262-5643); they also can be downloaded from the Web site.




To have a data sheet faxed to you, call the Analog Devices Faxback System at **1-800-446-6212**. Follow the prompts and a list of data sheet code numbers will be faxed to you. If the data sheet you want is not listed, check for it on the Web site.

Notation Conventions

Text conventions used in this manual are identified and described as follows.

Example	Description
Close command (File menu)	Titles in reference sections indicate the location of an item within the VisualDSP++ environment's menu system (for example, the Close command appears on the File menu).
{this that}	Alternative required items in syntax descriptions appear within curly brackets and separated by vertical bars; read the example as <code>this</code> or <code>that</code> . One or the other is required.
[this that]	Optional items in syntax descriptions appear within brackets and separated by vertical bars; read the example as an optional <code>this</code> or <code>that</code> .
[this, ...]	Optional item lists in syntax descriptions appear within brackets delimited by commas and terminated with an ellipsis; read the example as an optional comma-separated list of <code>this</code> .

Notation Conventions

Example	Description
.SECTION	Commands, directives, keywords, and feature names are in text with letter gothic font.
<i>Filename</i>	Non-keyword placeholders appear in text with italic style format.
	Note: For correct operation, ... A Note provides supplementary information on a related topic. In the online version of this book, the word Note appears instead of this symbol.
	Caution: Incorrect device operation may result if ... Caution: Device damage may result if ... A Caution identifies conditions or inappropriate usage of the product that could lead to undesirable results or product damage. In the online version of this book, the word Caution appears instead of this symbol.
	Warning: Injury to device users may result if ... A Warning identifies conditions or inappropriate usage of the product that could lead to conditions that are potentially hazardous for the devices users. In the online version of this book, the word Warning appears instead of this symbol.

1 USING ADSP-BF548 EZ-KIT LITE

This chapter provides specific information to assist you with development of programs for the ADSP-BF548 EZ-KIT Lite evaluation system.

The following topics are covered.

- “Package Contents” on page 1-3
- “Default Configuration” on page 1-4
- “Installation and Session Startup” on page 1-5
- “Evaluation License Restrictions” on page 1-7
- “Memory Map” on page 1-7
- “DDR Interface” on page 1-9
- “Burst Flash Memory Interface” on page 1-12
- “NAND Flash Interface” on page 1-12
- “SPI Interface” on page 1-13
- “SD Interface” on page 1-14
- “EPPI Interface” on page 1-14
- “LCD Module Interface” on page 1-15
- “Touchscreen Interface” on page 1-17
- “Keypad Interface” on page 1-18

- “Rotary Encoder Interface” on page 1-18
- “Ethernet Interface” on page 1-19
- “Audio Interface” on page 1-19
- “ATAPI Interface” on page 1-21
- “USB OTG Interface” on page 1-22
- “UART Interface” on page 1-22
- “CAN Interface” on page 1-23
- “Host Interface” on page 1-24
- “RTC Interface” on page 1-25
- “LEDs and Push Buttons” on page 1-25
- “JTAG Interface” on page 1-26
- “Expansion Interface” on page 1-26
- “Power Measurements” on page 1-27
- “Design Reference Information” on page 1-28
- “Power-On-Self Test” on page 1-28
- “Example Programs” on page 1-29
- “Background Telemetry Channel” on page 1-29

For information about the graphical user interface, including the boot loading, target options, and other facilities of the EZ-KIT Lite system, refer to the online Help.

For more detailed information about the ADSP-BF548 Blackfin processor, see documents referred to as “[Related Documents](#)”.

Package Contents

Your ADSP-BF548 EZ-KIT Lite evaluation system package contains the following items.

- ADSP-BF548 EZ-KIT Lite board
- *VisualDSP++ Installation Quick Reference Card*
- CD containing:
 - ✓ VisualDSP++ software
 - ✓ ADSP-BF548 EZ-KIT Lite debug software
 - ✓ USB driver files
 - ✓ Example programs
 - ✓ *ADSP-BF548 EZ-KIT Lite Evaluation System Manual*
- Universal 7.5V DC power supply
- 256 MB secure digital (SD) memory card
- 1 GB USB high-speed flash drive
- 7-foot Ethernet crossover cable
- 7-foot Ethernet patch cable
- Four 6-foot 3.5 mm male-to-male audio cables
- 3.5 mm headphones
- 10-foot USB A-B male cable for USB Debug Agent
- 5-in-1 cable and connectors for USB on-the-go (OTG) applications
- Ethernet loopback connector
- CAN loopback cable

If any item is missing, contact the vendor where you purchased your EZ-KIT Lite or contact Analog Devices, Inc.

Default Configuration

The EZ-KIT Lite evaluation system contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused EZ-KIT Lite boards in the protective shipping package.



The ADSP-BF548 EZ-KIT Lite board is designed to run outside your personal computer as a stand-alone unit. You do not have to open your computer case.

When removing the EZ-KIT Lite board from the package, handle the board carefully to avoid the discharge of static electricity, which can damage some components. [Figure 1-1](#) shows the default jumper settings, switches, connector locations, and LEDs used in installation. Confirm that your board is in the default configuration before using the board.

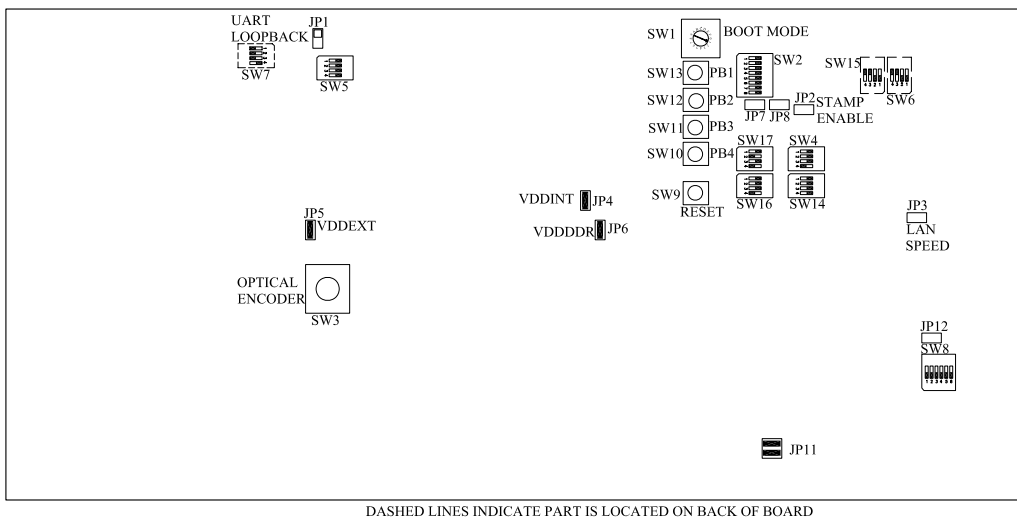


Figure 1-1. EZ-KIT Lite Hardware Setup

Installation and Session Startup

For correct operation, install the software and hardware in the order presented in the *VisualDSP++ Installation Quick Reference Card*.



There are two USB interfaces on the ADSP-BF548 EZ-KIT Lite. Be sure to use the debugger's interface (labelled `USB Debug Agent`) when connecting your computer to the board with provided USB cable. The other USB interface (labelled `USB-OTG`) is for applications use.

1. Verify that the yellow USB monitor LED (`ZLED3`, located near the USB connector) is lit. This signifies that the board is communicating properly with the host PC and is ready to run VisualDSP++.
2. If you are running VisualDSP++ for the first time, navigate to the VisualDSP++ environment via the **Start**→**Programs** menu. The main window appears. Note that VisualDSP++ does not connect to any session. Skip the rest of this step to step 3.

If you have run VisualDSP++ previously, the last opened session appears on the screen. You can override the default behavior and force VisualDSP++ to start a new session by pressing and holding down the **Ctrl** key while starting VisualDSP++. Do not release the **Ctrl** key until the **Session Wizard** appears on the screen. Go to step 4.

3. To connect to a new EZ-KIT Lite session, start **Session Wizard** by selecting one of the following.
 - From the **Session** menu, **New Session**.
 - From the **Session** menu, **Session List**. Then click **New Session** from the **Session List** dialog box.
 - From the **Session** menu, **Connect to Target**.

4. The **Select Processor** page of the wizard appears on the screen. Ensure **Blackfin** is selected in **Processor family**. In **Choose a target processor**, select **ADSP-BF548**. Click **Next**.
5. The **Select Connection Type** page of the wizard appears on the screen. Select **EZ-KIT Lite** and click **Next**.
6. The **Select Platform** page of the wizard appears on the screen. Ensure that the selected platform is **ADSP-BF548 EZ-KIT Lite via Debug Agent**. Specify your own **Session name** for your session or accept the default name.

The session name can be a string of any length; although, the box displays approximately 32 characters. The session name can include space characters. If you do not specify a session name, VisualDSP++ creates a session name by combining the name of the selected platform with the selected processor. The only way to change a session name later is to delete the session and to open a new session.

Click **Next**.

7. The **Finish** page of the wizard appears on the screen. The page displays your selections. Check the selections. If you are not satisfied, click **Back** to make changes; otherwise, click **Finish**. VisualDSP++ creates the new session and connects to the EZ-KIT Lite. Once connected, the main window's title is changed to include the session name set in step 6.



To disconnect from a session, click the disconnect button or select **Session->Disconnect from Target**.



To delete a session, select **Session -> Session List**. Select the session name from the list and click **Delete**. Click **OK**.

Evaluation License Restrictions

The ADSP-BF548 EZ-KIT Lite installation is part of the VisualDSP++ installation. The EZ-KIT Lite is a licensed product that offers an unrestricted evaluation license for the first 90 days. Once the initial unrestricted 90-day evaluation license expires:

- VisualDSP++ restricts a connection to the ADSP-BF548 EZ-KIT Lite via the USB debug agent interface only. Connections to simulators and emulation products are no longer allowed.
- The linker restricts a user's program to 60 KB of memory for code space with no restrictions for data space.
- The EZ-KIT Lite hardware must be connected and powered up to use VisualDSP++ with a valid evaluation or permanent license.

Refer to the *VisualDSP++ Installation Quick Reference Card* for details.

Memory Map

The ADSP-BF548 processor has internal static random access memory (SRAM), used for instruction or data storage; see [Figure 1-1](#). The internal memory details can be found in the *ADSP-BF548 Blackfin Processor Hardware Reference*.

The ADSP-BF548 EZ-KIT Lite board includes five types of external memory: double data rate (DDR), serial peripheral interconnect (SPI), burst flash, NAND, and secure digital (SD); see [Figure 1-2](#). For more information about a specific memory type, refer to the respective section in this chapter.

Memory Map

Table 1-1. EZ-KIT Lite Internal Memory Map

Start Address	Content
0xEF00 0000	BOOT ROM (4K BYTE)
0xEF00 1000	Reserved
0xFE80 0000	L2 SRAM (128K BYTE)
0xFEB2 0000 0xFF40 0000 0xFF40 4000 0xFF40 8000 0xFF50 0000 0xFF50 4000 0xFF50 8000 0xFF60 0000 0xFF60 4000 0xFF60 8000 0xFF60 C000 0xFF61 0000 0xFF61 4000 0xFF70 0000 0xFF70 1000	Reserved
0xFF80 0000	L1 DATA BANKA SRAM (16K BYTE)
0xFF80 4000	L1 DATA BANKA SRAM/CACHE (16K BYTE)
0xFF80 8000	Reserved
0xFF90 0000	L1 DATA BANKB SRAM (16K BYTE)
0xFF90 4000	L1 DATA BANKB SRAM/CACHE (16K BYTE)
0xFF90 8000	Reserved
0xFFA0 0000	L1 DATA BANKA LOWER SRAM (16K BYTE)
0xFFA0 4000	L1 DATA BANKA UPPER SRAM (16K BYTE)
0xFFA0 8000	Reserved
0xFFA0 C000	Reserved
0xFFA1 0000	L1 INSTRUCTION SRAM/CACHE (16K BYTE)

Table 1-1. EZ-KIT Lite Internal Memory Map (Cont'd)

Start Address	Content
0xFFA1 4000 0xFFA1 8000 0xFFA1 C000 0xFFA2 0000	L1 INSTRUCTION BANKB ROM (64K BYTE)
0xFFA2 4000	Reserved
0xFFB0 0000	L1 SCRATCHPAD SRAM (4K BYTE)
0xFFB0 1000	Reserved
0xFFC0 0000	SYSTEM MMR REGISTERS
0xFFE0 0000	CORE MMR REGISTERS

Table 1-2. EZ-KIT Lite External Memory Map

Start Address	End Address	Content
0x0000 0000	0x03FF FFFF	SDRAM bank 0 (SDRAM) See “DDR Interface” on page 1-9.
0x2000 0000	0x20FF FFFF	ASYNC memory bank 0 See “Burst Flash Memory Interface” on page 1-12.
0x2400 0000	0x2400 007F	ASYNC memory bank 1 See “Ethernet Interface” on page 1-19.
0x2800 0000	0x2BFF FFFF	ASYNC memory bank 2
0x2C00 0000	0x2FFF FFFF	ASYNC memory bank 3
0x3000 0000	0xEEFF FFFF	Reserved

DDR Interface

The ADSP-BF548 processor holds a built-in double data rate (DDR) SDRAM controller, which connects to a Micron MT46V32M16 32M x 16 bits (64 MB) DDR memory chip. The controller connects to the DDR memory bank 0 via the \sim DDRC_{SO} signal of the processor. The

DDR Interface

DDR memory chip is the only device connected to the processor's DDR interface. The DDR interface can operate at a maximum system clock (SCLK) frequency of 133 MHz.

There is a trade-off between selecting the maximum core clock (CCLK) of the processor and the maximum system clock. Consequently, the respective control registers must be initialized appropriately to get either maximum CCLK or maximum SCLK.

When you are in a VisualDSP++ session and connected to the EZ-KIT Lite board via the USB debug agent, the DDR registers are configured automatically with values listed in [Table 1-3](#) each time the processor is being reset. The values are used whenever DDR bank 0 is accessed through the debugger (for example, when viewing memory windows or loading a program).

To disable the automatic setting of the DDR registers, select **Target Options** from the **Settings** menu in VisualDSP++ and uncheck **Use XML reset values**. For more information on changing the reset values, refer to the online Help.

Table 1-3. DDR Default Settings with an 83 MHz to 133 MHz SCLK

Register	Value	Function
EBI U_DDRCTL0	0x218A8287	Calculated with SCLK = 83 MHz to 133 MHz 16-bit data path External buffering timing disabled tRC = 8 SCLK cycles tRAS = 6 SCLK cycles tRP = 2 SCLK cycles tRFC = 10 SCLK cycles tREFI = 0x0287 clock cycles

Table 1-3. DDR Default Settings with an 83 MHz to 133 MHz SCLK

Register	Value	Function
EBI_U_DDRCTL1	0x20022222	tWTR = 2 SCLK cycles Device size = 512 Mbit Device width = 16 bits Ext. banks = CS0 only Data width = 16 bits tWR = 2 SCLK cycles tMRD = 2 SCLK cycles tRCD = 2 SCLK cycles
EBI_U_DDRCTL2	0x00000021	Processor default values
EBI_U_AMGCTL	0x0009	Enables the EBIU of the processor to generate a clock out for all memory banks

Table 1-4 shows configuration of the PLL registers using a 120 MHz SCLK and a 133 MHz SCLK. The PLL_CTL and PLL_DIV registers need to be initialized in the user code to achieve maximum performance.

Table 1-4. PLL Register Settings

Register	SCLK = 133 MHz CCLK = 400 MHz	SCLK = 120 MHz CCLK = 600 MHz
PLL_CTL	0x2000	0x3000
PLL_DIV	0x3	0x5

Please remember that the DDR control register values in **Table 1-3** are for the SCLK set between 83 MHz and 133 MHz.

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the DDR interface. For more information on how to initialize the registers after a reset, search the VisualDSP++ online Help for “reset values”.

Burst Flash Memory Interface

The burst flash memory interface of the ADSP-BF548 EZ-KIT Lite holds a 32 MB (16M x 16-bits) Intel PC28F128K3C115 chip. Flash memory connects gluelessly to the processor and is mapped to the processor's external bank 0. This is accomplished by mapping the flash memory's chip enable pin to the \sim AMSO memory select pin of the processor. The address range for flash memory is 0x2000 0000 to 0x20FF FFFF.

Flash memory is pre-loaded with boot code for the blink and power-on-self test (POST) programs. For more information, refer to [“Power-On-Self Test” on page 1-28](#).

By default, the EZ-KIT Lite boots from 16-bit burst flash memory. The processor boots from the burst flash if the boot mode select switch (SW1) is set to a position of 1 (see [“Boot Mode Select Switch \(SW1\)” on page 2-15](#)).

The flash memory code can be modified. For instructions, refer to the online Help and example program included in the EZ-KIT Lite installation directory.

NAND Flash Interface

The ADSP-BF548 processor is equipped with an internal NAND flash controller, which allows the 2 Gbit ST Micro NAND02 device to be attached gluelessly to the processor. NAND flash is attached via the processor's specific NAND flash control lines and external eight-bit data bus on the EBIU interface. NAND flash shares the data bus with burst flash memory, Ethernet controller, ATAPI hard drive, and expansion interface. You can write to each of the mentioned peripherals, one peripheral at a time.

Refer to the ST Microelectronics Web site at <http://www.st.com/ston-line/products/families/memories/memory/index.htm> for more information.

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the NAND flash interface.

SPI Interface

The ADSP-BF548 processor has three serial peripheral interconnect (SPI) ports that share multi-function I/O pins. The processor's SPI port 0 connects directly to serial flash memory, AD7877 touchscreen controller, and expansion interface.

Serial flash memory is a 16 Mb ST Micro M25P16 device, which is selected using the `SPI_OSEL1` flag pin of the processor. SPI flash memory is pre-loaded with boot code for the blink and POST programs. For more information, refer to “[Power-On-Self Test](#)” on page 1-28. By default the EZ-KIT Lite boots from the 16-bit flash burst memory. The SPI flash can be used to boot up the processor by setting the boot mode select switch (SW1) to position 3 (see “[Boot Mode Select Switch \(SW1\)](#)” on page 2-15).

The SPI flash code can be modified. For instructions, refer to the VisualDSP++ online Help and example program included in the EZ-KIT Lite installation directory.

The AD7877 touchscreen controller for the LCD can be selected using the `SPI_OSEL2` flag pin of the processor. For more information, refer to “[Touchscreen Interface](#)” on page 1-17.

SPI ports 0 and 2 of the processor also connect to the expansion interface and can be accessed with an EZ-Extender[®] board that interfaces with the ADSP-BF548 EZ-KIT Lite. When using SPI port 0, use the processor's `SPI_OSEL3` flag pin on an EZ-Extender because `SPI_OSEL1` and `SPI_OSEL2` are dedicated for the serial flash and touchscreen controller, respectively.

SD Interface

Refer to the ST Microelectronics Web site at <http://www.st.com/ston-line/products/families/memories/memory/index.htm> for more information.

SD Interface

The ADSP-BF548 processor has a secure digital (SD) interface. The interface consists of a CLK pin, a command pin, and a four-bit data bus. The SD interface of the processor gluelessly connects to the on-board memory. The SD interface pins are not shared with other peripherals on the board. The memory can be written to in both one-bit and four-bit modes. The EZ-KIT Lite is accompanied with a 256 MB SD memory card plugged into the SD memory card connector (J5). For more information, refer to “SD Memory Card Connector (J5)” on page 2-35.

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the SD interface.

EPPI Interface

The ADSP-BF548 processor provides up to three enhanced parallel peripheral interfaces (EPPIs), supporting data widths up to 24 bits. Each EPPI interface is a half-duplex, bi-directional bus consisting of up to 24 bits of data, a dedicated clock, and synchronization signals. The EZ-KIT Lite board utilizes two EPPI ports. One port connects to a TFT LCD module, while the other port connects to the expansion interface and STAMP connector.

The PPIO interface is configured to output 18-bit or 24-bit data to an LCD module (see “LCD Module Interface” on page 1-15). The PPIO interface also connects to the expansion interface and can be used with an EZ-Extender board. When using the PPIO interface with an EZ-Extender board, the PPIO signals can be disconnected from the LCD module via the

SW14 and SW17 switches. Refer to [“LCD/PPI Configuration Switch \(SW14\)” on page 2-21](#) and [“LCD Module Configuration \(SW17\)” on page 2-23](#) for more information.

The PPI 1 interface connects to the LCD, STAMP connector, and expansion interface. Since the PPI 1 signals are connected to multi-function pins, the signals also can be configured for the host port and keypad interfaces. Refer to [“Keypad Interface” on page 1-18](#) for more information.

The PPI 1 interface has a dedicated clock, generated either internally or externally and configured independently by software via the PPI 1_SEL signal, which connects to PJ13. The clock source is the on-board 27 MHz oscillator or an external source via the expansion interface. The PPI 1_SEL signal is configured via the SW14 switch. Refer to [“LCD/PPI Configuration Switch \(SW14\)” on page 2-21](#) for more information.

LCD Module Interface

The EZ-KIT Lite features a Sharp LQ043T1DG01 TFT LCD module. This is a 4.3” landscape display with a resolution of 480 x 272 and a color depth of 18 or 24 bits.

[Table 1-5](#) lists the register values when the PPI 0 interface is configured for the LCD module. The values are obtained from the timing characteristics section of the LQ043T1DG01 data sheet.

Table 1-5. LCD Module Interface Settings

EPPI Register	Name	Data Sheet Symbol	Value
EPPI O_LINE	Samples per line	TH	525
EPPI O_FRAME	Lines per frame	TV	286
EPPI O_FS1W_HBL	Frame sync 1 width	THp	41
EPPI O_FS1P_AVPL	Frame sync 1 period	TH	525

LCD Module Interface

Table 1-5. LCD Module Interface Settings (Cont'd)

EPPI Register	Name	Data Sheet Symbol	Value
EPPI_O_HDELAY	Horizontal delay	THp + THf	43 (41 + 2)
EPPI_O_HCOUNT	Horizontal transfer count	THd	480
EPPI_O_FS2W_LVB	Frame sync 2 width	TH x TVp	5250 (525 x 10)
EPPI_O_FS2P_LAVF	Frame sync 2 period	H x TV	150150 (525 x 286)
EPPI_O_VDELAY	Vertical delay	TVp + TVf	12 (10 + 2)
EPPI_O_VCOUNT	Vertical transfer count	TVd	272
EPPI_O_CLKDIV	Clock divide register	N/A	0x07
EPPI_O_CONTROL (18 bit)	Control	N/A	0x12EE2F
EPPI_O_CONTROL (24 bit)	Control	N/A	0x136E2F

The LCD module connects to the EPPI_O port. The LCD interface can be configured to run in either 18-bit or 24-bit mode:

- In 24-bit mode, 16M colors are possible, and the PPI data is mapped as eight bits each of red, green, and blue. The D5–D0 signals of EPPI_1 are not available because the signals share pins with D18–23 of EPPI_0.
- In 18-bit mode, 256K colors are possible, and the PPI data is mapped as six bits each of red, green, and blue. Since the LCD is a 24-bit display, the lower two least significant bits of red, green, and blue are tied low.

Refer to [“LCD Module Configuration \(SW17\)” on page 2-23](#) for information on how to configure the board for 18-bit or 24-bit mode.

The LCD module can be disconnected from PPI0 by disabling signals on SW14 and SW17. Refer to [“LCD/PPI Configuration Switch \(SW14\)” on page 2-21](#) and [“LCD Module Configuration \(SW17\)” on page 2-23](#) for more information.

The DISP signal is generated internally by software via PE3.

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the LCD module.

Touchscreen Interface

The AD7877 touchscreen controller connects to the SPI0 interface. The controller provides the X and Y positions, as well as a measurement for the pressure applied to the touchscreen. The touchscreen can be used with either a stylus or a finger.

The AD7877 touchscreen controller connects to the SPI0 interface via the SPI0SEL2 control signal. Two interrupt signals connect to the device:

- The data available output (DAV) signal is mapped to PB4 and is used to notify the ADSP-BF548 processor that the new ADC data is available in the results register.
- The pen interrupt (PENIRQ) signal is mapped to PB5 and is used to notify the ADSP-BF548 processor that the screen has been touched.

Refer to [“LCD/PPI Configuration Switch \(SW14\)” on page 2-21](#) for information on how to configure the interrupt signals.

The STOPACQ pin connects to PPI0FS1. The STOPACQ signal is used to ensure that an acquisition never occurs during the noisy period when the LCD is being updated.

Keypad Interface

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the touchscreen controller.

Keypad Interface

The EZ-KIT Lite features a 4 x 4 keypad assembly connected to the keypad interface of the ADSP-BF548 processor. The keypad connects to the EZ-KIT Lite via a nine-pin connector (P1). The keypad interface of the processor shares the same multi-function pins as the EPPI 1 port and the host interface. Consequently, the same keypad pins connect to the host connector, PPI connector, and expansion interface. If you need to use the processor's pins for functions other than keypad, simply disconnect the keypad via the eight-position keypad switch (SW2). [For more information, see “Keypad Enable Switch \(SW2\)” on page 2-16.](#)

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the keypad interface.

Rotary Encoder Interface

The ADSP-BF548 processor has a built-in, up-down counter with support for a rotary encoder. The three-wire rotary encoder interface connects to the rotary switch (SW3) and host connector. The rotary encoder can be turned clockwise for the up function, counter clockwise for the down function, or can be used as a push button for clearing the counter.

If you need to use the processor pins for the host interface, disconnect the rotary encoder switch via the four-position rotary enable switch (SW4). [For more information, see “Rotary Encoder Enable Switch \(SW4\)” on page 2-17.](#)

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the rotary encoder interface.

Ethernet Interface

The EZ-KIT Lite has a fully functional, high-performance, single-chip Ethernet controller with HP Auto-MDIX and is fully compliant with IEEE 802.2/802.2u standards. The SMSC LAN9218 chip contains an integrated Ethernet MAC and PHY, supports 10BASE-T and 100BASE-TX operations. The part is attached gluelessly to the ADSP-BF548 processor via the asynchronous memory bus and is mapped directly to the processor's `~AMS1` memory bank. The valid address range for the Ethernet chip access is `0x2400 0000` through `0x2400 007F`. The `IRQ` signal of the Ethernet chip is mapped to the `PE8` flag pin of the processor and is connected via the `SW16` switch position 3. If `PE8` needs to be used elsewhere on the board, turn off the `SW16` switch to disconnect it from the Ethernet chip. [For more information, see “Peripheral Control Enable \(SW16\)” on page 2-22.](#)

The Ethernet chip is pre-loaded with a MAC address for the EZ-KIT Lite. The MAC address is stored in the Ethernet serial ROM (`U12`) and can be found on a sticker on the bottom side of the EZ-KIT Lite. The serial ROM is connected directly to the LAN9218 and is accessed via the Ethernet chip only.

The PHY portion of the Ethernet chip connects to a Pulse HX1188 (`U15`) magnetics, then to a standard RJ-45 Ethernet connector (`J4`). [For more information, see “Ethernet Connector \(J4\)” on page 2-34.](#)

Example programs are included in the EZ-KIT Lite installation directory to demonstrate the Ethernet interface.

Audio Interface

The audio interface of the EZ-KIT Lite consists of an Analog Devices AD1980 audio codec and its associated passive components. The AD1980 is a AC'97 2.3 compliant SoundMAX codec that supports 5.1 surround

Audio Interface

sound. The codec carries integrated DACs and requires minimal external circuitry. The codec connects to the ADSP-BF548 processor via the processor's serial port 0; the port is dedicated for the audio interface and does not connect to anything else on the board.

The codec connects to multiple connectors which allow you to get audio IN and OUT signals. Connector J10 can be used as a line or head phone out. J10 also can be configured via software as the front surround left and right channel or a 5.1 surround system. Connector J9 has two locations for plugging in 3.5 mm cables. The top location is the center channel on the left channel and the LFE out on the right channel. The bottom location of J9 is left and right back surround channels for a 5.1 surround system. Similarly to J9, J8 has two locations for 3.5 mm cables. The top location is for a stereo microphone, and the bottom location is for a stereo line in.

For more information, see “Dual Audio Connectors (J8 and J9)” on page 2-36 and “Audio Connector (J10)” on page 2-36.

The EZ-KIT Lite is shipped with a headphone and multiple 3.5 mm cables, which allow you to run the example programs provided in the EZ-KIT Lite installation directory and learn about the audio interface.

For more information on the AD1980 codec, please refer to the codec's data sheet at www.analog.com.

ATAPI Interface

The ADSP-BF548 processor has a built-in advanced technology attachment packet interface (ATA/ATAPI-6) controller that can be attached to any peripherals that support ATAPI standards. The EZ-KIT Lite is shipped with a 2.5" Toshiba 5V 40GB ATAPI hard disk drive. The ATAPI interface shares pins with other peripherals on the EZ-KIT Lite. Consequently, the ATAPI interface of the processor can connect to an ATAPI device (hard drive) via the PPI port pins or the external address and data bus. The EZ-KIT Lite is wired such that it connects the ATAPI hard drive to the processor via the external address and data bus.

Two external 5V tolerant bus switches (U4 and U24) are used between the 3.3V processor signals and the 5V ATAPI hard drive. U24 connects to all control signals of the ATAPI controller and is always enabled. U4 connects to the 16-bit data bus of the processor and is enabled with simple signal conditioning:

- When you write data to the hard drive, the FET switch U4 automatically connects the two devices together.
- When you do not use the ATAPI interface, the FET switch U4 is disconnected, and the processor does not see the capacitive load or the net traces associated with the hard disk drive.

Example programs are included in the EZ-KIT Lite installation directory to demonstrate the ATAPI controller and hard disk drive operations. For more information about Toshiba MK4032GAX, refer to the data sheet provided by the product's manufacturer.

For more information on the ATAPI interface, refer to the *ADSP-BF548 Blackfin Processor Hardware Reference*.

USB OTG Interface

The ADSP-BF548 processor has a built-in, high-speed USB on-the-go (OTG) interface and integrated PHY. This interface connects to a 24 MHz clock (U13), has surge protection, and can be configured as a host or device. When in device mode, the USB 5V regulator (VR1) and FET switch (U39) are turned OFF. When in host mode, the USB 5V regulator and FET are turned ON and can supply 5V at 500 mA.

The control mechanism to turn the two devices ON and OFF are via the PE7 flag pin of the processor. By default PE7 is set low or a logic '0' via a pull-down resistor, and both devices are turned OFF. If you are not using the USB OTG interface and would like to use the PE7 flag pin for other purposes, turn OFF position 2 on the SW16 switch. This disconnects the PE7 flag pin from both the VR1 regulator and U39 FET. [For more information, see “Peripheral Control Enable \(SW16\)” on page 2-22.](#)

The USB OTG interface has a mini-AB connector (P4); cables that plug into P4 are shipped with the EZ-KIT Lite.

Use the example programs in the EZ-KIT Lite installation directory to learn about the ADSP-BF548 processor's device and host modes. For more information on the USB interface, refer to the *ADSP-BF548 Blackfin Processor Hardware Reference*.

UART Interface

The *ADSP-BF548* processor has four built-in universal asynchronous receiver transmitters (UARTs). UART3–0 share the same processor pins as other peripherals on the EZ-KIT Lite. As a result, not all of the UARTs are available on the board: UART0 is not available on the board.

UART1 has full RS-232 functionality via the Analog Devices 3.3V ADM3202 (U32) line driver and receiver. The UART can be disconnected from the ADM3202 bit by turning OFF all positions on the SW7 switch. See

[“UART Enable Switch \(SW7\)” on page 2-19](#). When using UART1, jumpers JP1 and JP12 should not be installed. JP1 is a UART loopback jumper and should be installed only when running the POST program. JP12 is installed when you are not using the UART and need to use PP1FS3. See [“UART1 Loopback Jumper \(JP1\)” on page 2-26](#) and [“PP1FS3 Pull-down Jumper \(JP12\)” on page 2-30](#) for more information.

UART2 and UART3 are connected to the expansion interface. UART3 of the processor also is available via a STAMP connector (P12). See [“UART3 Connector \(P12\)” on page 2-41](#).

Example programs are included in the EZ-KIT Lite installation directory to demonstrate UART and RS-232 operations.

For more information on the UART interface, refer to the *ADSP-BF548 Blackfin Processor Hardware Reference*.

CAN Interface

The Controller Area Network (CAN) interface contains two Philips TJA1041 high-speed CAN transceivers. The two transceivers are connected to the CAN0 and CAN1 ports of the processor. Either of the CAN ports can be used to transmit or receive data. The PC0 programmable flag connects to the error and power-on indication output of CAN0 (CAN0_ERR). The PC5 programmable flag connects to the error and power-on indication output of CAN1 (CAN1_ERR). The transmit and receive pins for both transceivers connect to the dedicated CAN0 and CAN1 transmit and receive pins of the processor.

The CAN0 interface can be disconnected from the processor by turning OFF positions 1 through 4 of the SW6 switch. Similarly, the CAN1 interface can be disconnected from the processor by turning OFF positions 1 through 4 of the SW15 switch. When OFF, the signals can be used elsewhere on the board. See [“CAN0 Enable Switch \(SW6\)” on page 2-18](#) and [“CAN1 Enable Switch \(SW15\)” on page 2-22](#) for more information.

Host Interface

The CAN interface contains two 4-position modular connectors (see [“CAN Connectors \(J11 and J12\)” on page 2-36](#)).

Example programs are included in the EZ-KIT Lite installation directory to demonstrate CAN circuit operation.

Host Interface

The host DMA port of the Blackfin processor is available via a IDC 16x2 header (P3) on the EZ-KIT Lite. The port allows a host device external to the Blackfin processor to be a DMA master and transfer data back and forth.

When using the host interface port, the host device is the master, and the Blackfin processor is a DMA slave device. Since the host signals share pins with other peripherals on the EZ-KIT Lite, certain switches and jumpers must be OFF in order to use the host interface. When turning the switches or jumpers OFF, you disable the respective peripherals and are not able to evaluate the peripherals at the same time as the host interface. [Table 1-6](#) describes the jumpers and switches that must be OFF, the respective host interface signal associated with these jumpers or switches, and the peripherals that are affected by turning these jumpers or switches OFF.

Table 1-6. Host Interface


Switch or Jumper:	Host Signals Affected:	EZ-KIT Lite Peripheral Affected:
SW2 (all OFF)	PPI 1D[8: 15] /HPD[0: 7]	Keypad disabled
SW4 (all OFF)	HPACK, HPA, #HPCE	Rotary encoder disabled
SW5 (position 4 OFF)	HPWAI T	Push button 4 disabled
SW17 (position 3 OFF)	PPI 1D[0: 5] /HPD[8: 13]	LCD 24-bit mode disabled; LCD 18-bit mode operational
JP2 (OFF)	#HPCE, #HPRD, #HPWR	STAMP interface disabled; LED1–2 can not be used as global status indicators.

RTC Interface

The ADSP-BF548 processor has a real-time clock (RTC) and a watchdog timer. Typically the RTC interface is used to implement a real-time watch or a life counter of the time elapsed since the last system reset. The EZ-KIT Lite is equipped with a Panasonic lithium coin 3V 24 MM battery with a 1000 mAh. The 3V battery and the 3.3V supply of the board are connected to the `RTC` power pin of the processor. When the EZ-KIT Lite is powered, it uses the board power to supply voltage to the `RTC` pin. When the EZ-KIT Lite is not powered, it uses the lithium battery to maintain the power to the `RTC` pin.

The battery allows you to evaluate RTC functionality for the life of the EZ-KIT Lite. You can calculate your application's specific power requirements and use a much smaller battery in a custom design.

Example programs are included in the EZ-KIT Lite installation directory to demonstrate the RTC features.

 The EZ-KIT Lite is shipped with a protective Mylar sheet placed between the coin battery and the positive pin of the battery holder. Please remember to remove the Mylar sheet before trying to use RTC functionality of the processor.

For more information on the RTC and watchdog timer, refer to the *ADSP-BF548 Blackfin Processor Hardware Reference*.

LEDs and Push Buttons

The EZ-KIT Lite provides four push buttons and six LEDs for general-purpose I/O.

The six LEDs, labeled `LED1` through `LED6`, are accessed via the `PG6–11` pins of the processor. For information on how to program the pins, refer to the *ADSP-BF548 Blackfin Processor Hardware Reference*.

JTAG Interface

The four general-purpose push buttons are labeled PB1 through PB4. The status of each individual button can be read through programmable flag (PF) inputs, PF8–11. A PF reads 1 when a corresponding switch is being pressed. When the switch is released, the PF reads 0. A connection between the push button and PF input is established through the SW5 DIP switch. See “[Push Button Enable Switch \(SW5\)](#)” on page 2-18 for details.

An example program is included in the EZ-KIT Lite installation directory to demonstrate functionality of the LEDs and push buttons.

JTAG Interface

The JTAG emulation port allows an emulator to access the processor’s internal and external memory through a six-pin interface. The JTAG emulator port of the processor can be accessed via the on-board USB Debug Agent or with an external emulator via the JTAG connector (ZP4). When an external emulator connects to the board, the on-board USB Debug Agent is disabled. See “[JTAG Connector \(ZP4\)](#)” on page 2-42 for more information.

For more information on emulators, contact Analog Devices or go to: <http://www.analog.com/processors/blackfin/evaluationDevelopment/crosscore/>.

Expansion Interface

The expansion interface consists of three 90-pin connectors, J1–3. These connectors contain a majority of the ADSP-BF548 processor’s signals. For the pinout of the connectors, go to “[ADSP-BF548 EZ-KIT Lite Schematic](#)” on page B-1. The expansion interface allows an EZ-Extender or a custom-design daughter board to be tested across various hardware platforms. The mechanical dimensions of the expansion connectors can be obtained by contacting [Technical or Customer Support](#).

Analog Devices offers many EZ-Extender products. For more information about EZ-Extenders, visit the Analog Devices Web site at:

<http://www.analog.com/processors/blackfin/evaluation/development/crosscore/>.

Limits to current and interface speed must be taken into consideration when using the expansion interface. Because current for the expansion interface is sourced from the EZ-KIT Lite, the current should be limited to 1A for both the 5V and 3.3V planes. If more current is required, then a separate power connector and a regulator must be designed on a daughter card. Additional circuitry can add extra loading to signals, decreasing their maximum effective speed.



Analog Devices does not support and is not responsible for the effects of additional circuitry.

Power Measurements

Several locations are provided for measuring the current draw from various power planes. Precision 0.05 ohm shunt resistors are available on the VDDINT, VDDEXT, and VDDDDR pins. For the current draw measurements, the associated jumper (JP4, JP5, or JP6) should be removed. Once the jumper is removed, the voltage across the resistor can be measured using an oscilloscope. Once the voltage is measured, the current can be calculated by dividing the voltage by 0.05. For the highest accuracy, a differential probe should be used for measuring the voltage across the resistor.

For more information, see “VDDINT Power Jumper (JP4)”, “VDDEXT Power Jumper (JP5)”, and “VDDDDR Power Jumper (JP6)”.

Design Reference Information

A design reference info package is available for download on the Analog Devices Web site. The package provides information on the design, layout, fabrication, and assembly of the EZ-KIT Lite.

The information can be found at:

<http://www.analog.com/en/prod/0,2877,BF548%252DHARDWARE,00.html>.

Power-On-Self Test

Once assembled, each EZ-KIT Lite is fully tested for an extended period of time with a power-on-self test (POST). The POST tests all EZ-KIT Lite peripherals and validates functionality as well as connectivity to the processor. The POST is loaded into burst flash memory (U5) and can be activated by resetting the board and pressing the associated push button(s). The POST also can be used as a reference for a custom software design or hardware troubleshooting.

When running the POST, you may need to place switches and jumpers in specific test modes. In some instances, such as Ethernet, you may need to plug in an Ethernet loopback connector (provided with the EZ-KIT Lite) to run the POST. The user LEDs (LED1–6) will convey whether the specific tests have passed or failed.

The POST program is included in the EZ-KIT Lite installation directory. For more information, refer to the readme file in the POST directory.

Example Programs

Example programs are provided with the ADSP-BF548 EZ-KIT Lite to demonstrate various capabilities of the evaluation board. These programs are installed with the EZ-KIT Lite software and can be found in the `<install_path>\Blackfin\Examples\ADSP-BF548 EZ-KIT Lite VisualDSP++` directory. Please refer to the readme file provided with each example for more information.

Background Telemetry Channel

The ADSP-BF548 USB debug agent supports the background telemetry channel (BTC), which facilitates data exchange between VisualDSP++ and the processor without interrupting processor execution.

The BTC allows you to view a variable as it is updated or changed, all while the processor continues to execute. For increased performance of the BTC, including faster reading and writing, please check our latest line of processor emulators at:

<http://www.analog.com/processors/blackfin/evaluationDevelopment/crosscore/>. For more information about the background telemetry channel, see the *VisualDSP++ User's Guide* or online Help.

Background Telemetry Channel

2 ADSP-BF548 EZ-KIT LITE

HARDWARE REFERENCE

This chapter describes the hardware design of the ADSP-BF548 EZ-KIT Lite board.

The following topics are covered.

- [“System Architecture” on page 2-2](#)
Describes the ADSP-BF548 EZ-KIT Lite board configuration and explains how the board components interface with the processor.
- [“Programmable Flags” on page 2-3](#)
Shows the locations and describes the programming flags (PFs).
- [“Push Button and Switch Settings” on page 2-15](#)
Shows the location and describes the push buttons and switches.
- [“Jumpers” on page 2-25](#)
Shows the location and describes the configuration jumpers.
- [“LEDs” on page 2-31](#)
Shows the location and describes the LEDs.
- [“Connectors” on page 2-33](#)
Shows the locations and provides part numbers for the on-board connectors. In addition, the manufacturer and part number information is provided for the mating parts.

System Architecture

This section describes the processor's configuration on the EZ-KIT Lite board (Figure 2-1).

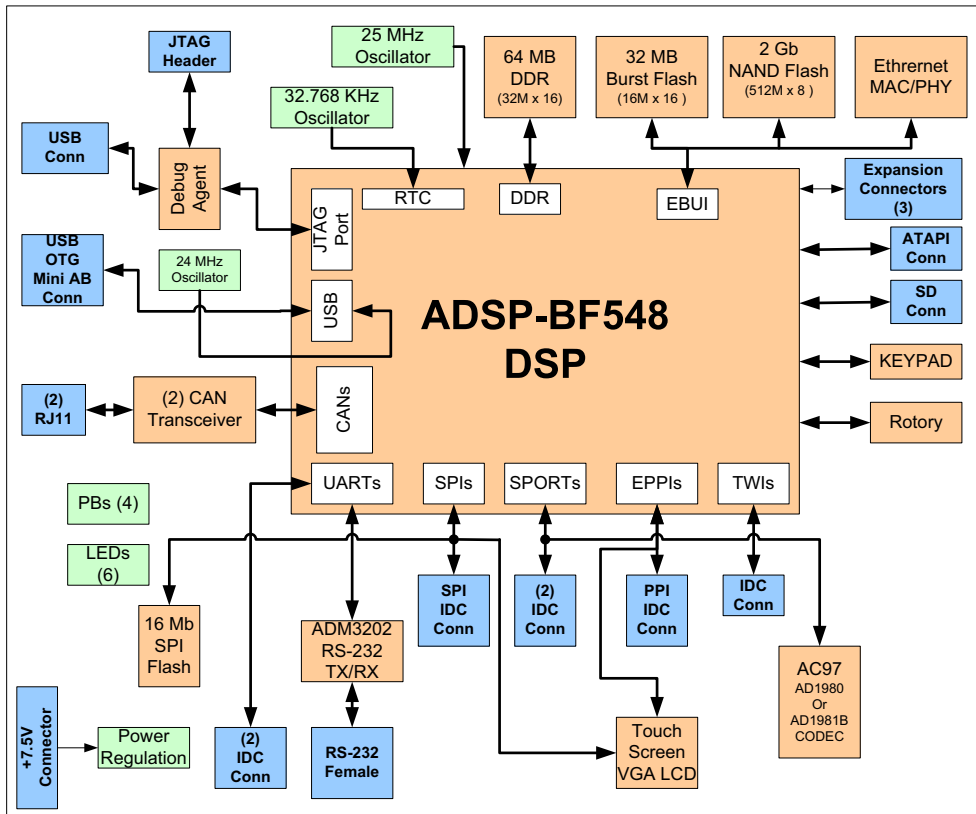


Figure 2-1. System Architecture

This EZ-KIT Lite is designed to test the ADSP-BF548 processor capabilities. The processor has an I/O voltage of 3.3V. The core voltage of the processor is controlled by the internal voltage regulator.

The core voltage and clock rate can be set on the fly by the processor. The input clock is 25 MHz. A 32.768 kHz crystal supplies the real-time clock (RTC) inputs of the processor. The default boot mode for the processor is burst flash boot. See [“Boot Mode Select Switch \(SW1\)” on page 2-15](#) for information on how to change the default boot mode.

Programmable Flags

The processor has 153 general-purpose input/output (GPIO) signals spread across ten ports (PA, PB, PC, PD, PE, PF, PG, PH, PI, and PJ). The pins are multi-functional and depend on the ADSP-BF548 processor setup. The following tables show how the programmable flag pins are used on the EZ-KIT Lite.

PA programmable flag pins in [Table 2-1](#)

PF programmable flag pins in [Table 2-6](#)

PB programmable flag pins in [Table 2-2](#)

PG programmable flag pins in [Table 2-7](#)

PC programmable flag pins in [Table 2-3](#)

PH programmable flag pins in [Table 2-8](#)

PD programmable flag pins in [Table 2-4](#)

PI programmable flag pins in [Table 2-9](#)

PE programmable flag pins in [Table 2-5](#)

PJ programmable flag pins in [Table 2-10](#)

Table 2-1. PA Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PA0	TFS2	Expansion interface, SPORT2 connector
PA1	DT2SEC/TMR4	Expansion interface, SPORT2 connector
PA2	DT2PRI	Expansion interface, SPORT2 connector
PA3	TSCLK2	Expansion interface, SPORT2 connector
PA4	RFS2	Expansion interface, SPORT2 connector
PA5	DR2SEC/TMR5	Expansion interface, SPORT2 connector
PA6	DR2PRI	Expansion interface, SPORT2 connector

Programmable Flags

Table 2-1. PA Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PA7	RSCLK2/TACLK0	Expansion interface, SPORT2 connector
PA8	TFS3/TACLK1	Expansion interface, SPORT3 connector
PA9	DT3SEC/TMR6	Expansion interface, SPORT3 connector
PA10	DT3PRI /TACLK2	Expansion interface, SPORT3 connector
PA11	TSCLK3/TACLK3	Expansion interface, SPORT3 connector
PA12	RFS3/TACLK4	Expansion interface, SPORT3 connector
PA13	DR3SEC/TMR7/TACLK5	Expansion interface, SPORT3 connector
PA14	DR3PRI /TACLK6	Expansion interface, SPORT3 connector
PA15	RSCLK3/TACLK7 and TACI 7	Expansion interface, SPORT3 connector

Table 2-2. PB Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PB0	SCL1	Expansion interface, TWI connector
PB1	SDA1	Expansion interface, TWI connector
PB2	UART3RTS	Default: PPI 1CLK Mux select via SW14. 3. Expansion interface
PB3	UART3CTS	Default: audio codec reset via SW16. 1. Expansion interface
PB4	UART2TX	Default: LCD data available via SW14. 1. Expansion interface
PB5	UART2RX/TACI 2	Default: LCD IRQ via SW14. 2. Expansion interface
PB6	UART3TX	Expansion interface, UART3 connector
PB7	UART3RX/TACI 3	Expansion interface, UART3 connector
PB8	SPI 2SS/TMRO	Default: PB1 via SW5. 1. Expansion interface, timers connector, SPORT2–3 connectors

Table 2-2. PB Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PB9	SPI 2SEL1/TMR1	Default: PB2 via SW5. 2. Expansion interface, timers connector, UART3 connector, SPORT2–3 connectors
PB10	SPI 2SEL2/TMR2	Default: PB3 via SW5. 3. Expansion interface, timers connector, UART3 connector, SPORT2–3 connectors
PB11	SPI 2SEL3/BOOTWAIT	Default: PB4 via SW5. 4. Expansion interface, host interface connector. NOR RESET via SW16. 4.
PB12	SPI 2SCK	Expansion interface
PB13	SPI 2MOSI	Expansion interface
PB14	SPI MISO	Expansion interface

Table 2-3. PC Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PC0	TFSO	Default: CAN0 via SW6. 3 SPI connector, TWI connector, SPORT2–3 connectors
PC1	DT0SEC/MMCLK	Not used
PC2	DT0PRI	Audio codec data pin
PC3	TSCLKO	Audio codec clock pin
PC4	RFSO	Audio codec sync pin
PC5	DROSEC/MBCLK	Default: CAN1 via SW15. 3 SPI connector, TWI connector, SPORT2–3 connectors
PC6	DROPRI	Audio codec data pin
PC7	RSCLKO	Audio codec clock pin
PC8	SD_DO	SD memory data pin

Programmable Flags

Table 2-3. PC Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PC9	SD_D1	SD memory data pin
PC10	SD_D2	SD memory data pin
PC11	SD_D3	SD memory data pin
PC12	SD_CLK	SD memory clock pin
PC13	SD_CMD	SD memory command pin

Table 2-4. PD Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PD0	PPI 1_D0/HOST_D8/ TFS1/PPI O_D18	Default: LCD module via SW17. 3. Host interface connector, expansion inter- face, PPI 1 connector
PD1	PPI 1_D1/HOST_D9/ DT1SEC/PPI O_D19	Default: LCD module via SW17. 3. Host interface connector, expansion inter- face, PPI 1 connector
PD2	PPI 1_D2/HOST_D10/ DT1PRI /PPI O_D20	Default: LCD module via SW17. 3. Host interface connector, expansion inter- face, PPI 1 connector
PD3	PPI 1_D3/HOST_D11/ TSCLK1/PPI O_D21	Default: LCD module via SW17. 3. Host interface connector, expansion inter- face, PPI 1 connector
PD4	PPI 1_D4/HOST_D12/ RFS1/PPI O_D22	Default: LCD module via SW17. 3. Host interface connector, expansion inter- face, PPI 1 connector
PD5	PPI 1_D5/HOST_D13/ DR1SEC/PPI O_D23	Default: LCD module via SW17. 3. Host interface connector, expansion inter- face, PPI 1 connector
PD6	PPI 1_D6/HOST_D14/ DR1PRI	Host interface connector, expansion inter- face, PPI 1 connector
PD7	PPI 1_D7/HOST_D15/ RSCLK1	Host interface connector, expansion inter- face, PPI 1 connector

Table 2-4. PD Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PD8	PPI 1_D8/HOST_D0/ PPI 2_D0/KEY_ROW0	Default: keypad via SW2. 8. Host interface connector, expansion interface, PPI 1 connector
PD9	PPI 1_D9/HOST_D1/ PPI 2_D1/KEY_ROW1	Default: keypad via SW2. 7. Host interface connector, expansion interface, PPI 1 connector
PD10	PPI 1_D10/HOST_D2/ PPI 2_D2/KEY_ROW2	Default: keypad via SW2. 6. Host interface connector, expansion interface, PPI 1 connector
PD11	PPI 1_D11/HOST_D3/ PPI 2_D3/KEY_ROW3	Default: keypad via SW2. 5. Host interface connector, expansion interface, PPI 1 connector
PD12	PPI 1_D12/HOST_D4/ PPI 2_D4/KEY_COL0	Default: keypad via SW2. 4. Host interface connector, expansion interface, PPI 1 connector
PD13	PPI 1_D13/HOST_D5/ PPI 2_D5/KEY_COL1	Default: keypad via SW2. 3. Host interface connector, expansion interface, PPI 1 connector
PD14	PPI 1_D14/HOST_D6/ PPI 2_D6/KEY_COL2	Default: keypad via SW2. 2. Host interface connector, expansion interface, PPI 1 connector
PD15	PPI 1_D15/HOST_D7/ PPI 2_D7/KEY_COL3	Default: keypad via SW2. 1. Host interface connector, expansion interface, PPI 1 connector

Table 2-5. PE Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PE0	SPI OSCK/KEY_COL7	SPI memory, LCD touchscreen controller, expansion interface
PE1	SPI OMI S0/KEY_ROW6	SPI memory, LCD touchscreen controller, expansion interface

Programmable Flags

Table 2-5. PE Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PE2	SPI OMOSI /KEY_COL6	SPI memory, LCD touchscreen controller, expansion interface
PE3	SPI OSS/KEY_ROW5	Default: LCD DISP via SW14. 4. Expansion interface
PE4	SPI OSEL1/KEY_COL5	Default: SPI memory. Expansion interface
PE5	SPI OSEL2/KEY_ROW4	Default: LCD touchscreen controller Expansion interface
PE6	SPI OSEL3/KEY_COL4	Expansion interface
PE7	UART0TX/KEY_ROW7	Default: USB OTG VR1 and U39 enable via SW16. 2. Expansion interface
PE8	UART0RX/TACIO	Default: Ethernet IRQ via SW16. 3. Expansion interface
PE9	UART1RTS	UART1 serial port via SW7. 3
PE10	UART1CTS	UART1 serial port via SW7. 1
PE11	PPI 1_CLK	Expansion interface, PPI 1 connector
PE12	PPI 1_FS1	Expansion interface, PPI 1 connector
PE13	PPI 1_FS2	Expansion interface, PPI 1 connector
PE14	SCL0	Expansion interface, SPORT2–3 connectors, PPI 1 connector
PE15	SDA0	Expansion interface, SPORT2–3 connectors, PPI 1 connector

Table 2-6. PF Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PF0	PPI O_D0	Default: LCD module via SW17. Expansion interface
PF1	PPI O_D1	Default: LCD module via SW17. Expansion interface
PF2	PPI O_D2	Default: LCD module via SW17. Expansion interface
PF3	PPI O_D3	Default: LCD module via SW17. Expansion interface
PF4	PPI O_D4	Default: LCD module via SW17. Expansion interface
PF5	PPI O_D5	Default: LCD module via SW17. Expansion interface
PF6	PPI O_D6	Default: LCD module via SW17. Expansion interface
PF7	PPI O_D7	Default: LCD module via SW17. Expansion interface
PF8	PPI O_D8	Default: LCD module via SW17. Expansion interface
PF9	PPI O_D9	Default: LCD module via SW17. Expansion interface
PF10	PPI O_D10	Default: LCD module via SW17. Expansion interface
PF11	PPI O_D11	Default: LCD module via SW17. Expansion interface
PF12	PPI O_D12	Default: LCD module via SW17. Expansion interface
PF13	PPI O_D13	Default: LCD module via SW17. Expansion interface

Programmable Flags

Table 2-6. PF Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PF14	PPI O_D14	Default: LCD module via SW17. Expansion interface
PF15	PPI O_D15	Default: LCD module via SW17. Expansion interface

Table 2-7. PG Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PG0	PPI O_CLK/TMRCLK	Default: LCD module via SW17. Expansion interface
PG1	PPI O_FS1	Default: LCD module via SW17. Expansion interface
PG2	PPI O_FS2	Default: LCD module via SW17. Expansion interface
PG3	PPI O_D16	Default: LCD module via SW17. Expansion interface
PG4	PPI O_D17	Default: LCD module via SW17. Expansion interface
PG5	SPI 1SEL1/HOST_CE/ PPI 2_FS2/ C2M	Default: rotary encoder via SW4. 3. Host interface connector SPI connector via JP2 SPORT2 connector via JP2 SPORT3 connector via JP2 PPI 1 connector via JP2
PG6	SPI 1SEL2/HOST_RD/ PPI 2_FS1	Default: LED1. Expansion interface Host interface connector SPI connector via JP2 SPORT2 connector via JP2 SPORT3 connector via JP2 PPI 1 connector via JP2

Table 2-7. PG Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PG7	SPI 1SEL3/HOST_WR/ PPI 2_CLK	Default: LED2. Expansion interface Host interface connector SPI connector via JP2 SPORT2 connector via JP2 SPORT3 connector via JP2
PG8	SPI 1SCK	Default: LED3. Expansion interface SPI connector via JP2 SPORT2 connector via JP2 SPORT3 connector via JP2 PPI 1 connector via JP2
PG9	SPI 1MI SO	Default: LED4. Expansion interface SPI connector via JP2 SPORT2 connector via JP2 SPORT3 connector via JP2 PPI 1 connector via JP2
PG10	SPI 1MOSI	Default: LED5. Expansion interface SPI connector via JP2, JP7, and JP8 SPORT2 connector via JP2, JP7, and JP8 SPORT3 connector via JP2, JP7, and JP8 PPI 1 connector via JP2, JP7, and JP8
PG11	SPI 1SS/MTX0N	Default: LED6. Expansion interface SPI connector via JP2 SPORT2 connector via JP2 SPORT3 connector via JP2 PPI 1 connector via JP2
PG12	CAN0TX	CAN0
PG13	CAN0RX/TAC1 4	Default: CAN0 via SW6. 4 SPI connector, TWI connector, timers connector, SPORT2–3 connectors, PPI 1 connector

Programmable Flags

Table 2-7. PG Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PG14	CAN1TX	CAN1
PG15	CAN1RX/TAC1 5	Default: CAN1 via SW15. 4 SPI connector, TWI connector, timers connector, SPORT2–3 connectors, PPI 1 connector

Table 2-8. PH Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PH0	UART1_TX/PPI 1_FS3	Default: UART1 serial port. Expansion interface, PPI 1 connector
PH1	UART1_RX/PPI 2_FS3/TAC1 1	Default: UART1 serial port via SW7. 2. Expansion interface
PH2	ATAPI_RESET/TMR8/ PPI 0_FS3	ATAPI reset; expansion interface
PH3	HOST_ADDR/TMR9/CUD	Default: rotary encoder via SW4. 2. Host interface connector
PH4	HOST_ACK/TMR10/CDG	Default: rotary encoder via SW4. 1. Host interface connector
PH5	MTX/DMAR0/TAC1 8 and TACLK8	Not used
PH6	MRX/DMAR1/TAC1 9 and TACLK9	Not used
PH7	MRXON/BOOTWAIT/TAC1 10 and TACLK10	Expansion interface, host interface connector
PH8	A4	Address line on burst flash memory, Ethernet controller, expansion interface
PH9	A5	Address line on burst flash memory, Ethernet controller, expansion interface
PH10	A6	Address line on burst flash memory, Ethernet controller, expansion interface

Table 2-8. PH Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PH11	A7	Address line on burst flash memory, Ethernet controller, expansion interface
PH12	A8	Address line on burst flash memory, expansion interface
PH13	A9	Address line on burst flash memory, expansion interface

Table 2-9. PI Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PI 0	A10	Address line on burst flash memory, expansion interface
PI 1	A11	Address line on burst flash memory, expansion interface
PI 2	A12	Address line on burst flash memory, expansion interface
PI 3	A13	Address line on burst flash memory, expansion interface
PI 4	A14	Address line on burst flash memory, expansion interface
PI 5	A15	Address line on burst flash memory, expansion interface
PI 6	A16	Address line on burst flash memory, expansion interface
PI 7	A17	Address line on burst flash memory, expansion interface
PI 8	A18	Address line on burst flash memory, expansion interface
PI 9	A19	Address line on burst flash memory, expansion interface

Programmable Flags

Table 2-9. PI Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PI 10	A20	Address line on burst flash memory, expansion interface
PI 11	A21	Address line on burst flash memory, expansion interface
PI 12	A22	Address line on burst flash memory, expansion interface
PI 13	A23	Address line on burst flash memory, expansion interface
PI 14	A24	Address line on burst flash memory, expansion interface
PI 15	A25/NORCLK	Clock for burst flash memory

Table 2-10. PJ Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PJ0	ARDY/WAI T	WAI T for burst flash memory, expansion interface
PJ1	ND_CE	Chip enable for NAND
PJ2	ND_RB	Ready/busy for NAND
PJ3	ATAPI _DI ORB	ATAPI (hard disk drive) interface
PJ4	ATAPI _DI OWB	ATAPI (hard disk drive) interface
PJ5	ATAPI _CS0B	ATAPI (hard disk drive) interface
PJ6	ATAPI _CS1B	ATAPI (hard disk drive) interface
PJ7	ATAPI _DMACKB	ATAPI (hard disk drive) interface
PJ8	ATAPI _DMARQ	ATAPI (hard disk drive) interface
PJ9	ATAPI _I NTRQ	ATAPI (hard disk drive) interface
PJ10	ATAPI _I ORDY	ATAPI (hard disk drive) interface
PJ11	BR	Expansion interface

Table 2-10. PJ Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PJ12	BG	Expansion interface
PJ13	BGH	Expansion interface

Push Button and Switch Settings

This section describes operation of the push buttons and switches. The push button and switch locations are shown in [Figure 2-2](#).

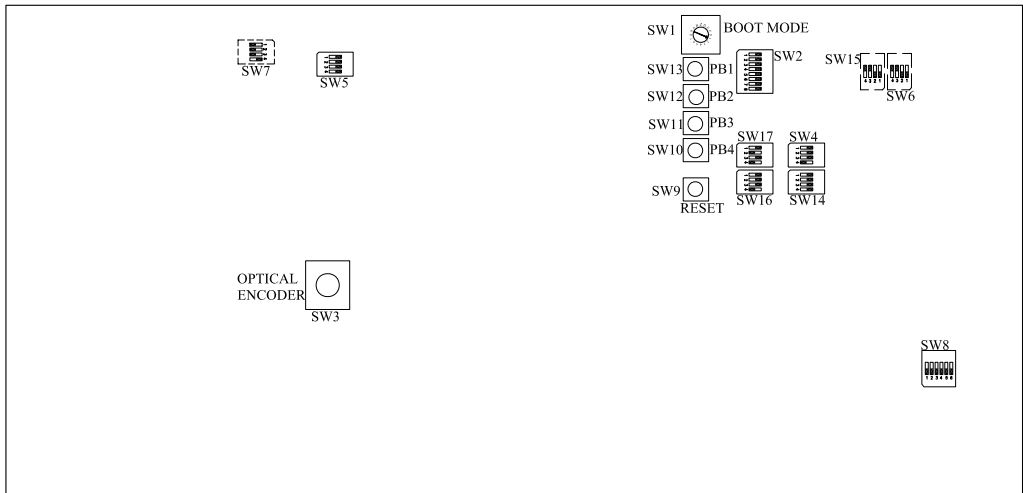


Figure 2-2. Push Button and Switch Locations

Boot Mode Select Switch (SW1)

The rotary switch (SW1) determines the boot mode of the processor. [Table 2-11](#) shows the available boot mode settings. By default the ADSP-BF548 processor boots from the on-board burst flash memory.

Push Button and Switch Settings

Table 2-11. Boot Mode Select Switch (SW1)

SW1 Position	Processor Boot Mode
0	Idle—no boot
1	Boot from 16-bit burst flash memory (default)
2	Boot from 16-bit asynchronous FIFO
3	Boot from serial SPI memory
4	Boot from SPI host device
5	Boot from serial TWI memory
6	Boot from TWI host
7	Boot from UART host
8–9	Reserved
A	Boot from double-data rate (DDR) SDRAM
B, C, D	Reserved
E	Boot from 16-bit host DMA
F	Boot from eight-bit host DMA

Keypad Enable Switch (SW2)

The keypad enable switch (SW2) disconnects the keypad signals from the GPIO pins of the processor. When the switch is OFF, its associated GPIO signals can be used on the PPI 1 port, host interface, or expansion interface (see [Table 2-12](#)).

Table 2-12. Keypad Enable Switch (SW2)

EZ-KIT Lite Signal	SW2 Switch Position (Default)	Processor Signal
PPI 1D15/HPD7/KPC3	1 (ON)	PD15
PPI 1D14/HPD6/KPC2	2 (ON)	PD14
PPI 1D13/HPD5/KPC1	3 (ON)	PD13

Table 2-12. Keypad Enable Switch (SW2) (Cont'd)

EZ-KIT Lite Signal	SW2 Switch Position (Default)	Processor Signal
PPI 1D12/HPD4/KPC0	4 (ON)	PD12
PPI 1D11/HPD3/KPR3	5 (ON)	PD11
PPI 1D10/HPD2/KPR2	6 (ON)	PD10
PPI 1D9/HPD1/KPR1	7 (ON)	PD9
PPI 1D8/HPD0/KPR0	8 (ON)	PD8

Rotary Encoder with Momentary Switch (SW3)

The rotary encoder can be turned clockwise for an up count or counter-clockwise for a down count. The encoder also features a momentary switch that allows you to zero the counter. The rotary encoder can be disabled from the processor by using the rotary encoder enable switch (SW4). See [“Rotary Encoder Enable Switch \(SW4\)”](#) for more information.

Rotary Encoder Enable Switch (SW4)

The rotary encoder enable switch (SW4) disconnects the rotary encoder signals from the GPIO pins of the processor. When the switch is OFF, its associated GPIO signals can be used on the host interface (see [Table 2-13](#)).

Table 2-13. Rotary Encoder Enable Switch (SW4)

EZ-KIT Lite Signal	SW4 Switch Position (Default)	Processor Signal
HPACK/CNTCUD	1 (ON)	PH4
HPA/CNTCDG	2 (ON)	PH3
#HPCE/CNTCZM	3 (ON)	PG5
N/A	4 (OFF)	N/A

Push Button Enable Switch (SW5)

The push button enable switch (SW5) disconnects the associated push button circuit from the GPIO pins of the processor. When SW5 is OFF, the associated GPIO signals can be used on the expansion interface, host interface, or STAMP (0.1" IDC) headers (see [Table 2-14](#)).

Table 2-14. Push Button Enable Switch (SW5)

Push Button	EZ-KIT Lite Signal	SW5 Switch Position (Default)	Processor Signal
PB1 (SW13)	PUSHBUTTON1	1 (ON)	PB8
PB2 (SW12)	PUSHBUTTON2	2 (ON)	PB9
PB3 (SW11)	PUSHBUTTON3	3 (ON)	PB10
PB4 (SW10)	PUSHBUTTON4/HPWAI T	4 (ON)	PB11

CAN0 Enable Switch (SW6)

The CAN0 enable switch (SW6) disconnects the CAN0 signals from the GPIO pins of the processor and deactivates the CAN0 transceiver (U21). When SW6 is in the default positions (shown in [Table 2-15](#)), the switch connects to CAN0; otherwise, the associated GPIO signal of SW6 can be used as a STAMP GPIO.

Table 2-15. CAN0 Enable Switch (SW6)

CAN0 Signal	EZ-KIT Lite Signal	SW6 Switch Position (Default)	Processor Signal
ENABLE	N/A	1 (OFF)	N/A
STANDBY	N/A	2 (OFF)	N/A
ERROR	CAN0_ERR	3 (ON)	PC0
RECEIVE DATA	CANORX	4 (ON)	PG13

UART Enable Switch (SW7)

The UART enable switch (SW7) disconnects the UART1 signals from the GPIO pins of the processor. When the switch is OFF, the associated GPIO signal of SW7 can be used elsewhere on the board (see [Table 2-16](#)).

Table 2-16. UART Enable Switch (SW7)

EZ-KIT Lite Signal	SW7 Switch Position (Default)	Processor Signal
UART1CTS	1 (ON)	PE10
UART1_RX	2 (ON)	PH1
UART1RTS	3 (ON)	PE9
N/A	4 (OFF)	N/A

Audio Loopback Test Switch (SW8)

The audio loopback test switch (SW8) connects the inputs signals of the audio interface to the output signals. This allows the EZ-KIT Lite to be placed in a loopback test mode for signal and circuit continuity and functionality (see “[Power-On-Self Test](#)” on [page 1-28](#)). All positions of the switch should be ON when running POST. In all other cases, the switch should be kept OFF. [Table 2-17](#) shows the default settings for the SW8 switch.

Table 2-17. Audio Loopback Test Switch (SW8)

EZ-KIT Lite Input Signal	SW8 Switch Position (Default)	EZ-KIT Lite Output Signal
LI NEI N_L	1 (OFF)	SURROUT_L
LI NEI N_R	2 (OFF)	SURROUT_R
LI NEI N_L	3 (OFF)	CENTER_OUT
LI NEI N_R	4 (OFF)	LFE_OUT

Push Button and Switch Settings

Table 2-17. Audio Loopback Test Switch (SW8) (Cont'd)

EZ-KIT Lite Input Signal	SW8 Switch Position (Default)	EZ-KIT Lite Output Signal
MI C_L	5 (OFF)	LI NEOUT_L
MI C_R	6 (OFF)	LI NEOUT_R

Reset Push Button (SW9)

The reset push button (SW9) resets all of the ICs on the board. One exception is the USB interface chip. The chip is not reset when the push button is pressed after the USB cable has been plugged in and communication with the PC has been initialized correctly. After USB communication has been initialized, the only way to reset the USB chip is by powering down the board.

Programmable Flag Push Buttons (SW10–13)

Four momentary push buttons (SW10–13) are provided for general-purpose user input. The buttons connect to the PB11–8 programmable flag pins of the processor. The push buttons are active high and, when pressed, send a high (1) to the processor. The push button enable switch (SW5) disconnects the push buttons from the corresponding PB signal (refer to [“Push Button Enable Switch \(SW5\)” on page 2-18](#) for more information). The programmable flag signals and associated switches are shown in [Table 2-18](#).

Table 2-18. Programmable Flag Switches

Push Button	EZ-KIT Lite Signal	Processor Signal
PB1 (SW13)	PUSHBUTTON1	PB8
PB2 (SW12)	PUSHBUTTON2	PB9
PB3 (SW11)	PUSHBUTTON3	PB10
PB4 (SW10)	PUSHBUTTON4/HPWAIT	PB11

LCD/PPI Configuration Switch (SW14)

The LCD/PPI configuration switch (SW14) connects the GPIO pins of the processor to the LCD or PPI configuration pins:

- SW14 position 1 connects PB4 to the data available output (DAV) of the touchscreen controller (U9).
- SW14 position 2 connects PB5 to the pen interrupt output (PENIRQ) of the touchscreen controller (U9).
- SW14 position 3 connects PB2 to the PPI 1CLK multiplexer (U20). This allows you to connect the PPI 1CLK to the clock signal generated on the expansion interface or the on-board 27 MHz oscillator (U19).
- SW14 position 4 connects PE3 to the DI SP signal of the LCD via the LCD data connector (P15).

When SW14 is OFF, its associated GPIO signals can be used on the expansion interface (see [Table 2-19](#)).

Table 2-19. LCD/PPI Configuration Switch (SW14)

EZ-KIT Lite Signal	SW14 Switch Position (Default)	Processor Signal
LCD_DAV	1 (ON)	UART2TX/PB4
LCD_IRQ	2 (ON)	UART2RX/PB5
PPI_1_SEL	3 (ON)	UART3RTS/PB2
LCD_DI SP	4 (ON)	PE3

CAN1 Enable Switch (SW15)

The CAN1 enable switch (SW15) disconnects the CAN1 signals from the GPIO pins of the processor and deactivates the CAN1 transceiver (U33). When SW15 is in the default positions (shown in [Table 2-20](#)), the switch connects to CAN1. When otherwise, the associated GPIO signal of SW15 can be used as a STAMP GPIO.

Table 2-20. CAN1 Enable Switch (SW15)

CAN1 Signal	EZ-KIT Lite Signal	SW15 Switch Position (Default)	Processor Signal
ENABLE	N/A	1 (OFF)	N/A
STANDBY	N/A	2 (OFF)	N/A
ERROR	CAN1_ERR	3 (ON)	PC5
RECEIVE DATA	CAN1RX	4 (ON)	PG15

Peripheral Control Enable (SW16)

The peripheral control enable (SW16) connects the GPIO pins of the processor to the enable pins of the audio codec, USB regulator, or Ethernet controller:

- SW16 position 1 connects PB3 to the reset pin of the audio codec (U11). This allows the audio codec to be reset via software.
- SW16 position 2 connects PE7 to the 5 volt VBUS USB regulator (VR1) and FET switch (U39). This allows the software to control the enable pins of both the regulator and the FET switch if the VBUS line is powered with 5 volts by some other host device. When in USB OTG host mode, the signal needs to be a logic 1. This will cause the EZ-KIT to supply the 5V to the VBUS line. When in

USB OTG device mode, the signal needs to be a logic 0. This will allow the host device to power the VBUS line and allow the Blackfin processor to remain in device mode.

- SW16 position 3 connects PE8 to the interrupt signal of the Ethernet controller (U14).
- SW16 position 4 connects PB11 to the reset of burst flash memory. This allows the software to reset the burst flash. In order to use this signal as a reset for burst flash, SW5.4 needs to be set OFF. When the signal is used as a reset for the burst flash, the HOSTWAIT signal and PB4 are not be available. By default the switch is set to OFF and is not used.

When the switch is OFF, its associated GPIO signals can be used on the expansion interface (see [Table 2-21](#)).

Table 2-21. Peripheral Control Enable (SW16)

EZ-KIT Lite Signal	SW16 Switch Position (Default)	Processor Signal
AUDIO_RESET	1 (ON)	UART3CTS/PB3
USB_VRSEL	2 (ON)	PE7
LAN_IRQ	3 (ON)	PE8
NOR_RESET	4 (OFF)	PB11 (PUSHBUTTON4/HPWAIT)

LCD Module Configuration (SW17)

The LCD module configuration switch (SW17) is used to set up the LCD module in 24-bit mode, 18-bit mode, or to disconnect the LCD in order to use the processor EPPI signals on other areas of the board. The default setting is for the LCD module to operate in 24-bit mode; the corresponding switch settings are shown in [Table 2-22](#). To operate the LCD module in 18-bit mode, set SW17 as shown in [Table 2-23](#).

Push Button and Switch Settings

In order to disconnect the LCD module so that PPI 1 or PPI 0 can be used elsewhere on the board, follow the settings in [Table 2-24](#). When the switch is OFF, its associated PPI 1 and PPI 0 signals can be used on the expansion interface, host interface, or STAMP PPI 1 header.

Table 2-22. LCD Module Configuration in 24-bit Mode (SW17)

SW17 Switch Position (Default)	Processor Signal	EZ-KIT Lite Signal
1 (ON)	PPI 0CLK PPI 0FS1 PPI 0FS2	LCD_PPI 0CLK LCD_PPI 0FS1 LCD_PPI 0FS2
2 (OFF)	PPI 0D[0–17]	LCD_R[2–7] LCD_G[2–7] LCD_B[2–7]
3 (ON)	PPI 0D[0–17] PPI 1D[0–5]/HPD[8–13]	LCD_R[0–7] LCD_G[0–7] LCD_B[0–7]
4 (OFF)	N/A	N/A

Table 2-23. LCD Module Configuration in 18-bit Mode (SW17)

SW17 Switch Position	Processor Signal	EZ-KIT Lite Signal
1 (ON)	PPI 0CLK PPI 0FS1 PPI 0FS2	LCD_PPI 0CLK LCD_PPI 0FS1 LCD_PPI 0FS2
2 (ON)	PPI 0D[0–17]	LCD_R[2–7] LCD_G[2–7] LCD_B[2–7]
3 (OFF)	PPI 0D[0–17] PPI 1D[0–5]/HPD[8–13]	LCD_R[0–7] LCD_G[0–7] LCD_B[0–7]
4 (OFF)	N/A	N/A

Table 2-24. LCD Module Configuration Disconnected (SW17)

SW17 Switch Position	Processor Signal	EZ-KIT Lite Signal
1 (OFF)	PPI OCLK PPI OFS1 PPI OFS2	LCD_PPI OCLK LCD_PPI OFS1 LCD_PPI OFS2
2 (OFF)	PPI OD[0–17]	LCD_R[2–7] LCD_G[2–7] LCD_B[2–7]
3 (OFF)	PPI OD[0–17] PPI ID[0–5] /HPD[8–13]	LCD_R[0–7] LCD_G[0–7] LCD_B[0–7]
4 (OFF)	N/A	N/A

Jumpers

This section describes functionality of the configuration jumpers. [Figure 2-3](#) shows the jumper locations.

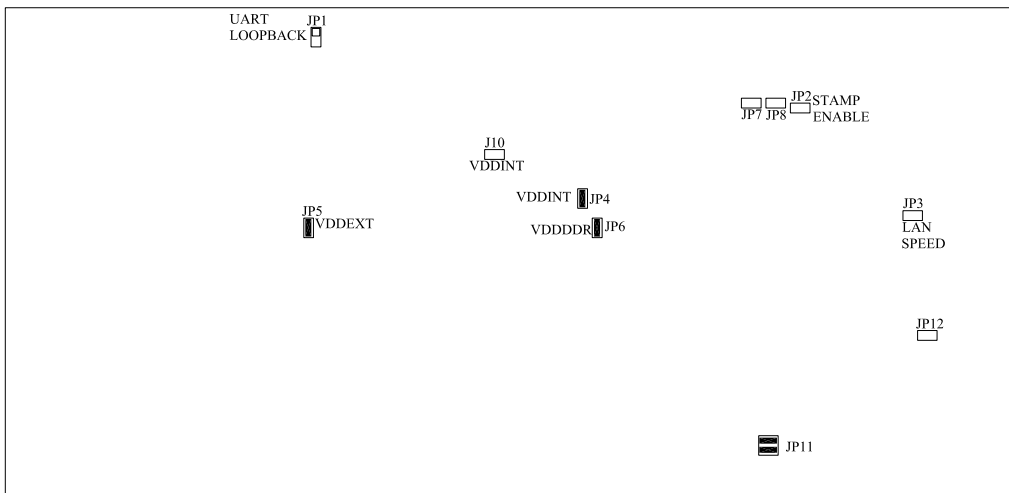


Figure 2-3. Configuration Jumper Locations

UART1 Loopback Jumper (JP1)

The UART1 loopback jumper (JP1) is used to place the UART1 port of the processor in a loopback condition. The jumper connects the UART1_TX line of the processor to the UART1_RX signal of the processor. The jumper is required only when the power-on-self-test (POST) is used to test the serial port interface. The jumper setting is shown in [Table 2-25](#).

Table 2-25. UART1 Loopback Jumper (JP1)

JP1 Setting	Mode
OFF	Normal operation. UART1_TX to UART1_RX is disconnected (default)
ON	Loopback operation. Connects UART1_TX to UART1_RX

SPI1 Enable Jumper (JP2)

The SPI1 enable jumper (JP2) activates a buffer and enables the SPI1 port of the processor to be connected to the STAMP headers. The default for these signals is the buffer being disabled, and the SPI1 port not connecting to the STAMP headers. Be aware that using the SPI1 port and its associated signals will disable the user LEDs (LED1–6) because the port and LEDs share the same pins on the processor. The jumper setting is shown in [Table 2-26](#).

Table 2-26. SPI1 Enable Jumper (JP2)

JP2 Setting	Mode
OFF	SPI1 port deactivated (default)
ON	SPI1 port activated

Ethernet Speed Select Jumper (JP3)

The Ethernet speed select jumper (JP3) selects the speed of the LAN9218 Ethernet controller. No jumper is required by default. The default setting operates the LAN9218 (U14) in 100 Mbps mode and enables auto negotiation. When JP3 is populated, the controller operates in 10 Mbps mode with auto negotiation disabled. The jumper setting is shown in [Table 2-27](#).

Table 2-27. Ethernet Speed Select Jumper (JP3)

JP3 Setting	Mode
OFF	LAN9218 in 100 Mbps mode; auto negotiation ON (default)
ON	LAN9218 in 10 Mbps mode; auto negotiation OFF

VDDINT Power Jumper (JP4)

The VDDINT power jumper (JP4) is used to measure the core voltage and current supplied to the processor core. By default JP4 is ON, and the power flows through the two-pin IDC header. To measure power, remove the jumper and measure the voltage across the 0.05 ohm resistor. Once the voltage is measured, the power can be calculated. For more information, refer to [“Power Measurements” on page 1-27](#). The jumper setting is shown in [Table 2-28](#).

Table 2-28. VDDINT Power Jumper (JP4)

JP4 Setting	Mode
ON	No power measurement (default)
OFF	For power measurement

VDDEXT Power Jumper (JP5)

The VDDEXT power jumper (JP5) is used to measure the processor's I/O voltage and current. By default JP5 is ON, and the power flows through the two-pin IDC header. To measure power, remove the jumper and measure the voltage across the 0.05 ohm resistor. Once the voltage is measured, the power can be calculated. For more information, refer to [“Power Measurements” on page 1-27](#). The jumper setting is shown in [Table 2-29](#).

Table 2-29. VDDINT Power Jumper (JP5)

JP5 Setting	Mode
ON	No power measurement (default)
OFF	For power measurement

VDDDDR Power Jumper (JP6)

The VDDDDR power jumper (JP6) is used to measure the voltage and current supplied to the DDR interface of the processor. By default JP6 is ON, and the power flows through the two-pin IDC header. To measure power, remove the jumper and measure the voltage across the 0.05 ohm resistor. Once the voltage is measured, the power can be calculated. For more information, refer to [“Power Measurements” on page 1-27](#). The jumper setting is shown in [Table 2-30](#).

Table 2-30. VDDDDR Power Jumper (JP6)

JP6 Setting	Mode
ON	No power measurement (default)
OFF	For power measurement

MOSI1 Out Jumper (JP7)

The MOSI out jumper (JP7) connects the PG10/MOSI 1 pin of the processor to the STAMP headers. To flow data from the processor to the STAMP headers, connect the jumper. To flow data from the STAMP headers to the processor, do not populate the header but the JP8 jumper. Be aware that using the SPI 1 port and its associated signals will disable the user LEDs (LED1–6) because the port and LEDs share the same pins on the processor. The jumper setting is shown in [Table 2-31](#).

Table 2-31. MOSI1 Out Jumper (JP7)

JP7 Setting	Mode
OFF	No connection between the MOSI1 of the processor to the STAMP headers (default)
ON	MOSI 1 of the processor transmitting data to the STAMP headers

MOSI1 In Jumper (JP8)

The MOSI in jumper (JP8) connect the PG10/MOSI 1 pin of the processor to the STAMP headers. To flow data to the processor from the STAMP headers, connect the jumper. To flow data to the STAMP headers from the processor, do not populate the header but the JP7 jumper. Be aware that using the SPI 1 port and its associated signals disable the user LEDs (LED1–6) because the port and LEDs share the same pins on the processor. The jumper setting is shown in [Table 2-32](#).

Table 2-32. MOSI1 In Jumper (JP8)

JP8 Setting	Mode
OFF	No connection between the MOSI1 of the processor to the STAMP headers (default)
ON	MOSI 1 of the processor receiving data from the STAMP headers

USB OTG Power Jumper (JP11)

The USB on-the-go (OTG) power jumper (JP11) connects the supply voltage for the USB OTG interface to the supply voltage of the USB interface of the processor. JP11 should always be populated. The jumper setting is shown in [Table 2-33](#).

Table 2-33. USB OTG Power Jumper (JP11)

USB Power for	JP11 Pins 1 and 3	JP11 Pins 2 and 4
ADSP-BF548 processor	ON	ON

PPI1FS3 Pull-down Jumper (JP12)

The PPI1FS3 pull-down jumper (JP12) connects the PPI1FS3 signal of the processor to GND via a pull-down resistor. The jumper should be used when the processor pin is being used for EPPI, and the PPI1FS3 pin is not used. The pull-down assures that the PPI1FS3 signal is not floating and is used for certain modes of the EPPI interface, in which the signal needs to be low. Be aware that installing this jumper while using the serial port (J6) will cause data communication errors on the UART1. By default JP12 is not populated. The jumper setting is shown in [Table 2-34](#).

Table 2-34. PPI1FS3 Pull-down Jumper (JP12)

JP12 Setting	Mode
OFF	No pull-down resistor to GND on PPIFS3/UART1_TX; Using the serial port J6 (default)
ON	Pull-down resistor connected to GND on PPI FS3/UART1_TX; Not using the serial port J6

LEDs

This section describes the on-board LEDs. [Figure 2-3](#) shows the LED locations.

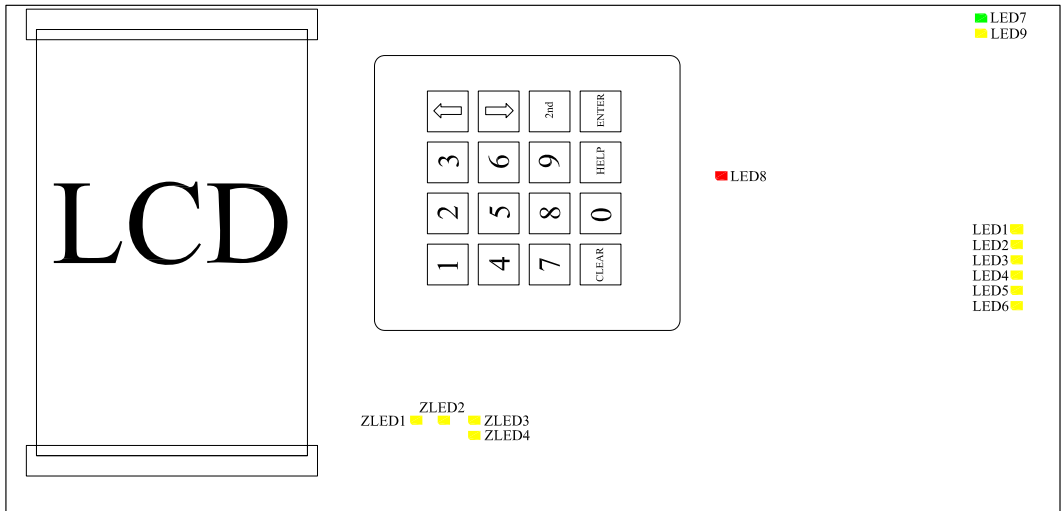


Figure 2-4. LED Locations

User LEDs (LED1–6)

Six LEDs connect to six general-purpose I/O pins of the processor (see [Table 2-35](#)). The LEDs are active high and are lit by writing a 1 to the correct PG signal.

Table 2-35. User LEDs

LED Reference Designator	Processor Programmable Flag Pin
LED1	PG6
LED2	PG7

LEDs

Table 2-35. User LEDs (Cont'd)

LED Reference Designator	Processor Programmable Flag Pin
LED3	PG8
LED4	PG9
LED5	PG10
LED6	PG11

Power LED (LED7)

When LED7 is lit (green), it indicates that power is being properly supplied to the board.

Reset LED (LED8)

When LED8 is lit, it indicates that the master reset of all the major ICs is active. The reset LED is controlled by the Analog Devices ADM708 supervisory reset circuit. You can assert the reset push button (SW9) to assert the master reset and to activate LED8. [For more information, see “Reset Push Button \(SW9\)” on page 2-20.](#)

Ethernet Link/Activity LED (LED9)

When LED9 is lit solid, it indicates that the SMSC LAN9218 (U14) chip detects a valid link. When transmit or receive activity is sensed, LED9 flashes as an activity indicator. For more information on the LED, refer to the LAN9218 data sheet provided by the product manufacturer.

Connectors

This section describes connector functionality and provides information about mating connectors. The connector locations are shown in [Figure 2-5](#).

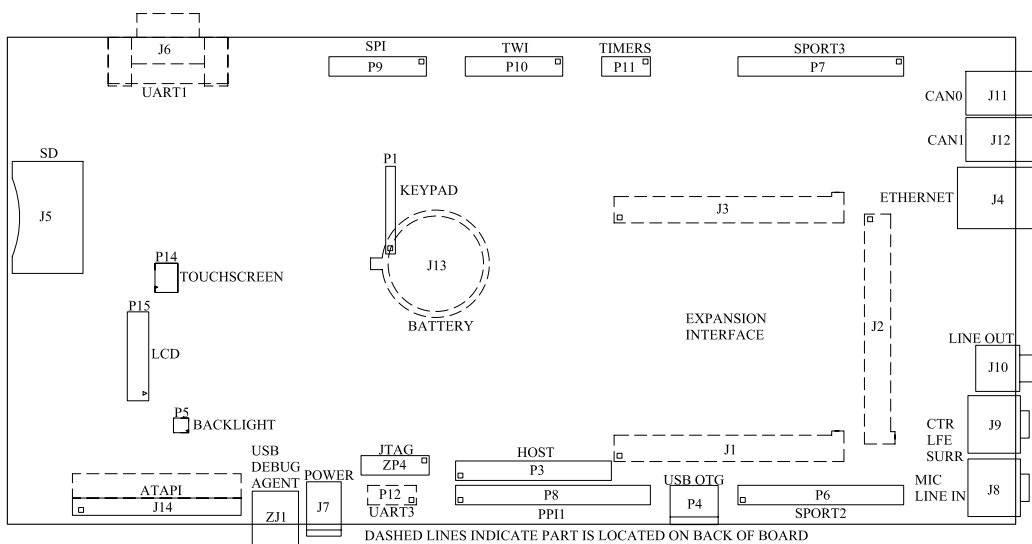


Figure 2-5. Connector Locations

Connectors

Expansion Interface Connectors (J1–3)

Three board-to-board connector footprints provide signals for most of the processor's peripheral interfaces. The connectors are located at the bottom of the board. For more information, see [“Expansion Interface” on page 1-26](#). For the availability and pricing of the J1–3 connectors, contact Samtec.

Part Description	Manufacturer	Part Number
90-position 0.05" spacing, SMT	SAMTEC	SFC-145-T2-F-D-A
Mating Connector		
90-position 0.05" spacing (through hole)	SAMTEC	TFM-145-x1 series
90-position 0.05" spacing (surface mount)	SAMTEC	TFM-145-x2 series
90-position 0.05" spacing (low cost)	SAMTEC	TFC-145 series

Ethernet Connector (J4)

Part Description	Manufacturer	Part Number
RJ-45 Ethernet jack	STEWART	SS-6488-NF
Mating Cable (shipped with EZ-KIT Lite)		
Cat 5E patch cable	RANDOM	PC10/100T-007
Cat 5E crossover cable	RANDOM	PC10/100TC-007
Mating Connector (shipped with EZ-KIT Lite)		
RJ-45 loopback connector	RANDOM	RAN830

SD Memory Card Connector (J5)

Part Description	Manufacturer	Part Number
SD 9-pin connector	ITT CANON	CCM05-5777LFT T50
Mating Memory Card (shipped with EZ-KIT Lite)		
256 MB	SanDISK	SDSDB-256-A10

RS-232 Connector (J6)

Part Description	Manufacturer	Part Number
DB9, female, right angle mount	TYCO	5747844-4
Mating Cable		
2m female-to-female cable	DIGI-KEY	AE1020-ND

Power Connector (J7)

The power connector provides all of the power necessary to operate the EZ-KIT Lite board.

Part Description	Manufacturer	Part Number
2.5 mm power jack	SWITCHCRAFT	RAPC712X
Mating Power Supply (shipped with EZ-KIT Lite)		
7.5VDC@4A power supply	CUI INC	DTS075400UDC-P6P-DB

Connectors

Dual Audio Connectors (J8 and J9)

Part Description	Manufacturer	Part Number
3.5 mm dual stereo jack	SWITCHCRAFT	35RAPC7JS
Mating Cable (shipped with EZ-KIT Lite)		
3.5mm male/male 6' cable	RANDOM	10A3-01106
Mating Headphone (shipped with EZ-KIT Lite)		
3.5 mm stereo headphones	KOSS	151225 UR5

Audio Connector (J10)

Part Description	Manufacturer	Part Number
3.5 mm stereo jack	SWITCHCRAFT	RAPC712X
Mating Cable (shipped with EZ-KIT Lite)		
3.5mm male/male 6' cable	RANDOM	10A3-01106
Mating Headphone (shipped with EZ-KIT Lite)		
3.5 mm stereo headphones	KOSS	151225 UR5

CAN Connectors (J11 and J12)

Part Description	Manufacturer	Part Number
RJ11 4-pin modular jack	TYCO	5558872-1
Mating Cable		
4-conductor modular jack cable	L-COM	TSP3044
Mating Loopback Cable (shipped with EZ-KIT Lite)		
4-conductor modular jack cable	RANDOM	RAN290

Battery Holder (J13)

Part Description	Manufacturer	Part Number
24 mm battery holder	KEystone	1025-7
Mating Battery (shipped with EZ-KIT Lite)		
3V 1000MAH 24 mm LI-COIN	PANASONIC	CR2477

ATAPI Connector (J14)

Part Description	Manufacturer	Part Number
ATAPI 44-pin 22 x 2 mm	SAMTEC	ASP-130199-02
Mating Hard Drive (shipped with EZ-KIT Lite)		
5V ATAPI hard disk drive	TOSHIBA	MK4032GAX

Keypad Connector (P1)

Part Description	Manufacturer	Part Number
IDC header female	SAMTEC	SSW-109-01-TM-S
Mating Keypad (shipped with EZ-KIT Lite)		
4 x 4 keypad	ACT COMPONENTS	ACT-07-30008-000-R

Host Interface Connector (P3)

The pinout of the P3 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	SAMTEC	TSW-116-26-T-D
Mating Connector		
IDC socket	SAMTEC	TSW-116-01-T-D

USB OTG Connector (P4)

The pinout of the P4 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
USB 5-pin mini AB	MOLEX	56579-0576
Mating Cables (shipped with EZ-KIT Lite)		
5-in-1 USB 2.0 cable	JO-DAN INTERNAT	GXQU-06

LCD Backlight Connector (P5)

Part Description	Manufacturer	Part Number
FPC 4-pin 0.5 mm	KYOCERA ELCO	046298004000883+
Mating LCD Display Module (shipped with EZ-KIT Lite)		
4" TFT LCD with touchscreen	SHARP	LQ043T1DG01

SPORT2 Connector (P6)

The pinout of the P6 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-434HLF
Mating Connector		
IDC socket	DIGI-KEY	S4217-ND

SPORT3 Connector (P7)

The pinout of the P7 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-434HLF
Mating Connector		
IDC socket	DIGI-KEY	S4217-ND

PPI1 Connector (P8)

The pinout of the P8 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-440HLF
Mating Connector		
IDC socket	DIGI-KEY	S4220-ND

Connectors

SPI Connector (P9)

The pinout of the P9 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-420HLF
Mating Connector		
IDC socket	DIGI-KEY	S4210-ND

Two-Wire Interface Connector (P10)

The pinout of the P10 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-420HLF
Mating Connector		
IDC socket	DIGI-KEY	S4210-ND

TIMERS Connector (P11)

The pinout of the P11 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-410HLF
Mating Connector		
IDC socket	DIGI-KEY	S4205-ND

UART3 Connector (P12)

The pinout of the P12 connector can be found in [“ADSP-BF548 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-410HLF
Mating Connector		
IDC socket	DIGI-KEY	S4205-ND

LCD Touchscreen Connector (P14)

Part Description	Manufacturer	Part Number
FPC 4-pin 1mm	JST	04FMS-1.0SP-TF(LF)(SN)
Mating LCD Display Module (shipped with EZ-KIT Lite)		
4" TFT LCD with touchscreen	SHARP	LQ043T1DG01

LCD Data Connector (P15)

Part Description	Manufacturer	Part Number
FPC 40-pin 0.5mm	HIROSE	FH12-40S-0.5SH(55)
Mating LCD Display Module (shipped with EZ-KIT Lite)		
4" TFT LCD with touchscreen	SHARP	LQ043T1DG01

USB Debug Agent Connector (ZJ1)

The USB debug agent connector is the connecting point for the JTAG USB debug agent interface. The JTAG header (ZP4) should not be used whenever ZJ1 and its mating cable are used to communicate to the processor via VisualDSP++.

JTAG Connector (ZP4)

The JTAG header is the connecting point for a JTAG in-circuit emulator pod. When an emulator connects to the JTAG header, the USB debug interface is disabled.

Pin 3 is missing to provide keying. Pin 3 in the mating connector should have a plug.

When using an emulator with the EZ-KIT Lite board, follow the connection instructions provided with the emulator.

A ADSP-BF548 EZ-KIT LITE BILL OF MATERIALS

The bill of materials corresponds to “[ADSP-BF548 EZ-KIT Lite Schematic](#)” on page B-1.

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
1	2	74LVC14A SOIC14	U10,U30	TI	74LVC14AD
2	1	IDT74FCT3244 APY SSOP20	U29	IDT	IDT74FCT3244APYG
3	1	24.576MHZ OSC005	Y1	EPSON	MA-505 24.5760M-C3:ROHS
4	1	25MHZ OSC005	Y3	EPSON	MA-505 25.0000 MHZ
5	1	32.768KHZ OSC008	Y2	EPSON	MC-156-32.7680KA- A0:ROHS
6	1	25MHZ OSC003	U7	EPSON	SG-8002CA MP
7	2	SN74LVC1G08 SOT23-5	U25,U31	TI	SN74LVC1G08DBVR
8	2	TJA1041 SOIC14	U21,U33	PHILIPS	TJA1041T
9	1	FDS9431A SOIC8	U28	FAIRCHILD	FDS9431A
10	1	NAND02 TSOP48	U3	ST MICRO	NAND02GW3B2CN6E
11	1	27MHZ OSC003	U19	EPSON	SG-8002CA-MP

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
12	2	FDS9926A SOIC8	U22-23	MOUSER	512-FDS9926A
13	1	SI4411DY SO-8	U16	VISHAY	Si4411DY-T1-E3
14	1	HX1188 ICS007	U15	DIGI-KEY	553-1340-ND
15	1	LAN9218 TQFP100	U14	SMSC	LAN9218-MT
16	1	24MHZ OSC003	U13	EPSON	SG-8002CA-MP
17	1	MT46V32M16 TSOP66	U1	MICRON	MT46V32M16P-5B:F
18	1	BF548 PC28F128P33 "U5"	U5	INTEL	PC28F128P33T85
19	1	SN74LVC1G02 SOT23-5	U35	DIGI-KEY	296-11597-1-ND
20	2	SN74CB3Q1621 1 TSSOP56	U37-38	DIGI-KEY	296-17629-1-ND
21	1	SN74CB3Q3245 TSSOP20	U36	DIGI-KEY	296-19130-1-ND
22	1	MIC2025-1 SOIC8	U39	DIGI-KEY	576-1057-ND
23	1	93LC46A SOIC8	U12	MICROCHIP	93LC46A-E/SN
24	1	BF548 M25P16 "U6"	U6	ST MICRO	M25P16-VMW6G
25	1	CBT3244A SSOP20	U26	DIGI-KEY	568-3620-5-ND
26	2	SN74CB3T1621 0 TSSOP48	U4,U24	DIGI-KEY	296-19147-1-ND
27	1	ADM708SARZ SOIC8	U27	ANALOG DEVICES	ADM708SARZ

ADSP-BF548 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
28	3	ADP3336ARMZ MSOP8	VR1-2,VR5	ANALOG DEVICES	ADP3336ARMZ-REEL7
29	1	ADG752BRTZ SOT23-6	U20	ANALOG DEVICES	ADG752BRTZ-REEL
30	1	ADM3202ARNZ SOIC16	U32	ANALOG DEVICES	ADM3202ARNZ
31	1	ADSP-BF548 MBGA400	U2	ANALOG DEVICES	ADSP-BF548BBCZ-5X
32	1	ADP1864AUJZ SOT23-6	VR3	ANALOG DEVICES	ADP1864AUJZ-R7
33	1	ADP1823 LFCSP32	VR7	ANALOG DEVICES	ADP1823ACPZ-R7
34	1	AD7877 LFCSP32	U9	ANALOG DEVICES	AD7877ACPZ-500RL7
35	1	AD1980 LQFP48	U11	ANALOG DEVICES	AD1980JSTZ
36	1	ADP1611 MSOP8	VR8	ANALOG DEVICES	ADP1611ARMZ-R7
37	1	ADP1715 MSOP8	VR4	ANALOG DEVICES	ADP1715ARMZ-R7
38	1	PWR 2.5MM_JACK CON005	J7	SWITCH- CRAFT	RAPC712X
39	3	.05 45X2 CON019	J1-3	SAMTEC	SFC-145-T2-F-D-A
40	1	DIP8 SWT016	SW2	C&K	TDA08H0SB1
41	1	DIP6 SWT017	SW8	CTS	218-6LPST
42	8	DIP4 SWT018	SW4-7,SW14-17	ITT	TDA04HOSB1
43	1	DB9 9PIN DB9F	J6	TYCO	5747844-4
44	2	RJ11 4PIN CON039	J11-12	TYCO	5558872-1

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
45	7	IDC 2X1 IDC2X1	JP2-8	FCI	90726-402HLF
46	2	IDC 2X1 IDC2X1	JP1,JP12	FCI	90726-402HLF
47	2	IDC 5X2 IDC5X2	P11-12	FCI	68737-410HLF
48	2	IDC 10X2 IDC10X2	P9-10	BURG-FCI	54102-T08-10LF
49	2	IDC 17X2 IDC17X2	P6-7	BURG-FCI	54102-T08-17LF
50	1	IDC 20X2 IDC20X2	P8	BURG-FCI	54102-T08-20LF
51	1	IDC 2X2 IDC2X2	JP11	FCI	68737-404HLF
52	1	3.5MM STEREO_JACK CON001	J10	DIGI-KEY	CP1-3525NG-ND
53	1	5A RESETABLE FUS005	F1	MOUSER	650-RGEF500
54	1	ROTARY SWT023	SW1	DIGI-KEY	563-1047-ND
55	1	ROTARY_ENC ODER SWT022	SW3	CTS	290UAB0R201B2
56	2	3.5MM DUAL_STEREO CON050	J8-9	SWITCH- CRAFT	35RAPC7JS
57	1	SD_CONN 9PIN CON051	J5	DIGI-KEY	401-1954-ND
58	1	IDC 16x2 IDC16x2	P3	SAMTEC	TSW-116-26-T-D
59	1	USB_MINI-AB 5PIN CON052	P4	MOLEX	56579-0576

ADSP-BF548 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
60	1	BATT_HOLDE R 24MM CON054	J13	KEystone	1025-7
61	1	RJ45 8PIN CON_RJ45_12P	J4	DIGI-KEY	380-1022-ND
62	1	ATAPI44 44PIN 22x2_2MM	J14	SAMTEC	ASP-130199-02
63	5	MOMENTARY SWT024	SW9-13	PANASONIC	EVQ-Q2K03W
64	1	FPC 40PIN CON057	P15	HIROSE	FH12-40S-0.5SH(55)
65	1	FPC 4PIN CON060	P5	KYOCERA ELCO	046298004000883+
66	1	FPC 4PIN CON061	P14	JST	04FMS-1.0SP-TF(LF)(SN)
67	1	IDC 9X1 IDC9X1	P1	SAMTEC	SSW-109-01-TM-S
68	1	0 1/4W 5% 1206	R76	KOA	0.0ECTrk7372BTED
69	7	YELLOW LED001	LED1-6,LED9	PANASONIC	LN1461C
70	3	22PF 50V 5% 0805	C115-116,C225	AVX	08055A220JAT
71	4	0.1UF 50V 10% 0805	C30-32,C266	AVX	08055C104KAT
72	1	1M 1/10W 5% 0805	R78	VISHAY	CRCW08051M00JNEA
73	7	100 1/10W 5% 0805	R34-36,R100-101, R103,R138	VISHAY	CRCW0805100RJNEA
74	11	600 100MHZ 200MA 0603	FER1-10,FER20	DIGI-KEY	490-1014-2-ND
75	5	600 100MHZ 500MA 1206	FER11-12,FER15-17	STEWART	HZ1206B601R-10

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
76	7	1UF 16V 10% 0805	C129,C139,C203- 205,C278-279	KEMET	C0805C105K4RAC TU
77	2	30PF 100V 5% 1206	C143-144	AVX	12061A300JAT2A
78	1	10UH 20% IND001	L1	TDK	445-2014-1-ND
79	4	0 1/10W 5% 0805	R147,R216,R227, R259	VISHAY	CRCW08050000Z0EA
80	1	190 100MHZ 5A FER002	FER19	MURATA	DLW5BSN191SQ2
81	2	1A ZHCS1000 SOT23-312	D5,D21	ZETEX	ZHCS1000TA pb-free
82	6	22 125MW 5% RNS001	RN11-16	CTS	744C083220JP
83	4	1UF 10V 10% 0805	C210,C220-222	AVX	0805ZC105KAT2A
84	20	10UF 6.3V 10% 0805	C9,C26,C49,C60, C67,C74,C84,C122- 123,C149,C152, C167,C206,C208, C232-233,C235-237, C255	AVX	08056D106KAT2A
85	5	4.7UF 6.3V 10% 0805	C138,C140,C198, C202,C209	AVX	08056D475KAT2A
86	38	0.1UF 10V 10% 0402	C1-2,C25,C27,C96, C109,C114,C119- 121,C124-125,C132, C134,C142,C153- 166,C175,C177-179, C240,C256,C275- 277	AVX	0402ZD104KAT2A

ADSP-BF548 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
87	104	0.01UF 16V 10% 0402	C3-8,C10-19,C23-24, C33-48,C50-59,C61- 66,C68-73,C75-83, C85-92,C112-113, C130-131,C136-137, C141,C148,C150- 151,C170-171,C180, C184-186,C188, C192,C195-197, C211,C229-230, C243-244,C249-250, C257-259	AVX	0402YC103KAT2A
88	64	10K 1/16W 5% 0402	R8-13,R16-19,R26, R29,R55-56,R60, R77,R95,R108-111, R120-123,R131-133, R148,R158,R161- 163,R166,R168, R171,R173,R178, R182,R187,R198, R200-203,R206, R209,R213-214, R222-225,R229-230, R248-249,R254, R257,R273-275, R282,R284	VISHAY	CRCW040210K0FKED
89	9	4.7K 1/16W 5% 0402	R43,R45-49,R65, R143,R212	VISHAY	CRCW04024K70JNED
90	32	0 1/16W 5% 0402	R20,R30,R57-59, R61,R146,R149, R172,R174-177, R205,R207,R210- 211,R215,R232-243, R278-279	PANASONIC	ERJ-2GE0R00X
91	4	1.2K 1/16W 5% 0402	R139-140,R276-277	PANASONIC	ERJ-2GEJ122X
92	7	22 1/16W 5% 0402	R151-154,R169-170, R283	PANASONIC	ERJ-2GEJ220X

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
93	20	33 1/16W 5% 0402	R7,R14,R21,R27-28, R66,R244-247,R250- 253,R255,R268-272	VISHAY	CRCW040233R0JNEA
94	2	18PF 50V 5% 0805	C28-29	AVX	08055A180JAT2A
95	6	100UF 10V 10% C	CT1-3,CT5,CT8-9	AVX	TPSC107K010R0075
96	2	64.9K 1/10W 1% 0805	R69,R165	VISHAY	CRCW080564K9FKEA
97	2	210.0K 1/4W 1% 0805	R68,R164	VISHAY	CRCW0805210KFKEA
98	1	0.022UF 50V 5% 0805	C145	AVX	08055C223JAT2A
99	10	49.9 1/10W 1% 0805	R83-92	DIGI-KEY	311-49.9CRCT-ND
100	6	0.1UF 16V 10%0603	C189,C260,C264- 265,C272,C274	AVX	0603YC104KAT2A
101	9	1UF 16V 10% 0603	C94,C103-104,C118, C187,C215-216, C241-242	PANASONIC	ECJ-1VB1C105K
102	1	4.7UF 25V 20% 0805	C102	AVX	0805ZD475KAT2A
103	1	68PF 50V 5% 0603	C200	AVX	06035A680JAT2A
104	11	470PF 50V 5% 0603	C93,C97-101,C105- 106,C110-111,C199	AVX	06033A471JAT2A
105	1	220UF 6.3V 20% D2E	CT4	SANYO	10TPE220ML
106	3	10K 1/10W 5% 0603	R99,R263-264	VISHAY	CRCW060310K0JNEA
107	1	10M 1/10W 5% 0603	R15	VISHAY	CRCW060310M0FNEA

ADSP-BF548 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
108	3	100K 1/10W 5% 0603	R188-189,R261	VISHAY	CRCW0603100KJNEA
109	9	330 1/10W 5% 0603	R119,R124-130,R141	VISHAY	CRCW0603330RJNEA
110	1	1M 1/10W 5% 0603	R67	VISHAY	CRCW06031M00FNEA
111	2	0 1/10W 5% 0603	R73,R156	PHYCOMP	232270296001L
112	8	10 1/10W 5% 0603	R102,R104,R134-137,R218,R220	VISHAY	CRCW060310R0JNEA
113	2	75.0K 1/16W 1% 0603	R71,R179	VISHAY	CRCW060375K0FKEA
114	2	1K 1/10W 5% 0603	R37,R42	DIGI-KEY	311-1.0KGRTR-ND
115	3	4700PF 16V 10% 0603	C168,C218,C226	DIGI-KEY	311-1083-2-ND
116	4	100PF 50V 5% 0603	C169,C172, C227-228	AVX	06035A101JAT2A
117	1	12.4K 1/10W 1% 0603	R80	DIGI-KEY	311-12.4KHRTR-ND
118	4	62.0 1/10W 1% 0603	R105-106,R219,R221	DIGI-KEY	311-62.0HRTR-ND
119	1	680PF 50V 5% 0603	C231	PANASONIC	ECJ-1VC1H681J
120	2	75.0 1/10W 1% 0603	R93-94	DALE	CRCW060375R0FKEA
121	2	270PF 50V 5% 0603	C95,C117	DIGI-KEY	311-1185-2-ND
122	2	1UF 6.3V 20% 0402	C107-108	PANASONIC	ECJ-0EB0J105M
123	3	100 1/16W 5% 0402	R1,R50-51	DIGI-KEY	311-100JRTR-ND

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
124	1	390PF 25V 5% 0603	C261	AVX	06033A391FAT2A
125	1	24.9K 1/10W 1% 0603	R155	DIGI-KEY	311-24.9KHTR-ND
126	6	1.05K 1/16W 1% 0603	R74-75,R81,R96-98	PANASONIC	ERJ-3EKF1051V
127	4	10UF 10V 10% 0805	C135,C193,C271, C273	PANASONIC	ECJ-2FB1A106K
128	1	20.0K 1/16W 1% 0603	R266	PANASONIC	ERJ-3EKF2002V
129	4	0.05 1/2W 1% 1206	R157,R192-194	SEI	CSF 1/2 0.05 1%R
130	3	10UF 16V 10% 1210	C201,C234,C238	AVX	1210YD106KAT2A
131	1	GREEN LED001	LED7	PANASONIC	LN1361CTR
132	1	RED LED001	LED8	PANASONIC	LN1261CTR
133	2	1000PF 50V 5% 1206	C190-191	AVX	12065A102JAT2A
134	1	255.0K 1/10W 1% 0603	R160	VISHAY	CRCW06032553FK
135	1	80.6K 1/10W 1% 0603	R159	DIGI-KEY	311-80.6KHRCT-ND
136	1	200MA BAT54A SOT23D	D12	MOUSER	512-BAT54A
137	2	200MA BAT54 SOT23D	D10-11	MOUSER	512-BAT54
138	1	8.2UH 20% IND012	L4	COILCRAFT	MSS6132-822ML
139	1	10UH 20% IND012	L3	COILCRAFT	MSS6132-103ML

ADSP-BF548 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
140	2	1.1K 1/16W 1% 0402	R191,R208	PANASONIC	ERJ-2RKF1101X
141	1	18K 1/16W 5% 0402	R183	DIGI-KEY	311-18KJRCT-ND
142	1	820 1/16W 5% 0402	R184	DIGI-KEY	311-820JRCT-ND
143	1	12.0K 1/16W 1% 0402	R79	DIGI-KEY	311-12.0KLRCT-ND
144	1	430 1/16W 1% 0402	R180	DIGI-KEY	311-430LRCT-ND
145	1	1200PF 50V 10% 0402	C219	DIGI-KEY	490-1304-1-ND
146	1	82PF 50V 5% 0402	C217	DIGI-KEY	490-1290-1-ND
147	2	22000PF 25V 10% 0402	C223,C239	DIGI-KEY	490-3252-1-ND
148	1	1500PF 50V 10% 0402	C224	DIGI-KEY	490-3245-1-ND
149	3	5A MBRS540T3G SMC	D4,D13,D15	ON SEMI	MBRS540T3G
150	3	15KV PGB1010603 0603	D1,D8-9	LITTLEFUSE	PGB1010603MR
151	1	VARISTOR V5.5MLA 30A 0603	R142	LITTLEFUSE	V5.5MLA0603
152	1	THERM 0.5A 0.4 1206	R72	LITTLEFUSE	1206L050-C
153	19	33 125MW 5% RNS001	RN1-10,RN17-25	CTS	744C083330JP

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
154	1	20MA MA3X717E DIO005	D16	PANASONIC	MA3X717E
155	2	100MA MA27D27 DIO006	D2,D7	PANASONIC	MA27D27
156	1	2A CZRF52C2V2 DIO007	D3	DIGI-KEY	641-1052-1-ND
157	1	2.5UH 30% IND013	L2	COILCRAFT	MSS1038-252NLB
158	4	47.0K 1/16W 1% 0402	R38-41	ROHM	MCR01MZPF4702
159	2	3.01K 1/16W 1% 0402	R52-53	ROHM	MCR01MZPF3011
160	1	5.6K 1/16W 5% 0402	R25	PANASONIC	ERJ-2GEJ562X
161	5	1.0K 1/16W 1% 0402	R2-3,R31-33	PANASONIC	ERJ-2RKf1001X
162	2	1000PF 2000V 10% 1206	C146-147	AVX	1206GC102KAT1A
163	3	82 1/16W 5% 0402	R4-6	ROHM	MCR01MZPJ820
164	1	1UF 50V 10% 0603	C267	DIGI-KEY	587-1257-1-ND
165	1	154.0K 1/16W 1% 0402	R70	DIGI-KEY	541-154KLCT-ND
166	1	10.0 1/10W 1% 0603	R82	DIGI-KEY	311-10.0HRTR-ND
167	3	10.0K 1/16W 1% 0402	R181,R185,R265	DIGI-KEY	541-10.0KLCT-ND
168	1	60.4 1/8W 1% 0805	R262	ROHM	MCR10EZPF60R4

ADSP-BF548 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
169	1	15uH 20% IND015	L5	COILCRAFT	MSS4020-153ML
170	3	.5A B0540W SOD-123	D17-19	DIODES INC	B0540W-7-F
171	1	.5A BZT52C33S SOD-323	D20	DIODES INC	BZT52C33S-7-F
172	4	2.2UF 25V 10% 0805	C263,C268-270	DIGI-KEY	490-3331-1-ND
173	1	1.0 1/16W 1% 0402	R260	DIGI-KEY	541-1.00LCT-ND
174	1	34.0K 1/10W 1% 0603	R186	DIGI-KEY	541-34.0KHCT-ND

A

B

C

D

1

1

2

2

3


3

4

4

ADSP-BF548 EZ-KIT LITE

SCHEMATIC



**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title ADSP-BF548 EZ-KIT LITE
TITLE

Size C	Board No. A0206-2006	Rev 1.4B
------------------	--------------------------------	--------------------

Date 12-4-2007_10:10	Sheet 1 of 17
--------------------------------	-------------------------

A

B

C

D

1

2

3


4

1

2

3

4

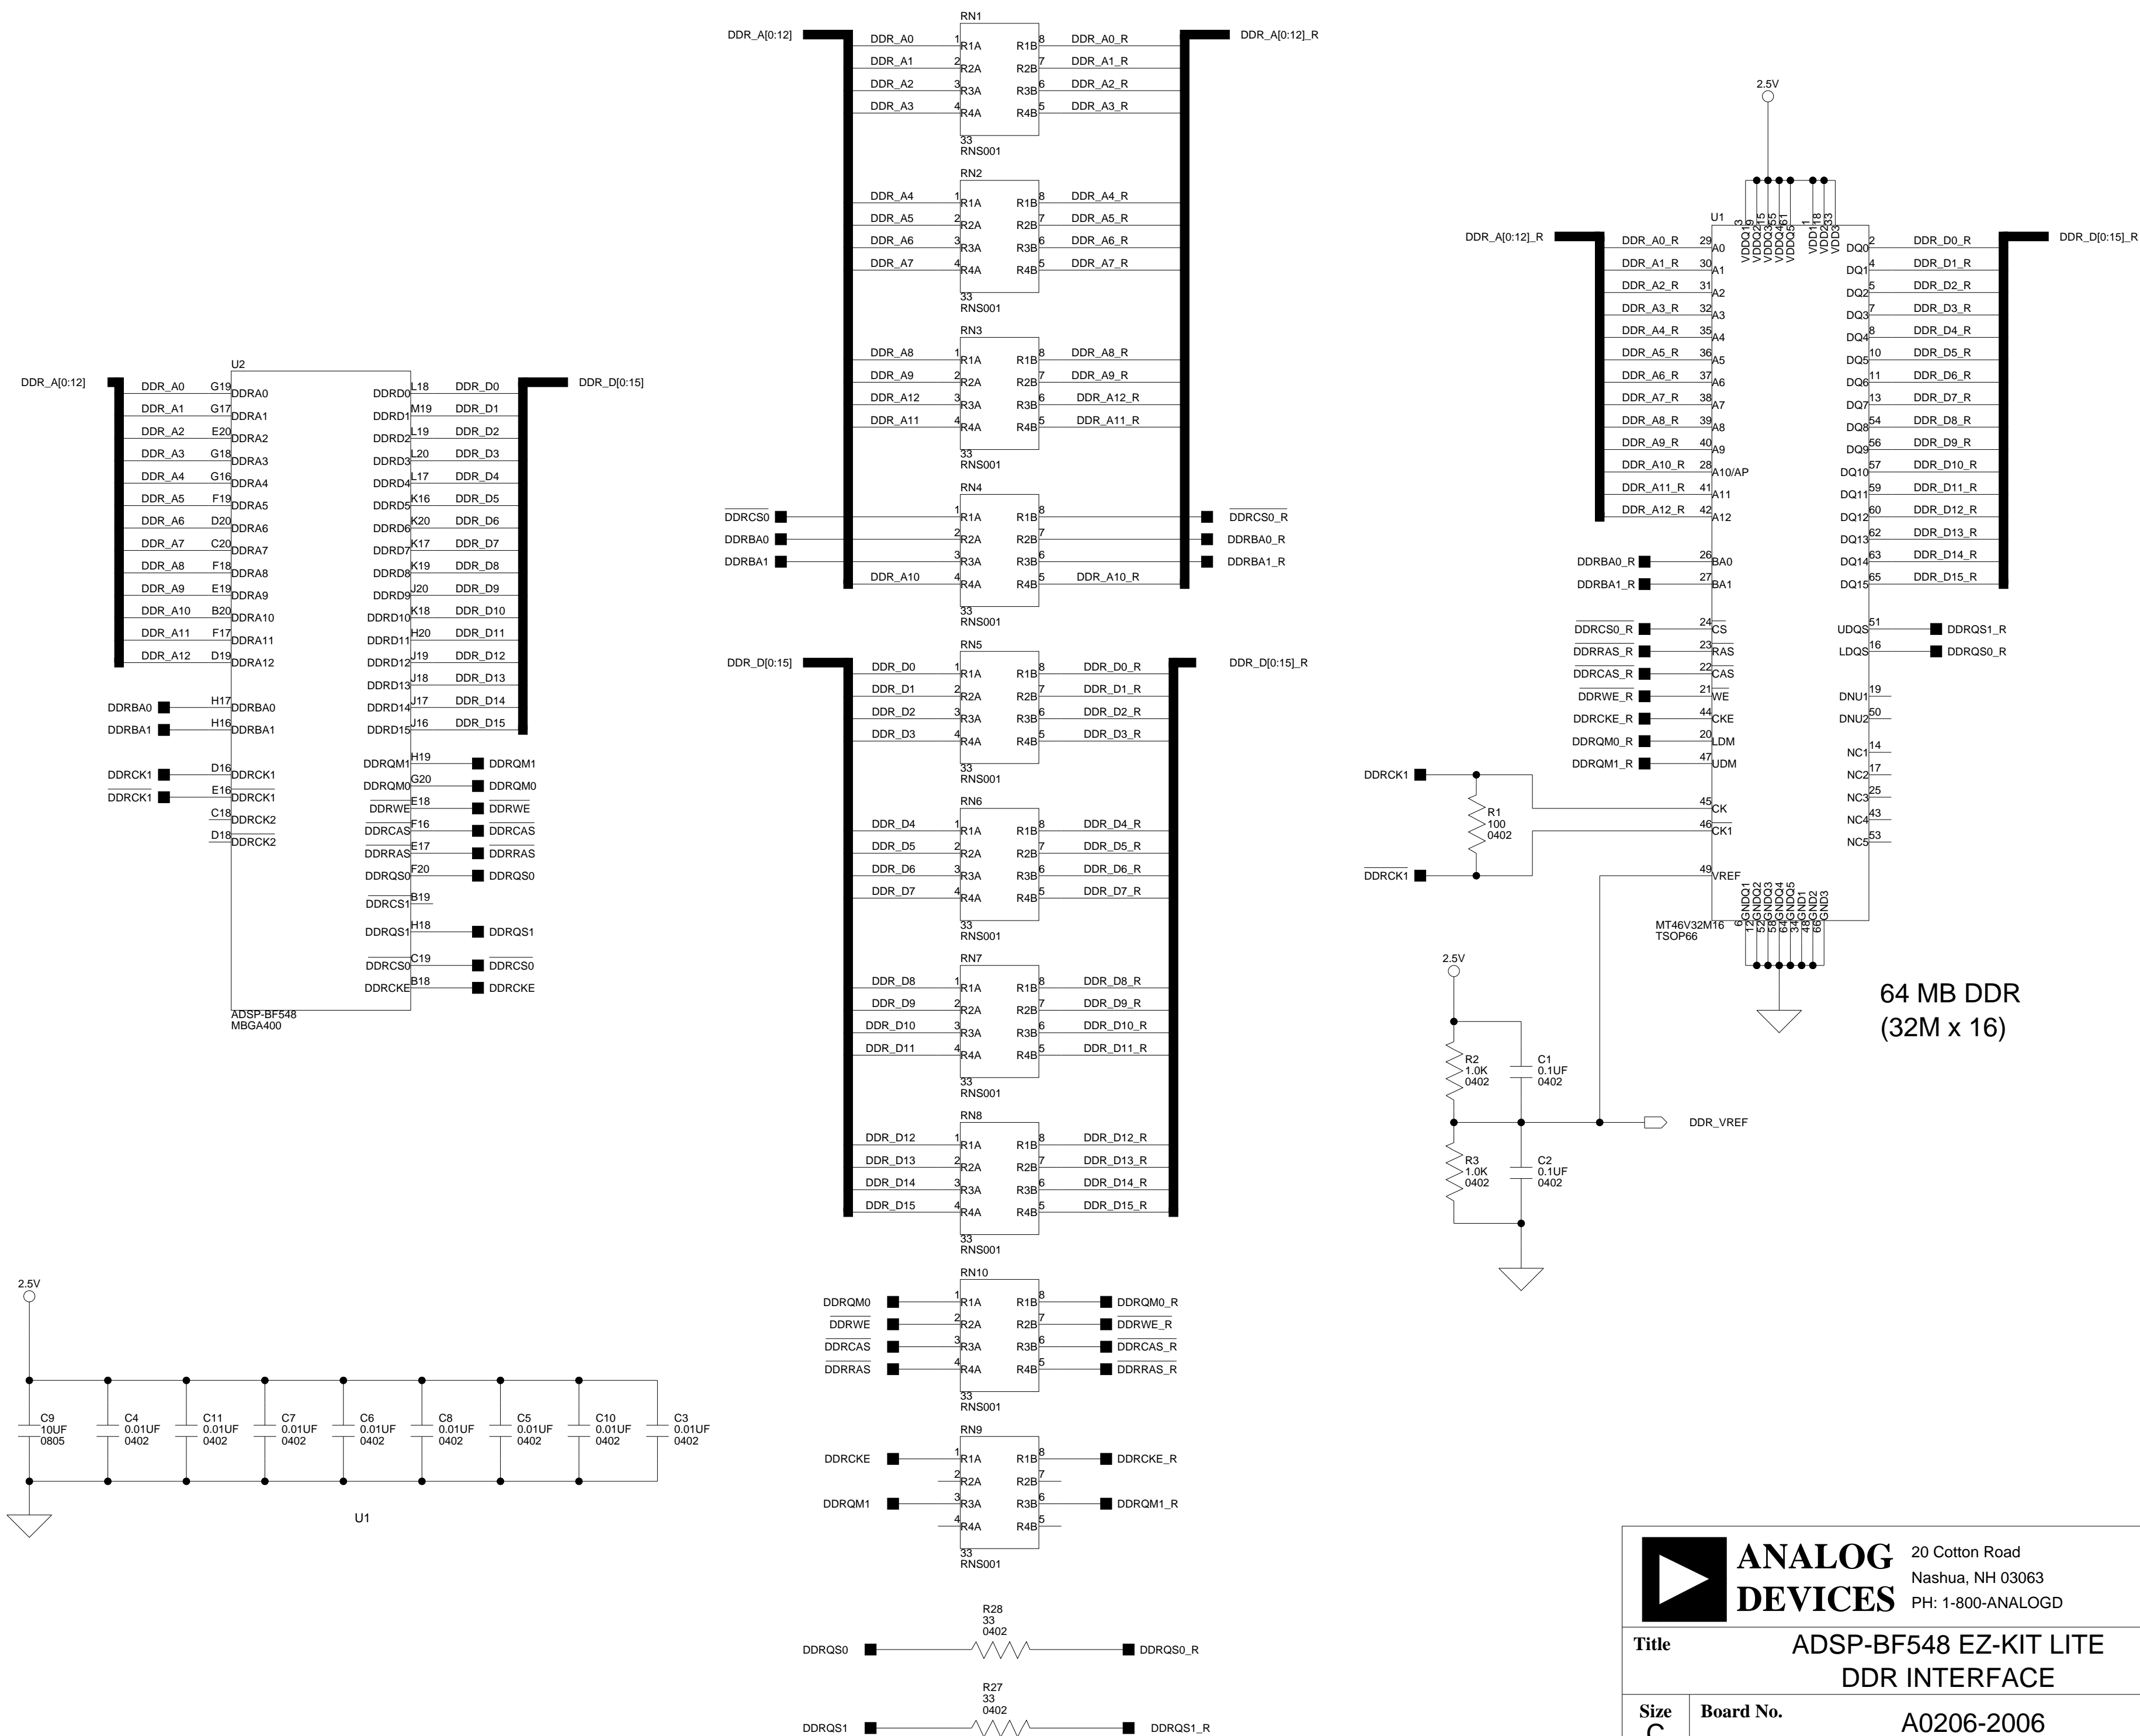

1

2

3


4

1

2

3

4

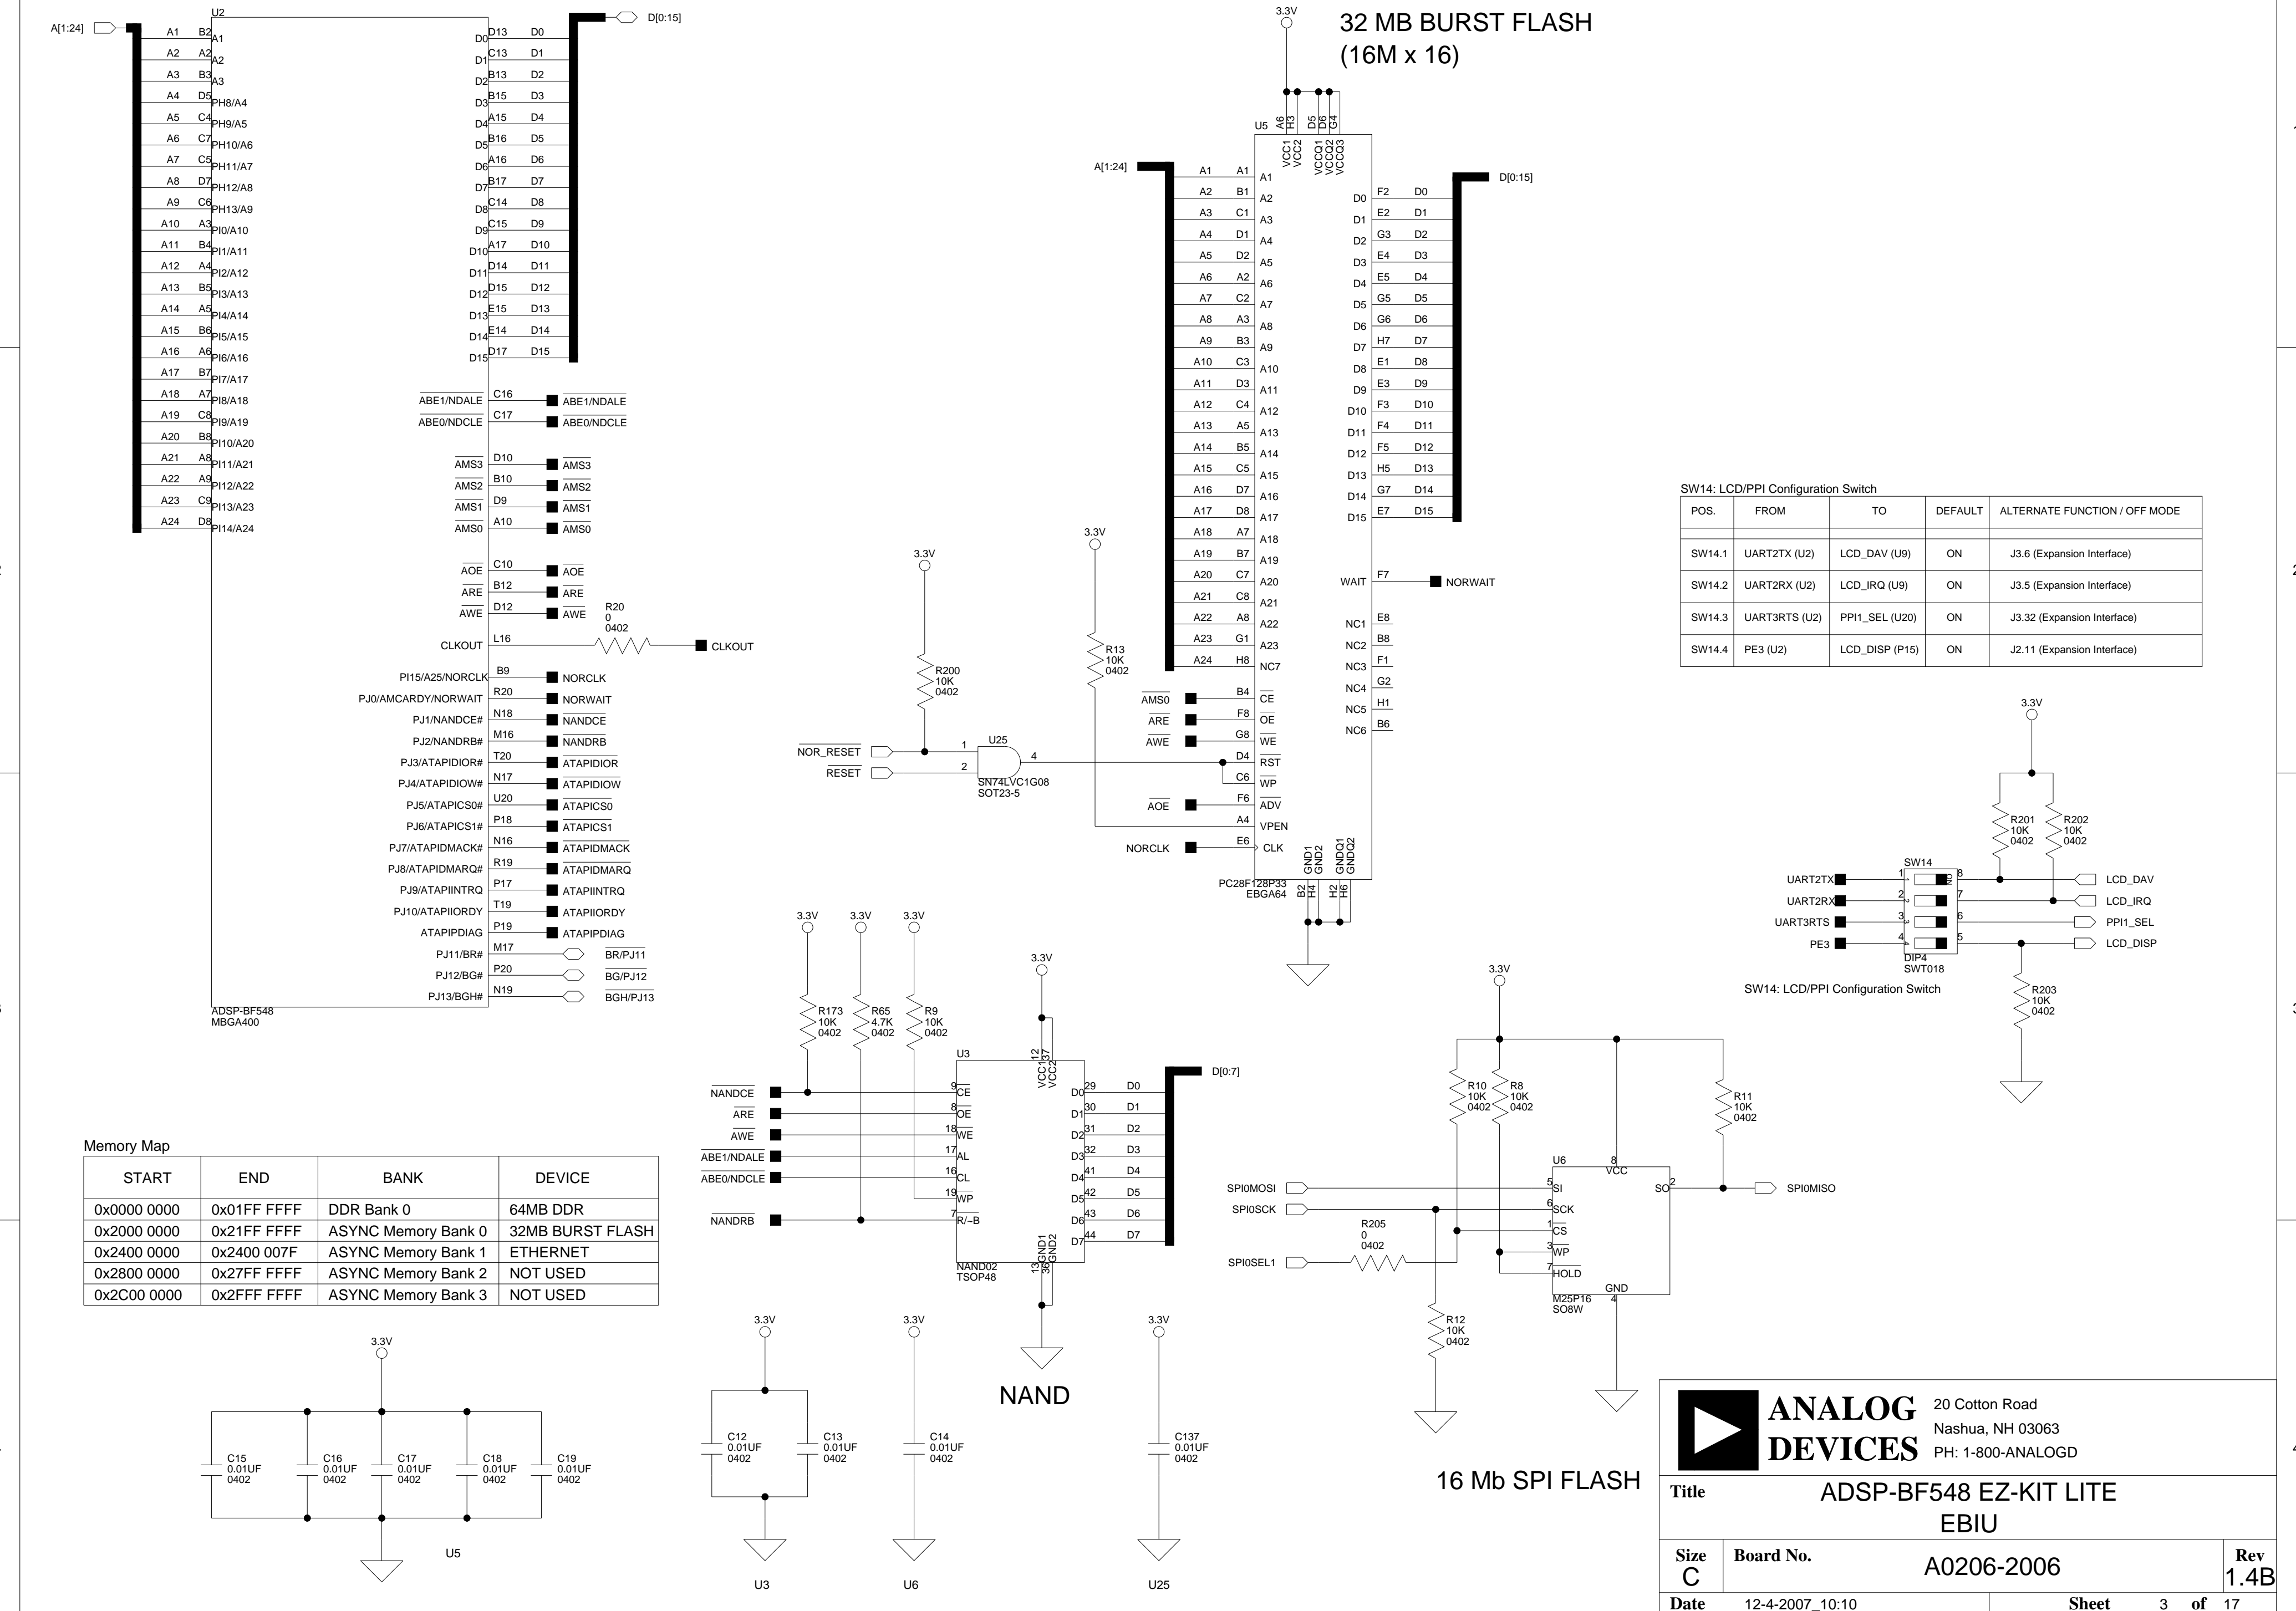

Memory Map

START	END	BANK	DEVICE
0x0000 0000	0x01FF FFFF	DDR Bank 0	64MB DDR
0x2000 0000	0x21FF FFFF	ASYNC Memory Bank 0	32MB BURST FLASH
0x2400 0000	0x2400 007F	ASYNC Memory Bank 1	ETHERNET
0x2800 0000	0x27FF FFFF	ASYNC Memory Bank 2	NOT USED
0x2C00 0000	0x2FFF FFFF	ASYNC Memory Bank 3	NOT USED

SW14: LCD/PPI Configuration Switch

POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION / OFF MODE
SW14.1	UART2TX (U2)	LCD_DAV (U9)	ON	J3.6 (Expansion Interface)
SW14.2	UART2RX (U2)	LCD_IRQ (U9)	ON	J3.5 (Expansion Interface)
SW14.3	UART3RTS (U2)	PPI1_SEL (U20)	ON	J3.32 (Expansion Interface)
SW14.4	PE3 (U2)	LCD_DISP (P15)	ON	J2.11 (Expansion Interface)

SW14: LCD/PPI Configuration Switch



**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title **ADSP-BF548 EZ-KIT LITE
EBIU**

Size
C

Board No.

A0206-2006

Rev
1.4B

Date 12-4-2007_10:10

Sheet 3 of 17

1

2

3



4

1

2

3

4

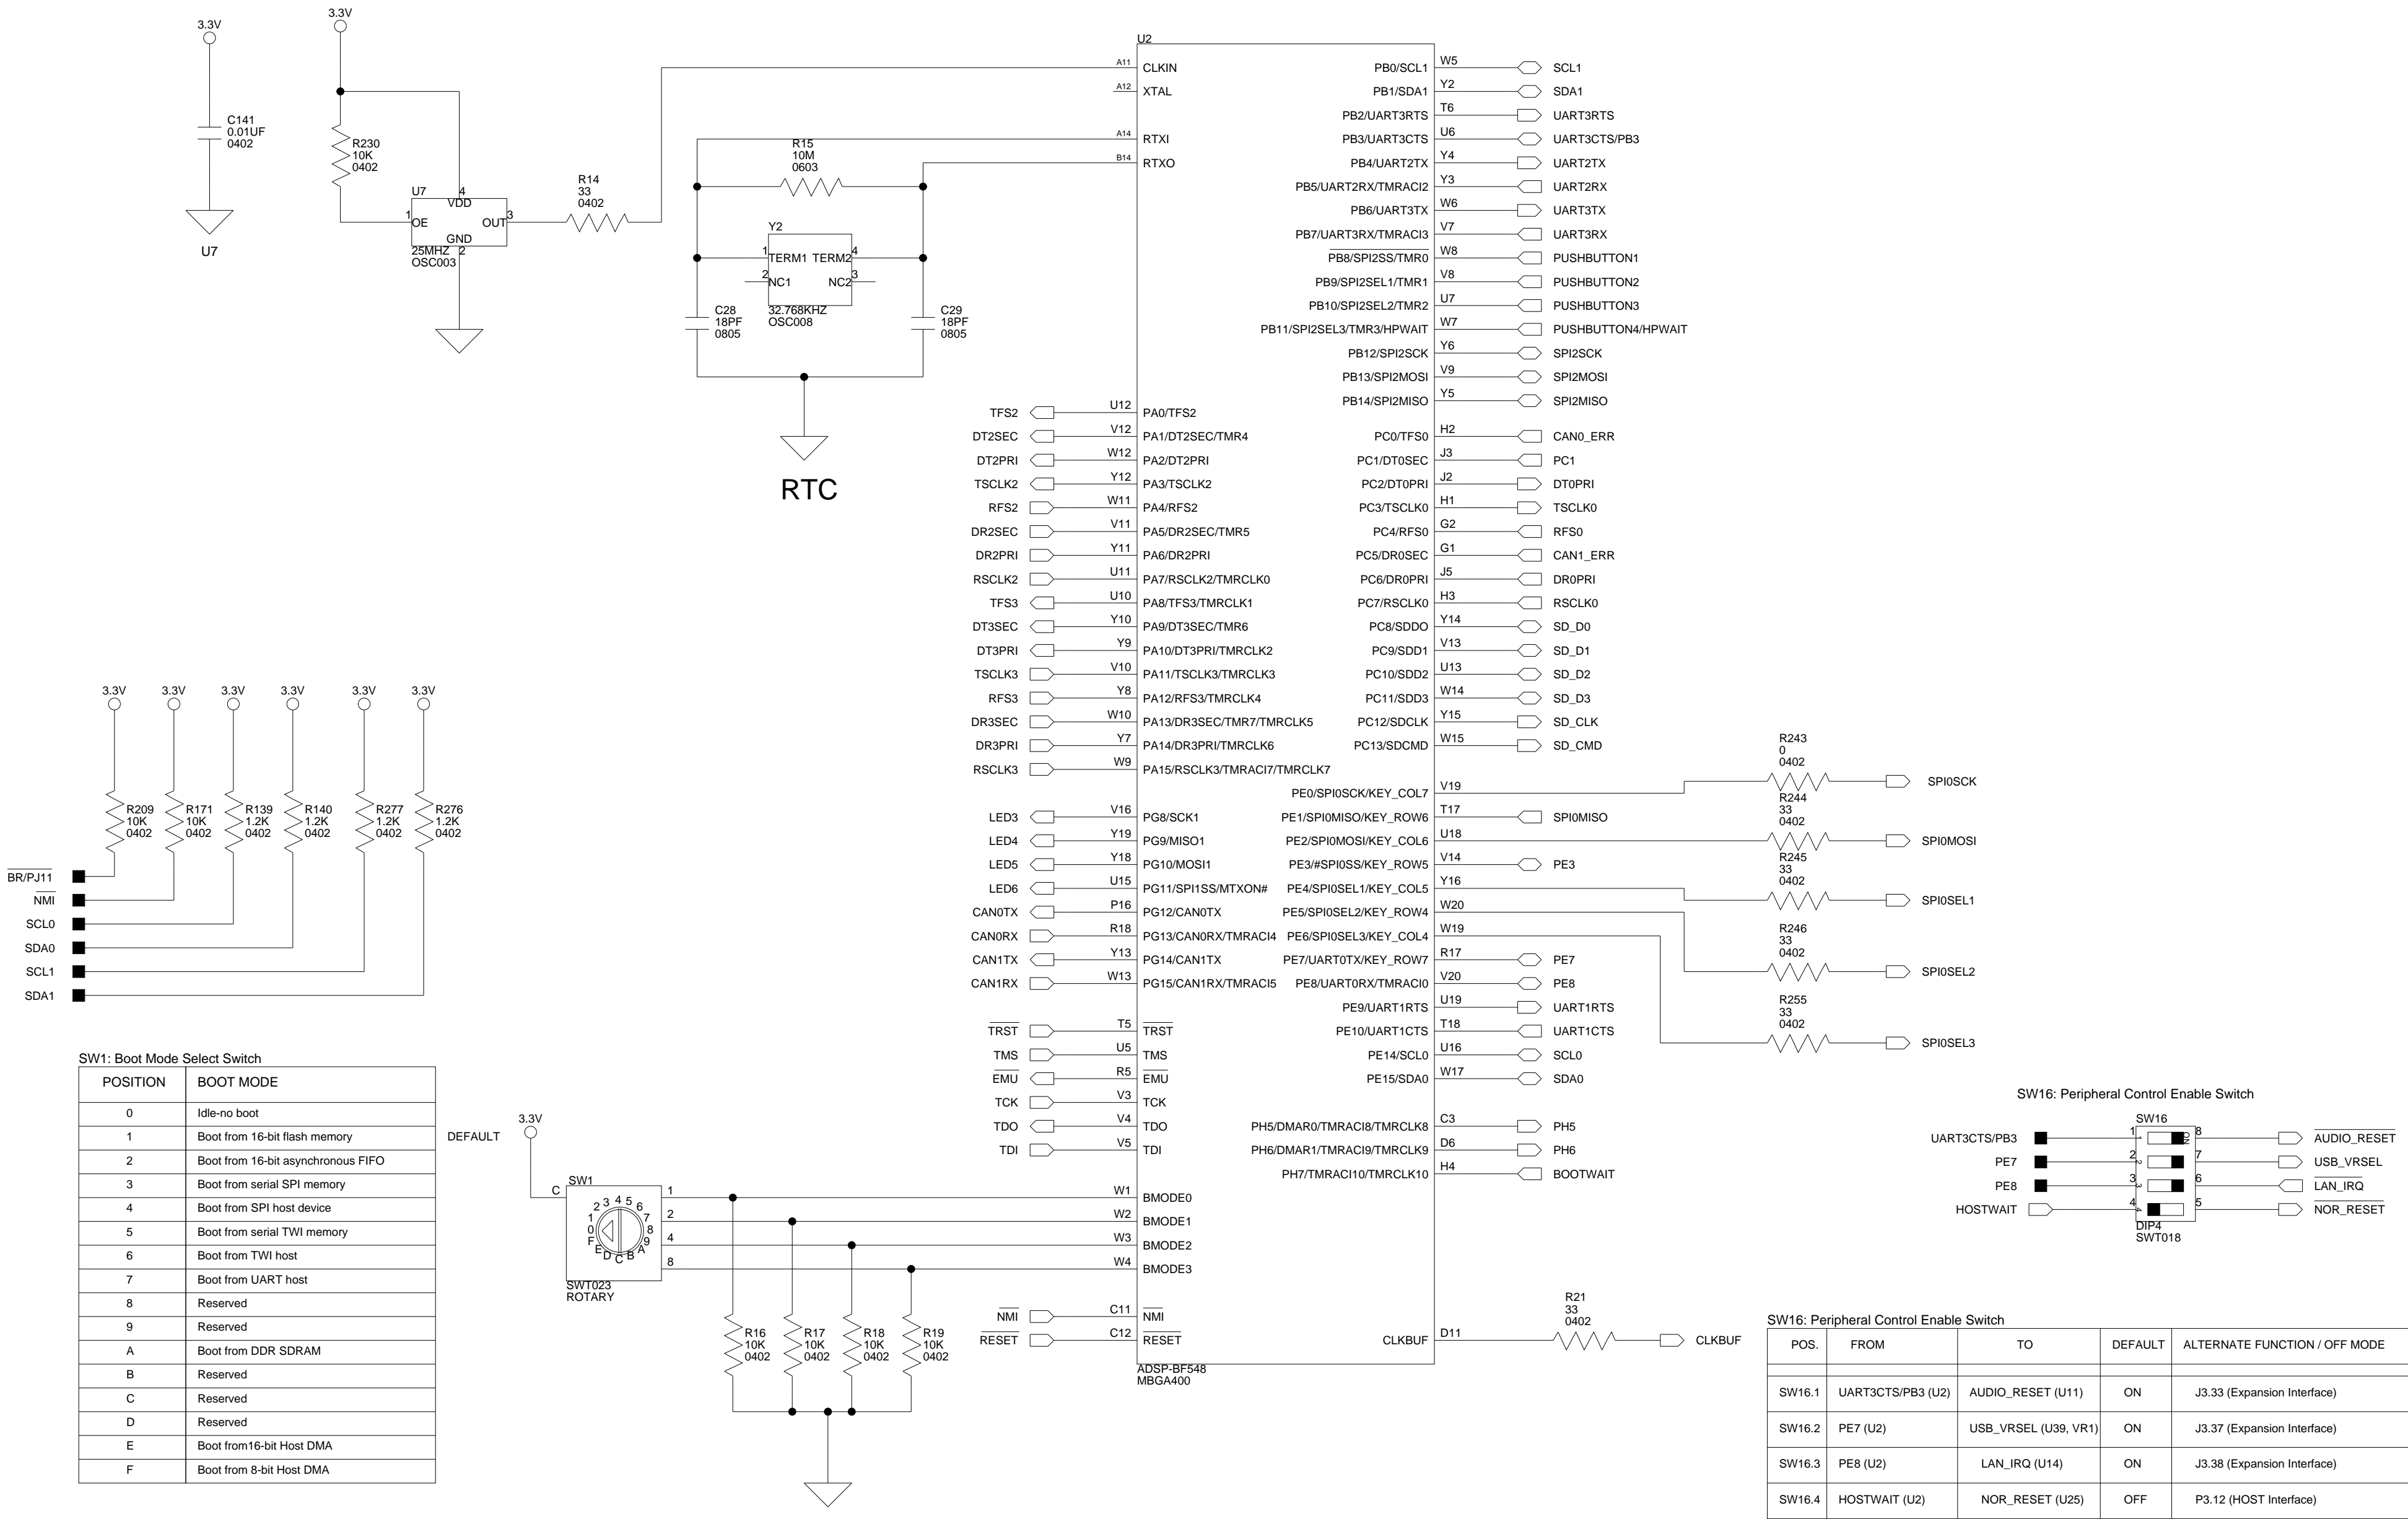


**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title **ADSP-BF548 EZ-KIT LITE
CONTROL**

Size **C** Board No. **A0206-2006** Rev **1.4B**

Date 2-15-2008_17:12 Sheet 4 of 17

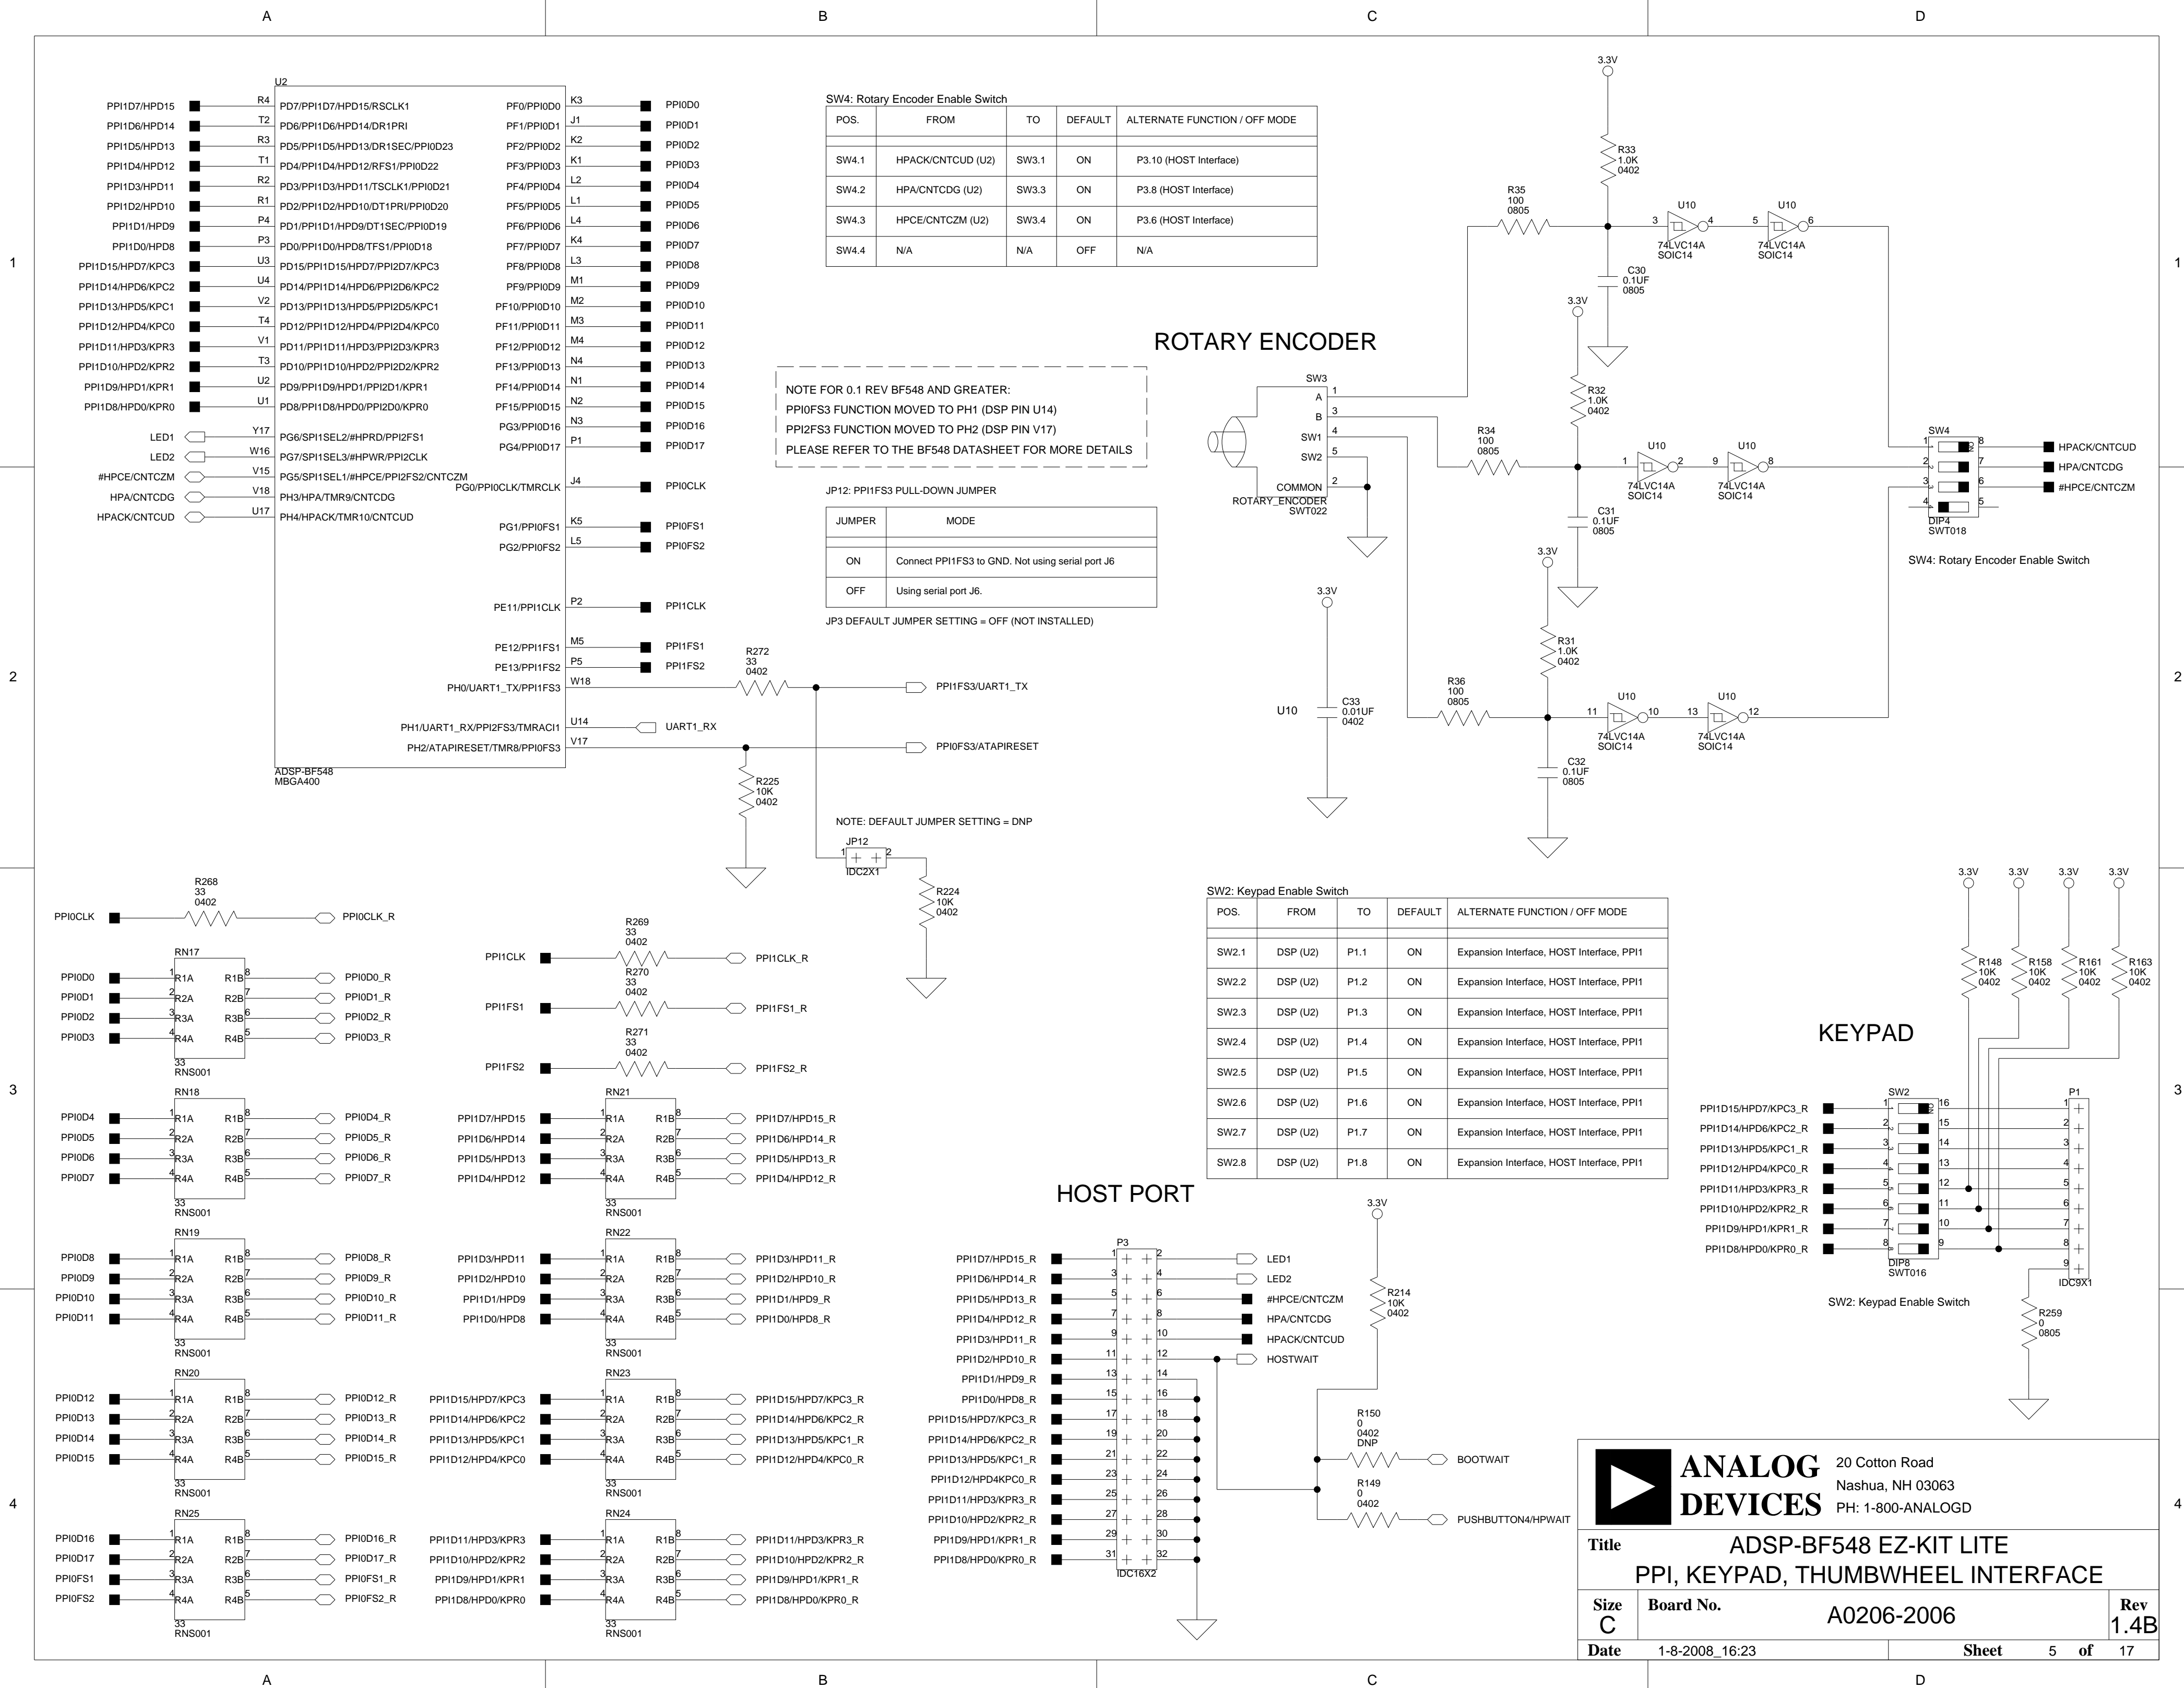

1

2

3



4

A

B

C

D

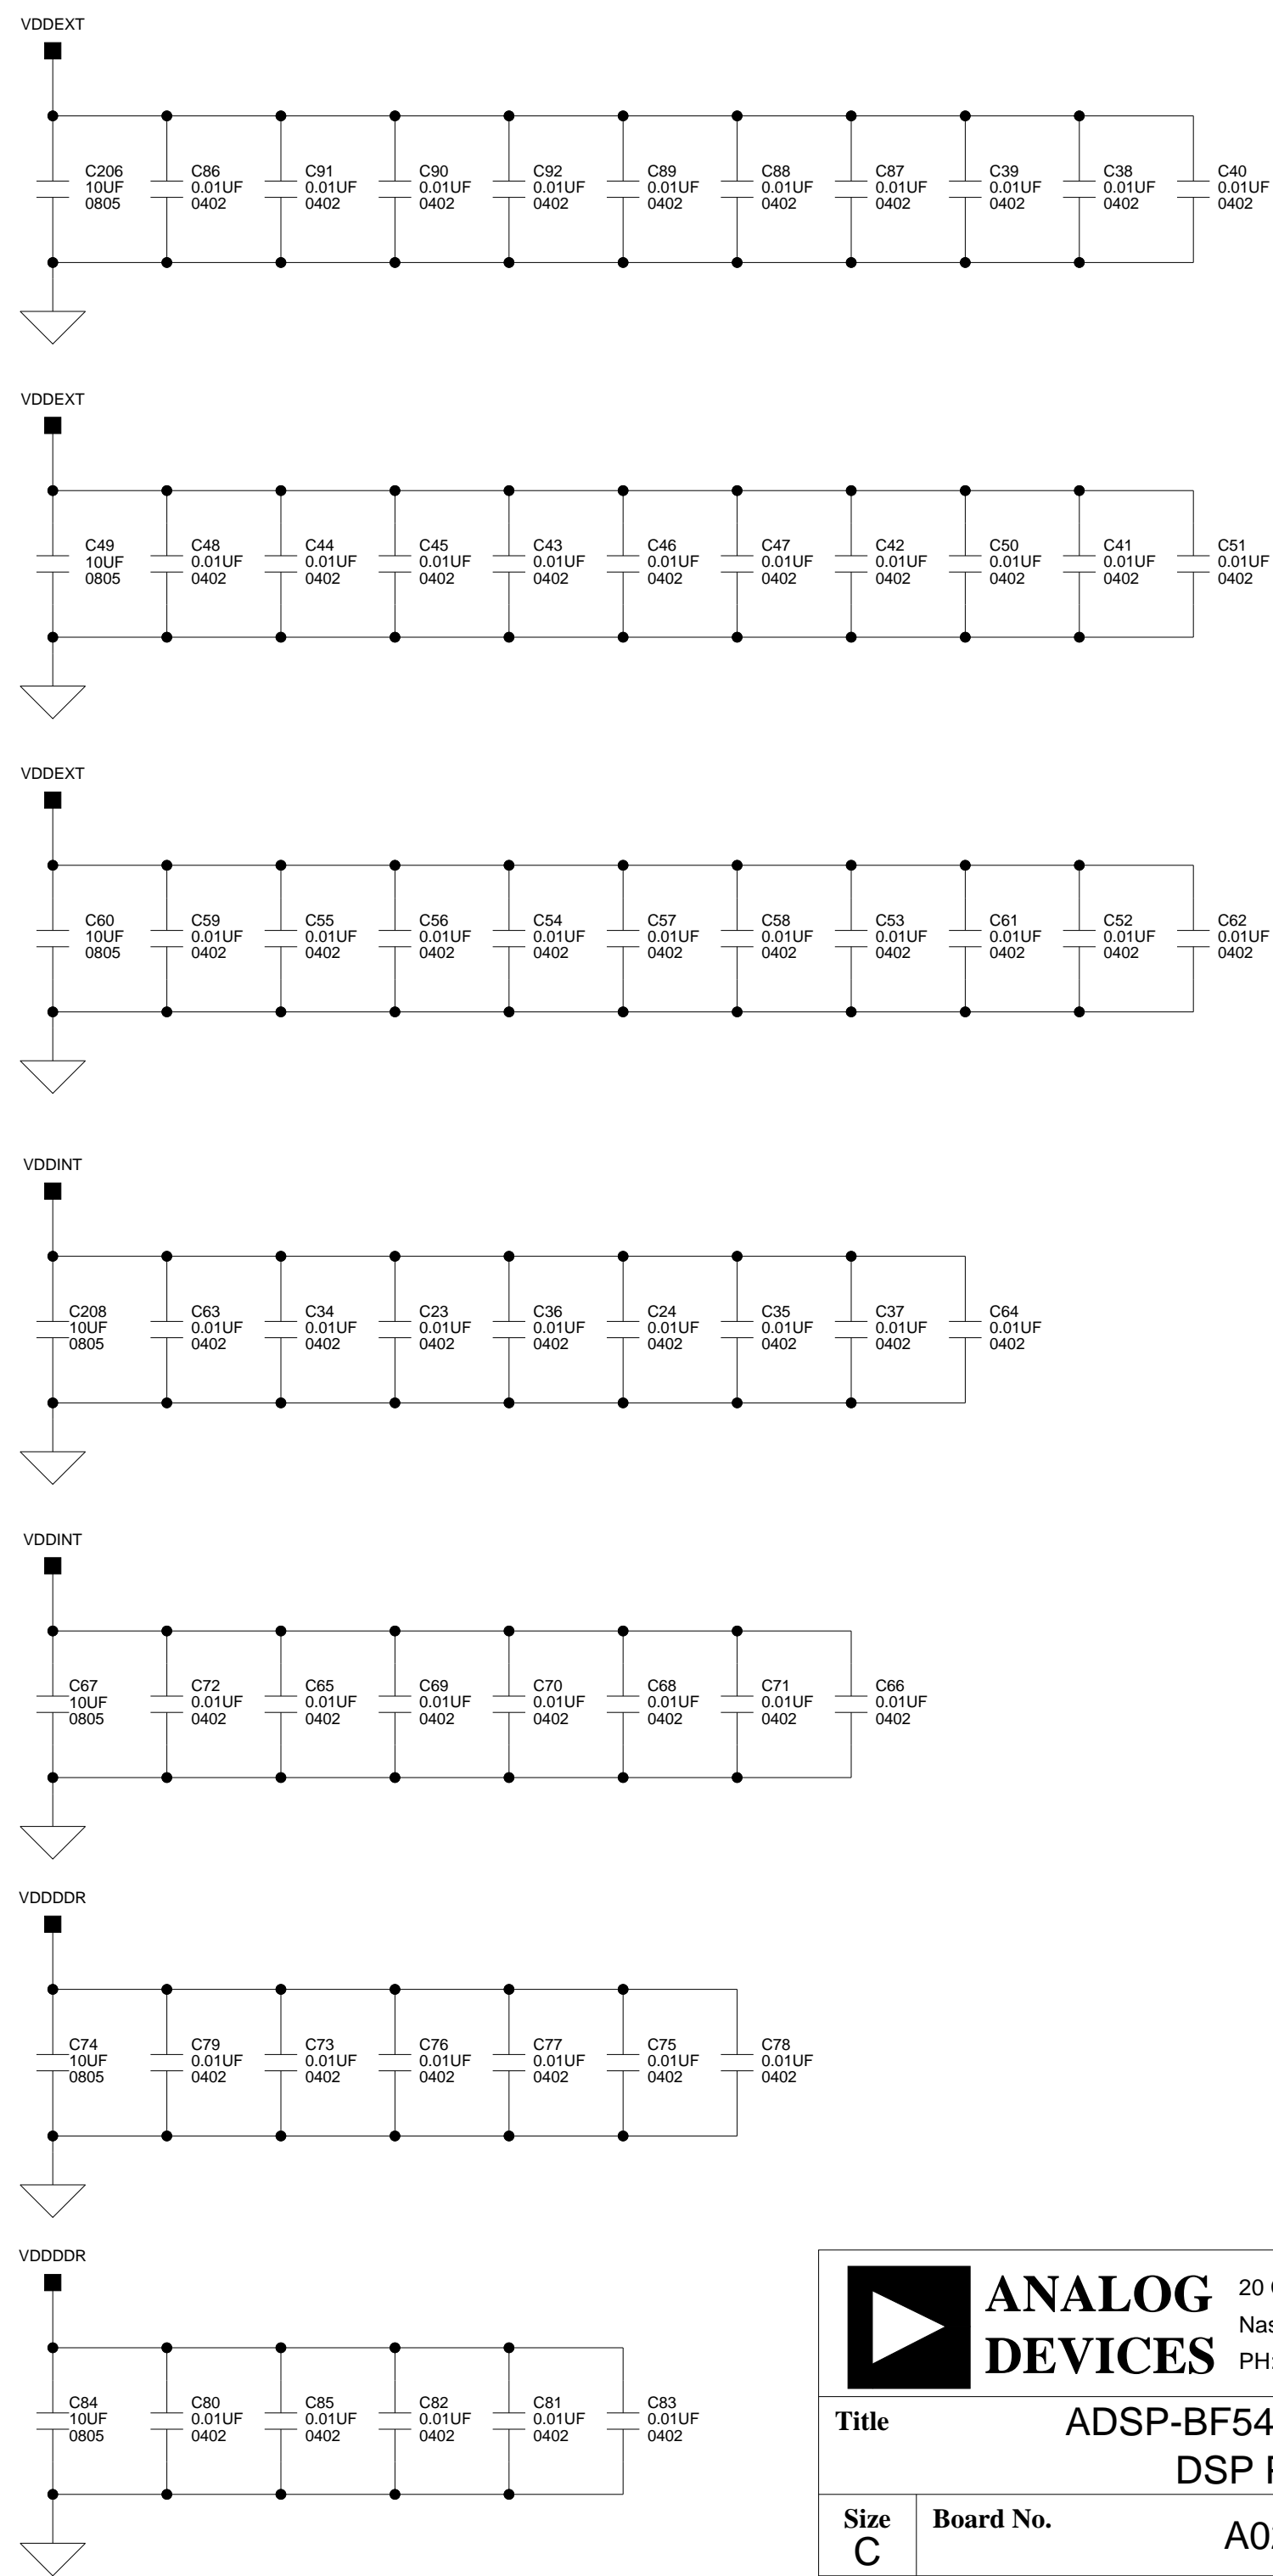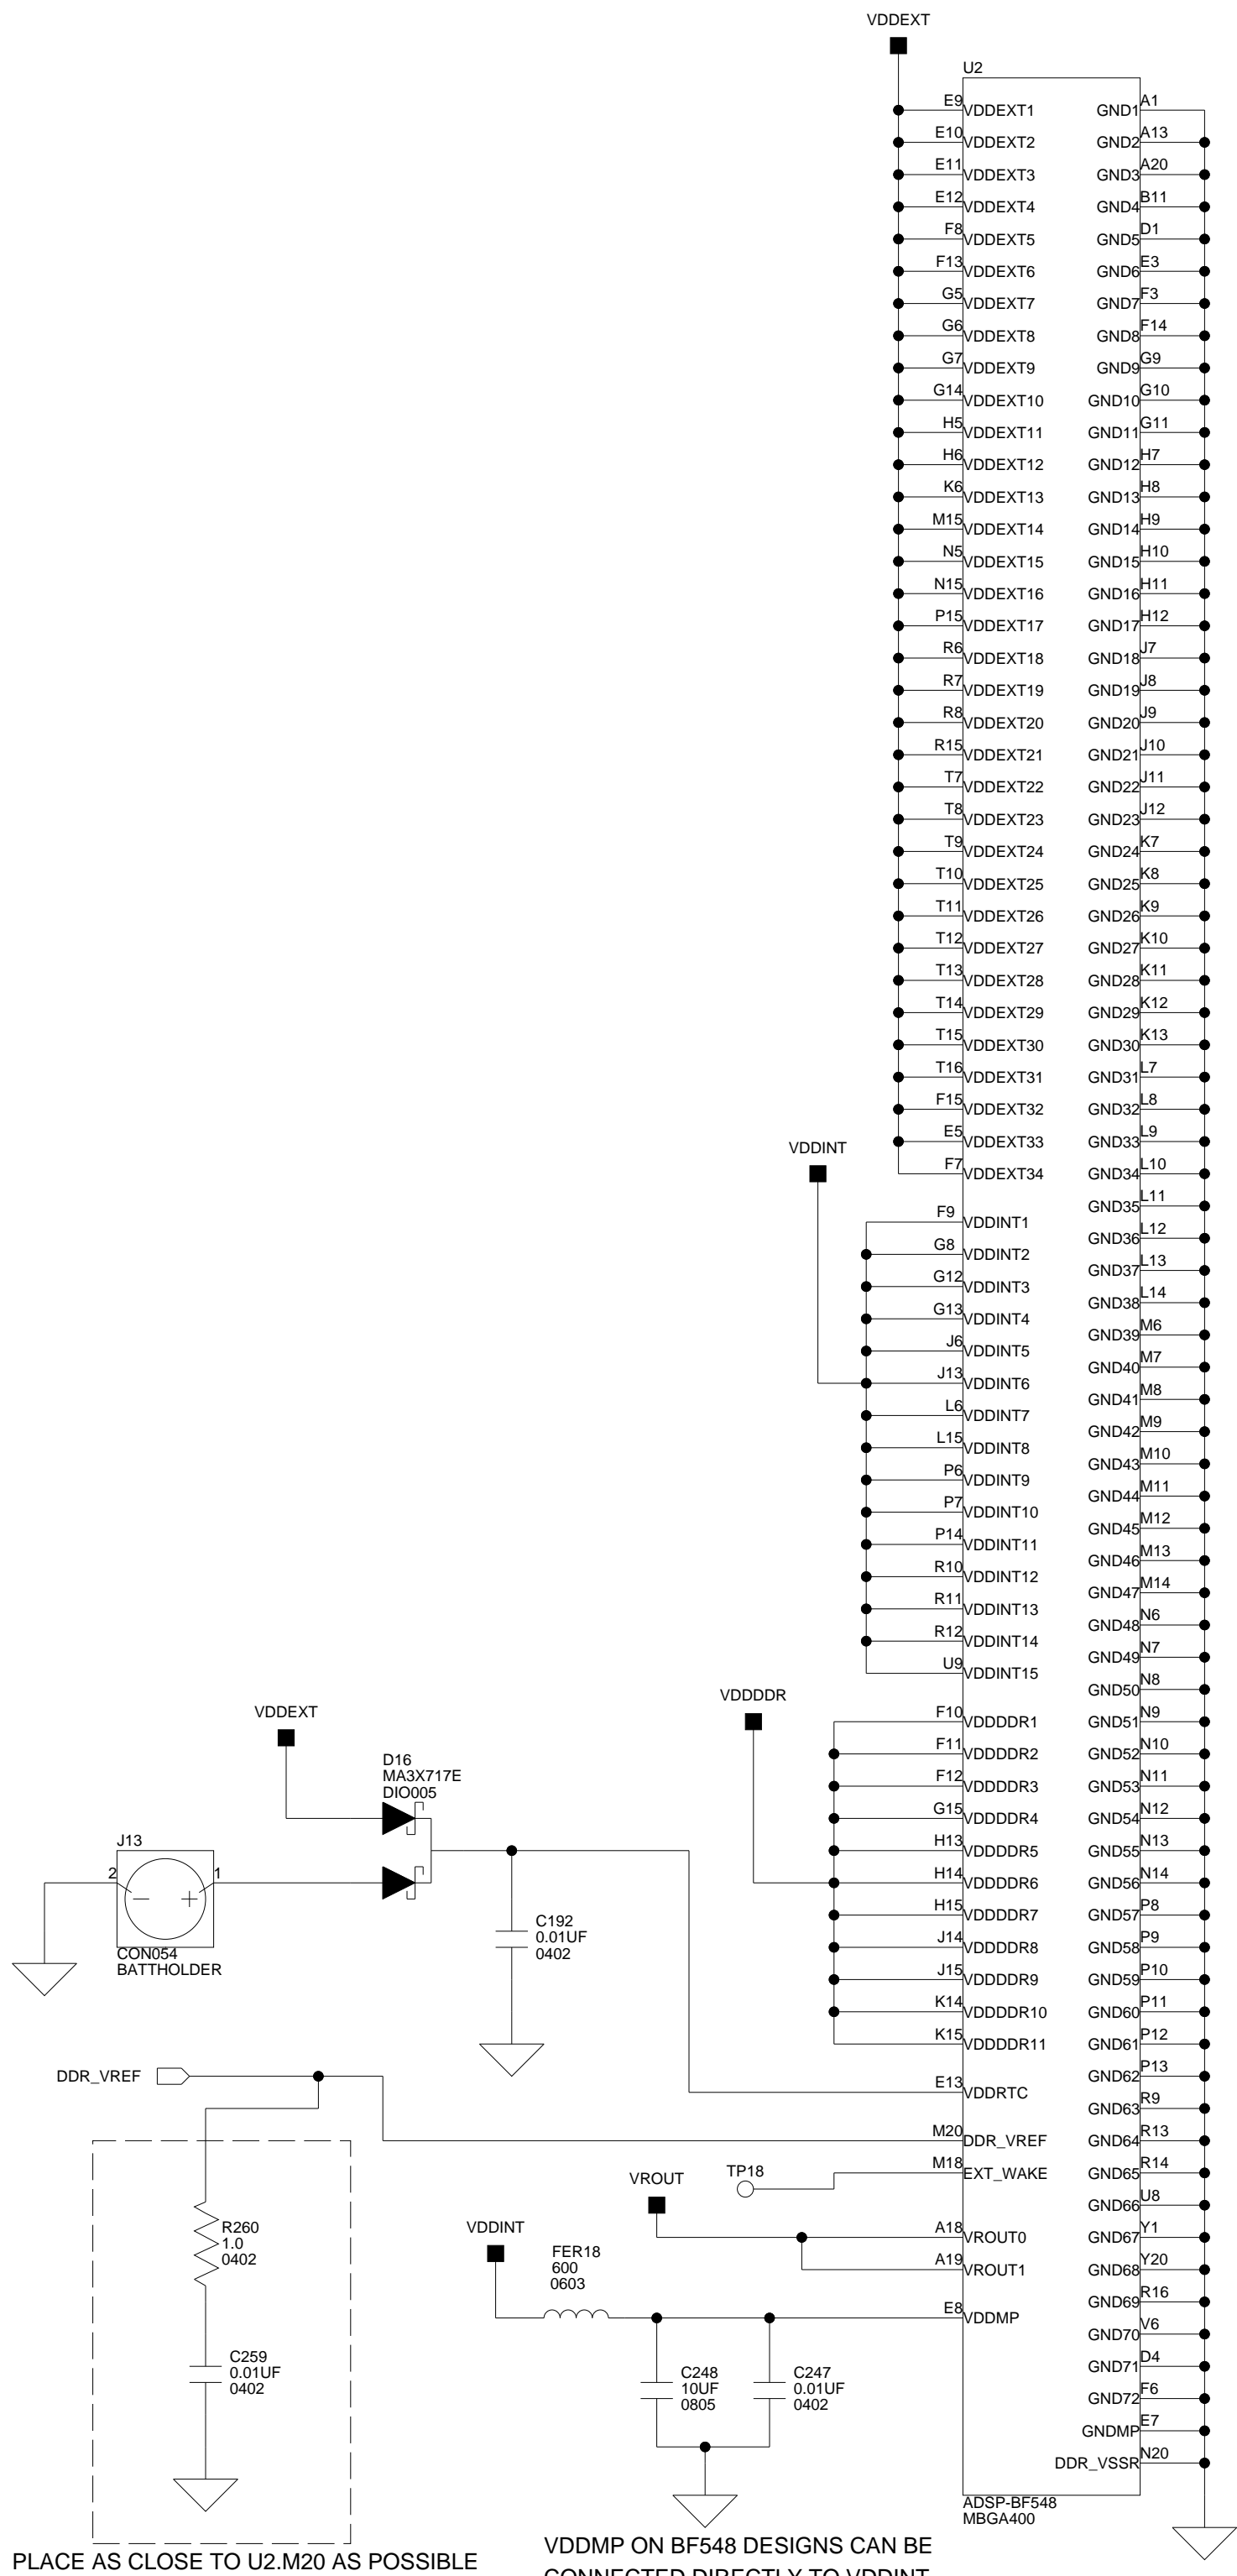


1


2

3

4


		ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
Title ADSP-BF548 EZ-KIT LITE DSP POWER					
Size C	Board No. A0206-2006			Rev 1.4B	
Date 4-17-2008_16:46	Sheet 6		of	17	

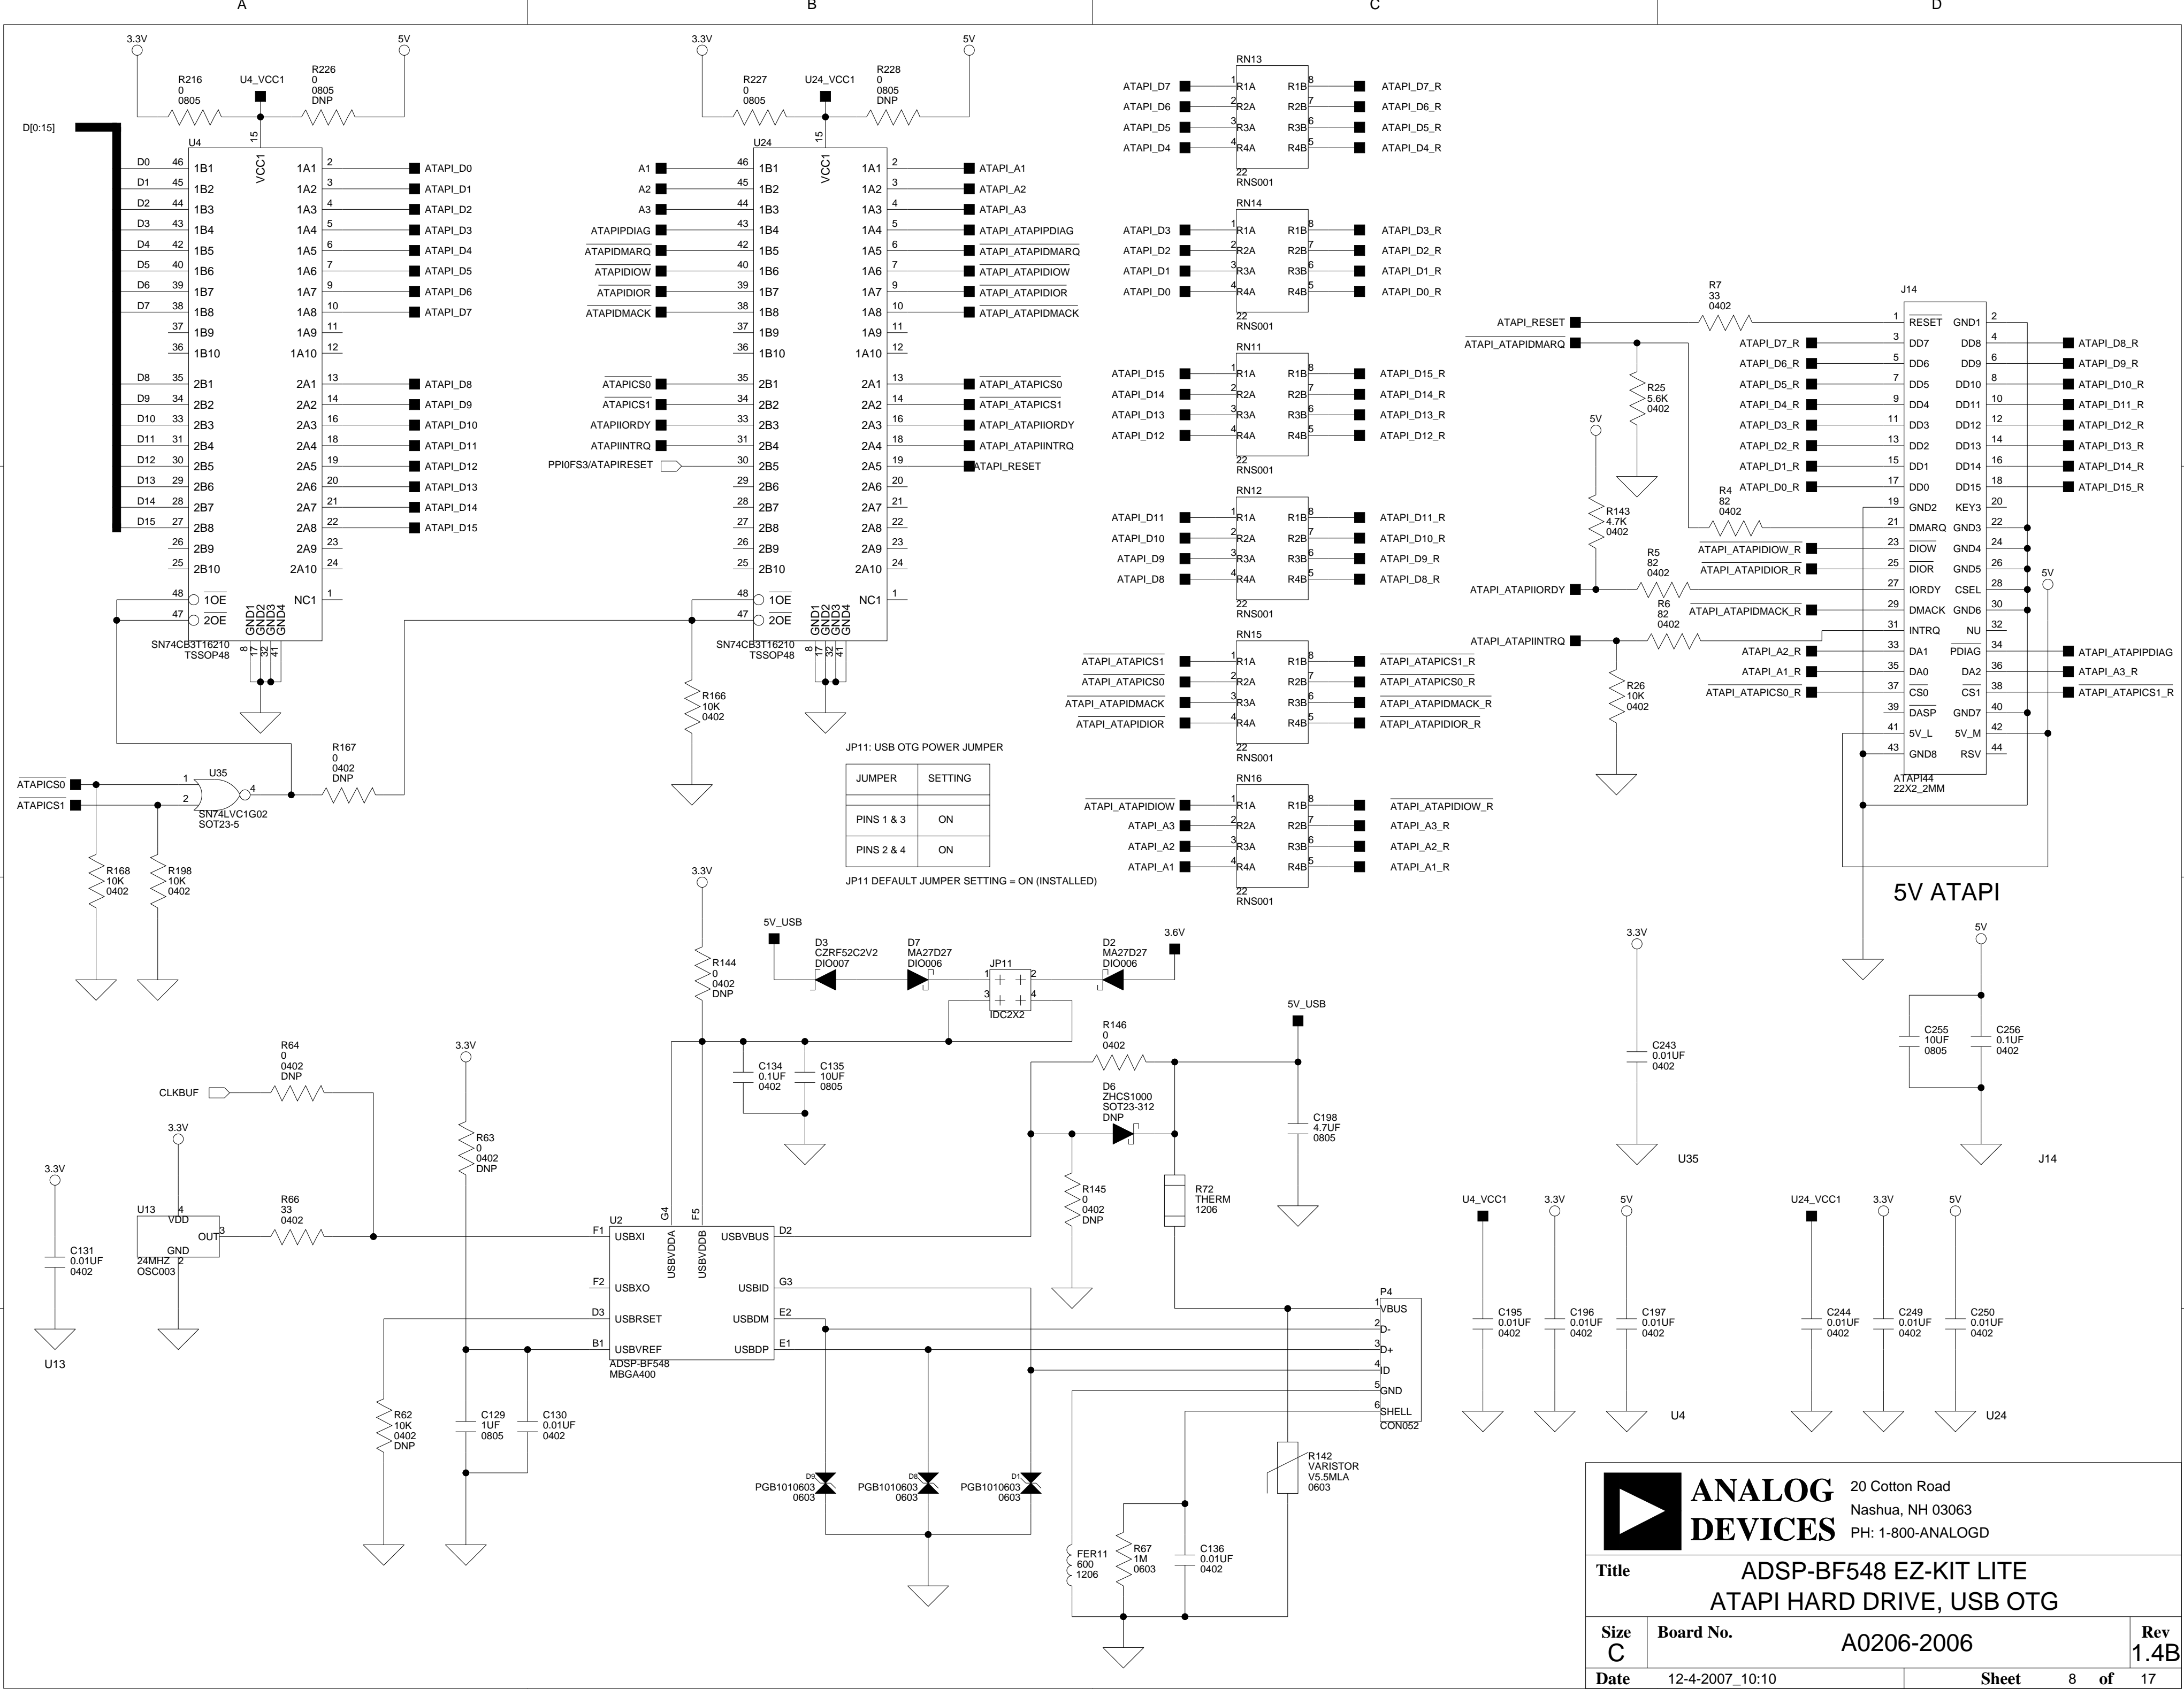

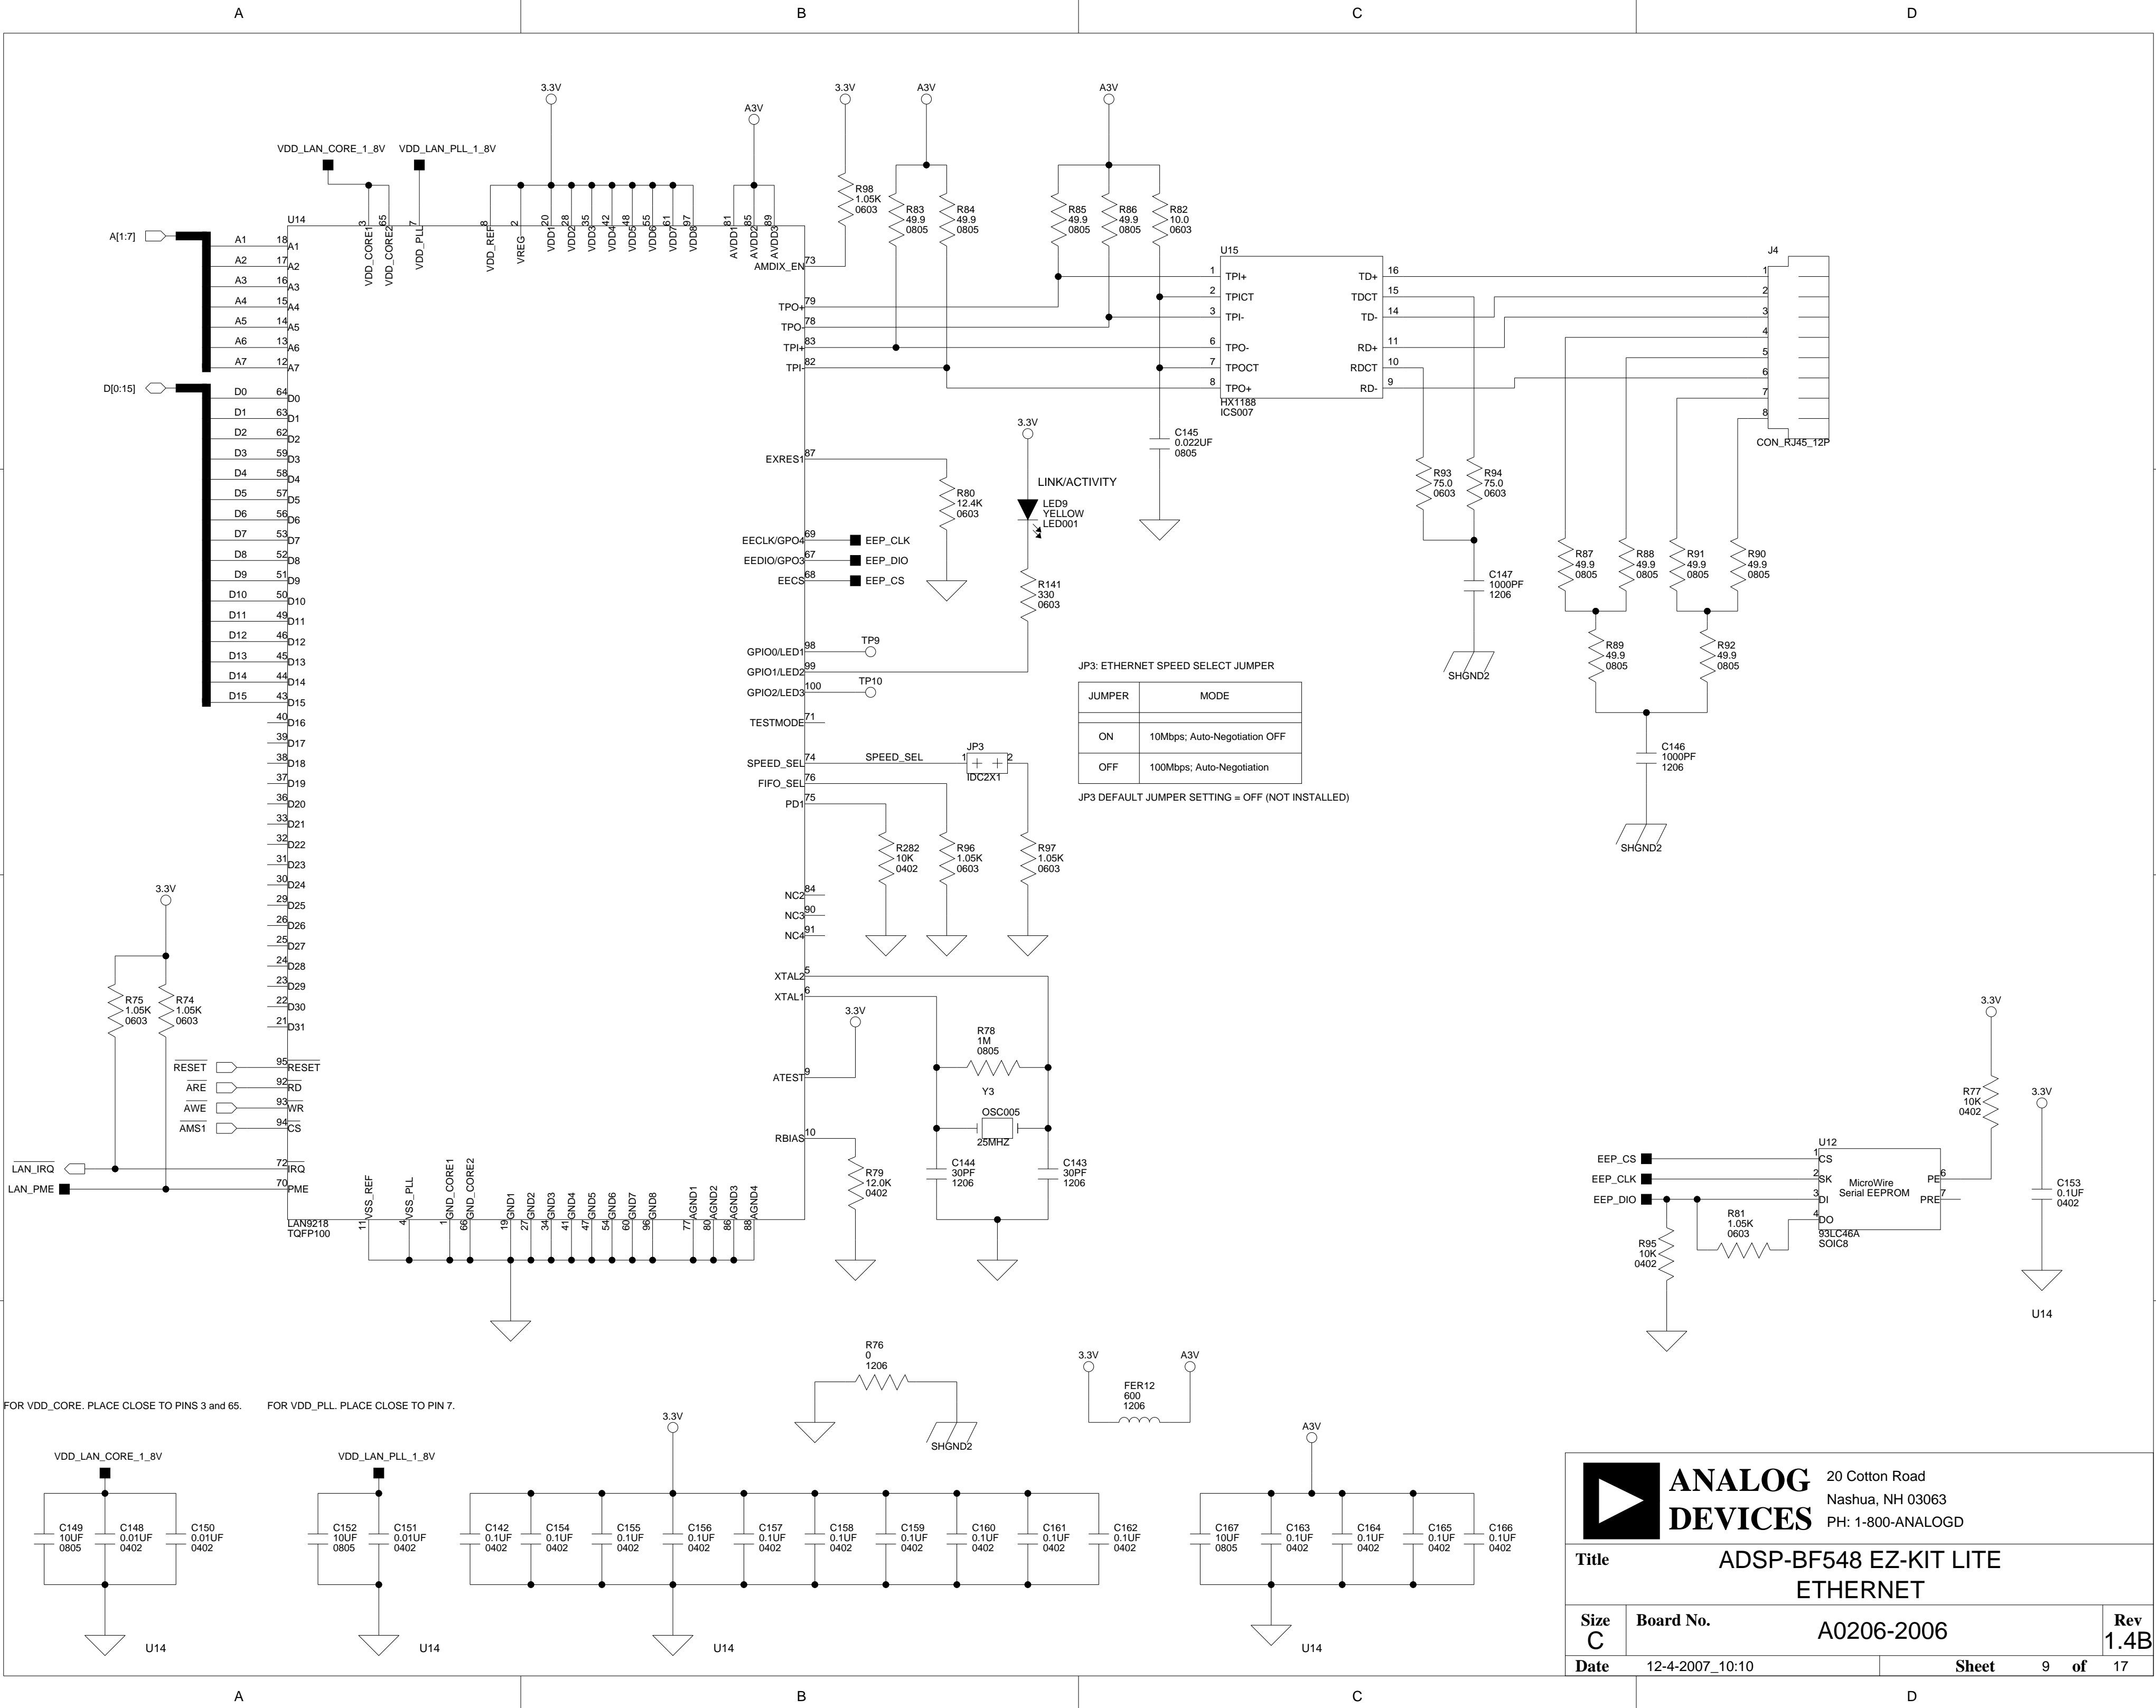


SW6: CAN0 Enable Switch

POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION
SW6.1	ENABLE	GND	OFF	
SW6.2	~STB	GND	OFF	
SW6.3	CAN0_ERR	U2 - PC0	ON	STAMP_GPIO1
SW6.4	CAN0RX	U2 - PG13	ON	STAMP_GPIO0

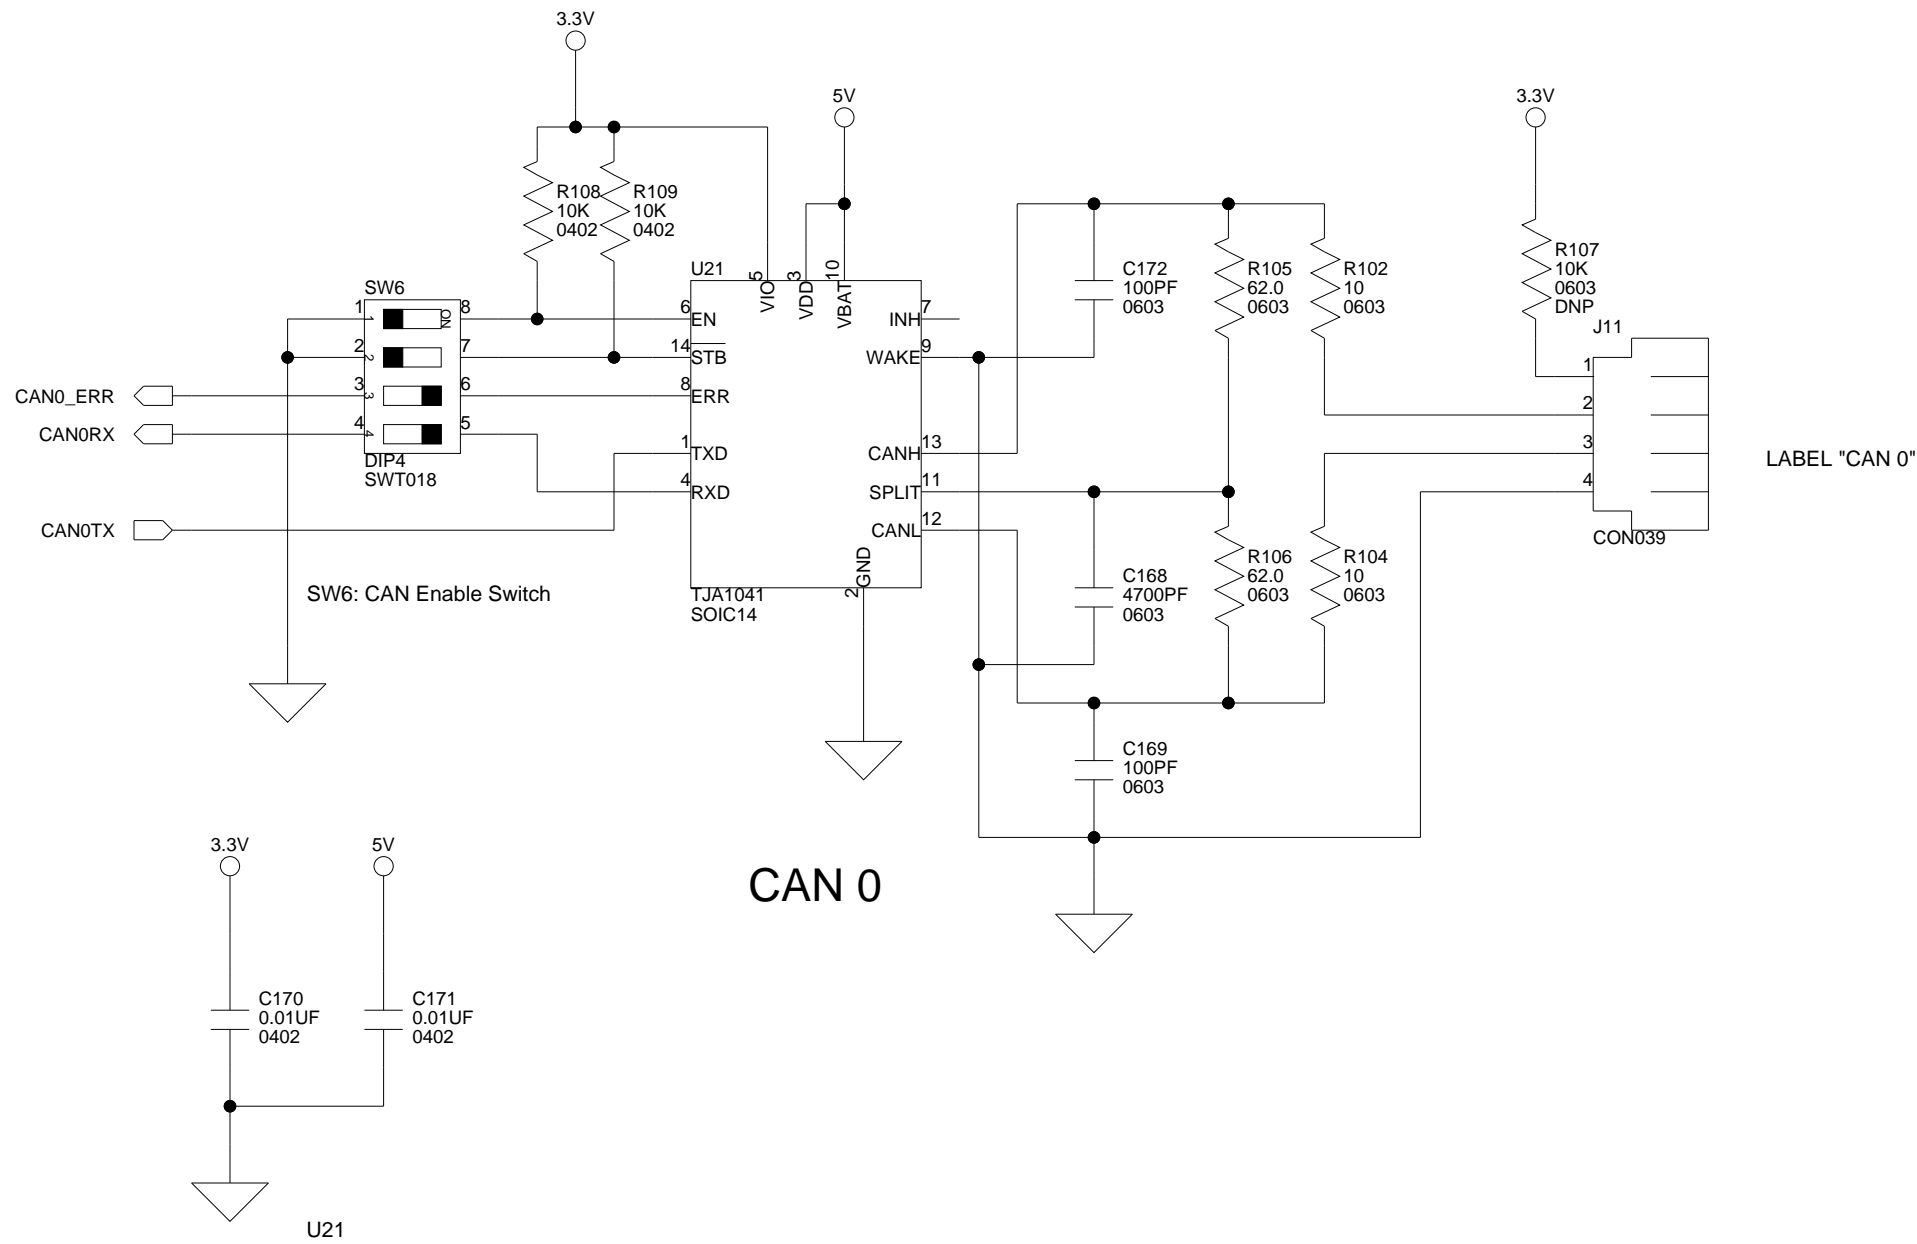

SW15: CAN1 Enable Switch

POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION
SW15.1	ENABLE	GND	OFF	
SW15.2	~STB	GND	OFF	
SW15.3	CAN1_ERR	U2 - PC5	ON	STAMP_GPIO3
SW15.4	CAN1RX	U2 - PG15	ON	STAMP_GPIO2


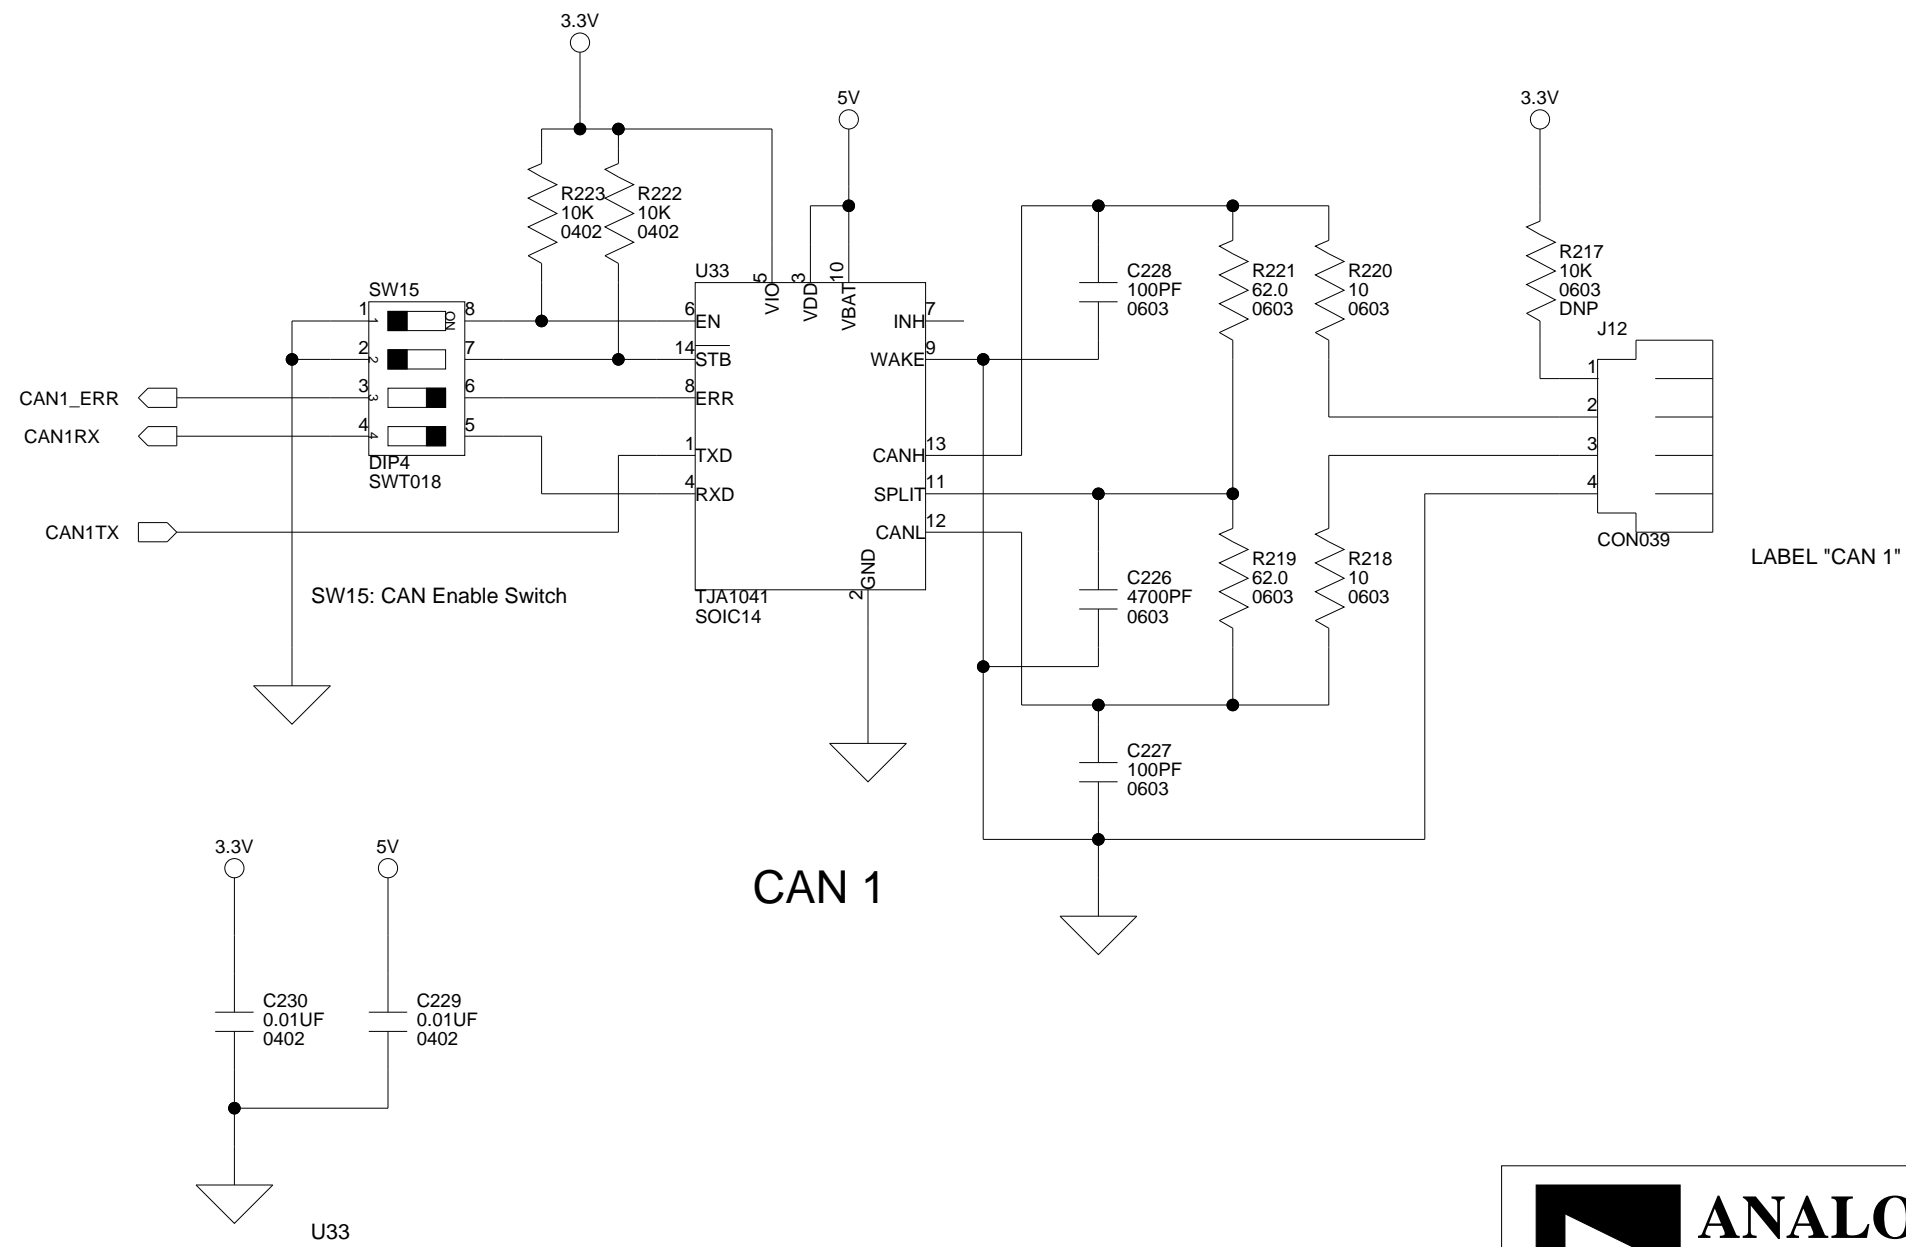


**ANALOG
DEVICES**


20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD


Title ADSP-BF548 EZ-KIT LITE CAN			
Size C	Board No. A0206-2006		Rev 1.4B
Date	12-4-2007_10:10	Sheet	10 of 17

SW7: UART Enable Switch				
POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION / OFF MODE
SW7.1	UART1CTS (U2)	U32	ON	N/A
SW7.2	UART1_RX (U2)	U32	ON	J3.47 (Expansion Interface)
SW7.3	UART1RTS (U2)	U32	ON	N/A
SW7.4	UART1RTS	UART1CTS	OFF	LOOPBACK OF CTS TO RTS

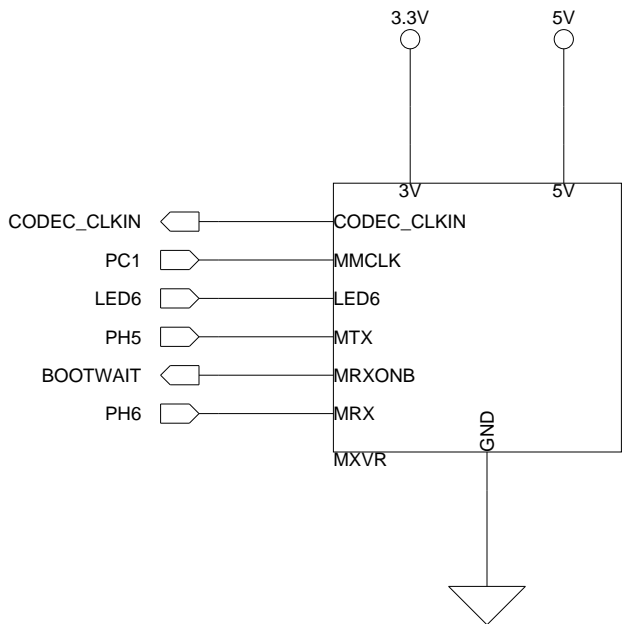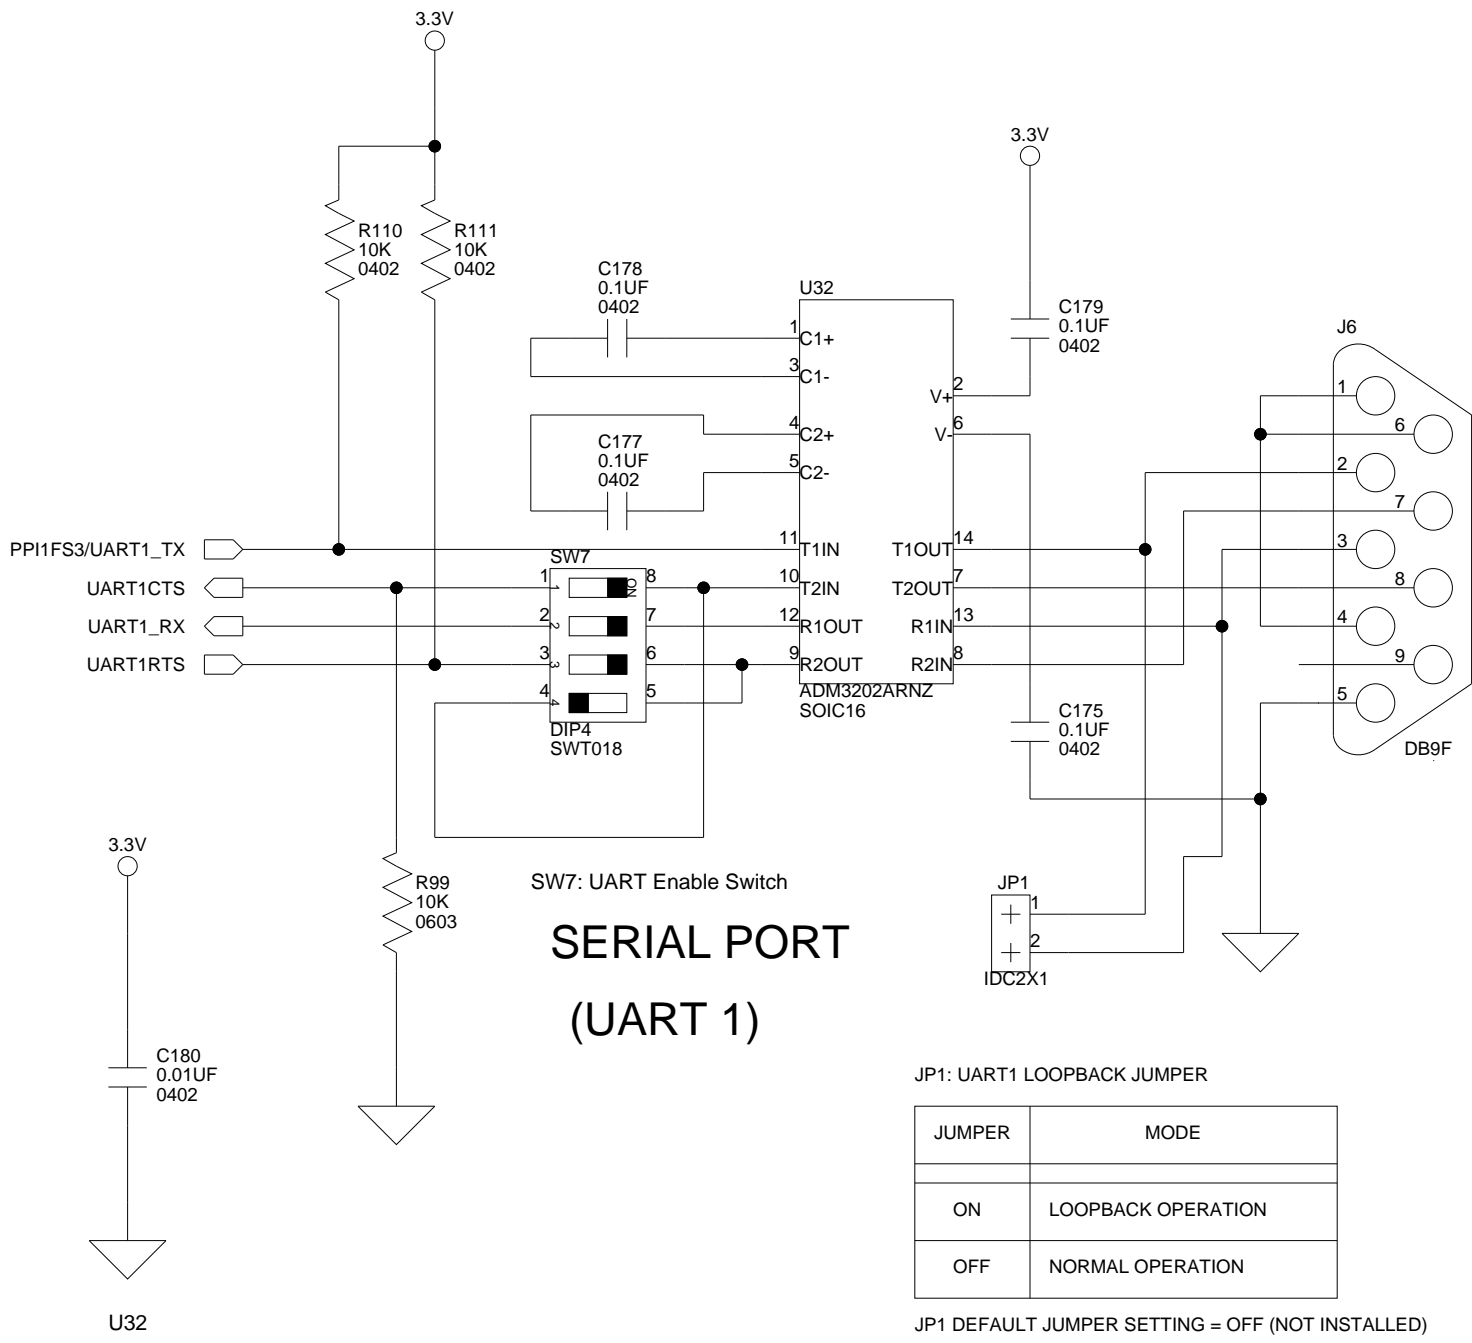

THE MXVR PORT IS ONLY AVAILABLE ON THE BF549
SOME OF THESE PINS STILL NEED TO BE CONNECTED ON THE BF548
PLEASE REFER TO BF548 DATASHEETS FOR MOST ACCURATE INFO

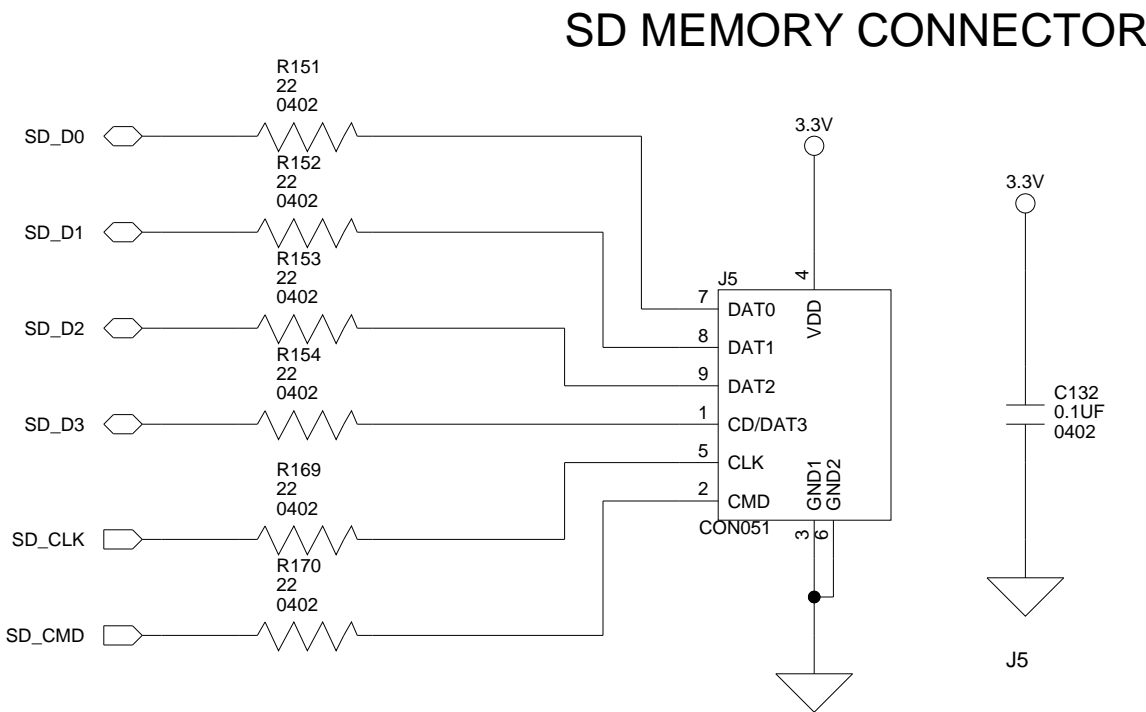




**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title			ADSP-BF548 EZ-KIT LITE MXVR PORT, UART, SD CONN	
Size C	Board No.		A0206-2006	Rev 1.4B
Date	4-17-2008_17:04		Sheet	11 of 17

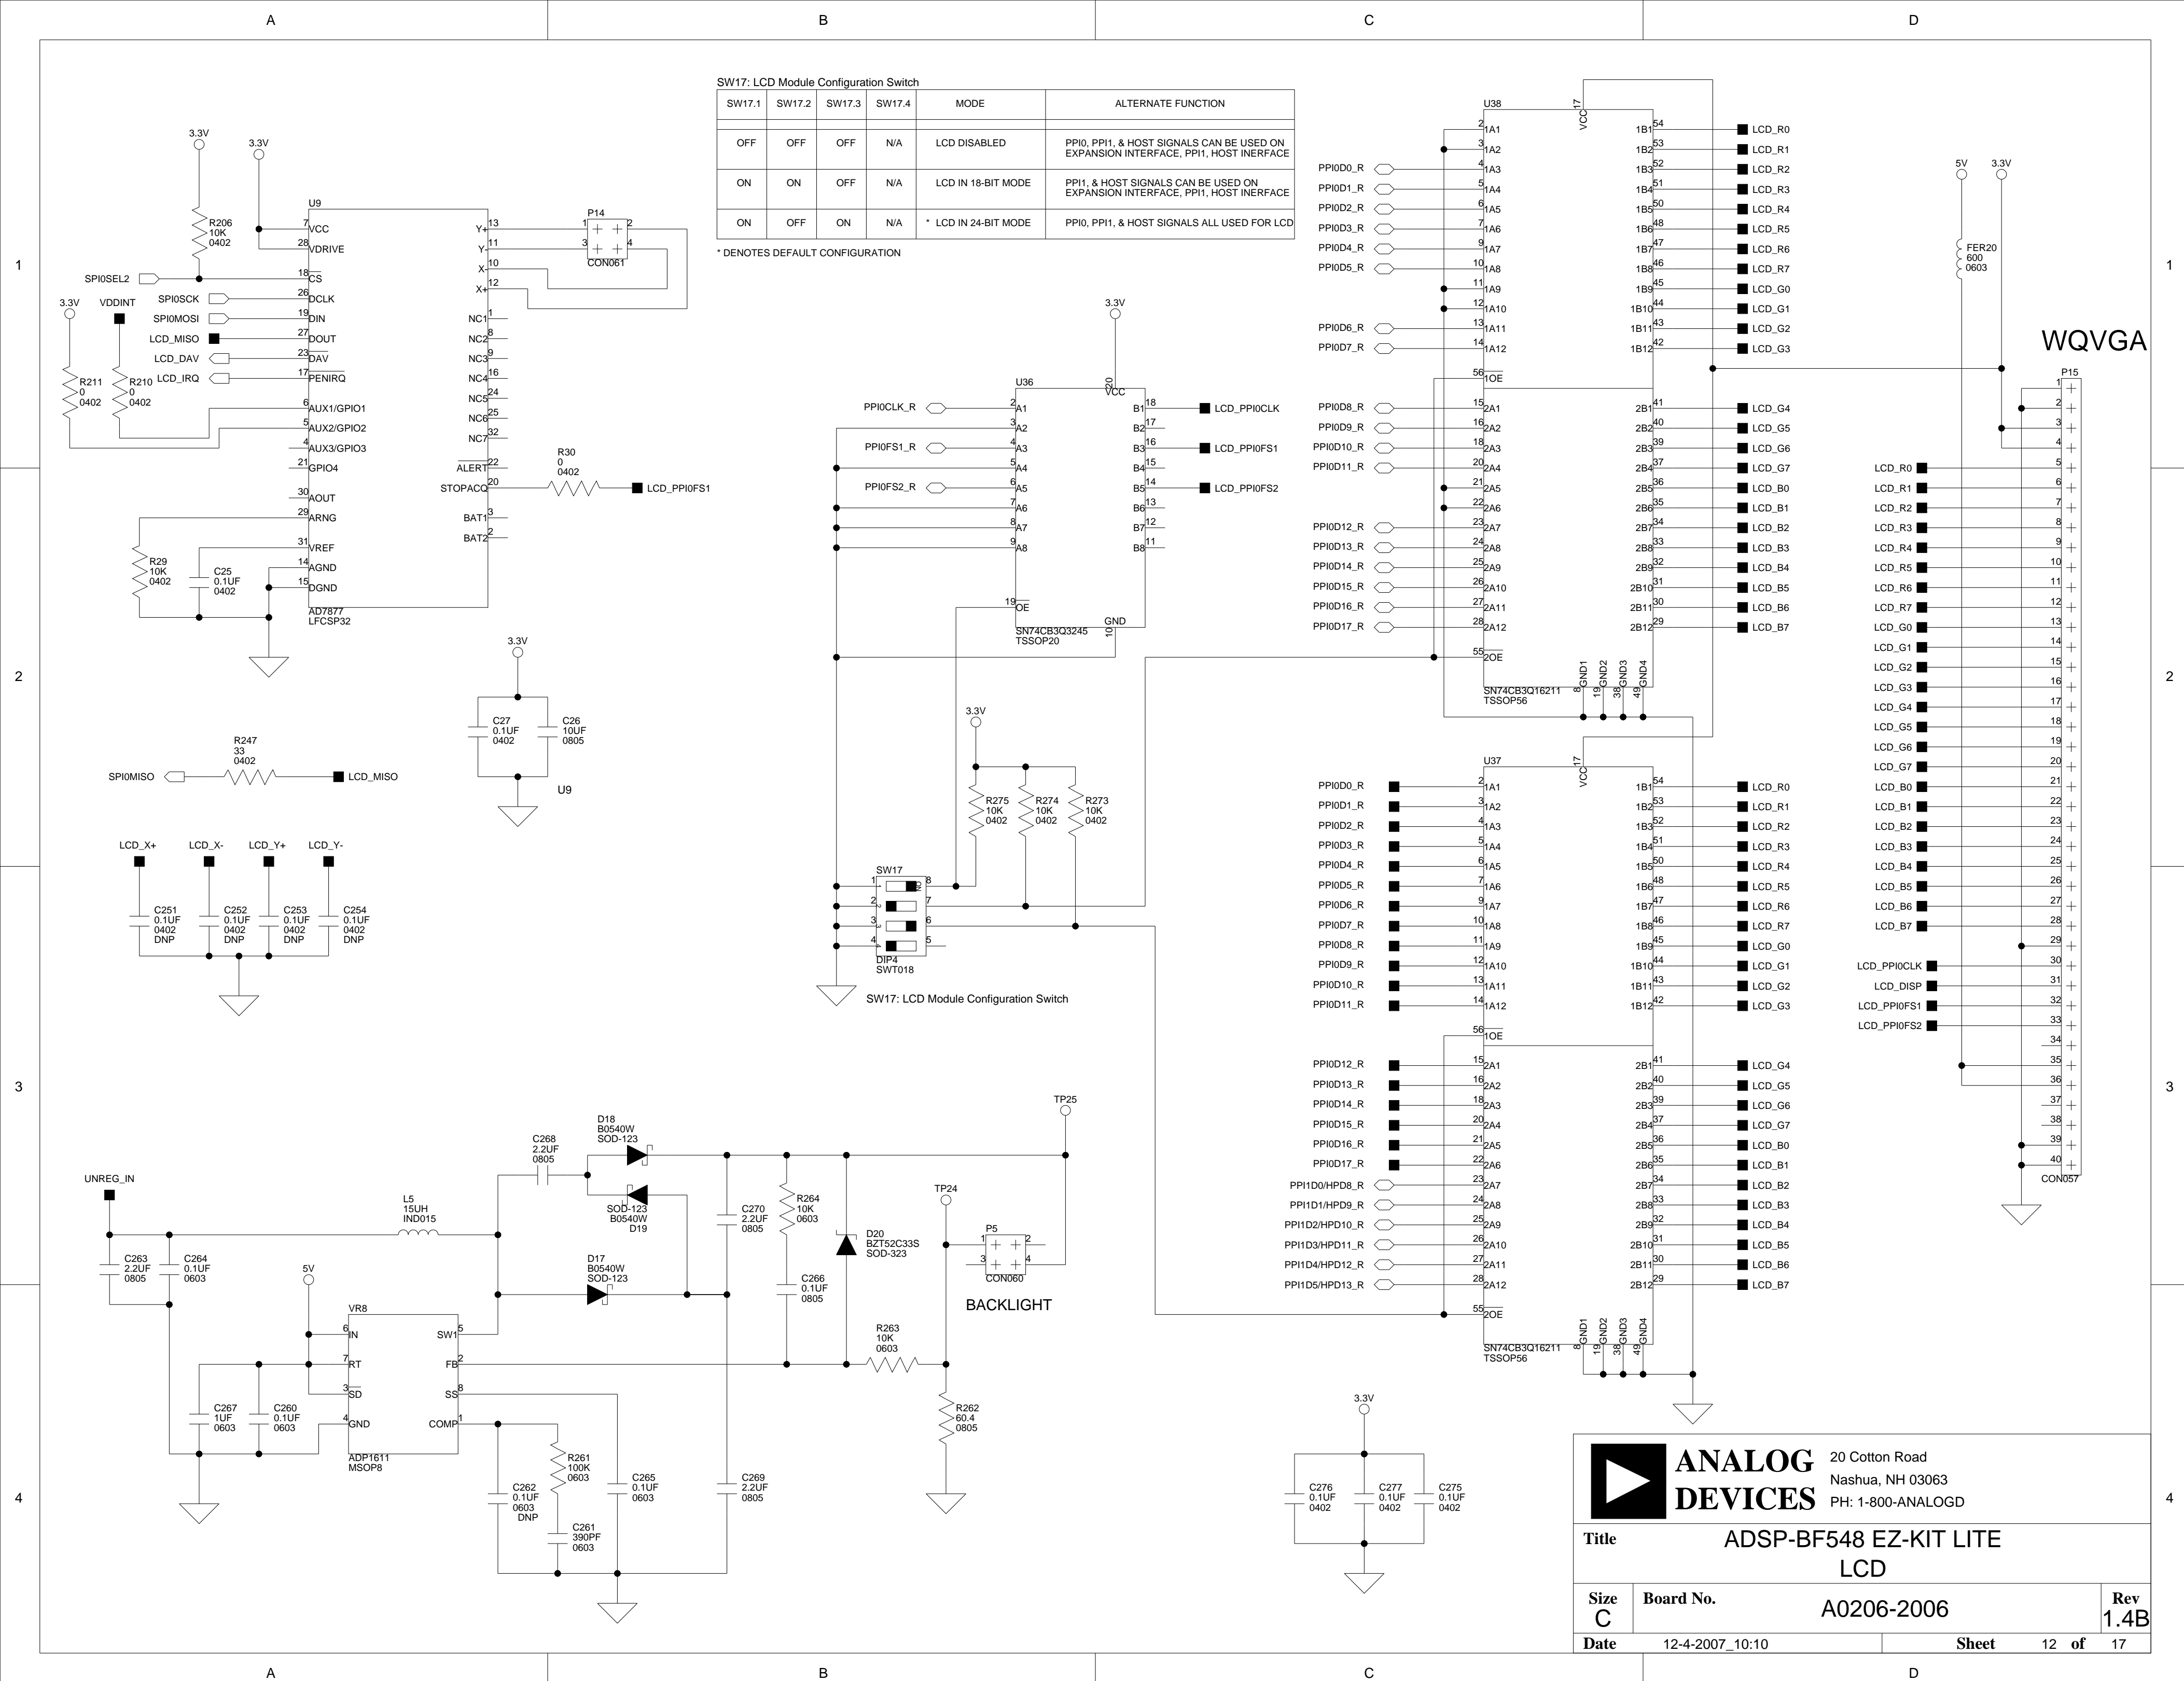

1

2

3


4

A





B


C

D

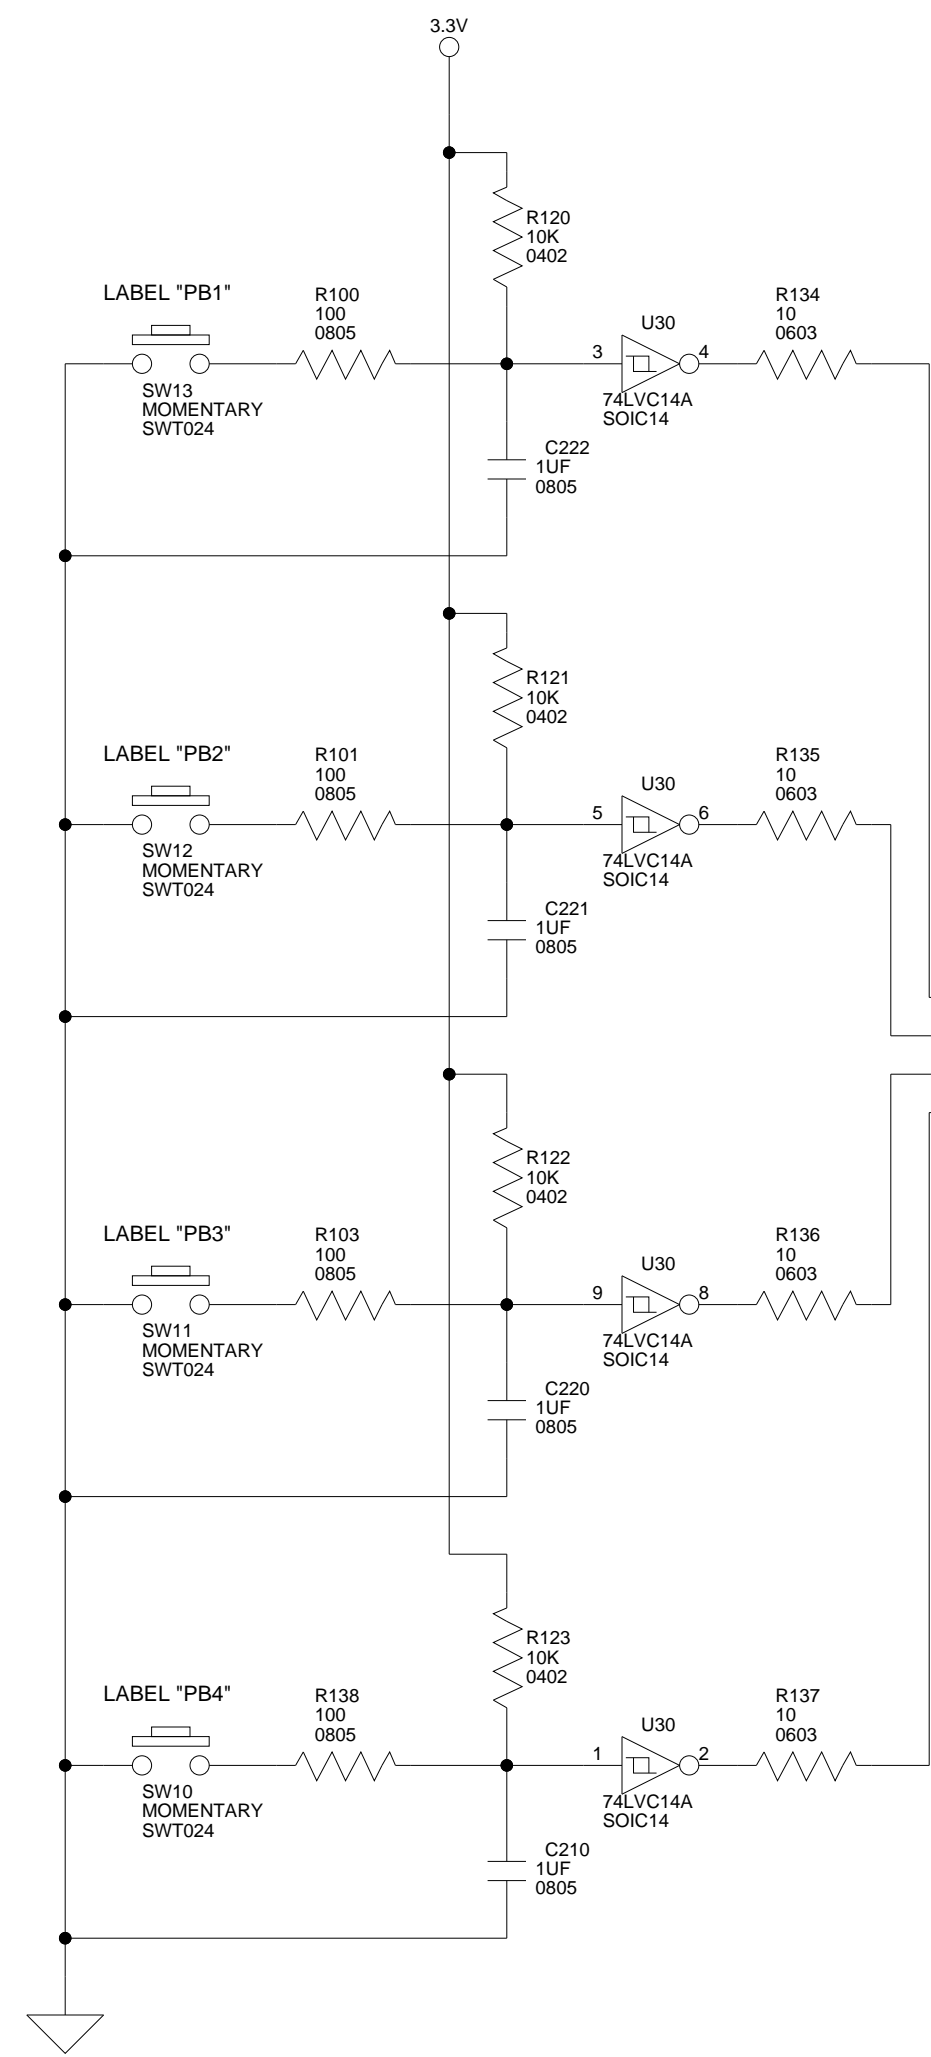

SW5: Push Button Enable Switch				
POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION / OFF MODE
SW5.1	PUSHBUTTON1 (U2 - GPIO: PB8)	PB1 (SW13)	ON	EXPANSION INTERFACE (J2.7 & J2.26) TIMERS (P11.6), SPORT2 (P6.28), SPORT3 (P7.28)
SW5.2	PUSHBUTTON2 (U2 - GPIO: PB9)	PB2 (SW12)	ON	EXPANSION INTERFACE (J2.23), UART3 (P12.3) TIMERS (P11.8), SPORT2 (P6.30), SPORT3 (P7.30)
SW5.3	PUSHBUTTON3 (U2 - GPIO: PB10)	PB3 (SW11)	ON	EXPANSION INTERFACE (J3.31), UART3 (P12.5) TIMERS (P11.10), SPORT2 (P6.32), SPORT3 (P7.32)
SW5.4	PUSHBUTTON4/HPWAIT (U2 - GPIO: PB11)	PB4 (SW10)	ON	HOST INTERFACE (P3.12), NOR_RESET (SW16.4) EXPANSION INTERFACE (J1.85)

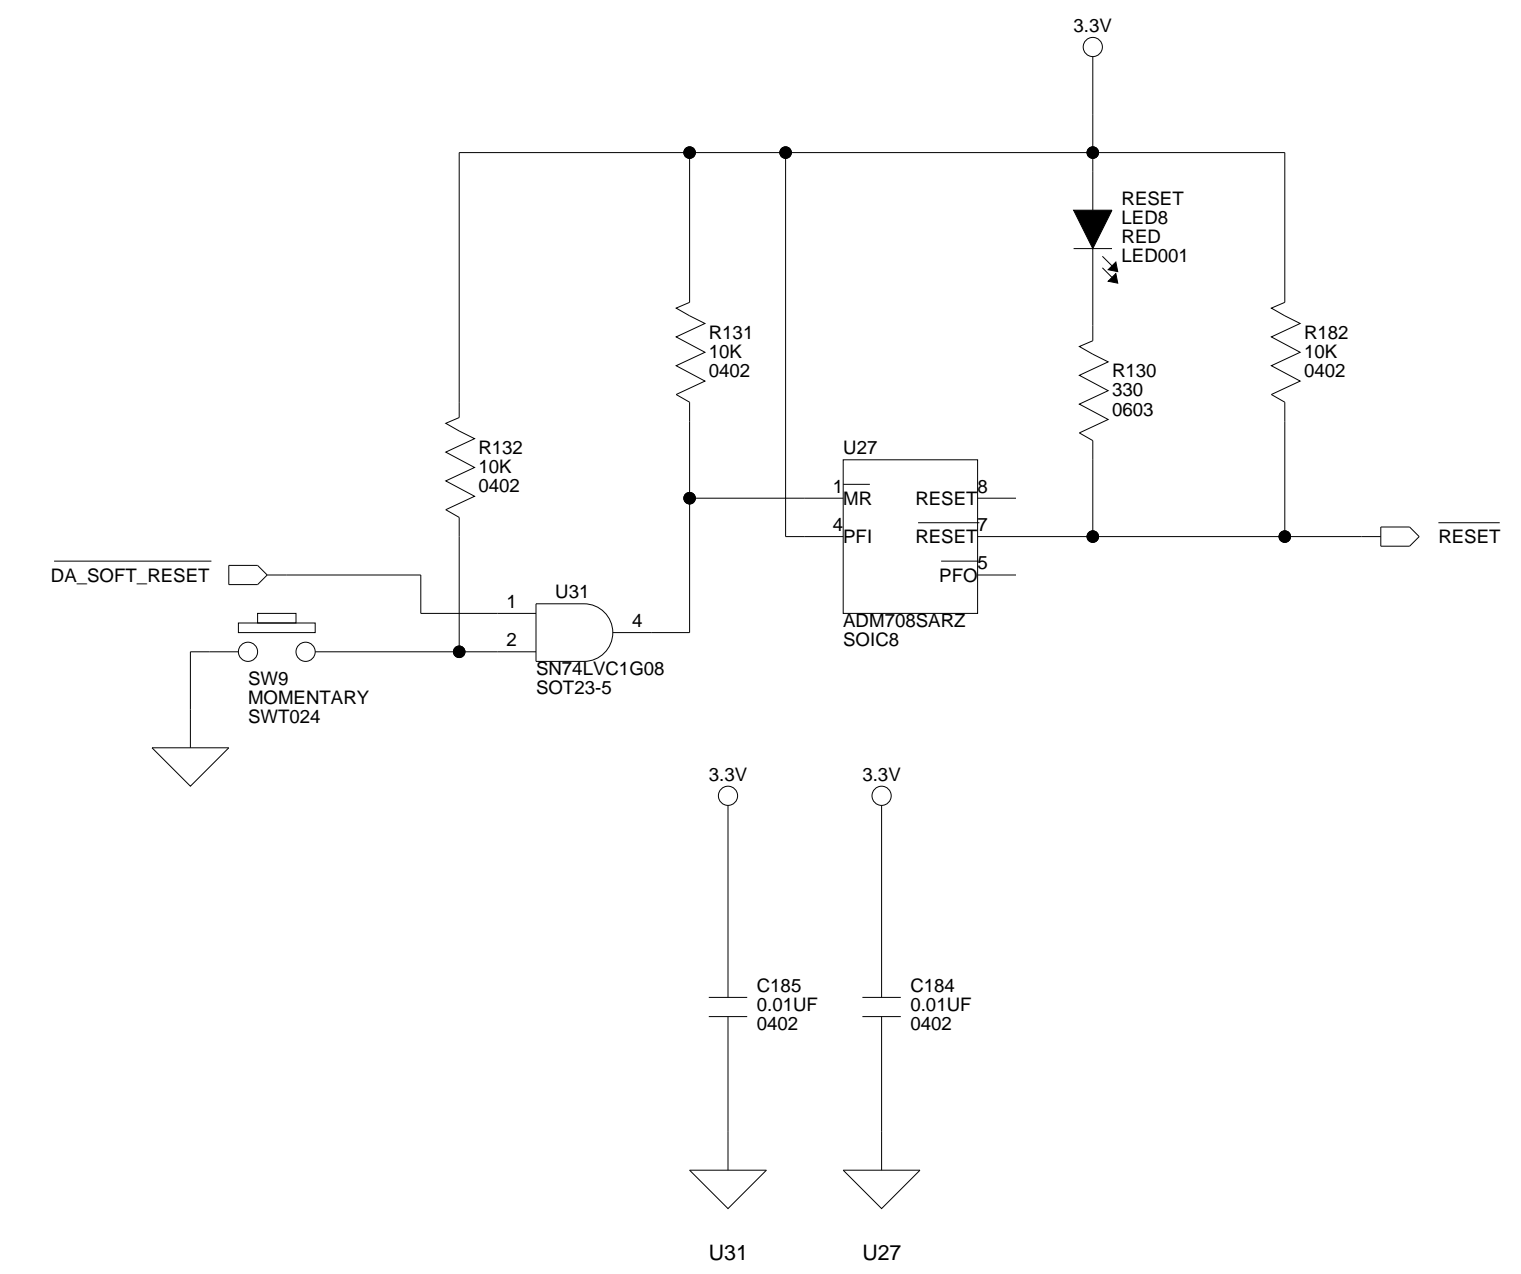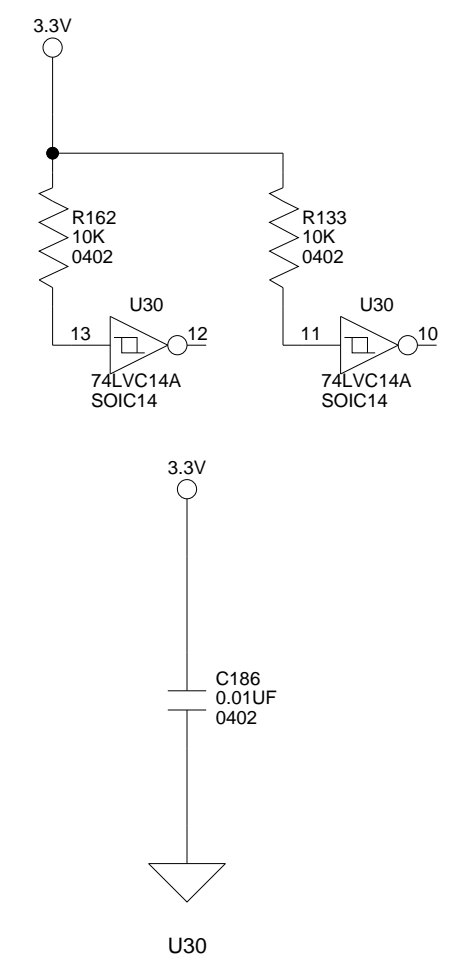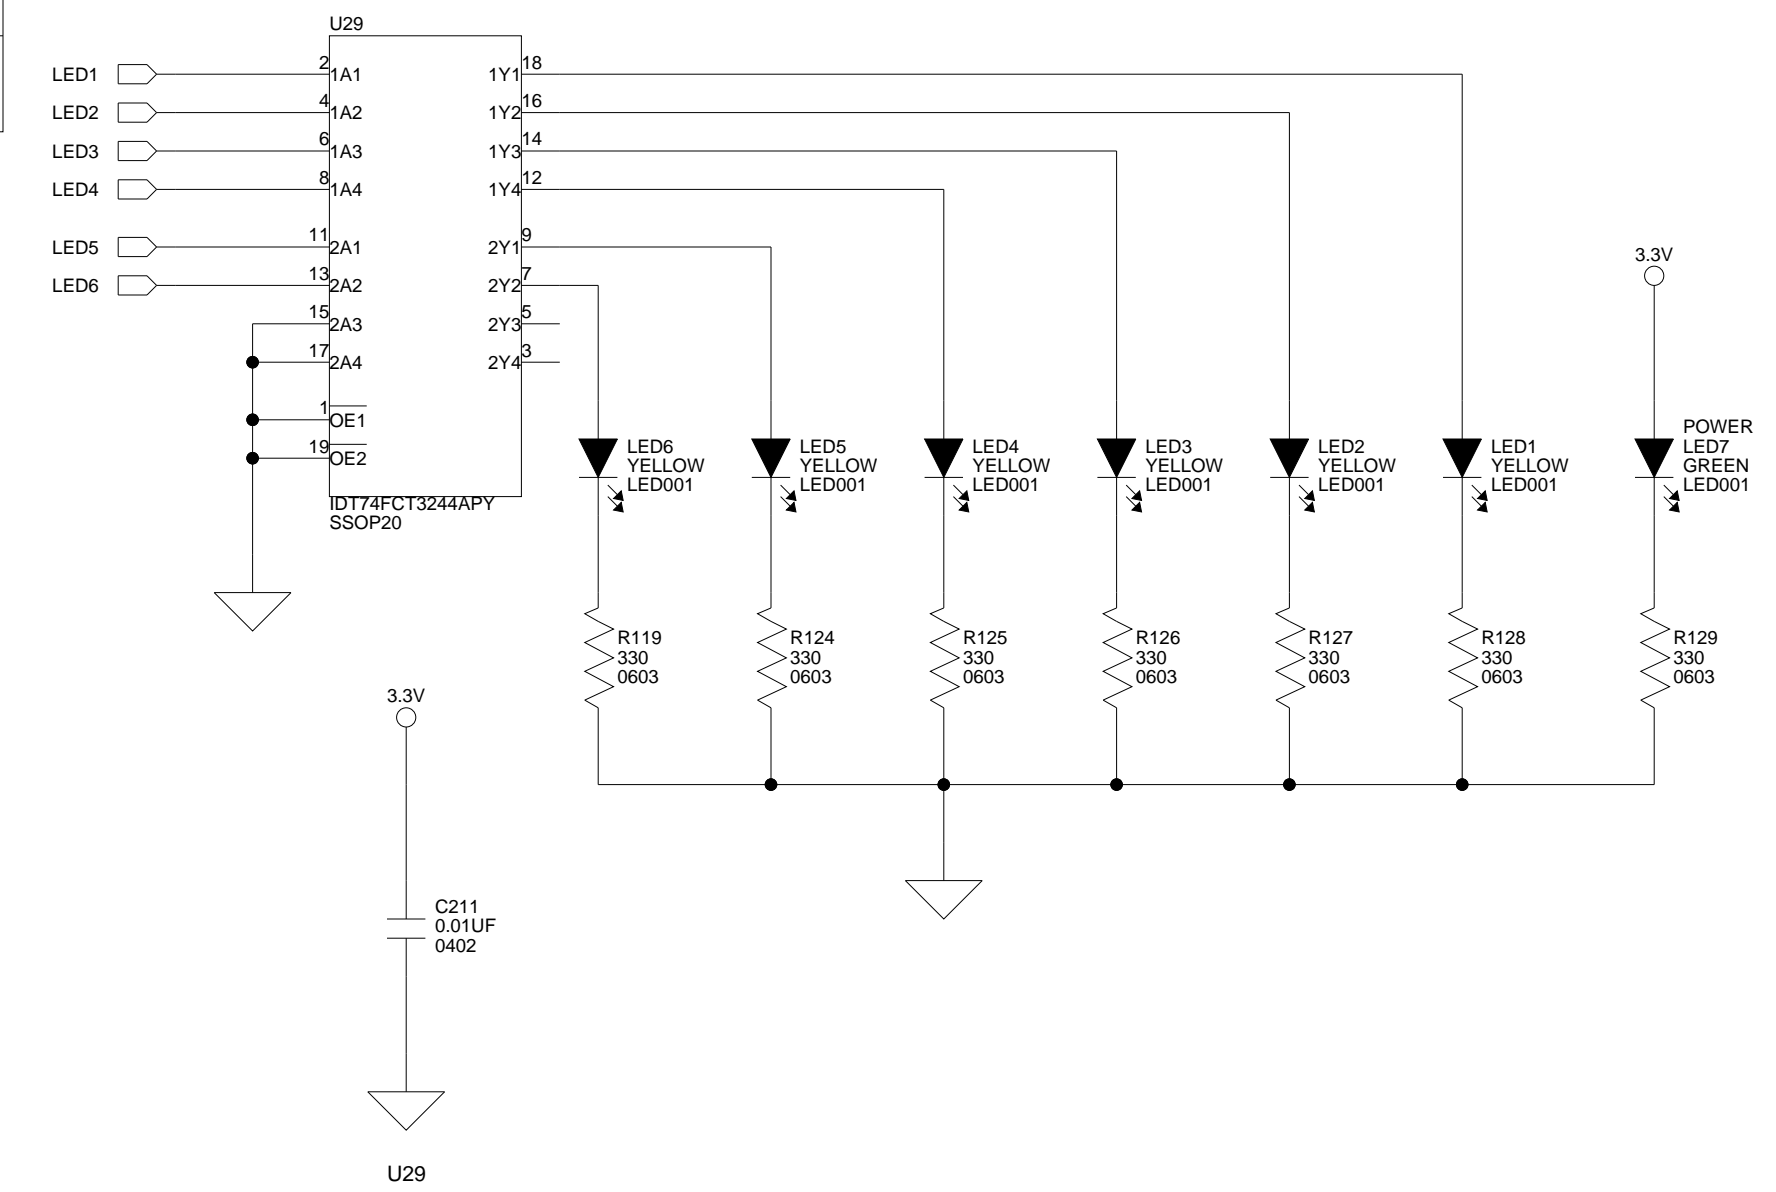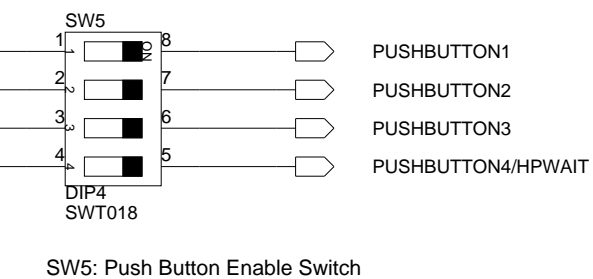







**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title			ADSP-BF548 EZ-KIT LITE PUSH BUTTONS, LEDS AND BOOT MODE		
Size C	Board No.		A0206-2006		Rev 1.4B
Date	12-4-2007_10:10		Sheet	13 of	17



EXPANSION INTERFACE (TYPE B)

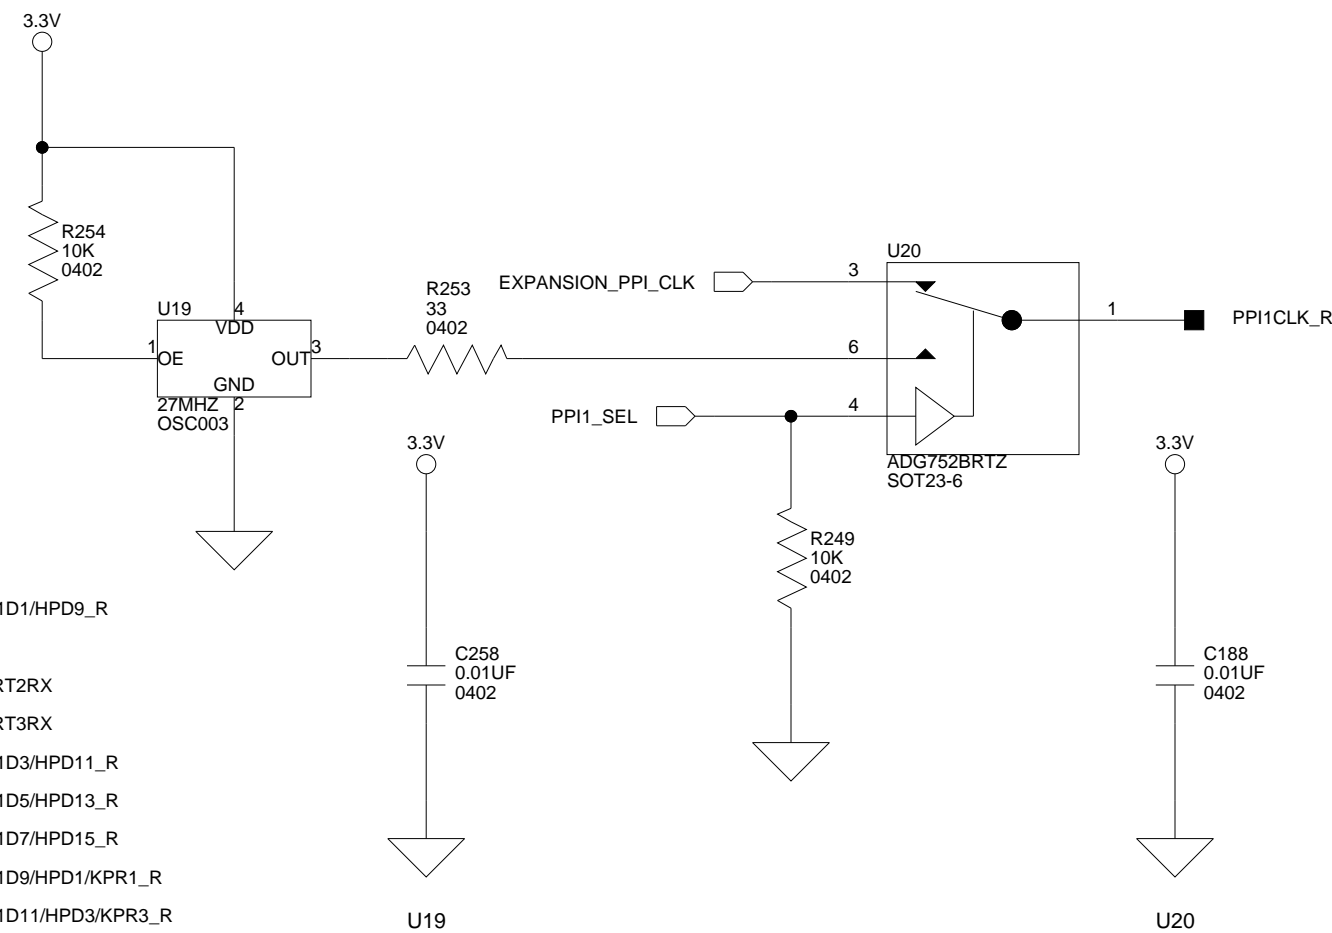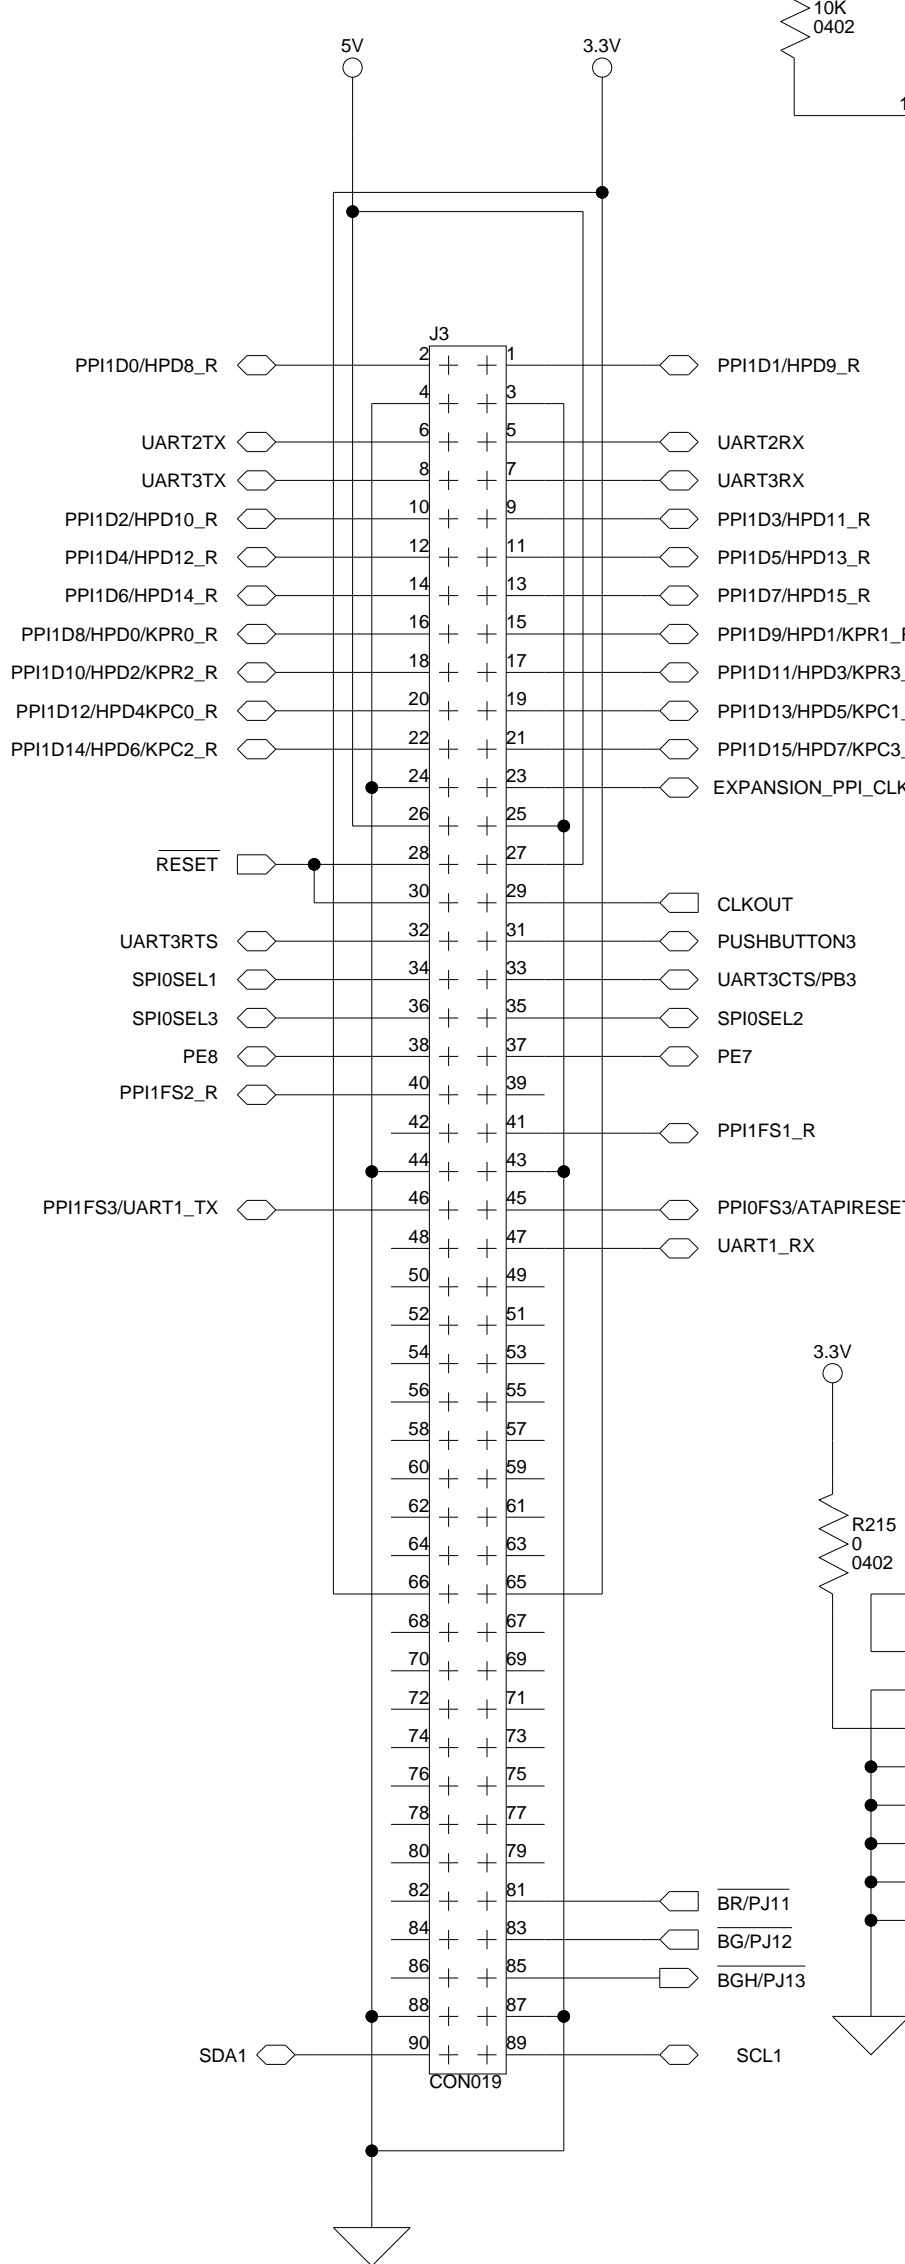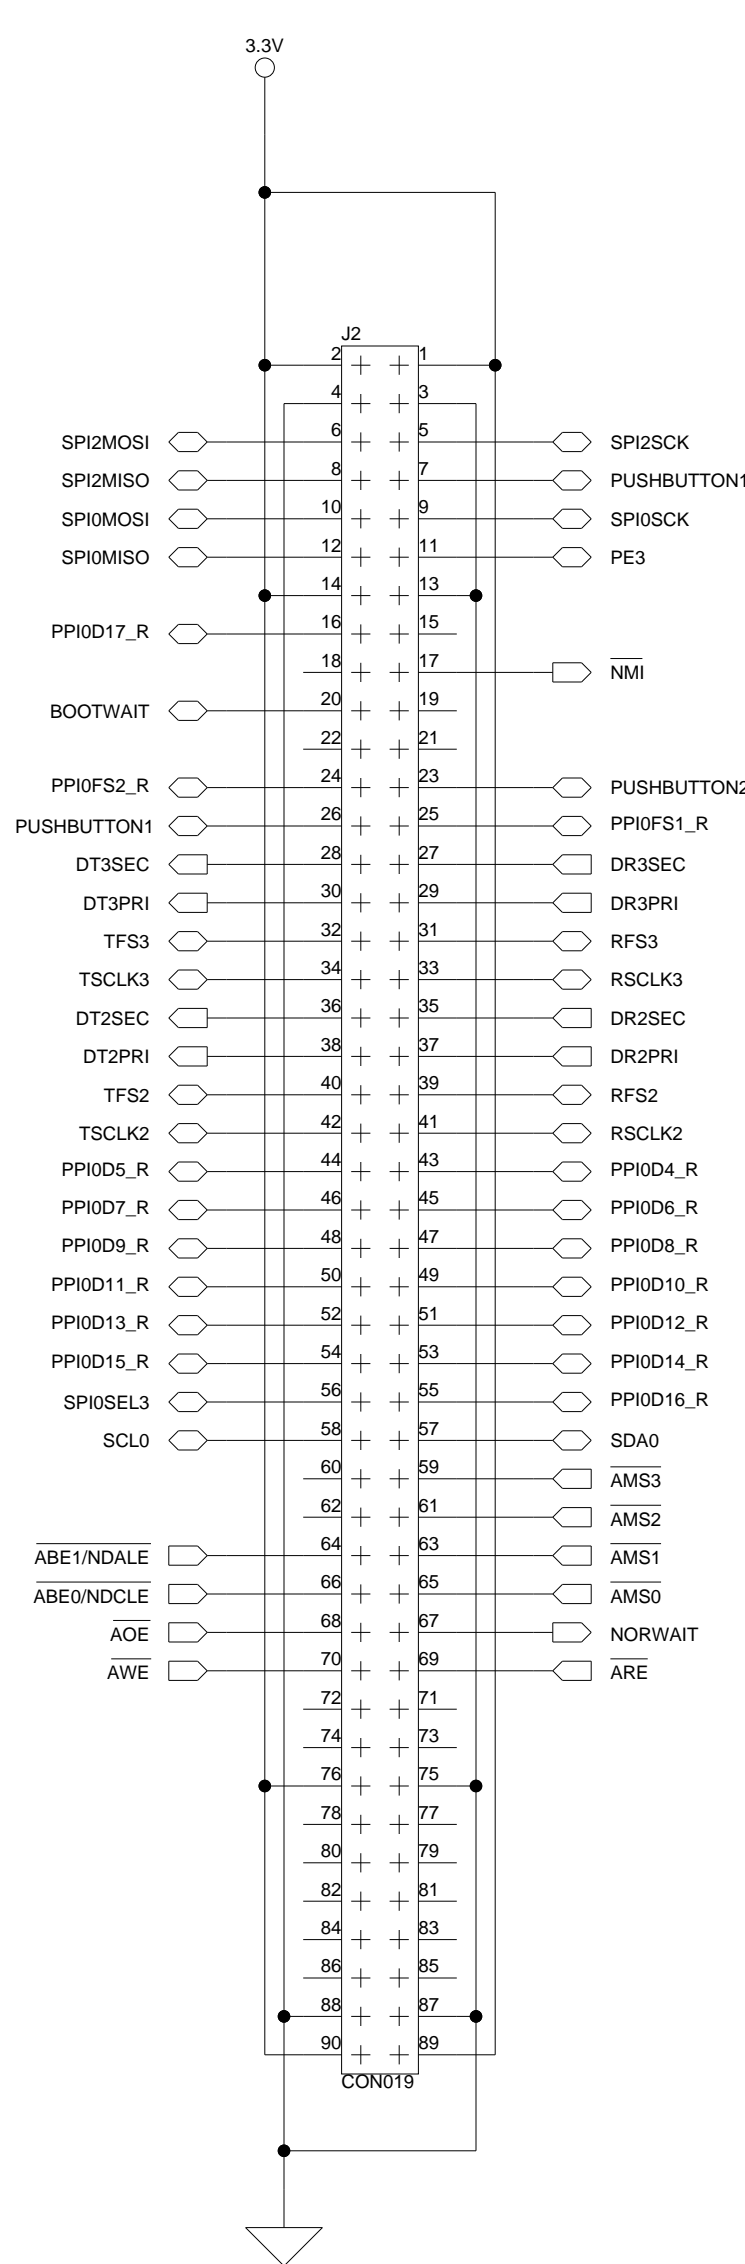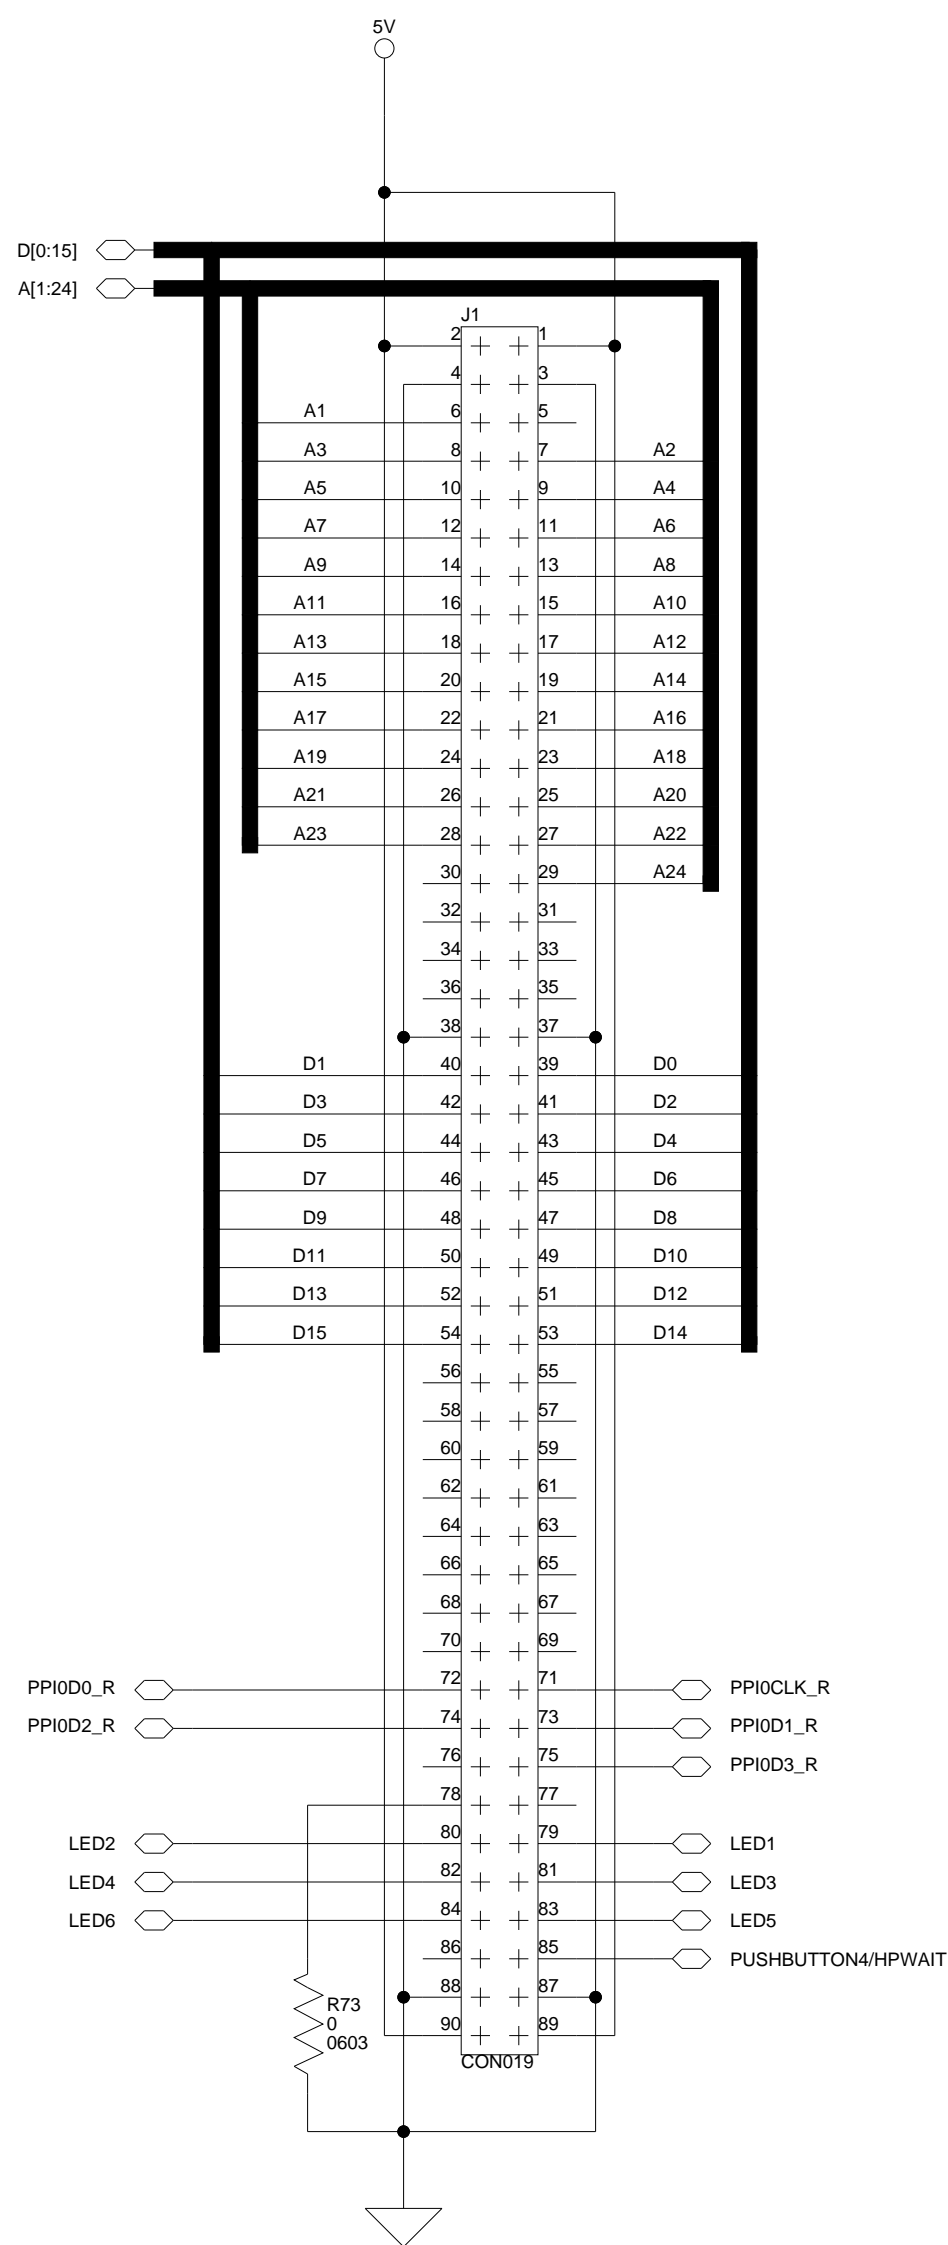

All USB interface circuitry is considered proprietary and has been omitted from this schematic.

When designing your JTAG interface please refer to the Engineer to Engineer Note EE-68 which can be found at <http://www.analog.com>

DSP JTAG HEADER

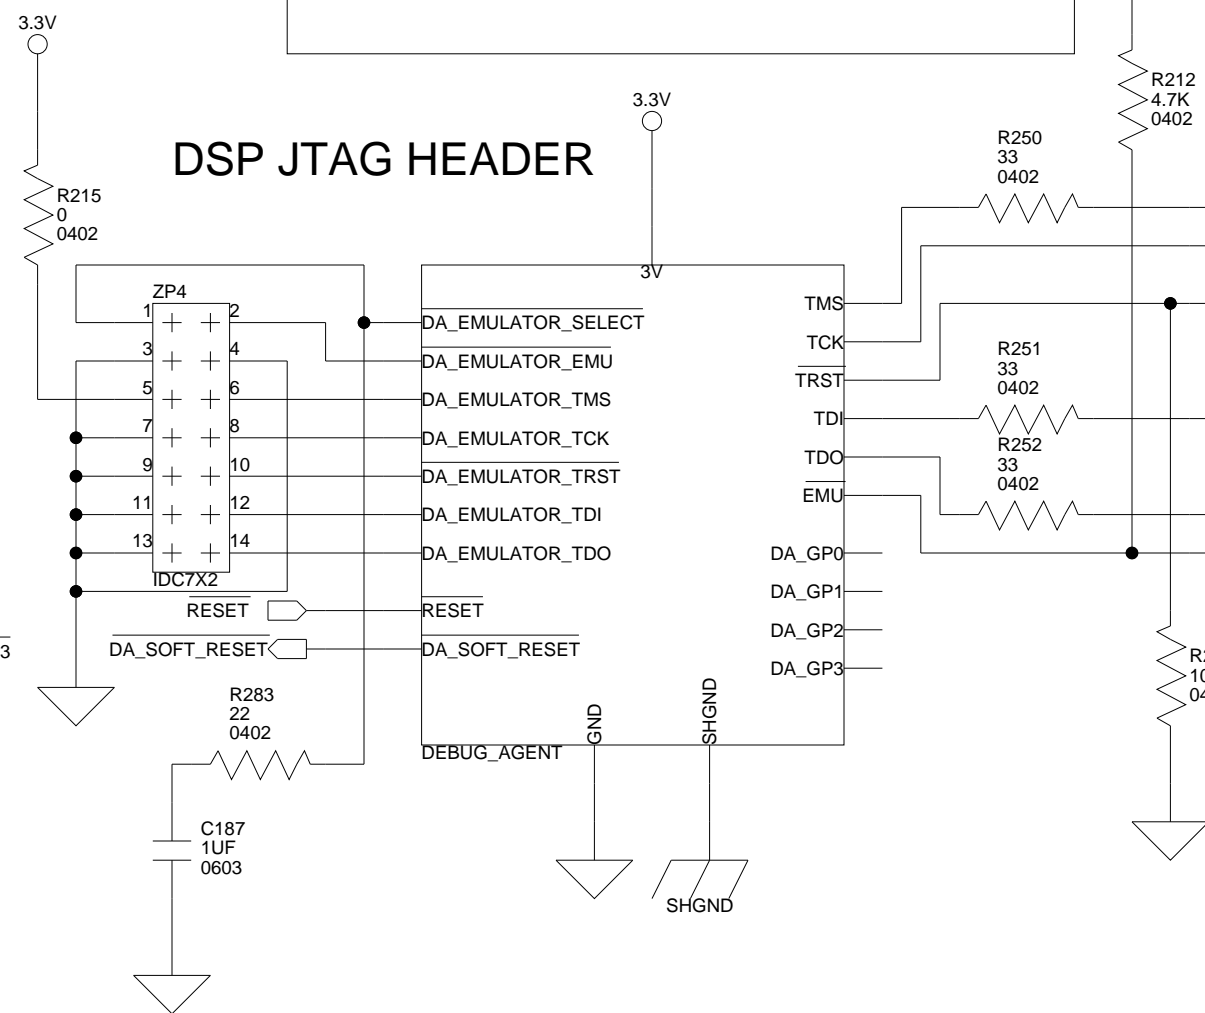

**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title **ADSP-BF548 EZ-KIT LITE
EXPANSION INTERFACE & JTAG**

Size C	Board No. A0206-2006	Rev 1.4B
Date 12-4-2007_10:10	Sheet 14	of 17

1

2

3

4

1

2

3












4


A

B

C

D

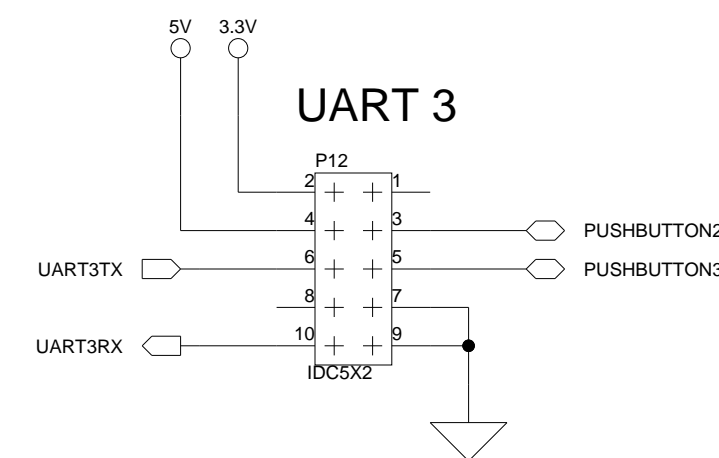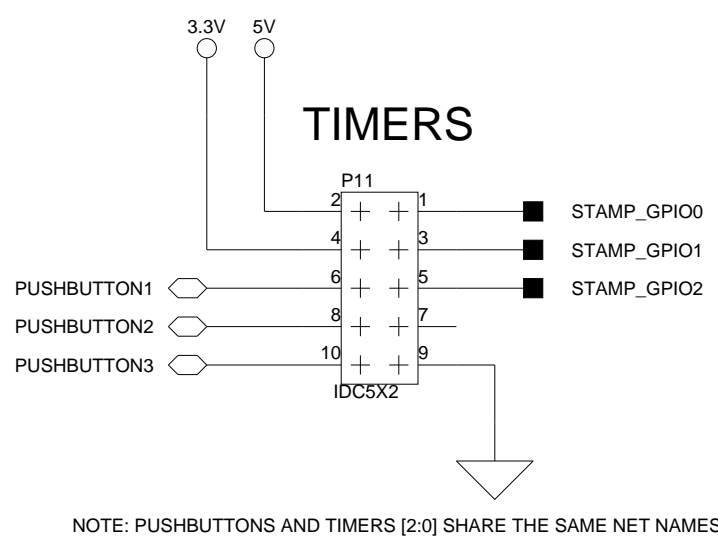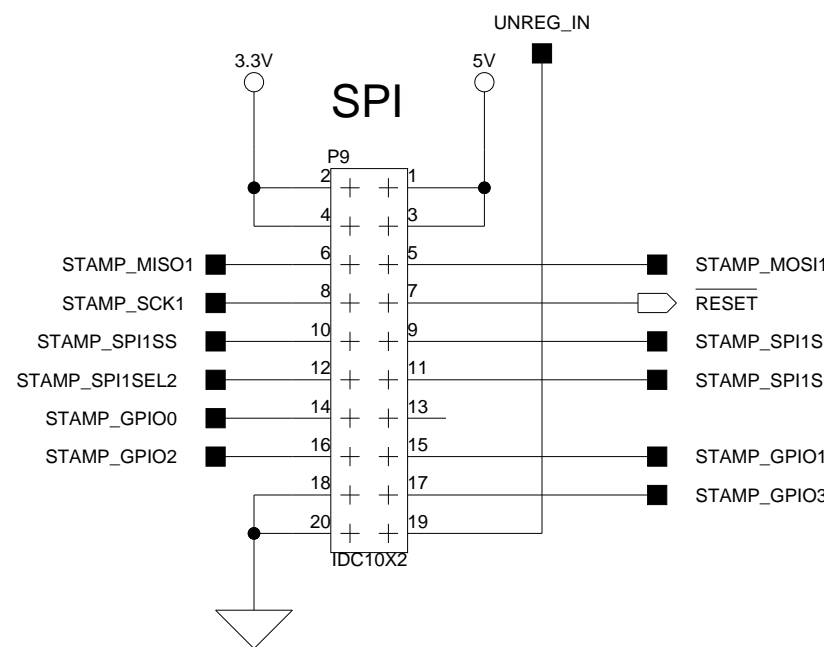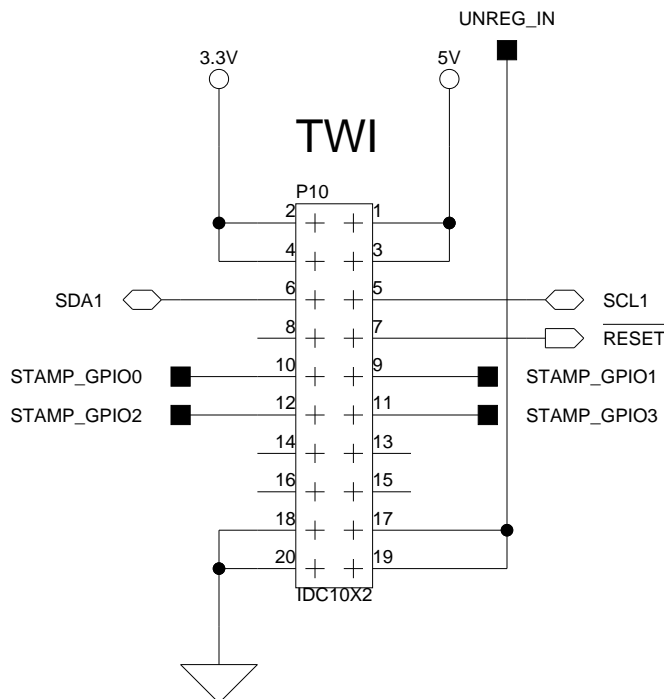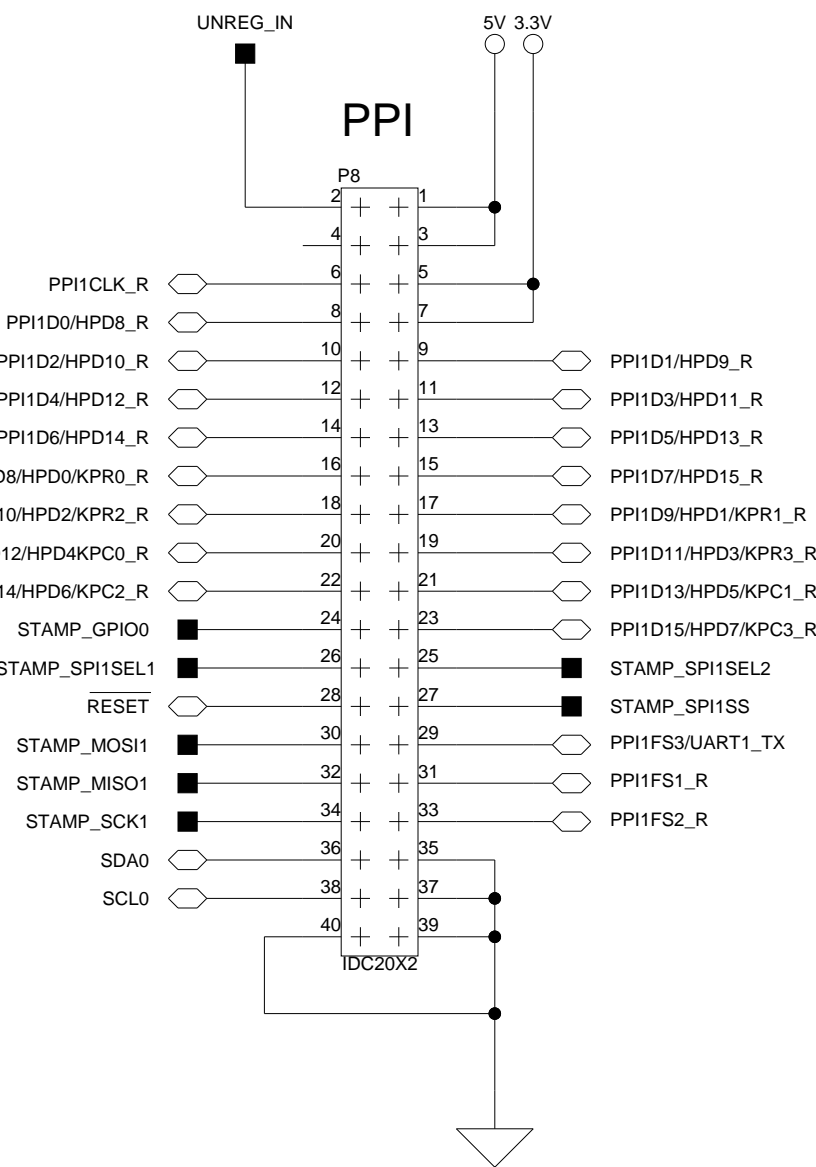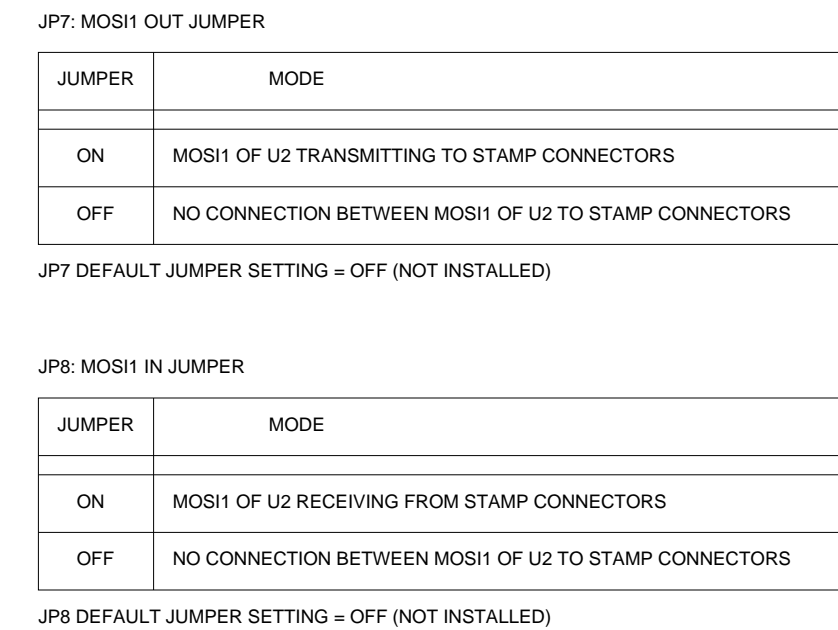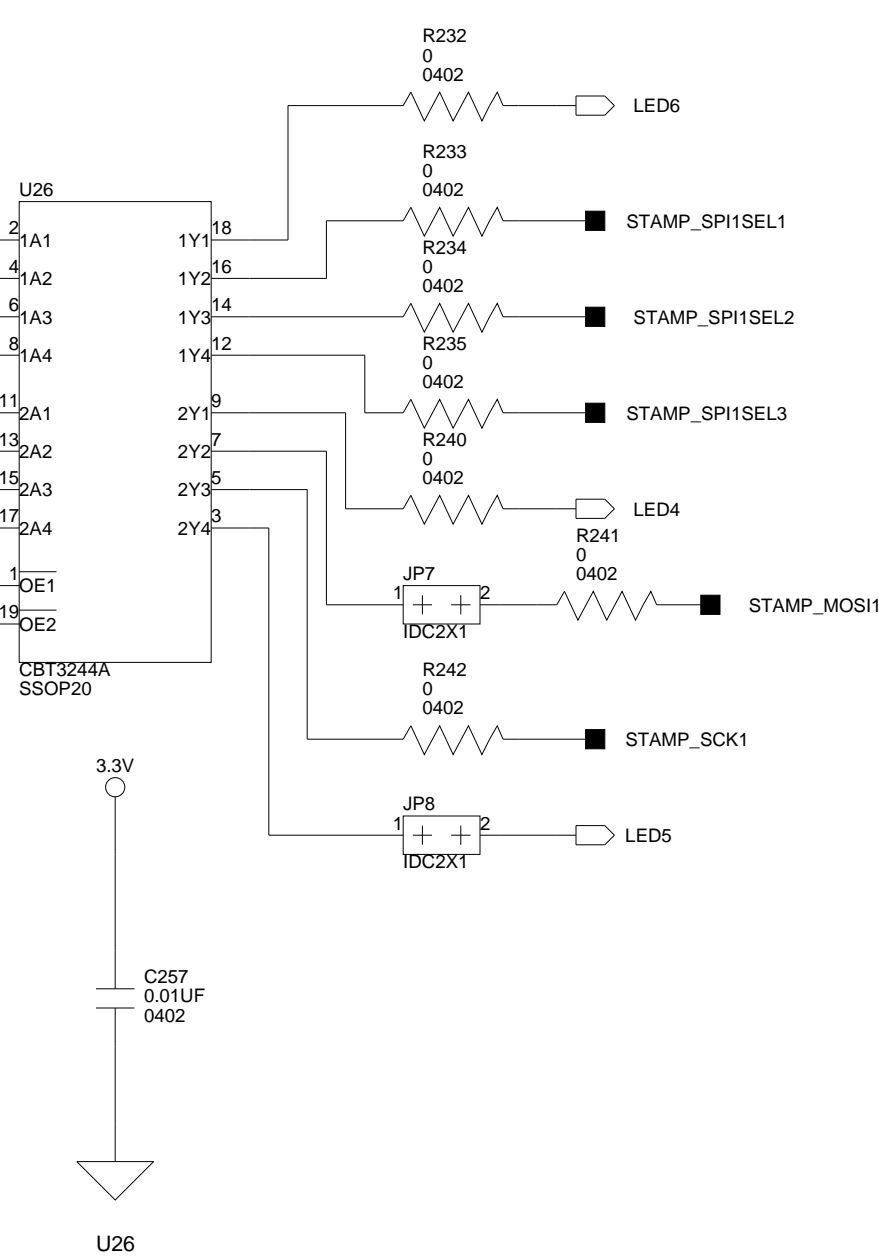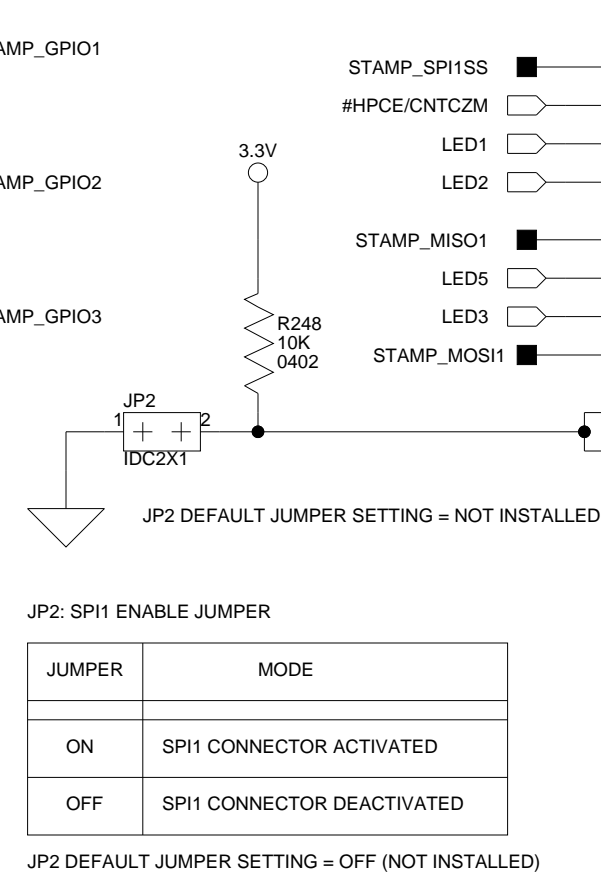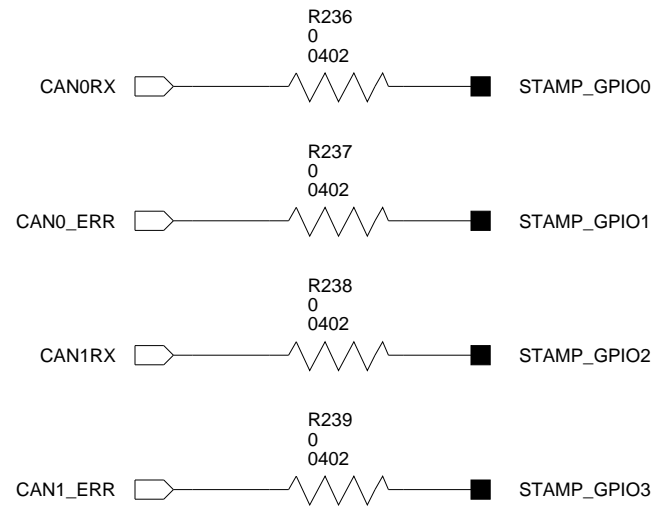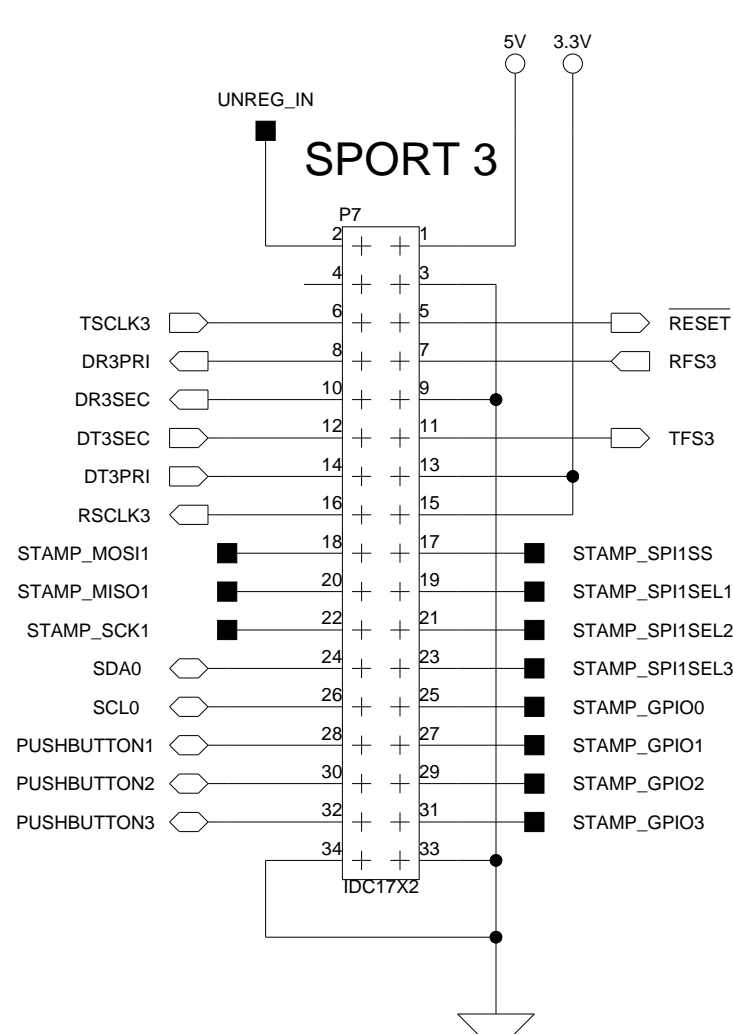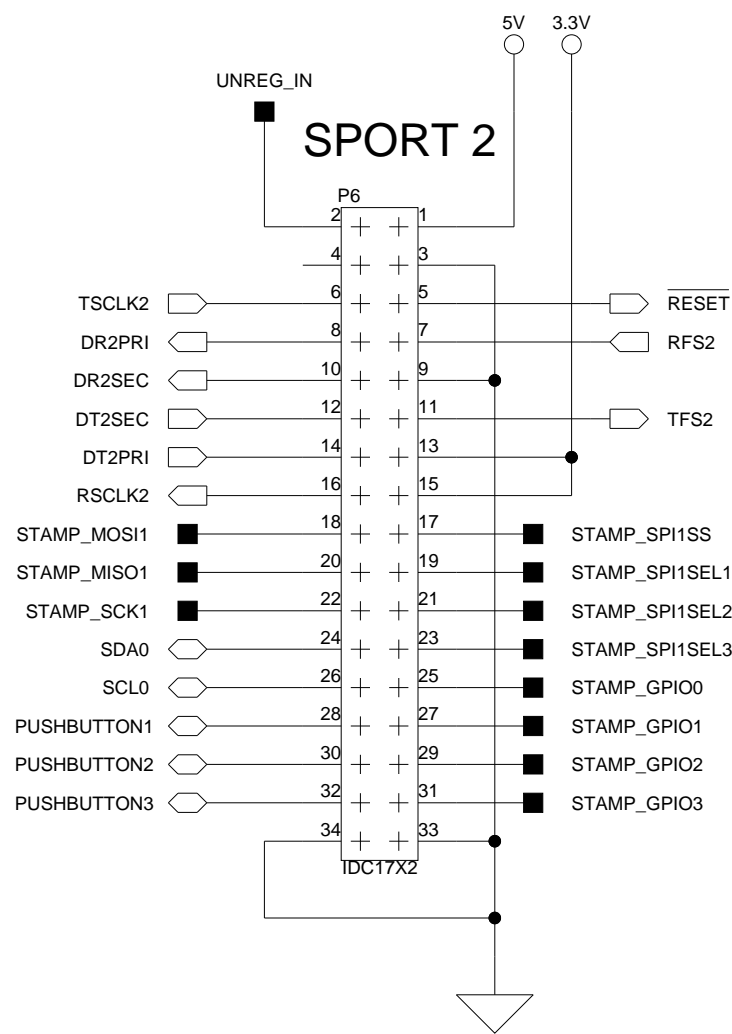




**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD





Title			ADSP-BF548 EZ-KIT LITE STAMP CONNECTORS		
Size C	Board No.		A0206-2006		Rev 1.4B
Date	12-4-2007_10:10		Sheet	15 of	17

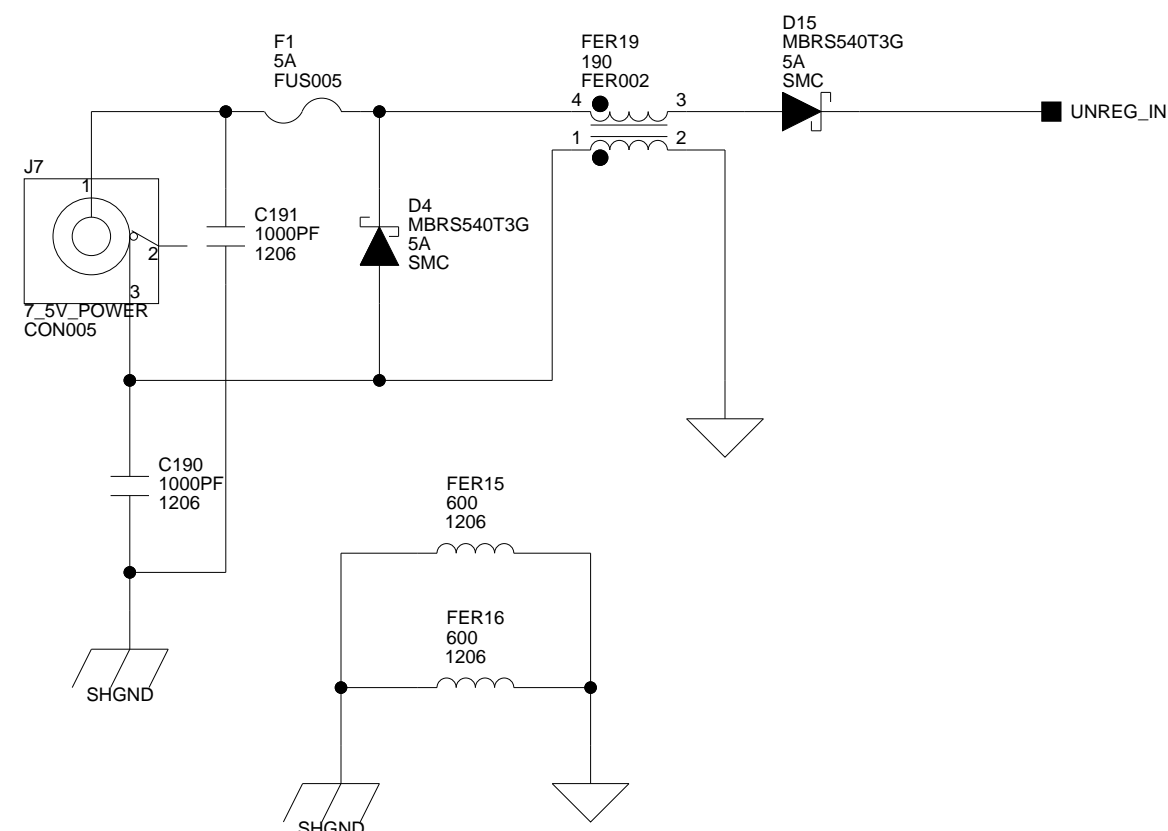

JP4: VDDINT POWER JUMPER

JUMPER	MODE
ON	NO POWER MEASUREMENT
OFF	FOR POWER MEASUREMENT


JP4 DEFAULT JUMPER SETTING = ON (INSTALLED)

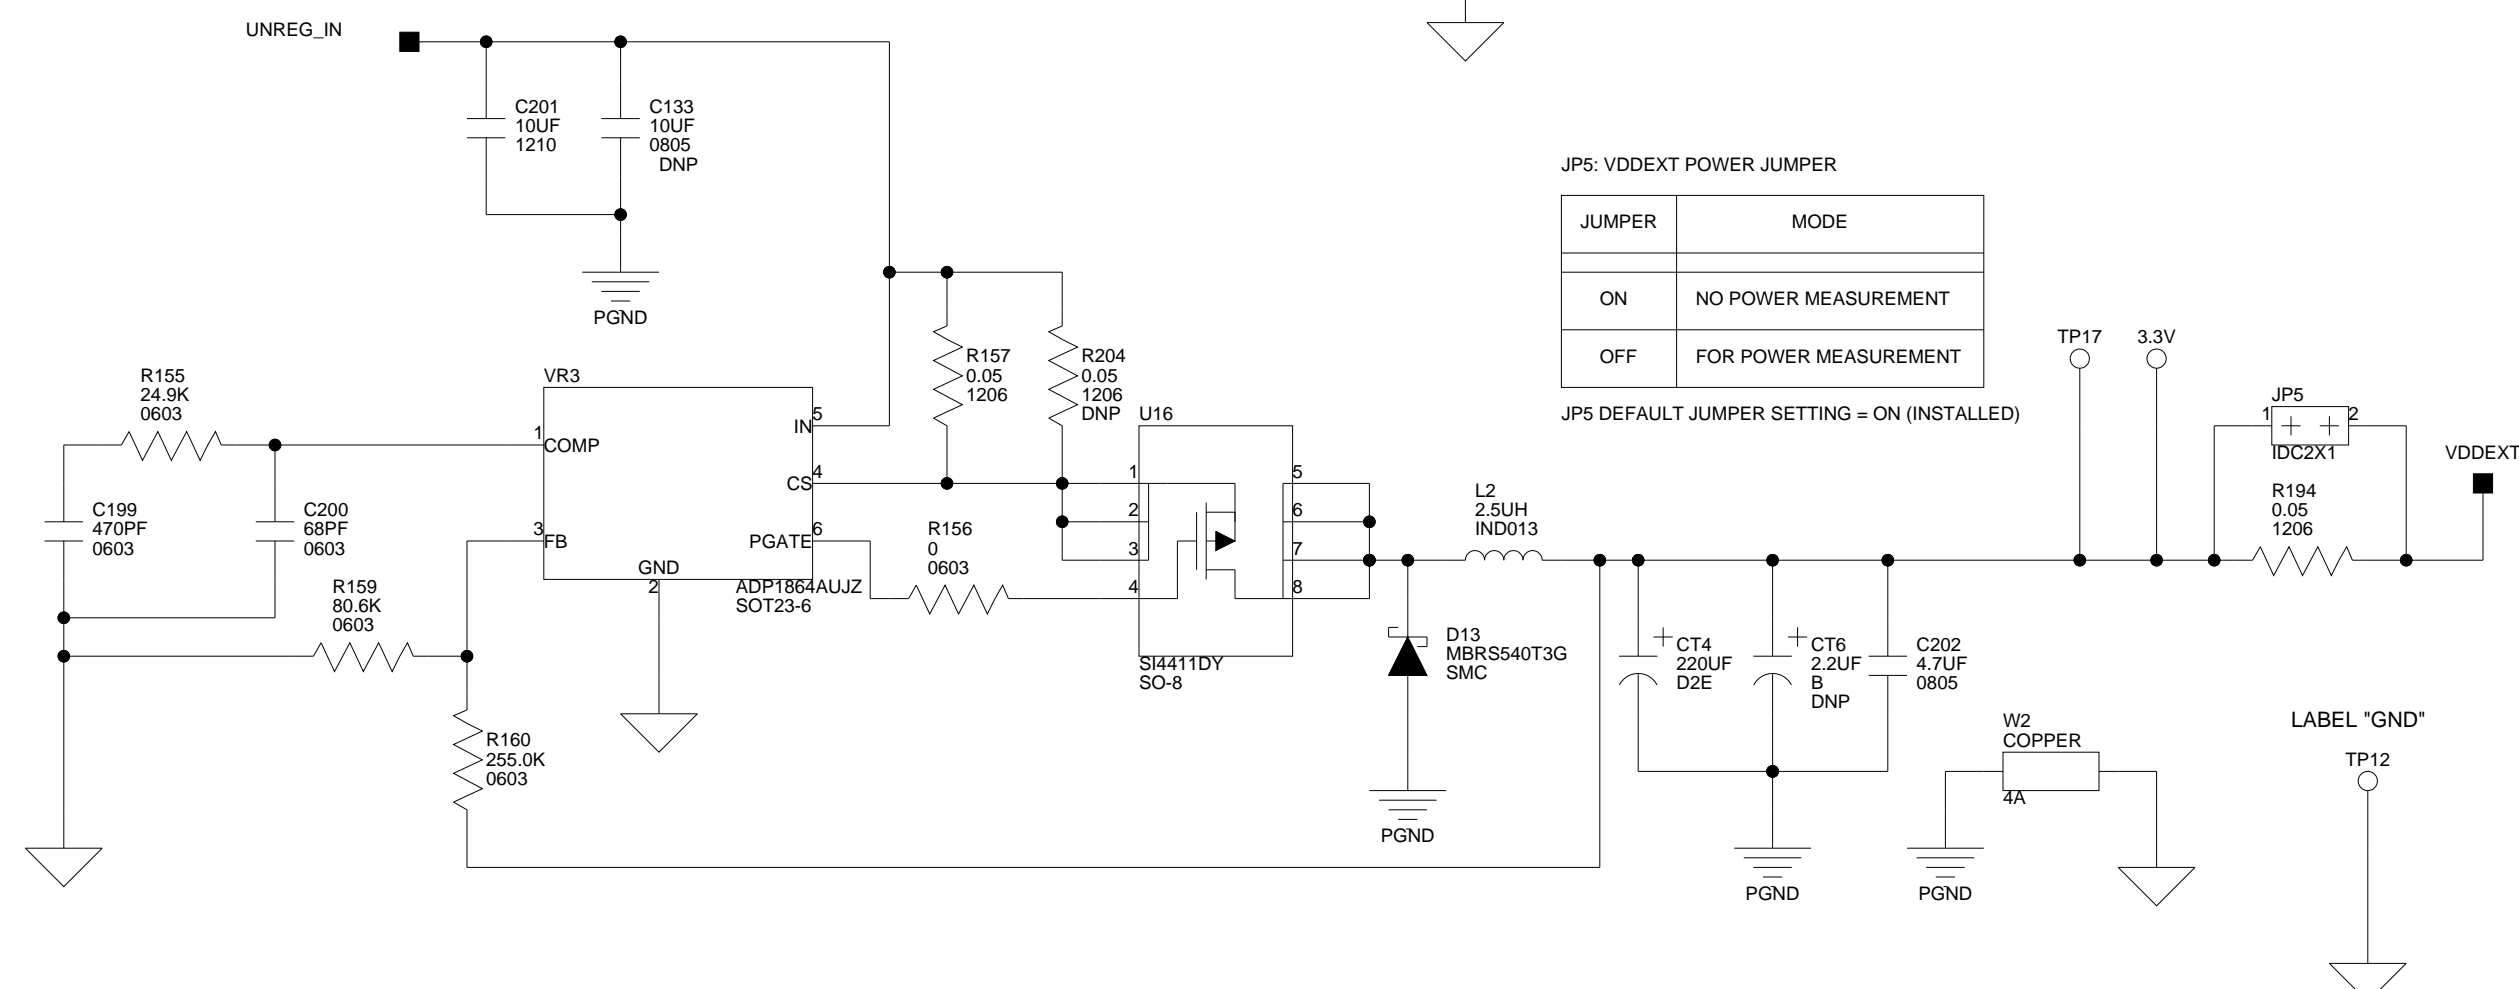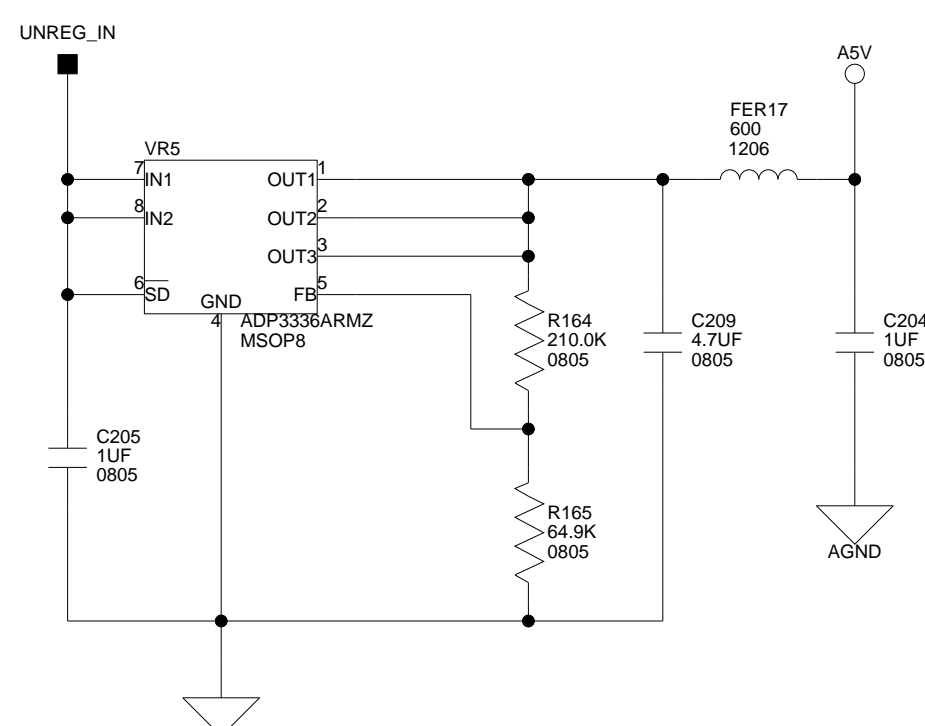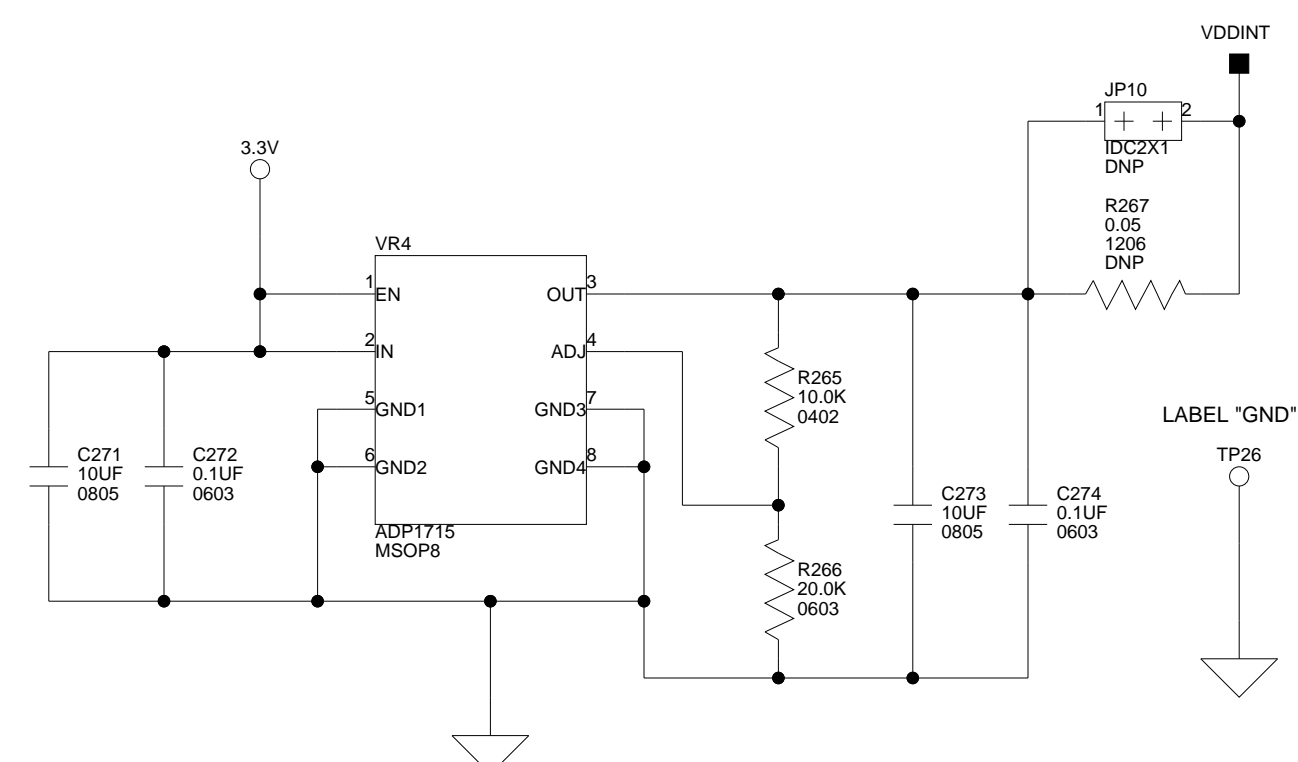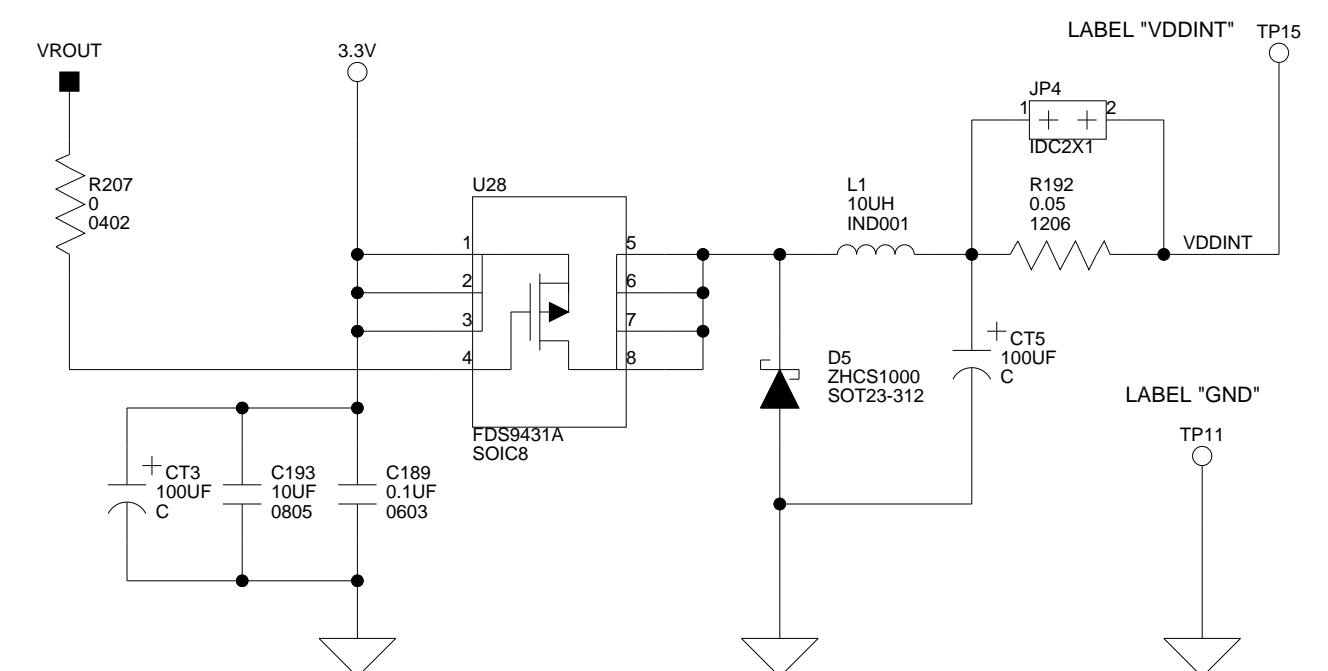

JP5: VDDEXT POWER JUMPER

JUMPER	MODE
ON	NO POWER MEASUREMENT
OFF	FOR POWER MEASUREMENT

JP5 DEFAULT JUMPER SETTING = ON (INSTALLED)




ANALOG DEVICES


20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title	ADSP-BF548 EZ-KIT LITE POWER PAGE 1
--------------	--

Size C	Board No. A0206-2006	Rev 1.4B
-----------	-------------------------	-------------

Date	12-4-2007 10:10	Sheet	16 of 17
-------------	-----------------	--------------	----------

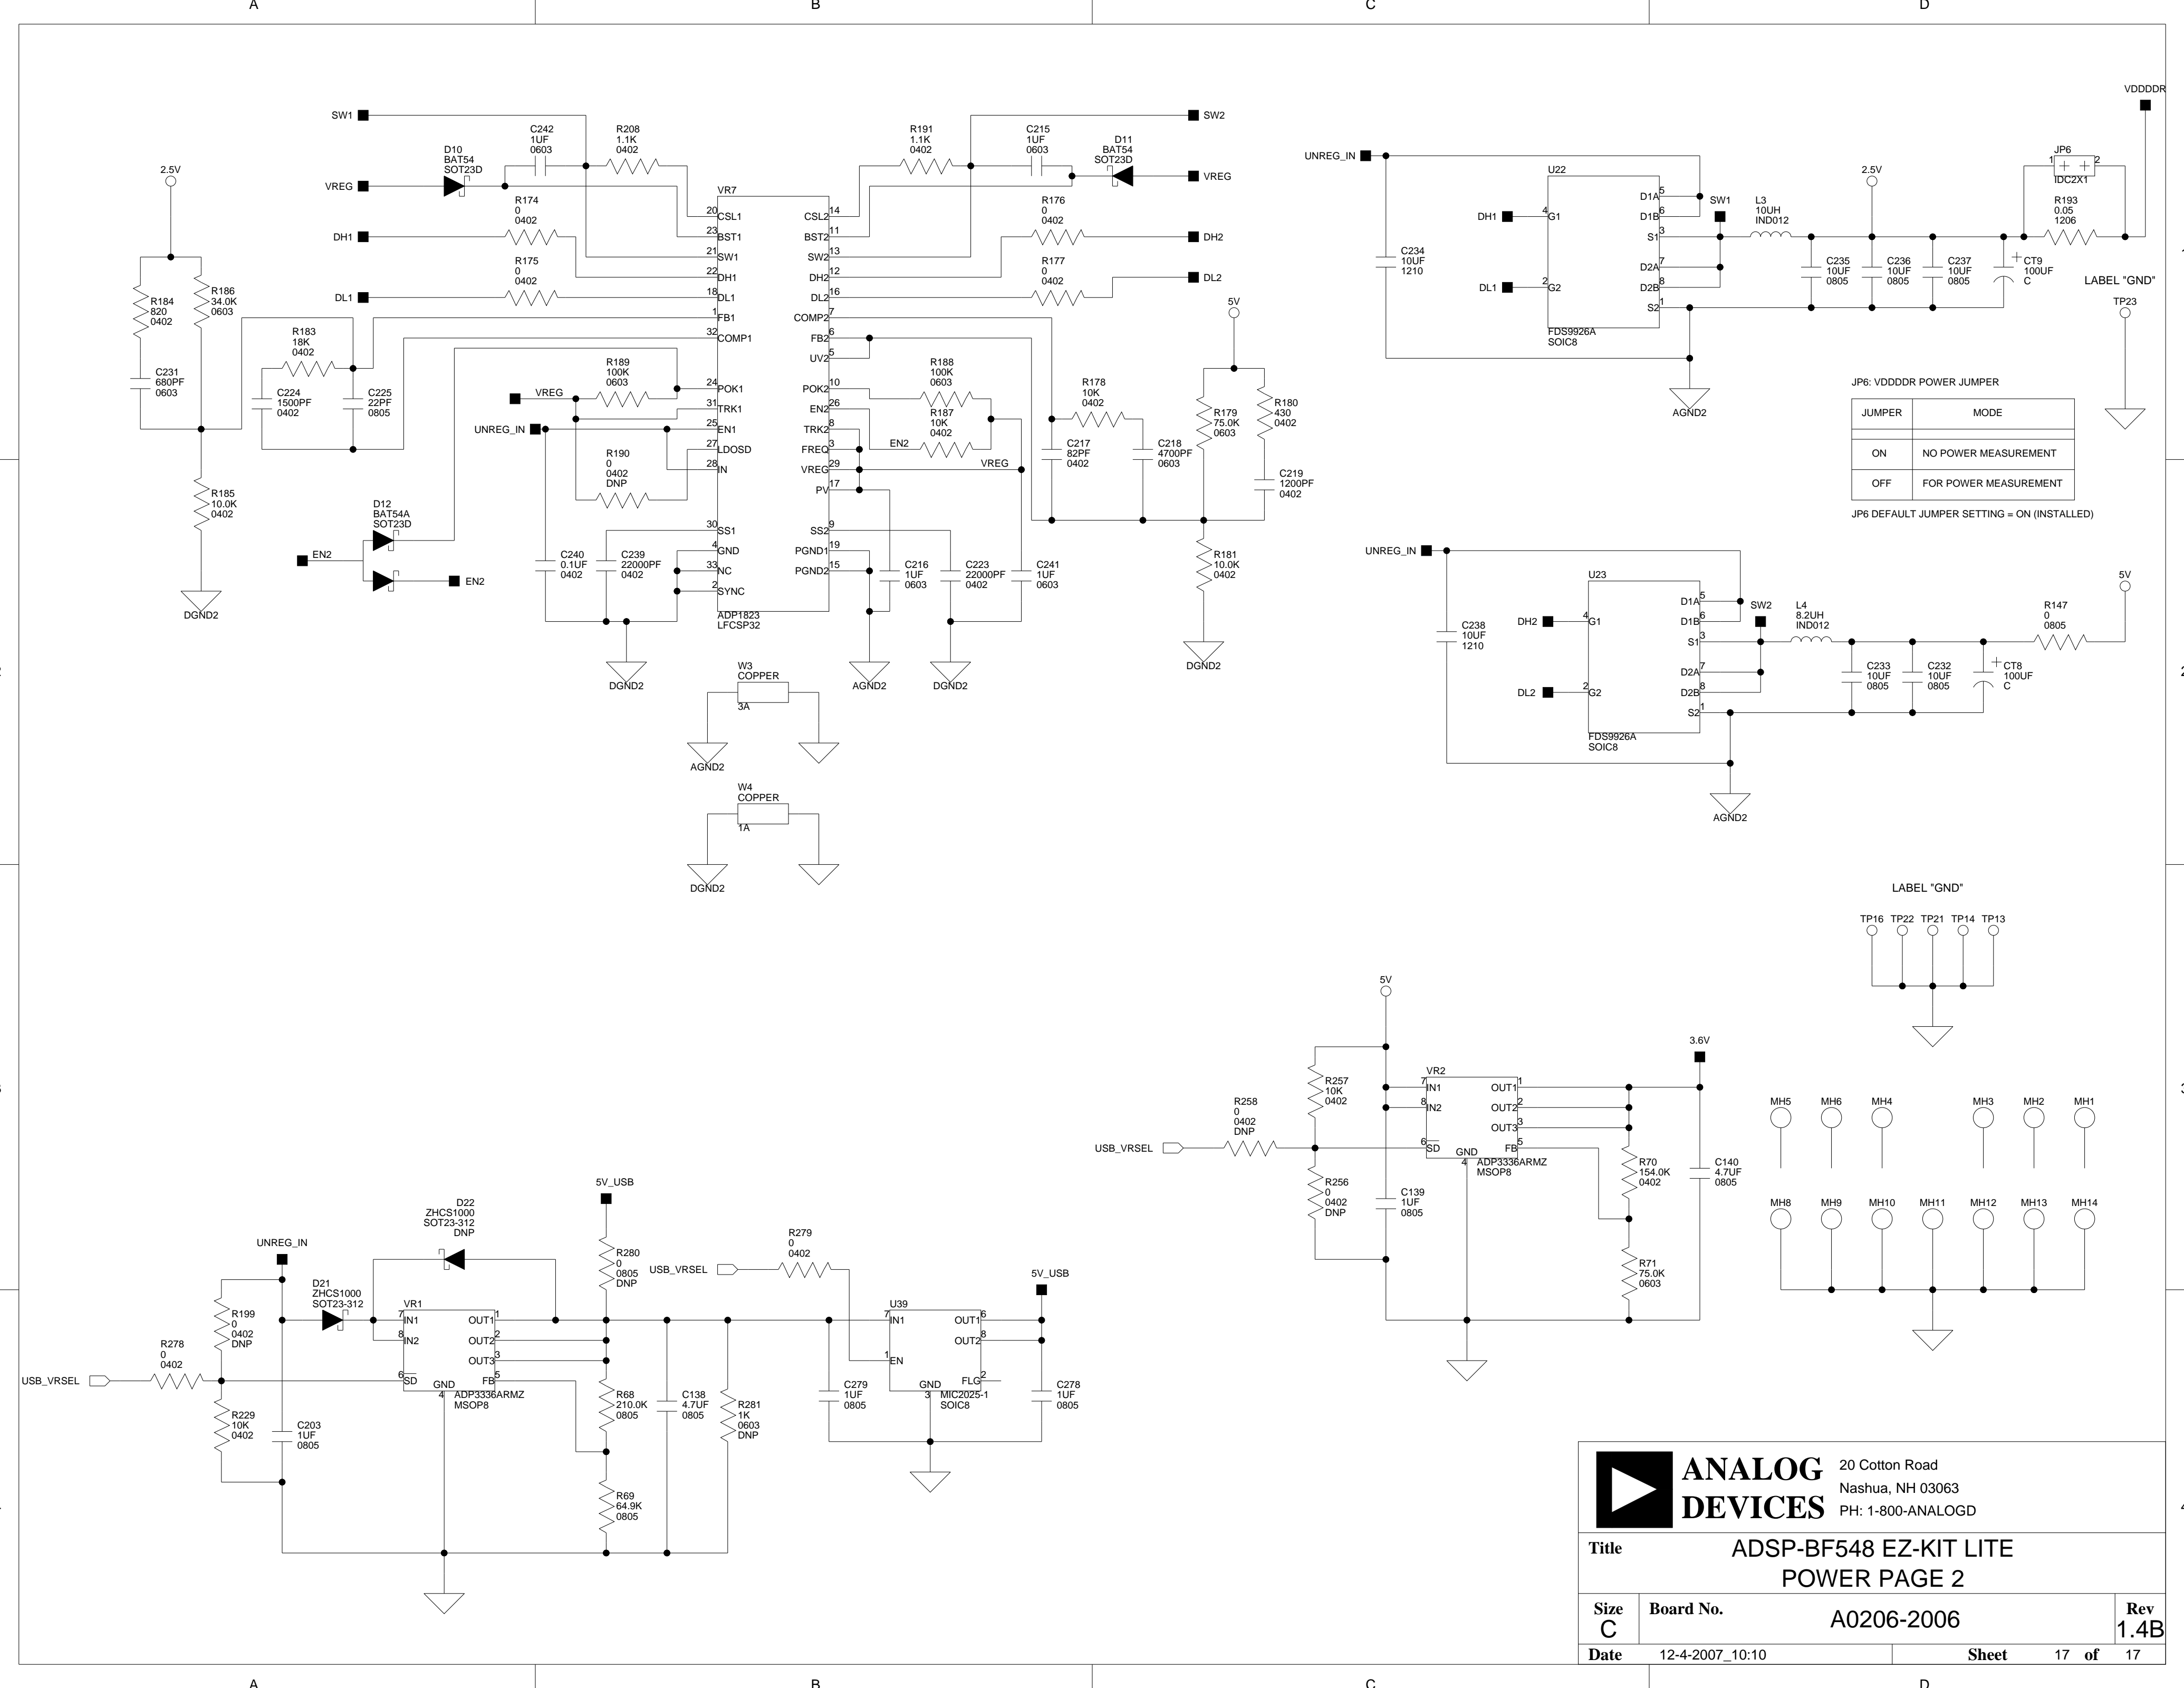





**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD


Title ADSP-BF548 EZ-KIT LITE POWER PAGE 2		
Size C	Board No. A0206-2006	Rev 1.4B
Date 12-4-2007_10:10	Sheet 17 of	17

FOR BF549 DESIGNS USING MXVR ALL COMPONENTS
ON THIS PAGE ARE POPULATED EXCEPT: R195,R196,R284,TP19,TP20

NOTE: THIS CIRCUIT FOR B549 DESIGNS ONLY.
UNPOPULATED FOR BF548 VERSION.
DNP = DO NOT POPULATE

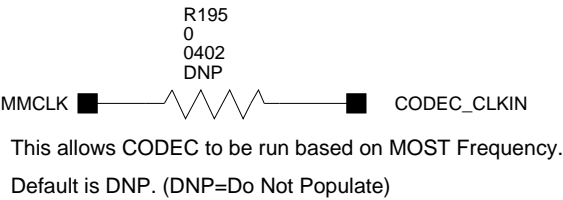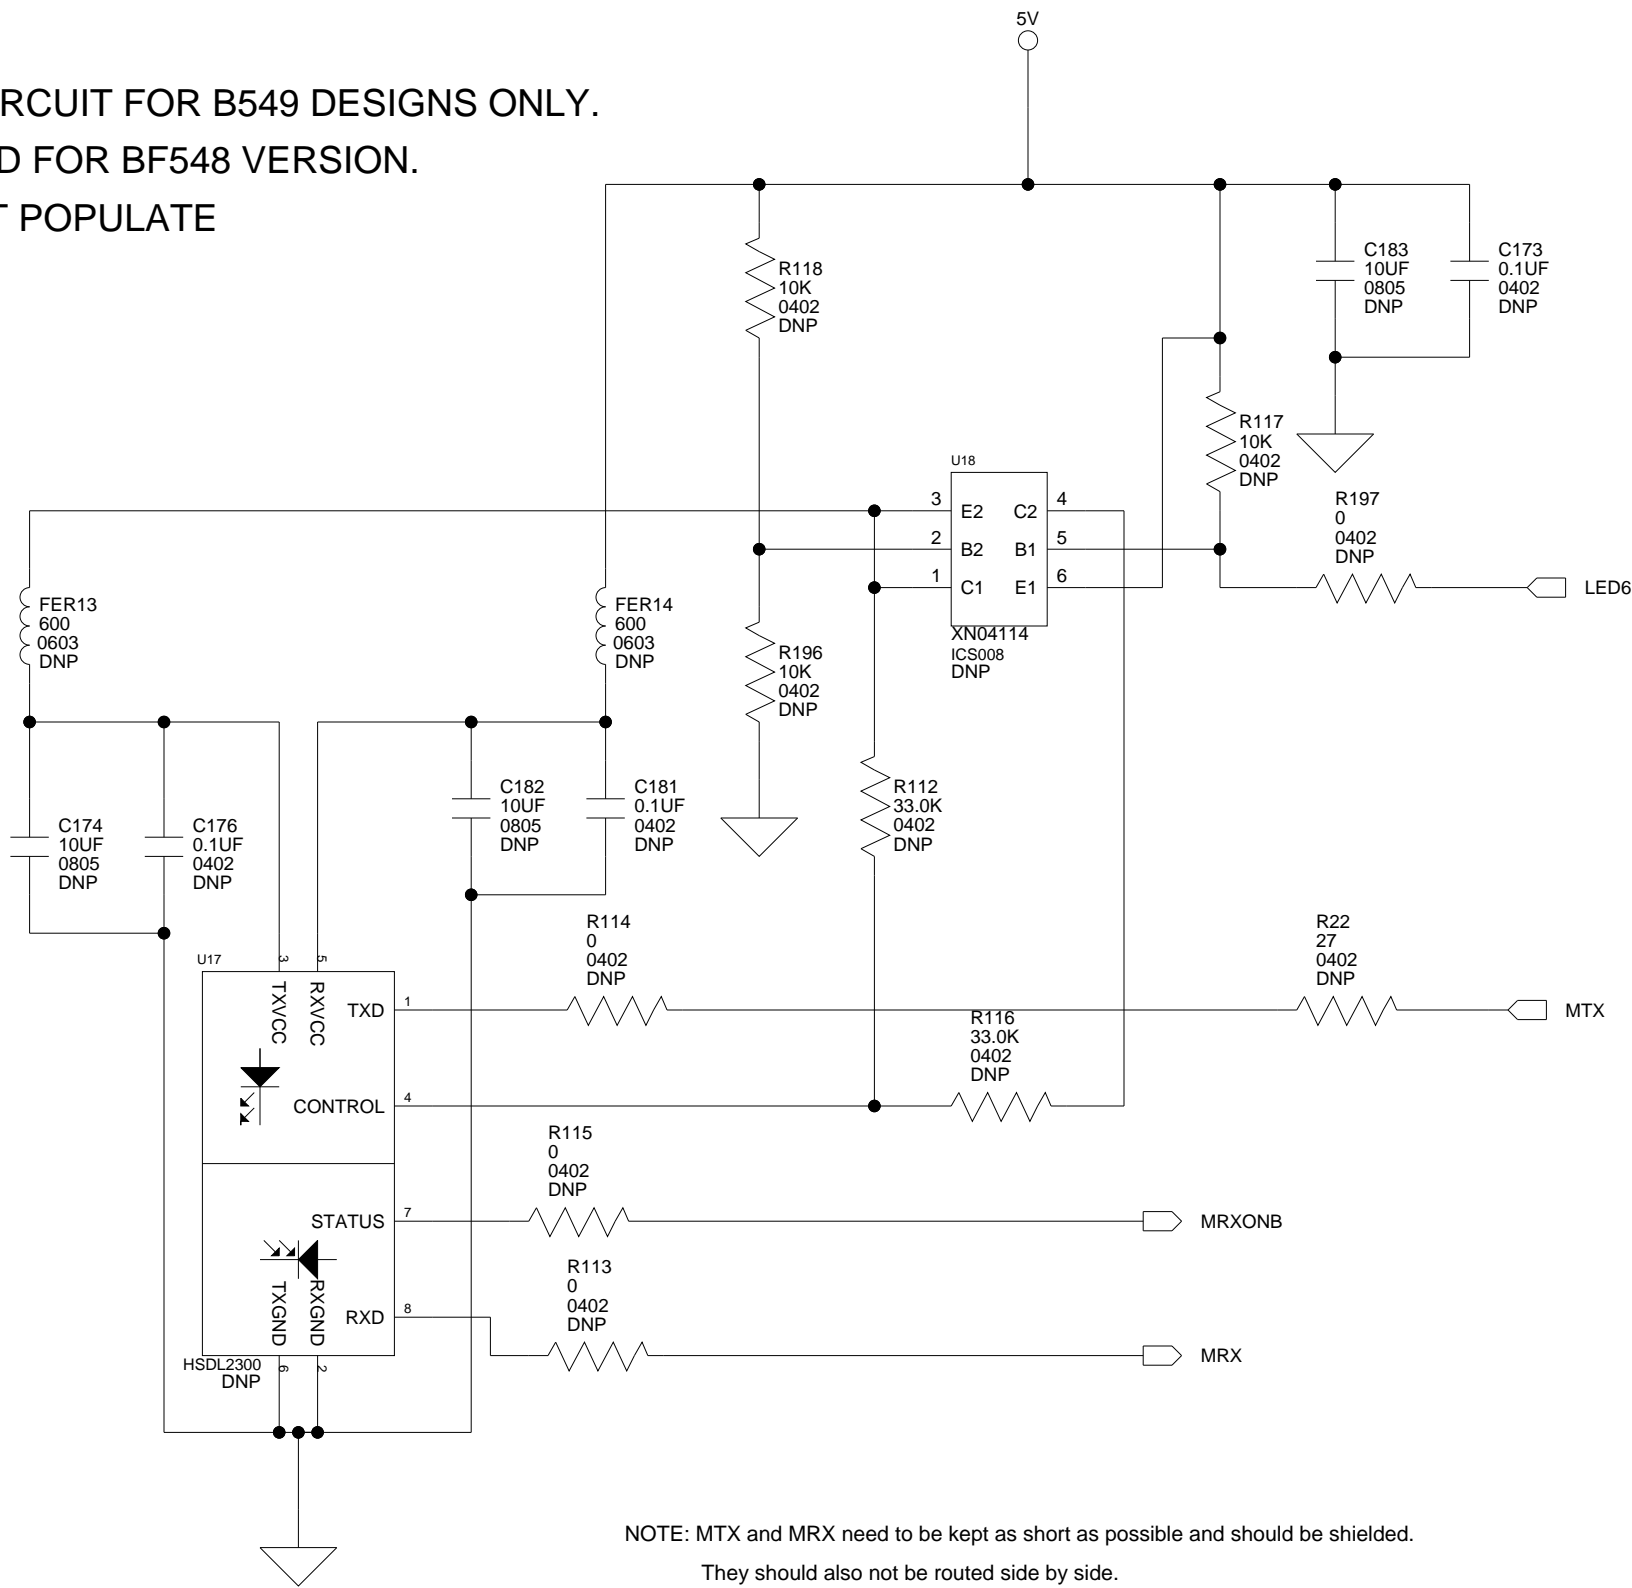


NOTE: MTX and MRX need to be kept as short as possible and should be shielded.
They should also not be routed side by side.

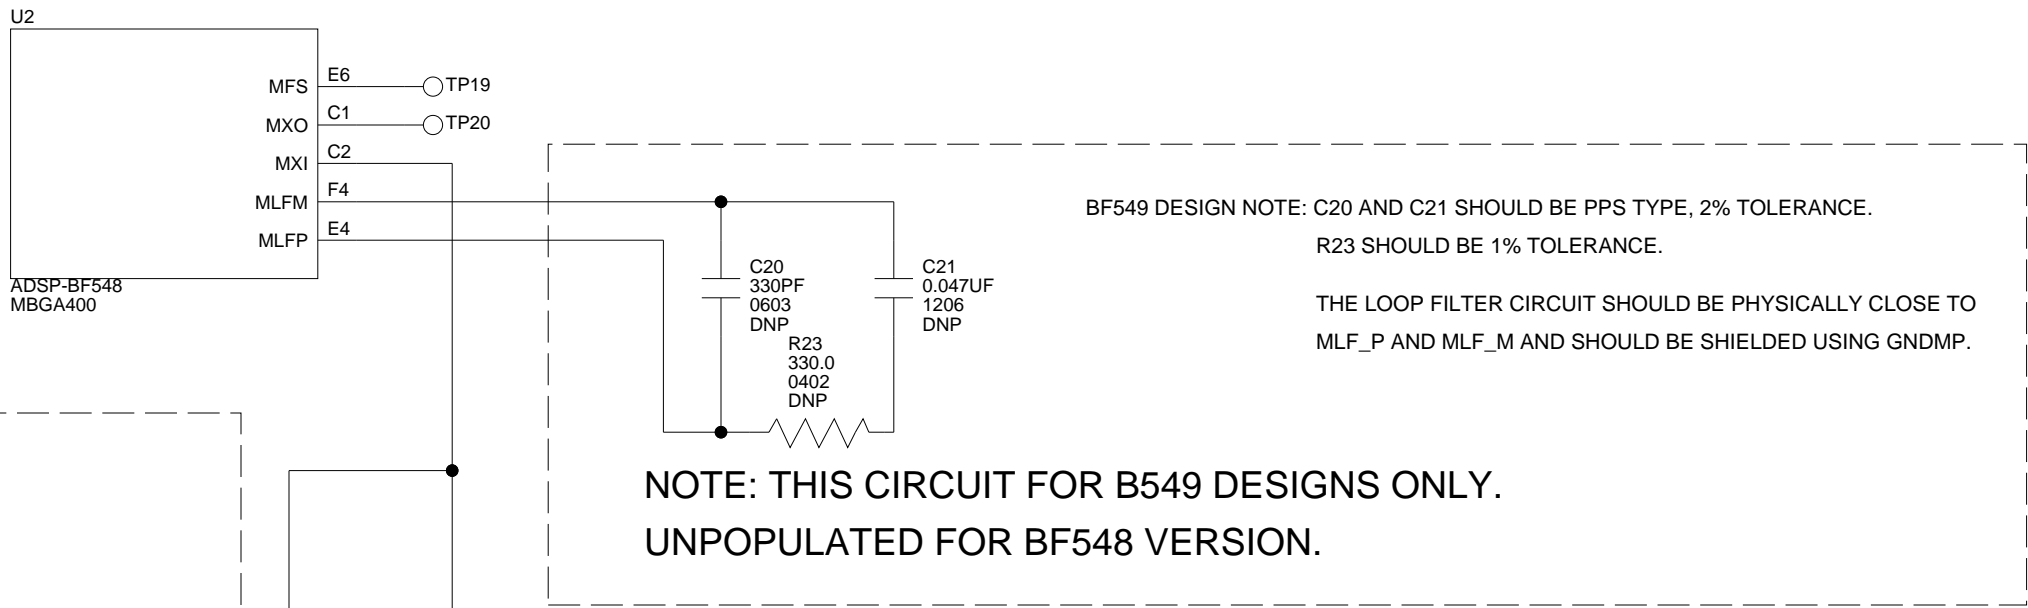


NOTE: THIS CIRCUIT FOR B549 DESIGNS ONLY.
UNPOPULATED FOR BF548 VERSION.

NOTE: PULL-DOWN ON MXI NEEDED WHEN NOT USING MXVR. (BF548)
PULL-DOWN SHOULD BE UNPOPULATED FOR MXVR USE. (BF549)

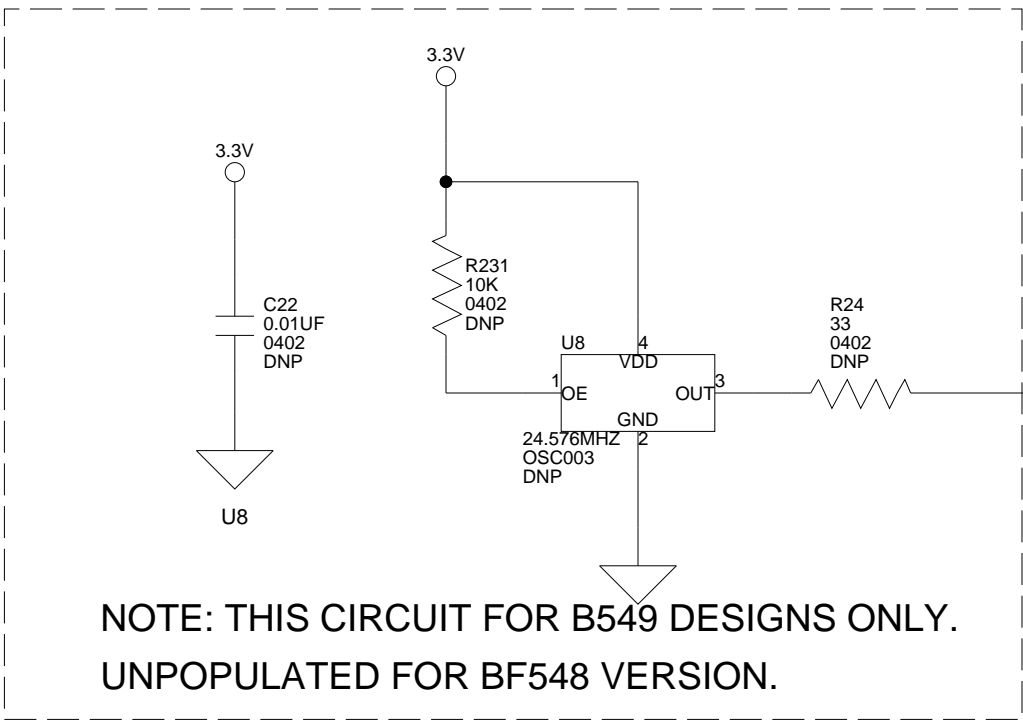

NOTE: THIS CIRCUIT FOR B549 DESIGNS ONLY.
UNPOPULATED FOR BF548 VERSION.



**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title		ADSP-BF548 EZ-KIT LITE MXVR	
Size C	Board No.	A0206-2006	Rev 1.4B
Date	Sheet 1 of 1		

I INDEX

A

- AD1980 audio codec
 - See also* audio interface
 - data pin (PC2), [2-5](#)
 - reset switch (SW16.1), [2-4](#), [2-22](#)
- AD7877 touchscreen controller, *See* touchscreen
- ADM3202 bit, [1-22](#)
- advanced technology attachment packet interface, *See* ATAPI
- ~AMS0 memory select pin, [1-12](#)
- ~AMS1 memory select pin, [1-19](#)
- analog audio interface, *See* audio interface
- architecture, of this EZ-KIT Lite, [2-2](#)
- ASYNC (asynchronous memory control)
 - external memory banks 0-3, [1-9](#)
- ATA/ATAPI-6 controller, [1-21](#)
- ATAPI
 - interface, [1-21](#), [2-14](#)
 - connector (J14), [2-37](#)
 - hard disk drive, [1-21](#)
 - reset signal (PH2), [2-12](#)
- audio
 - interface, [xv](#), [1-19](#)
 - connector (J10), [1-20](#), [2-36](#)
 - dual connectors (J8-9), [1-20](#), [2-36](#)
 - loopback test switch (SW8), [2-19](#)

B

- background telemetry channel (BTC), [1-29](#)
- battery holder (J13), [2-36](#)
- bill of materials, [A-1](#)
- board schematic (ADSP-BF548), [B-1](#)
- boot
 - modes, [2-15](#)
 - mode select switch (SW1), [1-12](#), [1-13](#), [2-15](#)
- burst flash memory, [xiv](#), [1-12](#), [2-12](#), [2-13](#), [2-14](#), [2-23](#)

C

- CAN
 - interface, [1-23](#)
 - CAN0 signals, [2-18](#)
 - CAN1 signals, [2-22](#)
 - SW15 (CAN1) enable switch, [2-22](#)
 - SW6 (CAN0) enable switch, [2-18](#)
 - transceiver devices, [1-23](#)
- CAN0_ERR signal, [1-23](#), [2-18](#)
- CAN0RX signal, [2-18](#)
- CAN1_ERR signal, [1-23](#), [2-22](#)
- CAN1RX signal, [2-22](#)
- CCLK register, [1-11](#)
- CLK pin, [1-14](#)
- clock in (CLK IN) signal, [2-3](#)
- configuration, of this EZ-KIT Lite, [1-4](#)

INDEX

connectors

- diagram of locations, [2-33](#)
- J10 (audio), [1-20](#), [2-36](#)
- J13 (battery), [2-36](#)
- J1-3 (expansion), [1-26](#), [2-34](#)
- J14 (ATAPI), [2-37](#)
- J4 (Ethernet), [1-19](#), [2-34](#)
- J5 (SD card), [1-14](#), [2-35](#)
- J6 (RS-232), [2-35](#)
- J7 (power), [2-35](#)
- J8-9 (dual audio), [1-20](#), [2-36](#)
- P10 (TWI), [2-40](#)
- P11 (timers), [2-40](#)
- P12 (UART3), [1-23](#), [2-4](#), [2-41](#)
- P14 (LCD touchscreen), [2-41](#)
- P15 (LCD data), [2-21](#), [2-41](#)
- P1 (keypad), [1-18](#), [2-37](#)
- P3 (host interface), [1-18](#), [2-5](#), [2-6](#), [2-10](#), [2-38](#)
- P4 (USB OTG), [1-22](#), [2-38](#)
- P5 (LCD backlight), [2-38](#)
- P6 (SPORT2), [2-3](#), [2-4](#), [2-8](#), [2-10](#), [2-39](#)
- P7 (SPORT3), [2-4](#), [2-8](#), [2-10](#), [2-39](#)
- P8 (PPI1), [2-6](#), [2-8](#), [2-12](#), [2-39](#)
- P9 (SPI), [2-40](#)
- PJ11 (AD7877 data), [2-14](#)
- PJ12 (AD7877 interrupt), [2-15](#)
- ZJ1 (USB), [2-42](#)
- ZP4 (JTAG), [1-26](#), [2-42](#)

contents, of this EZ-KIT Lite package, [1-3](#)

core

- clock signal (CCLK), [1-10](#)
- voltage, [2-2](#)

customer support, [xxii](#)

D

- data available output (DAV) signal, [1-17](#), [2-21](#)
- \sim DDRCSS0 signal, [1-9](#)
- DDR registers, [1-10](#)
- default configuration, of this EZ-KIT Lite, [1-4](#)
- design reference info, [1-28](#)

DIP switch (SW5), [1-26](#), [2-4](#), [2-5](#), [2-18](#), [2-20](#), [2-23](#)

double data rate (DDR) interface, [xiv](#), [1-9](#)

E

- EBIU_AMGCTL register, [1-11](#)
- EBIU_DDRCTL0-2 registers, [1-10](#)
- enhanced parallel peripheral interface (EPPI),
See PPI0, PPI1
- ERR signals, [1-23](#)
- Ethernet
 - interface, [xvi](#), [1-19](#)
 - cables, [1-3](#)
 - connector (J4), [1-19](#), [2-34](#)
 - controller (U14), [1-19](#), [2-12](#), [2-23](#)
 - enable switch (SW16.3), [1-19](#), [2-23](#)
 - LED (LED9), [2-32](#)
 - PHY portion, [1-19](#)
 - serial ROM (U12), [1-19](#)
 - speed select jumper (JP3), [2-27](#)
- example programs, [1-29](#)
- expansion interface, [1-13](#), [1-15](#), [1-18](#), [1-26](#), [2-3](#),
[2-4](#), [2-7](#), [2-12](#), [2-13](#), [2-14](#), [2-34](#)
- external memory, [1-7](#), [1-9](#)

F

- features, of this EZ-KIT Lite, [xiv](#)
- FET switches, [1-21](#), [1-22](#), [2-22](#)
- flag pins, *See* programmable flags by name (PAx to PJx)
- flash memory, *See* burst flash memory

G

- general-purpose IO pins, [1-25](#), [2-16](#), [2-17](#),
[2-18](#), [2-19](#), [2-21](#), [2-22](#), [2-31](#)

H

Help, online, [xxx](#)

host interface, [1-24](#)

host interface connector (P3), [1-18](#), [2-5](#), [2-6](#),
[2-10](#), [2-38](#)

I

IDC header (P3), [1-24](#)

installation, of this EZ-KIT Lite, [1-4](#), [1-5](#)

interrupt output (PENIRQ) signal, [2-21](#)

IO voltage, [2-2](#)

J

JTAG

interface, [1-26](#)

connector (ZP4), [1-26](#), [2-42](#)

jumpers

diagram of locations, [2-25](#)

JP11 (USB OTG power), [2-30](#)

JP12 (PPIFS3), [1-23](#), [2-30](#)

JP1 (UART1 loopback), [1-23](#), [2-26](#)

JP2 (SPI enable), [2-26](#)

JP3 (Ethernet speed select), [2-27](#)

JP4 (VDDINT power), [1-27](#), [2-27](#)

JP5 (VDDEXT power), [1-27](#), [2-28](#)

JP6 (VDDDDR power), [1-27](#), [2-28](#)

JP7 (MOSI1 out), [2-29](#)

JP8 (MOSI1 in), [2-29](#)

K

keypad interface

connections, [1-18](#)

connector (P1), [2-37](#)

enable switch (SW2), [1-18](#), [2-7](#), [2-16](#)

L

LCD module

See also touchscreen

interface, [xvi](#), [1-15](#)

backlight connector (P5), [2-38](#)

config switch (SW17), [1-17](#), [2-6](#), [2-9](#), [2-10](#)

data connector (P15), [2-21](#), [2-41](#)

PPI config switch (SW14), [1-17](#), [2-4](#), [2-8](#),
[2-21](#)

touchscreen connector (P14), [2-41](#)

LEDs

diagram of locations, [2-31](#)

LED1-6 (PG6-11), [1-25](#), [1-28](#), [2-10](#), [2-29](#),
[2-31](#)

LED7 (power), [2-32](#)

LED8 (reset), [2-32](#)

LED9 (Ethernet), [2-32](#)

ZLED3 (USB monitor), [1-5](#)

license restrictions, [xiii](#), [1-7](#)

M

MAC address, [1-19](#)

Media Instruction Set Computing (MISC), [xi](#)

memory map, of this EZ-KIT Lite, [1-7](#)

Micro Signal Architecture (MSA), [xi](#)

MOSI1

in jumper (JP8), [2-29](#)

out jumper (JP7), [2-29](#)

N

NAND

chip enable signal, [2-14](#)

flash memory interface, [xv](#), [1-12](#)

NOR RESER (SW16.4), [2-5](#)

notation conventions, [xxx](#)

O

oscillator, [1-15](#), [2-21](#)

INDEX

oscilloscope, [1-27](#)
OTG interface, [1-22](#)

P

PA0-15 signals, [2-3](#)
package contents, [1-3](#)
PB0-7 signals, [2-4](#)
PB11 signal, [2-4](#), [2-18](#), [2-20](#), [2-23](#)
PB12-14 signals, [2-4](#)
PB1-4 (SW13-10) push buttons, [1-17](#), [2-18](#),
[2-20](#)
PB8-10 signals, [2-4](#), [2-18](#), [2-20](#)
PC0-13 signals, [2-5](#)
PD0-7 signals, [2-6](#)
PD8-15 signals, [2-6](#), [2-16](#)
PE0-6 signals, [2-7](#)
PE11-15 signals, [2-7](#)
PE7 signal, [1-22](#), [2-7](#)
PE8 signal, [1-19](#), [2-7](#)
PE9-10 signals, [2-7](#), [2-19](#)
pen interrupt (PENIRQ) signal, [1-17](#)
peripheral control enable (SW16), [2-22](#)
PF0-15 signals, [2-9](#)
PG0-4 signals, [2-10](#)
PG10/MOSI1 signal, [2-10](#), [2-29](#)
PG11-15 signals, [2-10](#)
PG5 signal, [2-10](#), [2-17](#)
PG6-11 (IO) signals, [1-25](#), [2-10](#), [2-31](#)
PH0 signal, [2-12](#)
PH1 signal, [2-12](#), [2-19](#)
PH2 signal, [2-12](#)
PH3-4 signals, [2-12](#), [2-17](#)
PH5-13 signals, [2-12](#)
PI0-15 signals, [2-13](#)
PJ0-13 signals, [2-14](#)
PLL_CTL register, [1-11](#)
PLL_DIV register, [1-11](#)
POST (power-on-self test) program, [1-12](#), [1-13](#),
[1-23](#), [1-28](#), [2-26](#)

power
connector (J7), [2-35](#)
LED (LED7), [2-32](#)
measurements, [1-27](#)
supply, [1-3](#)
PPIO interface
config for LCD module, [1-14](#), [1-15](#)
PPIOFS1 signal, [1-17](#)
PPI1 interface
connections, [1-15](#)
connector (P8), [2-6](#), [2-8](#), [2-12](#), [2-39](#)
connector via JP2, [2-10](#)
PPI1CLK multiplexer, [2-21](#)
PPI1FS3 pull-down jumper (JP12), [1-23](#),
[2-30](#)
PPI1_SEL signal, [1-15](#)
programmable flags (PCs)
PC0 (CAN0_ERR), [1-23](#)
PC5 (CAN1_ERR), [1-23](#)
programmable flags (PFs), *See* PAX, PBx, PCx,
PDx, PEx, PFx, PGx, PHx, PIx, PJx
push buttons
See also switches by name (SWx)
SW13-10, [1-17](#), [2-18](#), [2-20](#)

R

real-time clock (RTC), [1-25](#), [2-3](#)
Reduced Instruction Set Computing (RISC), [xi](#)
reset
AD1980 codec (SW16.3), [2-4](#), [2-22](#)
LEDs (LED8), [2-32](#)
push button (SW9), [2-19](#), [2-20](#)
restriction, of the evaluation license, [1-7](#)
rotary enable switch (SW4), [1-18](#), [2-12](#)
rotary encoder
interface, [1-18](#)
enable switch (SW4), [2-10](#), [2-17](#)
switch (SW3), [1-18](#), [2-17](#)
RS-232 connector (J6), [2-35](#)
RTC interface, [1-25](#)

S

schematic, of ADSP-BF548 EZ-KIT Lite, [B-1](#)

SD memory

- card connector (J5), [1-14](#), [2-35](#)
- clock pin (SD_CLK), [2-6](#)
- data pins (SD_Dx), [2-5](#)

SDRAM

- controller, [1-9](#)
- memory map, [1-9](#)

secure digital (SD) interface, *See* SD memory

serial flash memory, [1-13](#), [2-7](#)

serial peripheral interconnect (SPI) ports, *See* SPI

SPI

- connector (P9), [2-5](#), [2-40](#)
- connector via JP2, [2-10](#)
- flash memory, [xv](#), [1-13](#), [2-7](#)

SPI0 interface

- connections, [1-17](#)
- SPI0SEL1 signal, [1-13](#)
- SPI0SEL2 signal, [1-13](#), [1-17](#)
- SPI0SEL3 flag pin, [1-13](#)

SPI1 interface, enable jumper (JP2), [2-26](#)

SPORT2 connector (P6), [2-3](#), [2-4](#), [2-5](#), [2-8](#), [2-10](#), [2-39](#)

SPORT3 connector (P7), [2-4](#), [2-5](#), [2-8](#), [2-10](#), [2-39](#)

SRAM memory, [1-7](#)

- See also* internal memory

STAMP connectors, [1-14](#), [1-23](#), [2-18](#), [2-26](#)

startup, of this EZ-KIT Lite, [1-5](#)

STOPACQ signal, [1-17](#)

SW14 (LCD/PPI config) switch, [1-15](#), [1-17](#), [2-4](#), [2-8](#), [2-21](#)

SW15 (CAN1 enable) switch, [1-23](#), [2-22](#)

SW16.1 (audio codec reset) switch, [2-4](#), [2-22](#)

SW16.2 (USB OTG enable) switch, [1-22](#), [2-8](#), [2-22](#)

SW16.3 (Ethernet enable) switch, [1-19](#), [2-23](#)

SW16.4 (NOR RESET) switch, [2-5](#), [2-23](#)

SW16 (peripheral Ctrl enable) switch, [2-22](#)

SW17 (LCD config) switch, [1-17](#), [2-6](#), [2-9](#), [2-10](#)

SW1 (boot mode select) switch, [1-12](#), [1-13](#), [2-15](#)

SW2 (keypad enable) switch, [1-18](#), [2-7](#), [2-16](#)

SW3 (rotary) switch, [1-18](#), [2-17](#)

SW4 (rotary enable) switch, [1-18](#), [2-10](#), [2-12](#), [2-17](#)

SW5 (push button enable) DIP switch, [1-26](#), [2-4](#), [2-5](#), [2-18](#), [2-20](#), [2-23](#)

SW6 (CAN0 enable) switch, [1-23](#), [2-18](#)

SW7 (UART enable) switch, [1-22](#), [2-8](#), [2-12](#), [2-19](#)

SW8 (audio loopback test) switch, [2-19](#)

SW9 (reset) push button, [2-19](#), [2-20](#)

switches

- See also* switches by name (SWx)
- diagram of locations, [2-15](#)

synchronous dynamic random access memory, *See* SDRAM

system

- architecture, of this EZ-KIT Lite, [2-2](#)
- clock (SCLK), [1-10](#)

T

thumbwheel control, [xvii](#)

timers connector (P11), [2-40](#)

touchscreen

- interface, [1-17](#)
- AD7877 controller, [1-13](#), [1-17](#), [2-7](#), [2-21](#)
- connector (P14), [2-41](#)
- data connector (PJ11), [2-14](#)
- interrupt (PJ12), [2-15](#)

TWI connector (P10), [2-4](#), [2-5](#), [2-40](#)

INDEX

U

UART1 interface

- connections, [2-12](#)
- enable switch (SW7.2), [2-12](#)
- installing JP12, [2-30](#)
- loopback jumper (JP1), [1-23](#), [2-26](#)
- UART1_RX signal, [2-26](#)
- UART1_TX signal, [2-26](#)

UART3 interface connector (P12), [1-23](#), [2-4](#), [2-41](#)

UART enable switch (SW7), [1-22](#), [2-8](#), [2-19](#)

universal asynchronous receiver transmitter, *See* UART

USB

- debug agent connector (ZJ1), [2-42](#)
- enable (SW16.2) switch, [1-22](#), [2-8](#), [2-22](#)
- interface, [2-42](#)
- OTG interface connector (P4), [1-22](#), [2-38](#)
- power jumper (JP11), [2-30](#)
- regulator (VR1), [2-22](#)
- voltage regulators, [1-22](#)

V

VDDDDR

- pin, [1-27](#)
- power jumper (JP6), [1-27](#), [2-28](#)

VDDEXT

- pin, [1-27](#)
- power jumper (JP5), [1-27](#), [2-28](#)

VDDINT

- pin, [1-27](#)
- power jumper (JP4), [1-27](#), [2-27](#)

very-long instruction word (VLIW), [xi](#)

VisualDSP++

- environment, [1-5](#)
- online Help, [xxx](#)

voltage planes, [1-27](#)

VR1 (USB voltage) regulator, [1-22](#)

W

watchdog timer, [1-25](#)



Embedded Processing & DSP

[View Cart](#) | [My Account](#) | [Log In](#)
[Home](#) > [Embedded Processing & DSP](#)
[Contact Us](#) | [Print this Page](#) | [Email this Page](#)

[Embedded Processing & DSP Home](#)

[Blackfin](#)
[SHARC](#)
[TigerSHARC](#)
[ADSP-21xx](#)
[Technical Support](#)
[Learning and Development](#)
[Purchasing Information](#)
[Software and Reference Designs](#)
[News, Events and Resources](#)
[All Product Categories](#) ▶

[Design Center](#) ▶

[All Solutions/ Applications](#) ▶

[Buy Online](#) ▶

Product Overview

Development tools provide easier and more robust methods for engineers to develop and optimize DSP systems and shorten product development cycles for faster time-to-market. The Development Tools components include:

Hardware

- EZ-KIT Lite®**
 Desktop evaluation board includes an evaluation suite of VisualDSP++® development environment. The evaluation suite of VisualDSP++ has limited memory only.
- EZ-Extender®**
 EZ-Extender daughter boards give developers access and ability to connect various peripherals from Analog Devices and third parties to the expansion interface of the EZ-KIT Lite evaluation kits.
- Starter Kit**
 Provides everything needed to get started on an application. Starter Kits contain a Blackfin EZ-KIT Lite, EZ-Extender daughter board(s), and the Software Development Kit (SDK) which contains sample code, "how to" documents, and various encoders/decoders that make getting started on an application easy and shorten the learning curve.
- Emulators**
 Rapid on-chip debugging allows developers to load code, set breakpoints, and observe variables, memory, registers, etc.

Software

- VisualDSP++®**
 Software development environment includes a C++ compiler, assembler, and linker, enhanced user interface, advanced plotting tools and statistical profiling to easily identify programming bottlenecks.
- Software Development Kit (SDK)**
[Software Development Kit \(SDK\)](#): contains example software, source code, device drivers, algorithms, utilities information and application notes that allow you to develop processor applications. The software can be used as a framework, or as examples of how to use certain aspects and peripherals, in conjunction with an ADI processor.
- Software Modules**
[Software modules](#) include audio and video codecs, encoders, decoders, post processing code and other

[VisualDSP++ Development Software Test Drive](#)
[Knowledge Base](#)
[Manual: Getting Started with Blackfin](#)
[Technical Support](#)
[Subscribe to eNewsletters](#)
[Contact Embedded Processing & DSP](#)

Communities

[Audio](#)
[Digital Signal Processing](#)
[Embedded Processing](#)

Solutions/Applications

[Automotive](#)
[Video](#)
[Wireless](#)
[More ...](#)

“The SHARC ADSP-21161 Processor is intuitive and easy to work with and highly cost-effective definitely a slam dunk choice.”

Bob Higgins, Lead Designer
Polhemus

[Read more...](#)

modules to speed development and evaluate processors.

- **[VisualAudio® Designer](#)**

Works in conjunction with VisualDSP++ integrated software development and debugging environment and includes a variety of ready-to-use software building blocks required for audio system design and development and provides the ability to generate product-ready code (optimized for memory and MIPS usage). Supports ADSP-BF533 and ADSP-BF537 Blackfin Processors and the ADSP-21262, ADSP-21364 and ADSP-21369 SHARC Processors.

View the full suite of Development Tools by Processor family:

- [Blackfin Processor Development Tools](#)
- [SHARC Processor Development Tools](#)

[Privacy/Security](#)

[myAnalog](#)

[Contact ADI](#)

[Site Map](#)

[Registration](#)

[Technical Support](#)

[Terms of Use](#)

© 1995-2008 Analog Devices, Inc. All Rights Reserved.
This site is **optimized for IE 6.0+, NN 7.1, and Mozilla.**



Embedded Processing & DSP

[View Cart](#) | [My Account](#) | [Log In](#)
[Home](#)
[Contact Us](#) | [Print this Page](#) | [Email this Page](#)

► SHARC Processor: Leadership in MFLOPS per \$ Performance



Blackfin



Blackfin® Processors embody a new breed of 16/32-bit embedded processor, ideally suited for products where a convergence of capabilities are necessary – multi-format audio, video, voice and image processing...

[Go to Blackfin](#) Software & Ref. Designs

- Download free software from the site. Analog Devices and its partners have a broad range of offerings from device drivers to complete reference designs.

Purchasing Information

- Buying from Analog Devices and Locating Distributors

SHARC



SHARC® Processors, dominate the floating-point Digital Signal Processing market, delivering exceptional core and memory performance complemented by outstanding I/O throughput. Starting at 319 MFLOPS per dollar...

[Go to SHARC](#)

Technical Support

- Knowledge Base
- Contact Technical Support
- Technical Library
- IC Anomalies
- Tools Anomalies
- Forums: Discussion Groups on the Web
- Complementary Parts Guide
- Part Numbering (pdf)

TigerSHARC



TigerSHARC® Processors provide the highest performance density for multiprocessing applications with peak performance well above a billion floating-point operations per second...

[Go to TigerSHARC](#)

News and Events

- Blackfin in the News
- Press Releases
- Subscribe to eNewsletters
- Trade Shows and Events

ADSP-21xx



ADSP-21xx Processors, are code- and pin-compatible families of Digital Signal Processors with performance up to 160MHz and power as low as 184 micro-amps. The ADSP-21XX family is ideal for...

[Go to ADSP-21xx](#)

Processors in Applications

[Automotive](#)
[Digital Home](#)
[Industrial](#)
[Portable Media Players \(PMP\)](#)
[Security](#)
[Voice over IP \(VoIP\)](#)

Processors

Explore, Evaluate, Design

Everything you need, from Software Development Tools, Third Party Support, Technical Library and more...



Download the Embedded Processing and DSP Selection Guide 2008 (pdf)



View all Products

- [Third Party Collaborative](#)

Learning and Development

- Blackfin Online Learning and Development (BOLD), Workshops and Seminars, University Program and Courses Offered by Universities
- University Program

Customer Case Studies

- [Fishman uses Blackfin for Guitar Amplifier Innovation](#)
- [NARI \(Nanjing Automation Research Institute\) Uses Blackfin in middle-voltage power line protection devices](#)
- [Aigo uses the Blackfin Processor to Optimize Performance, Power, and Development Time in a Dynamic Market with New PMP \(Portable Media Player\) models](#)

[More..](#)

White Papers

- [Device-Based Social Networking](#)

[More..](#)

Communities

[Audio](#)

[Digital Signal Processing](#)

[Embedded Processing](#)



[Privacy/Security](#)

[myAnalog](#)

[Contact ADI](#)

[Site Map](#)

[Registration](#)

[Technical Support](#)

[Terms of Use](#)

© 1995-2008 Analog Devices, Inc. All Rights Reserved.
This site is **optimized for IE 6.0+, NN 7.1, and Mozilla.**



[Parametric Search](#)

| [Replacement Parts Search](#)



[View Cart](#)

| [My Account](#)

| [Log In](#)

[Home](#)



[Contact ADI](#)

Log In:

Enter Email Address:

Do you have a password?

No, I am a new user.

Yes, I have a password:

[Forgot your password?](#)

[Keep me logged in](#) unless I log out.

myAnalog

Streamline your research and shorten your development cycle:

Get the product and technical information you need, quickly and easily

Stay informed on selected product updates and status changes

Choose to receive weekly email updates relevant to you

[View a sample of myAnalog.com](#)

Logging in is NOT required for access to the web site. All product information is available openly throughout the site.

Access to information on the Analog Devices web site is subject to our [Terms of Use](#).

Please refer to our [Privacy Policy](#) for additional information.

[Privacy/Security](#)

[myAnalog](#)

[Contact ADI](#)

[Site Map](#)

[Registration](#)

[Technical Support](#)

[Terms of Use](#)

© 1995-2008 Analog Devices, Inc. All Rights Reserved
This site is **optimized for IE 6.0+, NN 7.1, and Mozilla.**



Embedded Processing & DSP

[View Cart](#) | [My Account](#) | [Log In](#)

[Home](#) > [Embedded Processing & DSP](#) > [Technical Support](#)

[Contact Us](#) | [Print this Page](#) | [Email this Page](#)

[Embedded Processing & DSP Home](#)

[Blackfin](#)

[SHARC](#)

[TigerSHARC](#)

[ADSP-21xx](#)

[Technical Support](#)

[Knowledge Base](#)

[Contact Technical Support](#)

[Technical Library](#)

[IC Anomalies](#)

[Tools Anomalies](#)

[Forums: Discussion Groups on the Web](#)

[Complementary Parts Guide](#)

[Part Numbering](#)

[Learning and Development](#)

[Purchasing Information](#)

[Software and Reference Designs](#)

[News & Events](#)

[All Product Categories](#) ►

[Design Center](#) ►

[All Solutions/ Applications](#) ►

[Buy Online](#) ►

Technical Library

Analog Devices provides a comprehensive technical library for each processor family to assist you with your design projects.

[Blackfin Processors Technical Library](#)

[SHARC Processors Technical Library](#)

[TigerSHARC Processors Technical Library](#)

[ADSP-21xx Processors Technical Library](#)

[VisualDSP++ Development Software Test Drive](#)

[Knowledge Base](#)

[Technical Support](#)

[Subscribe to eNewsletters](#)

[Contact Embedded Processing & DSP](#)

Communities

[Audio](#)

[Digital Signal Processing](#)

[Embedded Processing](#)

**Order your
evaluation kit now ►**

[Privacy/Security](#)

[myAnalog](#)

[Contact ADI](#)

[Site Map](#)

[Registration](#)

[Technical Support](#)

[Terms of Use](#)

© 1995-2008 Analog Devices, Inc. All Rights Reserved.
This site is **optimized for IE 6.0+, NN 7.1, and Mozilla.**




- [About ST](#)
- [Products](#)
- [Applications](#)
- [Support](#)
- [Buy](#)
- [News & Events](#)
- [ST Worldwide](#)
- [Contact Us](#)
- [Login](#)



[ST Home](#) | [Memories](#)

Memories

Memory Product Families

-  [EEPROM, Serial](#)
-  [NVRAM](#)
-  [OTP and UV Erasable EPROM](#)
-  [Programmable System Memory](#)
-  [RFID and RF Memory](#)

Flash Memory Products

Flash Memory products formerly sold by STMicroelectronics are now supplied and supported by Numonyx B. V.

Information on these products is available on the [Numonyx website](#).

Product News

Related Topics

Product Selector and Datasheets

[Memories](#)

Support

[Contact Technical Support](#)

[Memory Product Support](#)

[Lead-Free/RoHS](#)

[Application Notes](#)

[Chinese Translation of Technical Terms](#)

Press Announcement, March 23, 2007

[STMicroelectronics Announces Serial EEPROM Families Now Available in Tiny 2 x 3mm MLP8 Packages](#)

eNews, February 12, 2007

[How designers can make the most of STMicroelectronics Serial EEPROMs - essential reading for automotive application designers](#)

Press Announcement, January 25, 2007

[STMicroelectronics First to Introduce 1Mbit Serial EEPROM in SO8 Narrow Package](#)


top

All rights reserved © 2008 STMicroelectronics :: [Terms Of Use](#) :: [Privacy Policy](#)



Embedded Processing & DSP

[View Cart](#) | [My Account](#) | [Log In](#)

[Home](#) > [Embedded Processing & DSP](#) > [Blackfin](#)

[Contact Us](#) | [Print this Page](#) | [Email this Page](#)

[Embedded Processing & DSP Home](#)

[Blackfin](#)

[SHARC](#)

[TigerSHARC](#)

[ADSP-21xx](#)

[Technical Support](#)

[Learning and Development](#)

[Purchasing Information](#)

[Software and Reference Designs](#)

[News & Events](#)

[All Product Categories](#) ▶

[Design Center](#) ▶

[All Solutions/ Applications](#) ▶

[Buy Online](#) ▶

Blackfin Processor Development Tools

Processor	Evaluation Platform	Emulator	Software	Third Party Tools
ADSP-BF522 ADSP-BF522C	TBD	---	- VisualDSP++ 5.0¹ - Free Upgrade to 5.0	---
ADSP-BF524 ADSP-BF524C				
ADSP-BF526 ADSP-BF526C				
ADSP-BF523 ADSP-BF523C	- BF527 EZ-KIT Lite Desktop Evaluation Board	- USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec	- VisualDSP++ 5.0¹ - Free Upgrade to 5.0	
ADSP-BF525 ADSP-BF525C				
ADSP-BF527 ADSP-BF527C				
ADSP-BF531	- BF533 EZ-KIT Lite Desktop Evaluation Board - Blackfin EZ-Extender Daughter Board - Blackfin A-V EZ-Extender Daughter Board - Blackfin USB-LAN EZ-Extender Daughter Board - Blackfin FPGA EZ-Extender Daughter Board - Blackfin Audio EZ-Extender Daughter Board - Blackfin Multimedia Starter Kit	- USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec	- VisualDSP++ 5.0¹ - Free Upgrade to 5.0 - VisualAudio - Software Development Kit (SDK) - LabVIEW Embedded for Blackfin	- Mathworks - Green Hills Software - uClinux Kernel + GNU Software - LabVIEW Embedded for Blackfin
ADSP-BF532				
ADSP-BF533				

ADSP-BF534 ADSP-BF536 ADSP-BF537	<ul style="list-style-type: none"> - Audio Starter Kit - BF537 EZ-KIT Lite Desktop Evaluation Board - Blackfin USB-LAN EZ-Extender Daughter Board - Blackfin A-V EZ-Extender Daughter Board - BF537 STAMP Kernel BSP uClinux Kernel Board Support Pkg - Blackfin FPGA EZ-Extender Daughter Board - Blackfin Audio EZ-Extender Daughter Board - Converter Evaluation & Development Platform 	<ul style="list-style-type: none"> - USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec 	<ul style="list-style-type: none"> - VisualDSP++ 5.0¹ - Free Upgrade to 5.0 - VisualAudio - LabVIEW Embedded for Blackfin - Software Development Kit (SDK) 	<ul style="list-style-type: none"> - Mathworks - Green Hills Software - uClinux Kernel + GNU Software - LabVIEW Embedded for Blackfin - Phytec
ADSP-BF535	---	<ul style="list-style-type: none"> - USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec 	<ul style="list-style-type: none"> - VisualDSP++ 5.0¹ - Free Upgrade to 5.0 	<ul style="list-style-type: none"> - Green Hills Software
ADSP-BF538 ADSP-BF538F	<ul style="list-style-type: none"> - BF538F EZ-KIT Lite Desktop Evaluation Board 	<ul style="list-style-type: none"> - USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec 	<ul style="list-style-type: none"> - VisualDSP++ 5.0¹ - Free Upgrade to 5.0 	<ul style="list-style-type: none"> - Green Hills Software
ADSP-BF542 ADSP-BF544 ADSP-BF547 ADSP-BF548 ADSP-BF549	<ul style="list-style-type: none"> - BF548 EZ-KIT Lite Desktop Evaluation Board - Media Player Starter Kit 	<ul style="list-style-type: none"> - USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec 	<ul style="list-style-type: none"> - VisualDSP++ 5.0¹ - Free Upgrade to 5.0 	<ul style="list-style-type: none"> - LabVIEW Embedded for Blackfin
ADSP-BF561	<ul style="list-style-type: none"> - BF561 EZ-KIT Lite Desktop Evaluation Board 	<ul style="list-style-type: none"> - USB-based Emulator USB 1.1, up to 150 KB/sec - High Perf USB-based Emulator USB 2.0, up to 1.5 MB/sec 	<ul style="list-style-type: none"> - VisualDSP++ 5.0¹ - Free Upgrade to 5.0 	<ul style="list-style-type: none"> - Green Hills Software - uClinux Kernel + GNU Software

¹ Floating license available

[Processor Development Tools: Product Overview](#)

Development Tools Support

Tel: 1-800-AnalogD (262-5643)

[Contact Support](#)

[Privacy/Security](#)

[myAnalog](#)

[Contact ADI](#)

[Site Map](#)

[Registration](#)

[Technical Support](#)

[Terms of Use](#)

© 1995-2008 Analog Devices, Inc. All Rights Reserved.
This site is **optimized for IE 6.0+, NN 7.1, and Mozilla.**



Embedded Processing & DSP

[View Cart](#) | [My Account](#) | [Log In](#)
[ADI Home](#) > [Embedded Processing & DSP](#)
[Contact Us](#) | [Print this Page](#) | [Email this Page](#)

[Embedded Processing & DSP Home](#)

[Blackfin](#)
[SHARC](#)
[TigerSHARC](#)
[ADSP-21xx](#)
[Technical Support](#)
[Learning and Development](#)
[Purchasing Information](#)
[Software and Reference Designs](#)
[News & Events](#)
[All Product Categories](#) ▶

[Design Center](#) ▶

[All Solutions/ Applications](#) ▶

[Buy Online](#) ▶

ADSP-BF548 EZ-KIT Lite® Evaluation Kit for the ADSP-BF54x Blackfin Family

[Product Highlights](#)
[Application Notes pdf\(1620k\)](#)
[Embedded Processing & DSP Knowledge Base](#)
[Code Examples](#)
[Manuals](#)
[Tools Anomalies](#)
[EZ-KIT Lite Design Database](#)

Product Description

The ADSP-BF548 EZ-KIT Lite® provides developers with a cost-effective method for initial evaluation of the ADSP-BF54x Blackfin® Processors via a USB-based, PC-hosted tool set. With this EZ-KIT Lite,...[More](#)


Features

- ADSP-BF548 Processor
- DDR SDRAM
- BURST Flash
- NAND Flash
- Hard Drive
- LCD Display
- AC'97 CODEC
- Ethernet PHY
- Touch Screen/Keyboard Controller

Minimum Requirements

- Pentium® 166 MHz or higher, Minimum of 32 megabytes of RAM
- Windows® 2000, Windows XP
- One available USB Connector

Functional Block Diagram

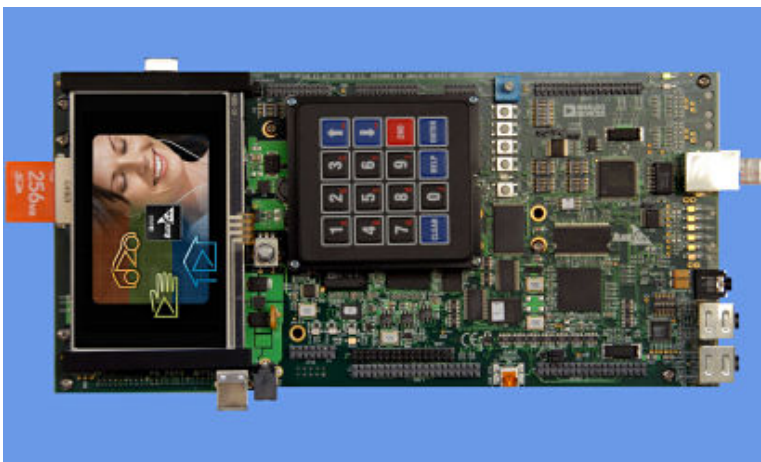

Test Drive Our Tools

90-day free trial of VisualDSP++

- [Download Test Drive](#)

If you purchased VisualDSP++ [register](#) for your license here


[Manuals](#)

Development Tools

[VisualDSP++ for Blackfin Processors](#)

Easy-to-use integrated software development and debugging environment (IDDE). Efficiently manage projects from start to finish from within a single interface....[more info](#)

[Emulators](#)

Used for real-time testing of software to demonstrate how code will affect performance characteristics. USB-based and PCI-based versions available....[more info](#)

[Download Test Drive](#)

Price, Packaging, and Availability

 [Print Table](#)

BF548-HARDWARE Model Options

Model	Status	Package	Pins	Temp Range	Price* (1000 pcs.)	Available	RoHS Compliant	Samples Cart	Purchase Cart
ADZS-BF548-EZLITE	Prodn	EVALUATION BOARDS	-	Comm	\$995.00	4/25/2008	Y	Contact ADI	Add to Cart

The USA list pricing shown is for BUDGETARY USE ONLY, shown in United States dollars (FOB USA per unit for the stated volume), and is subject to change. International prices may differ due to local duties, taxes, fees and exchange rates. For volume-specific price or delivery quotes, please contact your local Analog Devices, Inc. sales office or authorized distributor. Pricing displayed for Evaluation Boards and Kits is based on 1-piece pricing.

[View Sales and Distribution Offices](#)

[View Samples Cart](#)

[View Purchase Cart](#)

[Privacy/Security](#)

[myAnalog](#)

[Contact ADI](#)

[Site Map](#)

[Registration](#)

[Technical Support](#)

[Terms of Use](#)

© 1995-2008 Analog Devices, Inc. All Rights Reserved.
This site is optimized for IE 6.0+, NN 7.1, and Mozilla.